
## TABLE OF CONTENTS

## A. Construction Requirements

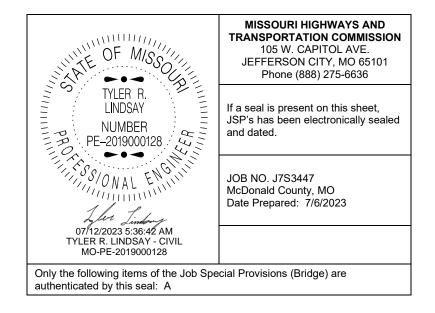

## JOB SPECIAL PROVISIONS (BRIDGE)

## A. <u>CONSTRUCTION REQUIREMENTS</u>

**1.0 Description.** This provision contains general construction requirements for this project.

**2.0 Construction Requirements.** The plans and the asbestos and lead inspection report for the existing structure(s) are included in the contract in the bridge electronic deliverables zip file for informational purposes only.

**2.1** In order to assure the least traffic interference, the work shall be scheduled so that a lane closure is for the absolute minimum amount of time required to complete the work. A lane shall not be closed until material is available for continuous construction and the contractor is prepared to diligently pursue the work until the closed lane is opened to traffic.

**2.3** Qualified special mortar shall be a qualified rapid set concrete patching material in accordance with Sec 704. A qualified rapid set concrete patching material will not be permitted for half-sole repair, deck repair with void tube replacement, full depth repair, modified deck repair and substructure repair (formed) unless a note on the bridge plans specifies that a qualified special mortar may be used.

**2.6** Provisions shall be made to prevent any debris and material from falling into the waterway. If determined necessary by the engineer, any debris and material that falls below the bridge outside the previously specified limits shall be removed as approved by the engineer at the contractor's expense.

**2.7** Any damage sustained to the remaining structure as a result of the contractor's operations shall be repaired or the material replaced as approved by the engineer at the contractor's expense.

**2.8** Provisions shall be made to prevent damage to any existing utilities. Any damage sustained to the utilities as a result of the contractor's operations shall be the responsibility of the contractor. All costs of repair and disruption of service shall be as determined by the utility owners and as approved by the engineer.

**2.10** A washer shall be required under head and nut when any reaming is performed for bolt installation.

**5.0 Method of Measurement.** No measurement will be made.

**6.0 Basis of Payment.** Payment for the above described work will be considered completely covered by the contract unit price for other items included in the contract.