
TABLE OF CONTENTS

- A. Construction Requirements
- B. Remove and Reinstall Conduit System

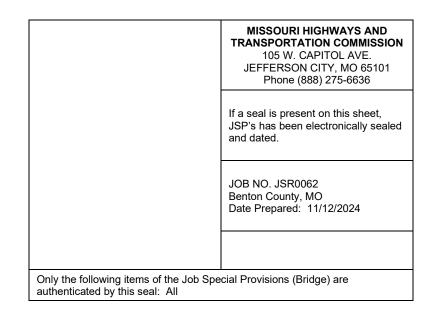

JOB SPECIAL PROVISIONS (BRIDGE)

A. <u>CONSTRUCTION REQUIREMENTS</u>

1.0 Description. This provision contains general construction requirements for this project.

2.0 Construction Requirements. The plans and the asbestos and lead inspection report for the existing structure(s) are included in the contract in the bridge electronic deliverables zip file for informational purposes only.

2.1 In order to assure the least traffic interference, the work shall be scheduled so that a lane closure is for the absolute minimum amount of time required to complete the work. A lane shall not be closed until material is available for continuous construction and the contractor is prepared to diligently pursue the work until the closed lane is opened to traffic.

2.2 Provisions shall be made to prevent any debris and material from falling into the waterway. If determined necessary by the engineer, any debris and material that falls below the bridge outside the previously specified limits shall be removed as approved by the engineer at the contractor's expense.

2.3 Any damage sustained to the remaining structure as a result of the contractor's operations shall be repaired or the material replaced as approved by the engineer at the contractor's expense.

2.4 Provisions shall be made to prevent damage to any existing utilities. Any damage sustained to the utilities as a result of the contractor's operations shall be the responsibility of the contractor. All costs of repair and disruption of service shall be as determined by the utility owners and as approved by the engineer.

3.0 Method of Measurement. No measurement will be made.

4.0 Basis of Payment. Payment for the above-described work will be considered completely covered by the contract unit price for other items included in the contract.

B. <u>REMOVE AND REINSTALL CONDUIT SYSTEM</u>

1.0 Description. This work item shall consist of removing and reinstalling the existing conduit system. The existing conduit material will be reused as shown in the plans.

2.0 Materials. The materials shall be as indicated in the plans. Reuse of the existing conduit and hanger material is required. Existing hanger rods shall remain in place unless directed by the engineer. Substitution shall be made only with the approval of the engineer.

3.0 Construction Requirements. Contractor shall make repairs to the reused conduit and hangers as directed by the engineer.

4.0 Basis of Payment. Payment for removing, reusing and installing the conduit system shall include all materials, equipment, tools, repairs, labor and work incidental thereto, and shall be completely covered by the contract unit price for Remove and Reinstall Conduit System.