

A.A.D.T. - 2024 = 52
T = 1%
V = 55 M.P.H.

FUNCTIONAL CLASSIFICATION-MINOR COLLECTOR


	EXISTING	NEW
BUILDINGS AND STRUCTURES		
GUARD RAIL		
GUARD CABLE		
CONCRETE RIGHT-OF-WAY MARKER		
STEEL RIGHT-OF-WAY MARKER		
LOCATION SURVEY MARKER		
UTILITIES		
FIBER OPTICS	— FO —	— FO —
OVERHEAD CABLE TV	— OTV —	— OTV —
UNDERGROUND CABLE TV	— UTV —	— UTV —
OVERHEAD TELEPHONE	— OT —	— OT —
UNDERGROUND TELEPHONE	— UT —	— UT —
OVERHEAD POWER	— OE —	— OE —
UNDERGROUND POWER	— UE —	— UE —
SANITARY SEWER	— S —	— S —
STORM SEWER	— SS —	— SS —
GAS	— G —	— G —
WATER	— W —	— W —
MANHOLE		
FIRE HYDRANT		
WATER VALVE		
WATER METER		
DROP INLET		
DITCH BLOCK		
GROUND MOUNTED SIGN		
LIGHT POLE		
H-FRAME POWER POLE		
TELEPHONE PEDESTAL		
FENCE		
CHAIN LINK		
WOVEN WIRE		
GATE POST		
BENCHMARK		

NOTE: DASHED OR OPEN SYMBOLS INDICATE
EXISTING FEATURES



KEY MAP
LOCATION OF NEW MADRID COUNTY

THE EXISTENCE AND APPROXIMATE LOCATION OF UTILITY FACILITIES KNOWN TO EXIST, AS SHOWN ON THE PLANS, ARE BASED ON THE BEST INFORMATION AVAILABLE TO THE COMMISSION AT THIS TIME. THIS INFORMATION IS PROVIDED BY THE COMMISSION "AS-IS" AND THE COMMISSION EXPRESSLY DISCLAIMS ANY REPRESENTATION OR WARRANTY AS TO THE COMPLETENESS, ACCURACY, OR SUITABILITY OF THE INFORMATION FOR ANY USE. RELIANCE UPON THIS INFORMATION IS DONE AT THE RISK AND PERIL OF THE USER, AND THE COMMISSION SHALL NOT BE LIABLE FOR ANY DAMAGES THAT MAY ARISE FROM ANY ERROR IN THE INFORMATION. IT IS, THEREFORE, THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY THE EXISTENCE, LOCATION AND STATUS OF ANY FACILITY. SUCH VERIFICATION INCLUDES DIRECT CONTACT WITH THE LISTED UTILITIES.

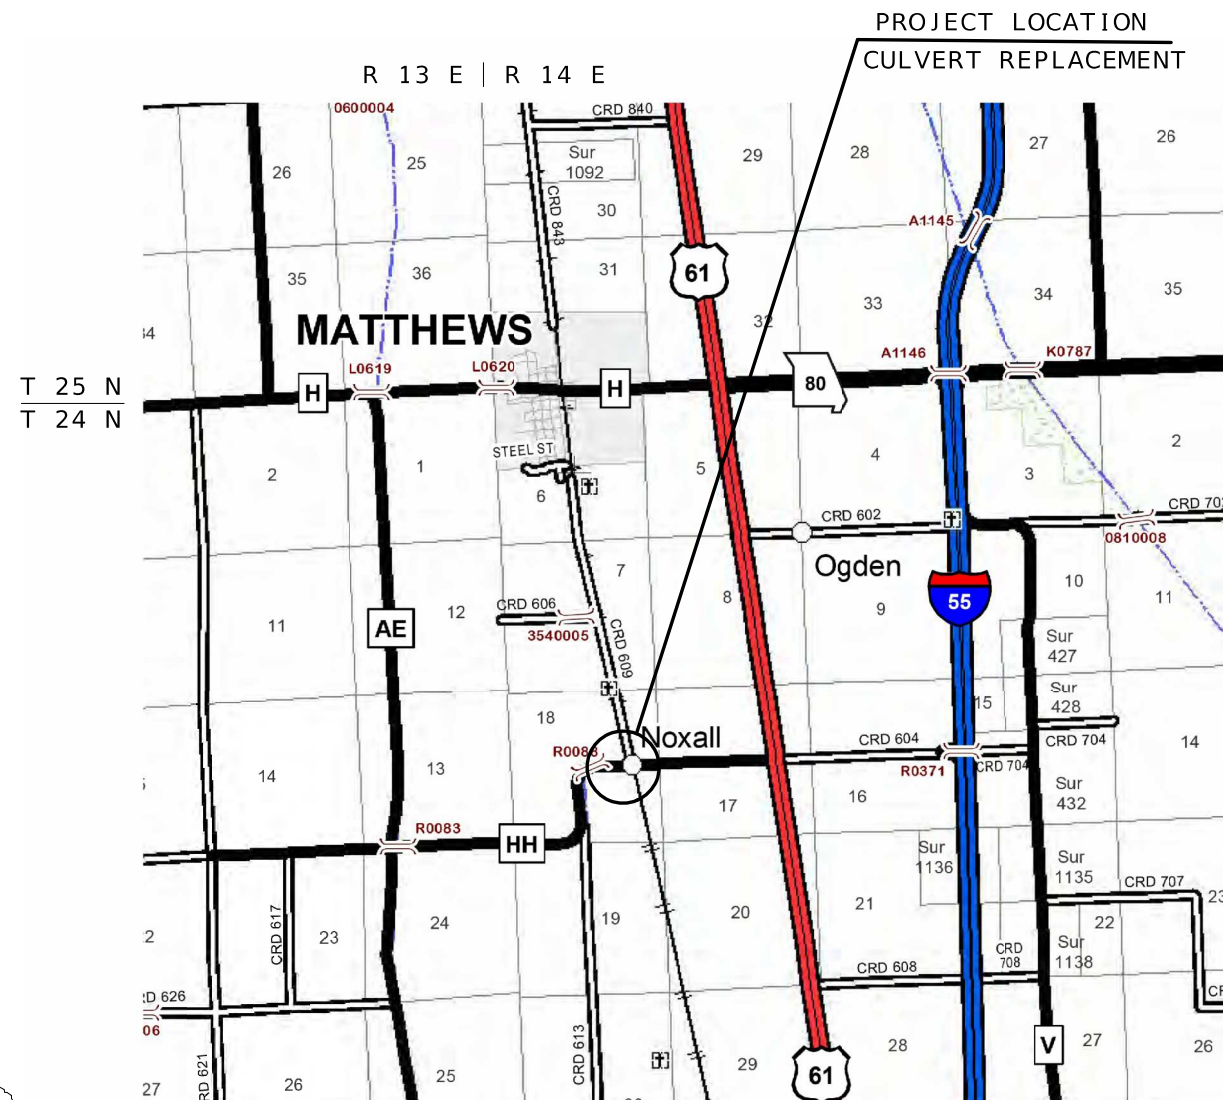

DESCRIPTION	NUMBER
TITLE SHEET -----	1
QUANTITIES (QU) (2 SHEETS)-----	3
PLAN-PROFILE (PP)-----	4
REFERENCE POINTS (RP)-----	5
TRAFFIC CONTROL SHEETS (TC)-----	6

COUNTY	NEW MADRID
JOB NO.	JSEM0048
CONTRACT ID.	

PROJECT NO.

BRIDGE NO.

[illegible]

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

MoDOT

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

BEGINNING OF PROJECT	STA.	166+65.00
END OF PROJECT		167+80.00
APPARENT LENGTH		115.00 FEET
EQUATIONS AND EXCEPTIONS:		

TOTAL CORRECTIONS	0.00	FEET
NET LENGTH OF PROJECT	115.00	FEET
STATE LENGTH	0.022	MILES
FOR INFORMATION ONLY		
ESTIMATED DISTURBED ACRES	0.1	ACRES

MOBILIZATION - LUMP SUM 1

PIPE CULVERTS							
SHEET	STA	STA	LOC	GROUP A PIPE 48" LF	GROUP A FES 48" EACH	CL 3 EXC CY	REMARKS
4	167+11.90	167+69.87	LT OF CL RTE HH	58	1	79.2	RCP
			TOTAL	58	1	80	

REMOVAL OF IMPROVEMENTS - LUMP SUM 1					
SHEET	STA	STA	LOC	DESCRIPTION	REMARKS
4	167+11	167+71	LT	EX 15" CMP	REMOVE APPROX. 61FT OF EXISTING PIPE
4	167+11	167+71	LT	EX 24" CMP	REMOVE APPROX. 61FT OF EXISTING PIPE

PRECAST DROP INLETS								
SHEET	STA	LOC	TYPE	"D"	DROP INLET	*GRATE & BEARING PLATE	CL 3 EXC CY	REMARKS
					5'X 3' FT	5'X 3' EACH		
4	167+70.87	LT OF CL RTE HH	S-2	5'0"	5	1	16.7	1-24" AND 1-48" OPENING
				TOTAL	5	1	17	*SEE JSP FOR GRATE AND BEARING PLATE DETAILS

TYPE 2 ROCK DITCH LINER										
SHEET	STA	STA	LOCATION	DEPTH FT	AVG WIDTH FT	LENGTH FT	TYPE 2 ROCK DITCH LINER		PERMANENT EROSION CONTROL GEOTEXTILE SY	REMARKS
							FURNISH CY	PLACE CY		
4	166+86.70	167+34.53	LT OF CL RTE HH	1.5	15.0	48	40.0	40.0	100	PIPE OUTLET
						TOTAL	40	40	100	

DRIVEWAY SURFACE				
SHEET	STA	LOC	GRAVEL (A) OR CRUSHED STONE (B) TONS	REMARKS
4	167+50	LT OF CL RTE HH	23	PLACE 6" ROCK TO BACK OF ROW
		TOTAL	23	

EROSION CONTROL & SEEDING							
SHEET	STA	STA	LOC	ROCK DITCH CHECK LF	SEEDING COOL SEASON ACRE	MULCHING ACRE	REMARKS
4	166+65	167+80	LT OF CL RTE HH	36	0.1	0.1	
			TOTAL	36	1.0	1.0	

STATE OF MISSOURI

PHILPOT

NUMBER

PE-2019000205

PROFESSIONAL ENGINEER

Donna Rene Philpot

16014 E. COLUMBIA RD. SUITE 200

JEFFERSON CITY, MO 65102

MO-PE-2019000205

DATE PREPARED

2/6/2024

ROUTE

HH

STATE

MO

DISTRICT

SE

SHEET NO.

3

COUNTY

NEW MADRID

JOB NO.

JSEM0048

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION

DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL

JEFFERSON CITY, MO 65102

1-888-ASK-MODOT (1-888-275-6636)

MODOT

SUMMARY OF QUANTITIES

SHEET 1 OF 2

EFFECTIVE: 04-01-2024																					
SIGN	SIZE	AREA	QTY	TOTAL	QTY	TOTAL	SIGN								ITEM	TOTAL					
IN.	SQ. FT.	EACH	SQ. FT.	EACH	SQ. FT.	NUM.	SIGN	IN.	AREA	QTY	TOTAL	QTY	TOTAL	SIGN	NUMBER	QTY	DESCRIPTION				
WARNING SIGNS							DESCRIPTION							GUIDE SIGNS					DESCRIPTION		
W01-1L	48X48	16.00					TURN (SYMBOL LEFT)	E05-1	36X48	12.00					GORE EXIT	6122008		IMPACT ATTENUATOR 40 MPH (SAND BARRELS)			
W01-1R	48X48	16.00					TURN (SYMBOL RIGHT)	E05-2	48X36	12.00					EXIT OPEN	6122009		IMPACT ATTENUATOR 45 MPH (SAND BARRELS)			
W01-2L	48X48	16.00					CURVE (SYMBOL LEFT)	E05-2a	48X36	12.00					EXIT CLOSED	6122010		IMPACT ATTENUATOR 50 MPH (SAND BARRELS)			
W01-2R	48X48	16.00					CURVE (SYMBOL RIGHT)	GO20-1	60X24	10.00					ROAD WORK NEXT XX MILES	6122012		IMPACT ATTENUATOR 55 MPH (SAND BARRELS)			
W01-3L	48X48	16.00					REVERSE TURN (SYMBOL LEFT)	GO20-2	48X24	8.00					END ROAD WORK	6122014		IMPACT ATTENUATOR 60 MPH (SAND BARRELS)			
W01-3R	48X48	16.00					REVERSE TURN (SYMBOL RIGHT)	GO20-4	36X18	4.50					PILOT CAR FOLLOW ME	6122017		IMPACT ATTENUATOR 65 MPH (SAND BARRELS)			
W01-4L	48X48	16.00					REVERSE CURVE (SYMBOL LEFT)	GO20-4a	42X30	8.75					PILOT CAR IN USE WAIT & FOLLOW	6122019		IMPACT ATTENUATOR 70 MPH (SAND BARRELS)			
W01-4R	48X48	16.00					REVERSE CURVE (SYMBOL RIGHT)	GO20-4a	18X12	1.50					PILOT CAR IN USE WAIT & FOLLOW	6122020		REPLACEMENT SAND BARREL			
W01-4bL	48X48	16.00					DOUBLE ARROW REVERSE CURVE (SYMBOL LEFT)	GO20-5aP	36X24	6.00					WORK ZONE (PLAQUE)	6122030		IMPACT ATTENUATOR (RELOCATION)			
W01-4bR	48X48	16.00					DOUBLE ARROW REVERSE CURVE (SYMBOL RIGHT)	MO4-8a	24X18	3.00					END DETOUR	6123001		TRUCK MOUNTED ATTENUATOR (TMA)			
W01-4cL	48X48	16.00					TRIPLE ARROW REVERSE CURVE (SYMBOL LEFT)	MO4-9L	48X36	12.00					DETOUR (LEFT)	6161008		ADVANCED WARNING RAIL SYSTEM			
W01-4cR	48X48	16.00					TRIPLE ARROW REVERSE CURVE (SYMBOL RIGHT)	MO4-9R	48X36	12.00					DETOUR (RIGHT)	6161012		BUOYS (BOATS KEEP OUT)			
W01-6	60X30	12.50					HORIZONTAL ARROW (SYMBOL)	MO4-9P	48X12	4.00					STREET NAME (PLAQUE)	6161013		BUOYS (NO WAKE)			
W01-6a	72X36	18.00					HORIZ. ARROW (SYMBOL ON PERMANENT BARRICADE)	MO4-10L	48X18	6.00					DETOUR ARROW (LEFT)	6161014		SPECIAL SIGN ASSEMBLY (BOATS KEEP OUT)			
W01-7	60X30	12.50					DOUBLE HEAD HORIZONTAL ARROW (SYMBOL)	MO4-10R	48X18	6.00					DETOUR ARROW (RIGHT)	6161025	25	CHANNELIZER (TRIM LINE)			
W01-7a	72X36	18.00					DOUBLE HEAD HORIZ. ARROW (SYMBOL ON PERM. BARR.)	REGULATORY SIGNS							6161030		TYPE III MOVEABLE BARRICADE				
W01-8	18X24	3.00					CHEVRON (SYMBOL)	R1-1	48X48	13.25					STOP	6161033		DIRECTION INDICATOR BARRICADE			
W01-8a	30X36	7.50					CHEVRON (SYMBOL FOR DIVIDED HIGHWAYS)	R1-2	48TRI	6.93					YIELD	6161040		FLASHING ARROW PANEL			
W03-1	48X48	16.00					STOP AHEAD (SYMBOL)	R1-2a	36X36	9.00					TO ONCOMING TRAFFIC (PLAQUE)	6161047		TYPE III OBJECT MARKER			
W03-2	48X48	16.00					YIELD AHEAD (SYMBOL)	R1-3P	30X12	2.50					ALL WAY (PLAQUE)	6161055		SEQUENTIAL FLASHING WARNING LIGHT			
W03-3	48X48	16.00					SIGNAL AHEAD (SYMBOL)	R2-1	36X48	12.00					SPEED LIMIT XX	6161070		TUBULAR MARKER			
W03-4	48X48	16.00					BE PREPARED TO STOP	R3-1	48X48	16.00					NO RIGHT TURN (SYMBOL)	6161095		RADAR SPEED ADVISORY SYSTEM			
W03-5	48X48	16.00					SPEED LIMIT AHEAD	R3-2	48X48	16.00					NO LEFT TURN (SYMBOL)	6161096		CHANGEABLE MESSAGE SIGN, COMMISSION FURNISHED/RETAINED			
W04-1L	48X48	16.00					MERGE (SYMBOL FROM LEFT)	R3-3	36X36	9.00					NO TURNS			CHANGEABLE MESSAGE SIGN W/O COMM.			
W04-1R	48X48	16.00					MERGE (SYMBOL FROM RIGHT)	R3-4	48X48	16.00					NO U-TURN (SYMBOL)	6161098A		CHANGEABLE MESSAGE SIGN WITH COMM.			
W04-1aL	48X48	16.00					MERGE (LEFT)	R3-7L	30X30	6.25					LEFT LANE MUST TURN LEFT			INTERFACE - CONTRACTOR FURNISHED/RETAINED			
W04-1aR	48X48	16.00					MERGE (RIGHT)	R3-7R	30X30	6.25					RIGHT LANE MUST TURN RIGHT		CHANGEABLE MESSAGE SIGN WITH COMM.				
W05-1	48X48	16.00					ROAD/BRIDGE/RAMP NARROWS	R4-1	36X48	12.00					DO NOT PASS	6161099		INTERFACE - CONTRACTOR FURNISHED/RETAINED			
W05-3	48X48	16.00					ONE LANE BRIDGE	R4-2	36X48	12.00					PASS WITH CARE	6162000A		WORK ZONE TRAFFIC SIGNAL SYSTEM			
W05-5	48X48	16.00					NARROW LANES	R4-7a	36X48	12.00					KEEP RIGHT (HORIZONTAL ARROW)	6162002		TEMPORARY LONG-TERM RUMBLE STRIPS			
W06-1	48X48	16.00					DIVIDED HIGHWAY (SYMBOL)	R4-8a	36X48	12.00					KEEP LEFT (HORIZONTAL ARROW)			TEMPORARY TRAFFIC BARRIER			
W06-2	48X48	16.00					DIVIDED HIGHWAY END (SYMBOL)	R5-1	30X30	6.25					DO NOT ENTER	6173600D		CONTRACTOR FURNISHED/RETAINED			
W06-3	48X48	16.00					TWO WAY TRAFFIC (SYMBOL)	R5-1a	36X24	6.00					WRONG WAY			TEMPORARY TRAFFIC BARRIER			
W07-3a	30X24	5.00					NEXT XX MILES (PLAQUE)	R6-1L	54X18	6.75					ONE WAY ARROW (LEFT)	6173602B		CONTRACTOR FURNISHED/COMMISSION RETAINED			
W08-1	48X48	16.00					BUMP	R6-1R	54X18	6.75					ONE WAY ARROW (RIGHT)	6174000A		TEMP. TRAFFIC BARRIER HEIGHT TRANSITION			
W08-2	48X48	16.00					DIP	R6-2L	24X30	5.00					ONE WAY (LEFT)	6175010A		RELOCATING TEMPORARY TRAFFIC BARRIER			
W08-3	48X48	16.00					PAVEMENT ENDS	R6-2R	24X30	5.00					ONE WAY (RIGHT)			TEMPORARY TRAFFIC BARRIER			
W08-4	48X48	16.00					SOFT SHOULDER	R9-9	24X12	2.00					SIDEWALK CLOSED	6176000B		COMMISSION FURNISHED/RETAINED			
W08-5	48X48	16.00					SLIPPERY WHEN WET (SYMBOL)	R9-11L	24X18	3.00					SIDEWALK CLOSED AHEAD, (ARROW LEFT) CROSS HERE	6177000B		TEMP. TRAFFIC BARRIER HEIGHT TRANSITION			
W08-6	48X48	16.00					TRUCK CROSSING										SIDEWALK CLOSED AHEAD, (ARROW RIGHT) CROSS HERE		COMMISSION FURNISHED/RETAINED		
W08-6c	48X48	16.00					TRUCK ENTRANCE	R9-11R	24X18	3.00					STOP HERE ON RED (45° ARROW)	6208064A		TEMPORARY RAISED PAVEMENT MARKER			
W08-7	36X36	9.00					LOOSE GRAVEL	R10-6	24X36	6.00					ROAD CLOSED	9029400		TEMPORARY TRAFFIC SIGNALS			
W08-7a	36X36	9.00					FRESH OIL / LOOSE GRAVEL	R11-2	48X30	10.00					ROAD CLOSED XX MILES AHEAD	9029401		TEMPORARY TRAFFIC SIGNALS AND LIGHTING			
W08-9	48X48	16.00					LOW SHOULDER	R11-3a	60X30	12.50					LOCAL TRAFFIC ONLY						
W08-11	48X48	16.00					UNEVEN LANES				R11-4	60X30	12.50					ROAD CLOSED TO THRU TRAFFIC			
W08-12	48X48	16.00					NO CENTER LINE	CONST-3A	60X48	20.00								FINE SIGN			
W08-15	48X48	16.00					GROOVED PAVEMENT	CONST-3X	56X12	4.67					SPEEDING/PASSING (PLATE)						
W08-15P	30X24	5.00					MOTORCYCLE (PLAQUE)	MISCELLANEOUS SIGNS													
W08-17L	48X48	16.00					SHOULDER DROP-OFF (SYMBOL LEFT)	CONST-5	48X36	12.00					POINT OF PRESENCE						
W08-17R	48X48	16.00					SHOULDER DROP-OFF (SYMBOL RIGHT)	CONST-5	96X48	32.00					POINT OF PRESENCE						
W08-17P	30X24	5.00					SHOULDER DROP-OFF (PLAQUE)	CONST-7	48X24	8.00					RATE OUR WORK ZONE						
W10-1	42RND.	9.62					RAILROAD CROSSING	CONST-7	72X36	18.00					RATE OUR WORK ZONE						
W012-1	24X24	4.00					DOUBLE DOWN ARROW (SYMBOL)	CONST-8	48X36	12.00					WORK ZONE NO PHONE ZONE						
W012-2	48X48	16.00					LOW CLEARANCE (SYMBOL)														
W012-2x	24X18	3.00					LOW CLEARANCE (PLAQUE)														
W012-2a	84X24	14.00					OVERHEAD LOW CLEARANCE (FEET AND INCHES)														
W012-4	120X60	50.00					LOW CLEARANCE XX FT XX IN XX MILES AHEAD														
W012-5	120X60	50.00					WIDTH RESTRICTION XX FT XX IN XX MILES AHEAD														
W013-1	30X30	6.25					ADVISORY SPEED (PLAQUE)														
W016-2	30X24	5.00					XXX FEET (PLAQUE)														
W016-3	30X24	5.00					X MILE (PLAQUE)														
W020-1	48X48	16.00	3	48			ROAD/BRIDGE/RAMP WORK AHEAD	616-10.05 TOTAL													
W020-2	48X48	16.00					DETOUR AHEAD	CONSTRUCTION SIGNS							192						
W020-3	48X48	16.00					ROAD CLOSED AHEAD	616-10.10 TOTAL													
W020-4	48X48	16.00	3	48			ONE LANE ROAD AHEAD	RELOCATED SIGNS							0						
W020-5	48X48	16.00					RIGHT/CENTER/LEFT LANE CLOSED AHEAD														
W020-5a	48X48	16.00					2 RIGHT/CENTER/LEFT LANES CLOSED AHEAD														
W020-6a	48X48	16.00					RIGHT/CENTER/LEFT LANE CLOSED														
W020-7a	48X48	16.00	3	48			FLAGGER (SYMBOL)														
W021-2	36X36	9.00					FRESH OIL														
W021-5	48X48	16.00	3	48			SHOULDER WORK / SHOULDER WORK AHEAD														
W022-1	48X48	16.00					BLASTING ZONE AHEAD														
W022-2	42X36	10.50					TURN OFF 2-WAY RADIO AND PHONE														
W022-3	42X36	10.50					END BLASTING ZONE														
GO22-1	21X15	2.19					WET PAINT (ARROW PIVOTS)														

STATE OF MISSOURI
DONNA RENE PHILPOT
NUMBER
PE-2019000205
PROFESSIONAL ENGINEER
Donna Rene Philpot
101 W. CHERRY STREET, 3RD FLOOR
DONNA RENE PHILPOT - CIVIL
MO-PE-2019000205

DATE PREPARED
2/6/2024

ROUTE
HH
DISTRICT
SE
STATE
MO
SHEET NO.
3

COUNTY
NEW MADRID
JOB NO.
JSEM0048
CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION

DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION


105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-273-6636)

SUMMARY OF QUANTITIES
SHEET 2 OF 2


* NO DIRECT PAY FOR RELOCATION OF TEMPORARY TRAFFIC CONTROL SIGNS OR DEVICES

ALL PROJECT COORDINATES HAVE BEEN PROJECTED FROM THE MISSOURI STATE PLANE COORDINATE (SPC) SYSTEM OF 1983 USING AN AVERAGE PROJECT PROJECTION (GRID TO GROUND) FACTOR. TO GET BACK TO STATE PLANE COORDINATES MULTIPLY THE PROJECT COORDINATES BY THE AVERAGE GRID FACTOR AS SHOWN IN THE "REFERENCE CONTROL INFORMATION" PORTION OF THIS TABLE.


PROJECT COORDINATE INFORMATION		
COORDINATE SYSTEM	MO COORDINATE SYSTEM OF 1983	
HORIZONTAL DATUM	NAD83 2011	
VERTICAL DATUM	MODOT GNSS NETWORK	
GEOID MODEL	2018	
ELEVATIONS DETERMINED BY	DIFFERENTIAL LEVELING	
PROJECT PROJECTION FACTOR		1.00000000
REFERENCE CONTROL INFORMATION		
COORDINATE SYSTEM	MO COORDINATE SYSTEM OF 1983	
CONTROL STATION	MOCH	
DESIGNATION	MODOT CHARLESTON CORS ARP	
CORS_ID	MOCH	
PID	DM4118	
LATITUDE	365505.22474	
LONGITUDE	891907.58631	
NORTHING (M)	121017.9250	
EASTING (M)	355250.6190	
ZONE	EAST	
PROJECT AVERAGE GRID FACTOR		1.00000000



CONTROL PT #100




CONTROL PT #101



CONTROL PT #102

COORDINATE POINT LISTING								
SHEET NO	STATION	LOCATION	OFFSET (USFT)	MODIFIED STATE PLANE (GROUND)			DESCRIPTION	GPK POINT ID
				NORTHING (US SURVEY FT)	EASTING (US SURVEY FT)	ELEVATION (US SURVEY FT)		
PROJECT CONTROL POINTS								
	181+53.00	RT HH LT	49.97	325071.812	1091449.358	307.178	3/8" Rebar w/ Pink Cap Located 0.44 Mile East of RR Crossing on North side of Rt. HH	CP100
4	167+46.93	RT HH RT	53.29	324935.411	1090045.956	293.183	3/8" Rebar w/ Pink Cap Located 0.08 Mile West of RR Crossing on South side of Rt. HH	CP101
4	172+72.78	RT HH RT	37.59	324965.944	1090571.166	305.602	3/8" Rebar w/ Pink Cap Located approx 100' East of RR Crossing on South Side of Rt. HH	CP102
ALIGNMENTS								
	155+11.53			324885.15	1088866.64		PC BEGIN CHAIN EXISTING HH	
	156+83.61			324966.29	1089018.39		PI	
	158+92.70			324969.69	1089190.44		PT	
	158+49.30			324969.69	1089190.44		EQUATION BK	
	158+92.70			324969.69	1089190.44		EQUATION AH	
	165+00.00			324981.71	1089797.62		PI	
	176+66.60			325014.63	1090963.76		PI	
	181+66.60			325022.05	1091463.7		PI END CHAIN EXISTING HH	



DATE PREPARED _____

2/5/2024

ROUTE HH	STATE MO
-------------	-------------

DISTRICT	SHEET NO.
SE	5

COUNTY

NEW MADRID


JOB NO.

JSEM0048

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

[illegible]MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

REFERENCE & COORDINATE POINTS
SHEET 1 OF 1

