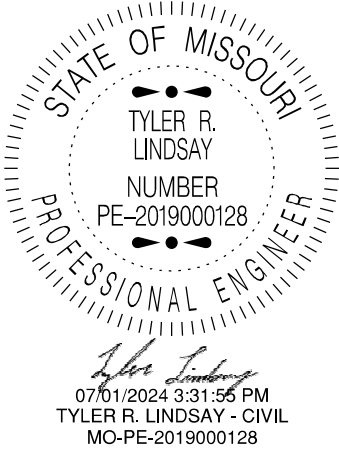


**TABLE OF CONTENTS**

A. Construction Requirements.

	<b>MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION</b> 105 W. CAPITOL AVE. JEFFERSON CITY, MO 65101 Phone (888) 275-6636
	If a seal is present on this sheet, JSP's has been electronically sealed and dated.
	JOB NO. J5P3498 Howard County, MO Date Prepared: 7/1/2024
Only the following items of the Job Special Provisions (Bridge) are authenticated by this seal: A	

JOB SPECIAL PROVISIONS (BRIDGE)

---

A. CONSTRUCTION REQUIREMENTS

**1.0 Description.** This provision contains general construction requirements for this project.

**2.0 Construction Requirements.** The plans and the asbestos and lead inspection report for the existing structure(s) and the geotechnical report for the new structure(s) are included in the contract in the bridge electronic deliverables zip file for informational purposes only.

**2.1** In order to assure the least traffic interference, the work shall be scheduled so that a lane closure is for the absolute minimum amount of time required to complete the work. A lane shall not be closed until material is available for continuous construction and the contractor is prepared to diligently pursue the work until the closed lane is opened to traffic.

**2.2** Bridge work by contractor forces, including erection, rehabilitation or demolition, shall not be allowed over traffic unless a bridge platform protection system is installed below the work area except for work performed above a deck that is intact. The protection system shall be capable of catching all falling objects such as tools, overhang brackets or materials. Lifting of objects that are heavier than the capacity of the bridge protection system shall not be permitted.

**2.3** Provisions shall be made to prevent any debris and material from falling into the waterway. If determined necessary by the engineer, any debris and material that falls below the bridge outside the previously specified limits shall be removed as approved by the engineer at the contractor's expense.

**2.4** Any damage sustained to the remaining structure for Stage 1 Traffic during Stage 1 Construction as a result of the contractor's operations shall be repaired or the material replaced as approved by the engineer at the contractor's expense.

**2.5** Provisions shall be made to prevent damage to any existing utilities. Any damage sustained to the utilities as a result of the contractor's operations shall be the responsibility of the contractor. All costs of repair and disruption of service shall be as determined by the utility owners and as approved by the engineer.

**3.0 Method of Measurement.** No measurement will be made.

**4.0 Basis of Payment.** Payment for the above described work will be considered completely covered by the contract unit price for other items included in the contract.