





JOB SPECIAL PROVISIONS TABLE OF CONTENTS (ROADWAY)

(Job Special Provisions shall prevail over General Special Provisions whenever in conflict therewith.)

	A.	General - Federal JSP-09-02K	1
	B.	Contract Liquidated Damages JSP-13-01D	1
	C.	Work Zone Traffic Management JSP-02-06M	2
	D.	Emergency Provisions and Incident Management JSP-90-11A	5
	E.	Project Contact for Contractor/Bidder Questions JSP-96-05	6
	F.	Supplemental Revisions JSP-18-01CC	6
	G.	Lump Sum Temporary Traffic Control JSP-22-01A	11
	H.	ATC Traffic Signal	13
 REVISED	I.	SL District Traffic Signal Stop Bar Detection System	14
 REVISED	J.	SL District Traffic Signal Advanced Detection System	38
	K.	Disposition of Existing Signal Equipment	45
	L.	Coordination with MoDOT Signal Shop for Cabinet Entry	45
	M.	Traffic Signal Maintenance and Programming	46
	N.	Contractor Quality Control	52
	O.	Utilities JSP-93-26F	54
	P.	Traffic Management Coordination	55
	Q.	MoDOT ITS Equipment within Project Limits	56
	R.	Pull Ropes	57
	S.	As-built Drawings	57
	T.	Remove In-Pavement Wireless Detection System-Sensys Travel-Time	57
	U.	Coordination with ITS Staff and Utility Locates	58
 ADDED	V.	Conduit Repair	59

Job No.: JSL0179
Route: 180
County: St. Louis

 <p>THIS SHEET HAS BEEN SIGNED, SEALED AND DATED ELECTRONICALLY.</p>	<p>MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION 105 W. CAPITOL AVE. JEFFERSON CITY, MO 65102 Phone 1-888-275-6636</p>
	<p>WSP USA 211 N. Broadway Suite 2800 St. Louis, MO 63102 Certificate of Authority: #2007002778 Consultant Phone: 314-206-4283</p>
	<p>If a seal is present on this sheet, JSP's have been electronically sealed and dated.</p>
	<p>JOB NUMBER: JSL01079 ST LOUIS COUNTY, MO DATE PREPARED: August 23, 2024</p>
	<p>ADDENDUM DATE: R001 September 3, 2024</p>
<p>Only the following items of the Job Special Provisions (Roadway) are authenticated by this seal: All</p>	

JOB
SPECIAL PROVISION

A. General - Federal JSP-09-02K

1.0 Description. The Federal Government is participating in the cost of construction of this project. All applicable Federal laws, and the regulations made pursuant to such laws, shall be observed by the contractor, and the work will be subject to the inspection of the appropriate Federal Agency in the same manner as provided in Sec 105.10 of the Missouri Standard Specifications for Highway Construction with all revisions applicable to this bid and contract.

1.1 This contract requires payment of the prevailing hourly rate of wages for each craft or type of work required to execute the contract as determined by the Missouri Department of Labor and Industrial Relations and requires adherence to a schedule of minimum wages as determined by the United States Department of Labor. For work performed anywhere on this project, the contractor and the contractor's subcontractors shall pay the higher of these two applicable wage rates. State Wage Rates, Information on the Required Federal Aid Provisions, and the current Federal Wage Rates are available on the Missouri Department of Transportation web page at www.modot.org under "Doing Business with MoDOT", "Contractor Resources". Effective Wage Rates will be posted 10 days prior to the applicable bid opening. These supplemental bidding documents have important legal consequences. It shall be conclusively presumed that they are in the bidder's possession, and they have been reviewed and used by the bidder in the preparation of any bid submitted on this project.

1.2 The following documents are available on the Missouri Department of Transportation web page at www.modot.org under "Doing Business with MoDOT"; "Standards and Specifications". The effective version shall be determined by the letting date of the project.

General Provisions and Supplemental Specifications

Supplemental Plans to July 2024 Missouri Standard Plans
For Highway Construction

These supplemental bidding documents contain all current revisions to the published versions and have important legal consequences. It shall be conclusively presumed that they are in the bidder's possession, and they have been reviewed and used by the bidder in the preparation of any bid submitted on this project.

B. Contract Liquidated Damages JSP-13-01D

1.0 Description. Liquidated Damages for failure or delay in completing the work on time for this contract shall be in accordance with Sec 108.8. The liquidated damages include separate amounts for road user costs and contract administrative costs incurred by the Commission.

2.0 Period of Performance. Prosecution of work is expected to begin on the date specified below in accordance with Sec 108.2. Regardless of when the work is begun on this contract, all work on all projects shall be completed on or before the date specified below. Completion by this date shall be in accordance with the requirements of Sec 108.7.1.

Job No.: JSL0179
Route: 180
County: St. Louis

Notice to Proceed: November 4, 2024
Contract Completion Date: May 31, 2026

2.1 Calendar Days and Completion Dates. Completion of the project is required as specified herein. The count of calendar days will begin on the date the contractor starts any construction operations on the project.

Project	Calendar Days	Daily Road User Cost
JSL0179	NA	\$5400

3.0 Liquidated Damages for Contract Administrative Costs. Should the contractor fail to complete the work on or before the contract completion date specified in Section 2.0, or within the number of calendar days specified in Section 2.1, whichever occurs first, the contractor will be charged contract administrative liquidated damages in accordance with Sec 108.8 in the amount of \$750 per calendar day for each calendar day, or partial day thereof, that the work is not fully completed. For projects in combination, these damages will be charged in full for failure to complete one or more projects within the specified contract completion date or calendar days.

4.0 Liquidated Damages for Road User Costs. Should the contractor fail to complete the work on or before the contract completion date specified in Section 2.0, or within the number of calendar days specified in Section 2.1, whichever occurs first, the contractor will be charged road user costs in accordance with Sec 108.8 in the amount specified in Section 2.1 for each calendar day, or partial day thereof, that the work is not fully completed. These damages are in addition to the contract administrative damages and any other damages as specified elsewhere in this contract.

C. Work Zone Traffic Management JSP-02-06M

1.0 Description. Work zone traffic management shall be in accordance with applicable portions of Division 100 and Division 600 of the Standard Specifications, and specifically as follows.

1.1 Maintaining Work Zones and Work Zone Reviews. The Work Zone Specialist (WZS) shall maintain work zones in accordance with Sec 616.3.3 and as further stated herein. The WZS shall coordinate and implement any changes approved by the engineer. The WZS shall ensure all traffic control devices are maintained in accordance with Sec 616, the work zone is operated within the hours specified by the engineer and will not deviate from the specified hours without prior approval of the engineer. The WZS is responsible to manage work zone delay in accordance with these project provisions. When requested by the engineer, the WZS shall submit a weekly report that includes a review of work zone operations for the week. The report shall identify any problems encountered and corrective actions taken. Work zones are subject to unannounced inspections by the engineer and other departmental staff to corroborate the validity of the WZS's review and may require immediate corrective measures and/or additional work zone monitoring.

1.2 Work Zone Deficiencies. Failure to make corrections on time may result in the engineer suspending work. The suspension will be non-excusable and non-compensable regardless if road user costs are being charged for closures.

2.0 Traffic Management Schedule.

2.1 Traffic management schedules shall be submitted to the engineer for review prior to the start of work and prior to any revisions to the traffic management schedule. The traffic management

schedule shall include the proposed traffic control measures, the hours traffic control will be in place, and work hours.

2.2 The traffic management schedule shall conform to the limitations specified in Sec 616 regarding lane closures, traffic shifts, road closures and other width, height, and weight restrictions.

2.3 The engineer shall be notified as soon as practical of any postponement due to weather, material, or other circumstances.

2.4 In order to ensure minimal traffic interference, the contractor shall schedule lane closures for the absolute minimum amount of time required to complete the work. Lanes shall not be closed until material is available for continuous construction and the contractor is prepared to diligently pursue the work until the closed lane is opened to traffic.

2.5 Traffic Congestion. The contractor shall, upon approval of the engineer, take proactive measures to reduce traffic congestion in the work zone. The contractor shall immediately implement appropriate mitigation strategies whenever traffic congestion reaches an excess of 10 minutes to prevent congestion from escalating to 15 minute or above threshold. If disruption of the traffic flow occurs and traffic is backed up in queues of 15-minute delays or longer, then the contractor shall immediately review the construction operations which contributed directly to disruption of the traffic flow and make adjustments to the operations to prevent the queues from reoccurring. Traffic delays may be monitored by physical presence on site or by utilizing real-time travel data through the work zone that generate text and/or email notifications where available. The engineer monitoring the work zone may also notify the contractor of delays that require prompt mitigation. The contractor may work with the engineer to determine what other alternative solutions or time periods would be acceptable.

2.5.1 Traffic Safety.

2.5.1.1 Recurring Congestion. Where traffic queues routinely extend to within 1000 feet of the ROAD WORK AHEAD, or similar, sign on a divided highway or to within 500 feet of the ROAD WORK AHEAD, or similar, sign on an undivided highway, the contractor shall extend the advance warning area, as approved by the engineer.

2.5.1.2 Non-Recurring Congestion. When traffic queues extend to within 1000 feet of the ROAD WORK AHEAD, or similar, sign on a divided highway or to within 500 feet of the ROAD WORK AHEAD, or similar, sign on an undivided highway infrequently, the contractor shall deploy a means of providing advance warning of the traffic congestion, as approved by the engineer. The warning location shall be no less than 1000 feet and no more than 0.5 mile in advance of the end of the traffic queue on divided highways and no less than 500 feet and no more than 0.5 mile in advance of the end of the traffic queue on undivided highways.

2.7 Traffic Management Center (TMC) Coordination. The Work Zone Specialist (WZS) or their designee shall contact by phone the MoDOT Traffic Management Center (Gateway Guide TMC at #314-275-1513) within five minutes of a lane or ramp closure beginning and within five minutes of a lane or ramp closure being removed. The WZS shall make this phone call 24 hours a day, 365 days of the year since the MoDOT Traffic Management Centers are always staffed.

3.0 Work Hour Restrictions.

3.1 Except for emergency work, as determined by the engineer, and long term lane closures required by project phasing, all lanes shall be scheduled to be open to traffic during the five major holiday periods shown below, from 12:00 noon on the last working day preceding the holiday until 6:00 a.m. on the first working day subsequent to the holiday unless otherwise approved by the engineer.

- Memorial Day
- Labor Day
- Thanksgiving
- Christmas
- New Year's Day

3.1.1 Independence Day. The lane restrictions specified in Section 3.1 shall also apply to Independence Day, except that the restricted periods shall be as follows:

When Independence Day falls on:	The Holiday is Observed on:	Halt Lane Closures beginning at:	Allow Lane Closures to resume at:
Sunday	Monday	Noon on Friday	6:00 a.m. on Tuesday
Monday	Monday	Noon on Friday	6:00 a.m. on Tuesday
Tuesday	Tuesday	Noon on Monday	6:00 a.m. on Wednesday
Wednesday	Wednesday	Noon on Tuesday	6:00 a.m. on Thursday
Thursday	Thursday	Noon on Wednesday	6:00 a.m. on Friday
Friday	Friday	Noon on Thursday	6:00 a.m. on Monday
Saturday	Friday	Noon on Thursday	6:00 a.m. on Monday

3.2 The contractor shall not perform any construction operation on the roadway, roadbed, or active lanes, including the hauling of material within the project limits, during restricted periods, holiday periods or other special events specified in the contract documents.

3.3 The contractor shall be aware that traffic volume data indicates construction operations on the roadbed between the following hours will likely result in traffic queues greater than 15 minutes. Based on this, the contractor's operations will be restricted accordingly unless it can be successfully demonstrated the operations can be performed without a 15-minute queue in traffic. It shall be the responsibility of the engineer to determine if the above work hours may be modified. Working hours for evenings, weekends and holidays will be determined by the engineer. The contractor may not work during the following listed hours:

- Route 180, no lane closures will be allowed from:
 - 6:00 a.m. - 9:00 a.m. Monday through Friday
 - 2:00 p.m. - 6:00 p.m. Monday through Friday
 - 9:00 a.m. - 1:00 p.m. Saturday

3.4 Any work requiring a reduction in the number of through lanes of traffic shall be completed during nighttime hours. Nighttime hours shall be considered to be 7:00 p.m. to 5:00 a.m. for this project.

4.0 Detours and Lane Closures.

4.1 At least one lane of traffic in each direction shall be maintained at all times except for brief intervals of time required when the movement of the contractor's equipment will seriously hinder

the safe movement of traffic. Periods during which the contractor will be allowed to interrupt traffic will be designated by the engineer.

5.0 Basis of Payment. No direct payment will be made to the contractor to recover the cost of equipment, labor, materials, or time required to fulfill the above provisions, unless specified elsewhere in the contract document. All authorized changes in the traffic control plan shall be provided for as specified in Sec 616.

D. Emergency Provisions and Incident Management JSP-90-11A

1.0 The contractor shall have communication equipment on the construction site or immediate access to other communication systems to request assistance from law enforcement or other emergency agencies for incident management. In case of traffic accidents or the need for law enforcement to direct or restore traffic flow through the job site, the contractor shall notify law enforcement or other emergency agencies immediately as needed. The area engineer's office shall also be notified when the contractor requests emergency assistance.

2.0 In addition to the 911 emergency telephone number for ambulance, fire or law enforcement services, the following agencies may also be notified for accident or emergency situation within the project limits.

Missouri Highway Patrol 573-751-3313		
St. Louis County	St Ann Police Department	Missouri State Highway Patrol Troop C Headquarters
Chief of Police: 314-444-5309	Police: (314) 428-6868	Hwy Patrol: (636) 300-2800
Community Fire Protection District Station 2	Mid-County Fire Protection District	Berkeley Fire Department
Fire: (314) 428-1128	Fire: (314) 863-4018	Fire: (314) 524-3313
MoDOT Transportation Management Center (TMC)	St John Police Department	Pagedale Police Department
MODOT: (314) 275-1500	Police: (314) 427-8700	Police: (314) 726-1112

2.1 This list is not all inclusive. Notification of the need for wrecker or tow truck services will remain the responsibility of the appropriate law enforcement agency.

2.2 The contractor shall notify law enforcement and emergency agencies before the start of construction to request their cooperation and to provide coordination of services when emergencies arise during the construction at the project site. When the contractor completes this notification with law enforcement and emergency agencies, a report shall be furnished to the engineer on the status of incident management.

3.0 No direct pay will be made to the contractor to recover the cost of the communication equipment, labor, materials, or time required to fulfill the above provisions.

E. Project Contact for Contractor/Bidder Questions JSP-96-05

All questions concerning this project during the bidding process shall be forwarded to the project contact listed below.

Jamie Rana, PE
Transportation Project Manager
St. Louis District
1590 Woodlake Dr.
Chesterfield, MO 63017

Telephone Number: 314-624-5035
Email: jamie.rana@modot.mo.gov

All questions concerning the bid document preparation can be directed to the Central Office – Design at (573) 751-2876.

F. Supplemental Revisions JSP-18-01CC

Compliance with [2 CFR 200.216 – Prohibition on Certain Telecommunications and Video Surveillance Services or Equipment](#).

The Missouri Highways and Transportation Commission shall not enter into a contract (or extend or renew a contract) using federal funds to procure or obtain equipment, services, or systems that uses covered telecommunications equipment or services as substantial or as critical technology as part of any system where the video surveillance and telecommunications equipment was produced by Huawei Technologies Company, ZTE Corporation, Hytera Communications Corporation, Hangzhou Hikvision Digital Technology Company, or Dahua Technology Company (or any subsidiary or affiliate of such entities).

Stormwater Compliance Requirements

1.0 Description. This provision requires the contractor to provide a Water Pollution Control Manager (WPCM) for any project that includes land disturbance on the project site and the total area of land disturbance, both on the project site, and all Off-site support areas, is one (1) acre or more. Regardless of the area of Off-site disturbance, if no land disturbance occurs on the project site, these provisions do not apply. When a WPCM is required, all sections within this provision shall be applicable, including assessment of specified Liquidated Damages for failure to correct Stormwater Deficiencies, as specified herein. This provision is in addition to any other stormwater, environmental, and land disturbance requirements specified elsewhere in the contract.

1.1 Definitions. The project site is defined as all areas designated on the plans, including temporary and permanent easements. The project site is equivalent to the “permitted site”, as defined in MoDOT’s State Operating Permit. An Off-site area is defined as any location off the project site the contractor utilizes for a dedicated project support function, such as, but not limited to, staging area, plant site, borrow area, or waste area.

1.2 Reporting of Off-Site Land Disturbance. If the project includes any planned land disturbance on the project site, prior to the start of work, the contractor shall submit a written report to the engineer that discloses all Off-site support areas where land disturbance is planned,

the total acreage of anticipated land disturbance on those sites, and the land disturbance permit number(s). Upon request by the engineer, the contractor shall submit a copy of its land disturbance permit(s) for Off-site locations. Based on the total acreage of land disturbance, both on and Off-site, the engineer shall determine if these Stormwater Compliance Requirements shall apply. The Contractor shall immediately report any changes to the planned area of Off-site land disturbance. The Contractor is responsible for obtaining its own separate land disturbance permit for Off-site areas.

2.0 Water Pollution Control Manager (WPCM). The Contractor shall designate a competent person to serve as the Water Pollution Control Manager (WPCM) for projects meeting the description in Section 1.0. The Contractor shall ensure the WPCM completes all duties listed in Section 2.1.

2.1 Duties of the WPCM:

- (a) Be familiar with the stormwater requirements including the current MoDOT State Operating Permit for construction stormwater discharges/land disturbance activities; MoDOT's statewide Stormwater Pollution Prevention Plan (SWPPP); the Corps of Engineers Section 404 Permit, when applicable; the project specific SWPPP, the Project's Erosion & Sediment Control Plan; all applicable special provisions, specifications, and standard drawings; and this provision;
- (b) Successfully complete the MoDOT Stormwater Training Course within the last 4 years. The MoDOT Stormwater Training is a free online course available at MoDOT.org;
- (c) Attend the Pre-Activity Meeting for Grading and Land Disturbance and all subsequent Weekly Meetings in which grading activities are discussed;
- (d) Oversee and ensure all work is performed in accordance with the Project-specific SWPPP and all updates thereto, or as designated by the engineer;
- (e) Review the project site for compliance with the Project SWPPP, as needed, from the start of any grading operations until final stabilization is achieved, and take necessary actions to correct any known deficiencies to prevent pollution of the waters of the state or adjacent property owners prior to the engineer's weekly inspections;
- (f) Review and acknowledge receipt of each MoDOT Inspection Report (Land Disturbance Inspection Record) for the Project within forty eight (48) hours of receiving the report and ensure that all Stormwater Deficiencies noted on the report are corrected as soon as possible, but no later than stated in Section 5.0.

3.0 Pre-Activity Meeting for Grading/Land Disturbance and Required Hold Point. A Pre-Activity meeting for grading/land disturbance shall be held prior to the start of any land disturbance operations. No land disturbance operations shall commence prior to the Pre-Activity meeting except work necessary to install perimeter controls and entrances. Discussion items at the pre-activity meeting shall include a review of the Project SWPPP, the planned order of grading operations, proposed areas of initial disturbance, identification of all necessary BMPs that shall be installed prior to commencement of grading operations, and any issues relating to compliance with the Stormwater requirements that could arise in the course of construction activity at the project.

3.1 Hold Point. Following the pre-activity meeting for grading/land disturbance and subsequent installation of the initial BMPs identified at the pre-activity meeting, a Hold Point shall occur prior to the start of any land disturbance operations to allow the engineer and WPCM the time needed to perform an on-site review of the installation of the BMPs to ensure compliance with the SWPPP is met. Land disturbance operations shall not begin until authorization is given by the engineer.

4.0 Inspection Reports. Weekly and post run-off inspections will be performed by the engineer and each Inspection Report (Land Disturbance Inspection Record) will be entered into a web-based Stormwater Compliance database. The WPCM will be granted access to this database and shall promptly review all reports, including any noted deficiencies, and shall acknowledge receipt of the report as required in Section 2.1 (f.).

5.0 Stormwater Deficiency Corrections. All stormwater deficiencies identified in the Inspection Report shall be corrected by the contractor within 7 days of the inspection date or any extended period granted by the engineer when weather or field conditions prohibit the corrective work. If the contractor does not initiate corrective measures within 5 calendar days of the inspection date or any extended period granted by the engineer, all work shall cease on the project except for work to correct these deficiencies, unless otherwise allowed by the engineer. All impact costs related to this halting of work, including, but not limited to stand-by time for equipment, shall be borne by the Contractor. Work shall not resume until the engineer approves the corrective work.

5.1 Liquidated Damages. If the Contractor fails to complete the correction of all Stormwater Deficiencies listed on the MoDOT Inspection Report within the specified time limit, the Commission will be damaged in various ways, including but not limited to, potential liability, required mitigation, environmental clean-up, fines, and penalties. These damages are not reasonably capable of being computed or quantified. Therefore, the contractor will be charged with liquidated damages specified in the amount of \$2,000 per day for failure to correct one or more of the Stormwater Deficiencies listed on the Inspection Report within the specified time limit. In addition to the stipulated damages, the stoppage of work shall remain in effect until all corrections are complete.

6.0 Basis of Payment. No direct payment will be made for compliance with this provision.

Delete Sec 106.9 in its entirety and substitute the following:

106.9 Buy America Requirements.

Buy America Requirements are waived if the total amount of Federal financial assistance applied to the project, through awards or subawards, is below \$500,000.

106.9.1 Buy America Requirements for Iron and Steel.

On all federal-aid projects, the contractor's attention is directed to Title 23 CFR 635.410 *Buy America Requirements*. Where steel or iron products are to be permanently incorporated into the contract work, steel and iron material shall be manufactured, from the initial melting stage through the application of coatings, in the USA except for "minimal use" as described herein. Furthermore, any coating process of the steel or iron shall be performed in the USA. Under a general waiver from FHWA the use of pig iron and processed, pelletized, and reduced iron ore manufactured outside of the USA will be permitted in the domestic manufacturing process for steel or iron material.

106.9.1.1 Buy America Requirements for Iron and Steel for Manufactured items.

A manufactured item will be considered iron and steel if it is “predominantly” iron or steel. Predominantly iron or steel means that the cost of iron or steel content of a product is more than 50 percent of the total cost of all its components.

106.9.2 Any sources other than the USA as defined will be considered foreign. The required domestic manufacturing process shall include formation of ingots and any subsequent process. Coatings shall include any surface finish that protects or adds value to the product.

106.9.3 “Minimal use” of foreign steel, iron or coating processes will be permitted, provided the cost of such products does not exceed 1/10 of one percent (0.1 percent) of the total contract cost or \$2,500.00, whichever is greater. If foreign steel, iron, or coating processes are used, invoices to document the cost of the foreign portion, as delivered to the project, shall be provided and the engineer’s written approval obtained prior to placing the material in any work.

106.9.4 Buy America requirements include a step certification for all fabrication processes of all steel or iron materials that are accepted per Sec 1000. The AASHTO Product Evaluation and Audit Solutions compliance program verifies that all steel and iron products fabrication processes conform to 23 CFR 635.410 Buy America Requirements and is an acceptable standard per 23 CFR 635.410(d). AASHTO Product Evaluation and Audit Solutions compliant suppliers will not be required to submit step certification documentation with the shipment for some selected steel and iron materials. The AASHTO Product Evaluation and Audit Solutions compliant supplier shall maintain the step certification documentation on file and shall provide this documentation to the engineer upon request.

106.9.4.1 Items designated as Category 1 will consist of steel girders, piling, and reinforcing steel installed on site. Category 1 items require supporting documentation prior to incorporation into the project showing all steps of manufacturing, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410 Buy America Requirements. This includes the Mill Test Report from the original producing steel mill and certifications documenting the manufacturing process for all subsequent fabrication, including coatings. The certification shall include language that certifies the following. That all steel and iron materials permanently incorporated in this project was procured and processed domestically and all manufacturing processes, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410.

106.9.4.2 Items designated as Category 2 will include all other steel or iron products not in Category 1 and permanently incorporated in the project. Category 2 items shall consist of, but not be limited to items such as fencing, guardrail, signing, lighting and signal supports. The prime contractor is required to submit a material of origin form certification prior to incorporation into the project from the fabricator for each item that the product is domestic. The Certificate of Materials Origin form ([link to certificate form](#)) from the fabricator must show all steps of manufacturing, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410 Buy America Requirements and be signed by a fabricator representative. The engineer reserves the right to request additional information and documentation to verify that all Buy America requirements have been satisfied. These documents shall be submitted upon request by the engineer and retained for a period of 3 years after the last reimbursement of the material.

106.9.4.3 Any minor miscellaneous steel or iron items that are not included in the materials specifications shall be certified by the prime contractor as being procured domestically. Examples of these items would be bolts for sign posts, anchorage inserts, etc. The certification shall read

"I certify that all steel and iron materials permanently incorporated in this project during all manufacturing processes, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410 Buy America Requirements procured and processed domestically in accordance with CFR Title 23 Section 635.410 Buy America Requirements. Any foreign steel used was submitted and accepted under minor usage". The certification shall be signed by an authorized representative of the prime contractor.

106.9.5 When permitted in the contract, alternate bids may be submitted for foreign steel and iron products. The award of the contract when alternate bids are permitted will be based on the lowest total bid of the contract based on furnishing domestic steel or iron products or 125 percent of the lowest total bid based on furnishing foreign steel or iron products. If foreign steel or iron products are awarded in the contract, domestic steel or iron products may be used; however, payment will be at the contract unit price for foreign steel or iron products.

106.9.6 Buy America Requirements for Construction Materials other than iron and steel materials. Construction materials means articles, materials, or supplies that consist of only one of the items listed. Minor additions of articles, materials, supplies, or binding agents to a construction material do not change the categorization of the construction material. Upon request by the engineer, the contractor shall submit a domestic certification for all construction materials listed that are incorporated into the project.

- (a) Non-ferrous metals
- (b) Plastic and Polymer-based products (including polyvinylchloride, composite building materials, and polymers used in fiber optic cables)
- (c) Glass (including optic glass)
- (d) Fiber optic cable (including drop cable)
- (e) Optical fiber
- (f) Lumber
- (g) Engineered wood
- (h) Drywall

106.9.6.1 Minimal Use allowance for Construction Materials other than iron or steel.

"The total value of the non-compliant products is no more than the lesser of \$1,000,000 or 5% of total applicable costs for the project." The contractor shall submit to the engineer any non-domestic materials and their total material cost to the engineer. The contractor and the engineer will both track these totals to assure that the minimal usage allowance is not exceeded.

106.9.7 Buy America Requirements for Manufactured Products.

Manufactured products means:

- (a) Articles, materials, or supplies that have been:
 - (i) Processed into a specific form and shape; or
 - (ii) Combined with other articles, materials, or supplies to create a product with different properties than the individual articles, materials, or supplies.
- (b) If an item is classified as an iron or steel product, a construction material, or a section 70917(c) material under § 184.4(e) and the definitions set forth in this section, then it is not a manufactured product. However, an article, material, or supply classified as a manufactured product under § 184.4(e) and paragraph (1) of this definition may include components that are construction materials, iron or steel products, or section 70917(c) materials.

106.9.7.1 Manufactured products are exempt from Buy America requirements. To qualify as a manufactured product, items that consist of two or more of the listed construction materials that have been combined together through a manufacturing process, and items that include at least one of the listed materials combined with a material that is not listed through a manufacturing process, should be treated as manufactured products, rather than as construction materials.

106.9.7.2 Manufactured items are covered under a general waiver to exclude them from Buy America Requirements. To qualify for the exemption the components must comprise of 55% of the value of materials in the item. The final assembly must also be performed domestically.

Pavement Marking Paint Requirements for Standard Waterborne and Temporary

1.0 Description. High Build acrylic waterborne pavement marking paint shall be used in lieu of standard acrylic waterborne pavement marking paint for all Standard Waterborne Pavement Marking Paint items and all Temporary Pavement Marking Paint items. Paint thickness, bead type, bead application rate, retroreflectivity requirements, and all other specifications shall remain as stated in the Missouri Standard Specifications for Highway Construction, except as otherwise amended in the contract documents.

2.0 Material Requirements. Material requirements for Sec 620.20.2.5 Standard Waterborne Paint, and Sec 620.10.2 Temporary Pavement Marking Paint shall be per Sec 1048.20.1.2 High Build Acrylic Waterborne Pavement Marking Paint.

G. Lump Sum Temporary Traffic Control JSP-22-01A

1.0 Delete Sec 616.11 and insert the following:

616.11 Method of Measurement. Measurement for relocation of post-mounted signs will be made to the nearest square foot of sign area only for the signs designated for payment on the plans. All other sign relocations shall be incidental. Measurement for construction signs will be made to the nearest square foot of sign area. Measurement will be made per each for each of the temporary traffic control items provided in the contract.

616.11.1 Lump Sum Temporary Traffic Control. No measurement will be made for temporary traffic control items grouped and designated to be paid per lump sum. The list of lump sum items provided in the plans or contract is considered an approximation and may be subject to change based on field conditions. This is not a complete list and may exclude quantities for duplicate work zone packages used in simultaneous operations. The contractor shall provide all traffic control devices required to execute the provided traffic control plans for each applicable operation, stage, or phase. No measurement will be made for any additional signs or devices needed except for changes in the traffic control plan directed by the engineer.

2.0 Delete Sec 616.12 and insert the following:

616.12 Basis of Payment. All temporary traffic control devices authorized for installation by the engineer will be paid for at the contract unit price for each of the pay items included in the contract. Whether the devices are paid individually, or per lump sum, no direct payment will be made for the following:

- (a) Incidental items necessary to complete the work, unless specifically provided as a pay item in the contract.
- (b) Installing, operating, maintaining, cleaning, repairing, removing, or replacing traffic control devices.
- (c) Covering and uncovering existing signs and other traffic control devices.
- (d) Relocating temporary traffic control devices, including permanent traffic control devices temporarily relocated, unless specifically included as a pay item in the contract.
- (e) Worker apparel.
- (f) Flaggers, AFADs, PFDs, pilot vehicles, and appurtenances at flagging stations.
- (g) Furnishing, installing, operating, maintaining, and removing construction-related vehicle and equipment lighting.
- (h) Construction and removal of temporary equipment crossovers, including restoring pre-existing crossovers.
- (i) Provide and maintaining work zone lighting and work area lighting.

616.12.1 Lump Sum Temporary Traffic Control. Traffic control items grouped together in the contract or plans for lump sum payment shall be paid incrementally per Sec 616.12.1.1. Alternately, upon request from the contractor, the engineer will consider a modified payment schedule that more accurately reflects completion of traffic control work. No payment will be made for any additional signs or devices needed except for changes in the traffic control plan directed by the engineer. Additional items directed by the engineer will be paid for in accordance with Sec 109.4. No adjustment to the price will be made for overruns or underruns of other work or for added work that is completed within existing work zones.

616.12.1.1 Partial payments. For purposes of determining partial payments, the original contract amount will be the total dollar value of all original contract line items less the price for Lump Sum Temporary Traffic Control (LSTTC). If the contract includes multiple projects, this determination will be made for each project. Partial payments will be made as follows:

- (a) The first payment will be made when five percent of the original contract amount is earned. The payment will be 50 percent of the price for LSTTC, or five percent of the original contract amount, whichever is less.
- (b) The second payment will be made when 50 percent of the original contract amount is earned. The payment will be 25 percent of the price for LSTTC, or 2.5 percent of the original contract amount, whichever is less.
- (c) The third payment will be made when 75 percent of the original contract amount is earned. The payment will be 20 percent of the price for LSTTC, or two percent of the original contract amount, whichever is less.
- (d) Payment for the remaining balance due for LSTTC will be made when the contract has been accepted for maintenance or earlier as approved by the engineer.

616.12.1.2 Temporary traffic control will be paid for at the contract lump sum price for Item:

Item No.	Unit	Description
616-99.01	Lump Sum	Misc. Lump Sum Temporary Traffic Control

H. ATC Traffic Signal

1.0 Description. All signal controllers must be able to interface with the Commission’s St. Louis District Advanced Traffic Management System (ATMS) platform.

2.0 Material. All traffic signal controllers purchased and installed on this project shall be selected from the list below and match the cabinet type and connections indicated on the D-37C sheet for each intersection(s). The controllers on the list below are the only controllers that are tested, fully functional, and approved with the ATMS platform that the Commission’s St. Louis District is currently operating:

Controller/Firmware Type	Firmware Supported	Cabinet Type (Match in field)
Econolite Cobalt	3.2.24	NEMA TS2 Type 1 or 2
Econolite Cobalt	32.65	NEMA TS2 Type 1 or 2

3.0 Construction Requirements. Contractor shall ensure that the signal controller as noted above is programmed to be compatible with the St. Louis District ATMS platform.

The Contractor shall swap new signal controllers at nighttime only at the following locations:

1. MO 180 and I-270 NB Ramp
2. MO 180 and I-270 SB Ramp

The Contractor will be allowed to swap new signal controllers at the other locations during normal daytime hours.

3.1 Controller Programming. The contractor shall be responsible for programming the new controller to match the existing phasing, timing, and communication settings of the existing signal controller. New detector assignments for stop bar and advanced detection shall be programmed per JSP I - SL District Traffic Signal Stop Bar Detection System and JSP J - SL District Traffic Signal Advanced Detection System.

4.0 Acceptance Testing. All controllers shall be tested per the Commission’s specifications. Programming and testing should be done prior to any installation and approved by the Commission’s engineer or representative. The contractor shall provide a copy of the signal programming to the engineer via an USB Flash drive.

5.0 Documentation. Contractor shall provide the engineer with an electronic copy of the manufacturer’s signal controller manual or link to the website where the manual can be downloaded in .pdf format.

6.0 Basis of Payment. Measurement and payment for work covered by this specification shall include all equipment, tools, and materials necessary and shall be paid at the contract unit price as follows:


Item No.	Type	Description
902-99.02	Each	ATC Traffic Signal Controller

I. **SL District Traffic Signal Stop Bar Detection System**

1.0 Description. This work shall consist of providing detectors for signalized installations that will support advance traffic signal performance measures (ATSPM) on the Commission’s St. Louis District roadways. Detectors shall be in accordance with the Missouri Standard Specifications for Highway Construction and installed to provide detection at locations as shown on the plans or as directed by the Engineer in accordance with Section 902. If any information conflicts between Section 902 and this JSP, the JSP shall supersede.

2.0 Detector Zones. Stop Bar detection zones shall be configured and placed as described in the plans (plan sheets and D-37C). The following detector zones shall be placed as shown in the plans. The following zones are listed in order of priority and shall be prioritized when programming.

1. Stop Bar Detection
2. Bicycle/Pedestrian (see Section 2.1)
3. Turn Counts

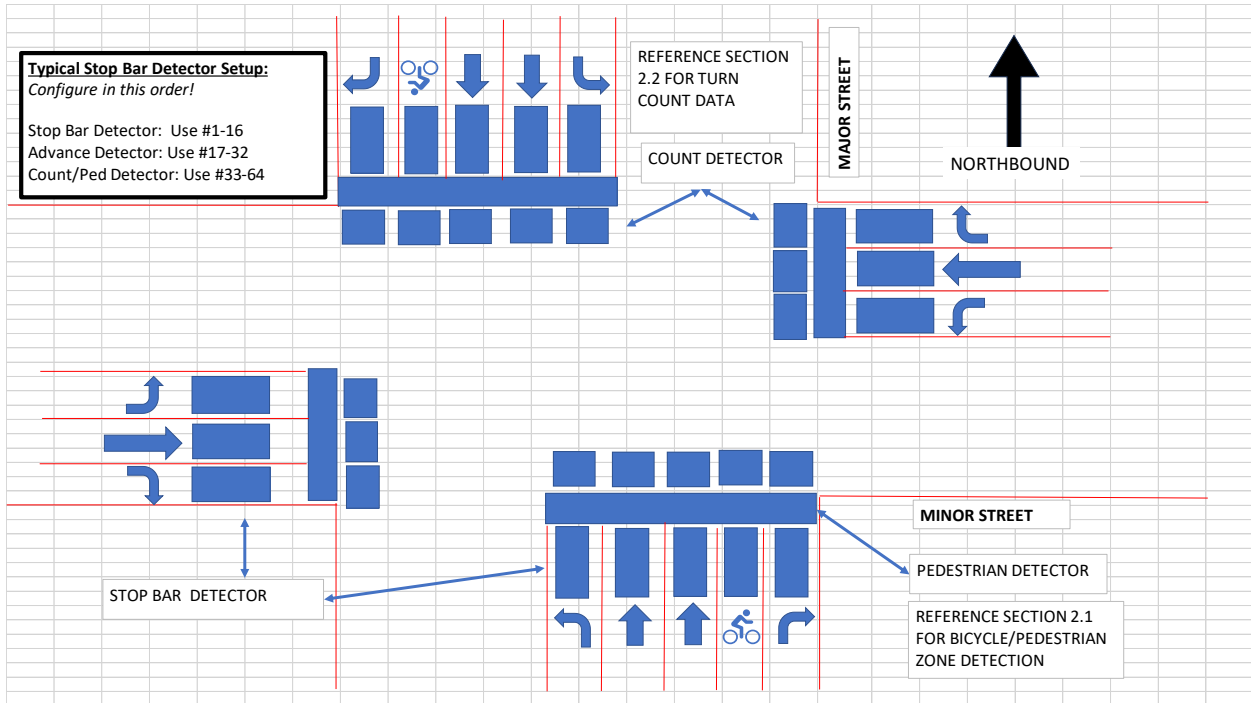


Description	Call	Extend	Data Collector
Stop Bar	Yes	Yes	No
Count Detector	No	No	Yes
Pedestrian Detector	No	No	Yes

2.1 Bicycle/Pedestrian Zones. Bicycle and/or pedestrian zones (if applicable) shall be provided when bicycle and/or pedestrian facilities are present as directed by the Engineer. Specific zone placement and description as required by vendor shall be reviewed and approved by the Engineer.


2.2 Turn Count Zones. Count detector zones should be drawn for each lane at the intersection even if no vehicle detection zone is required for each lane.

2.2 Intersection Stop Bar Detection Diagrams. The following diagrams depict the preferred zone configuration and detector assignments for each intersection. The zones shall be applied as per these diagrams or as directed by the Engineer.


1. MO 180 and Ogden

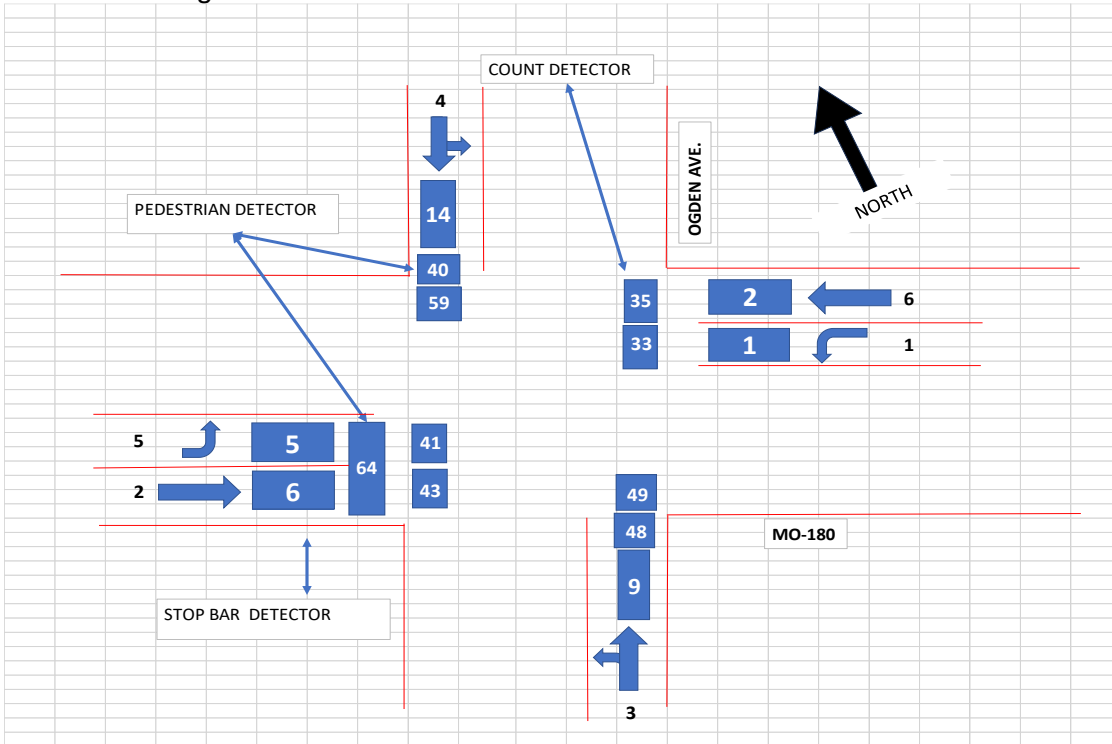


2. MO 180 and Lucas & Hunt

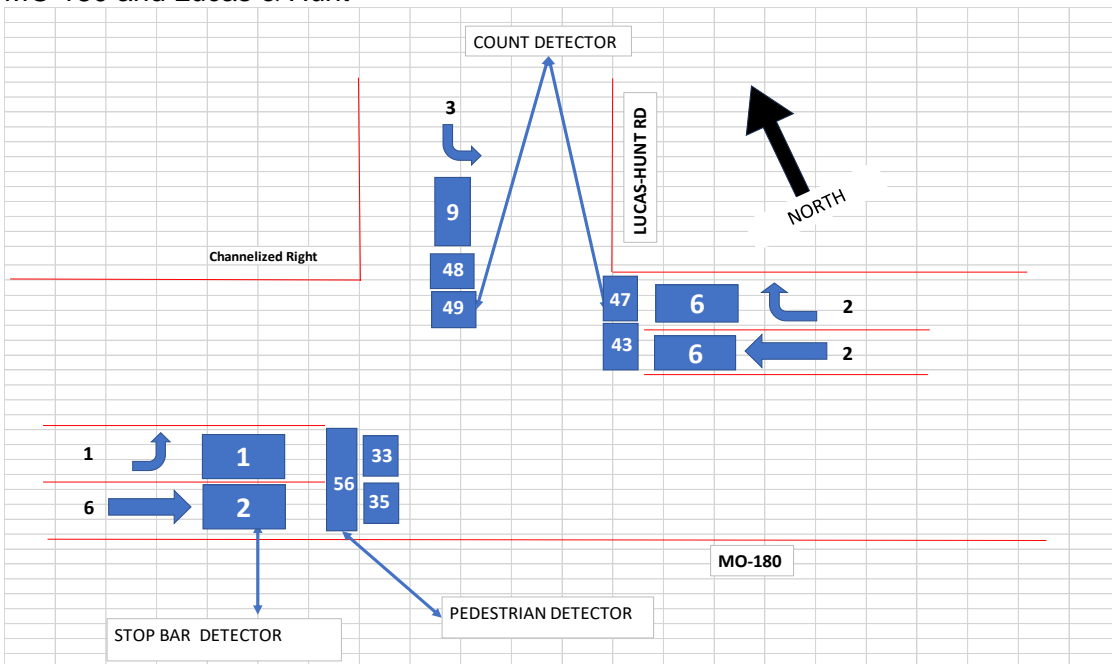


3. MO 180 and Kingsland-Metro

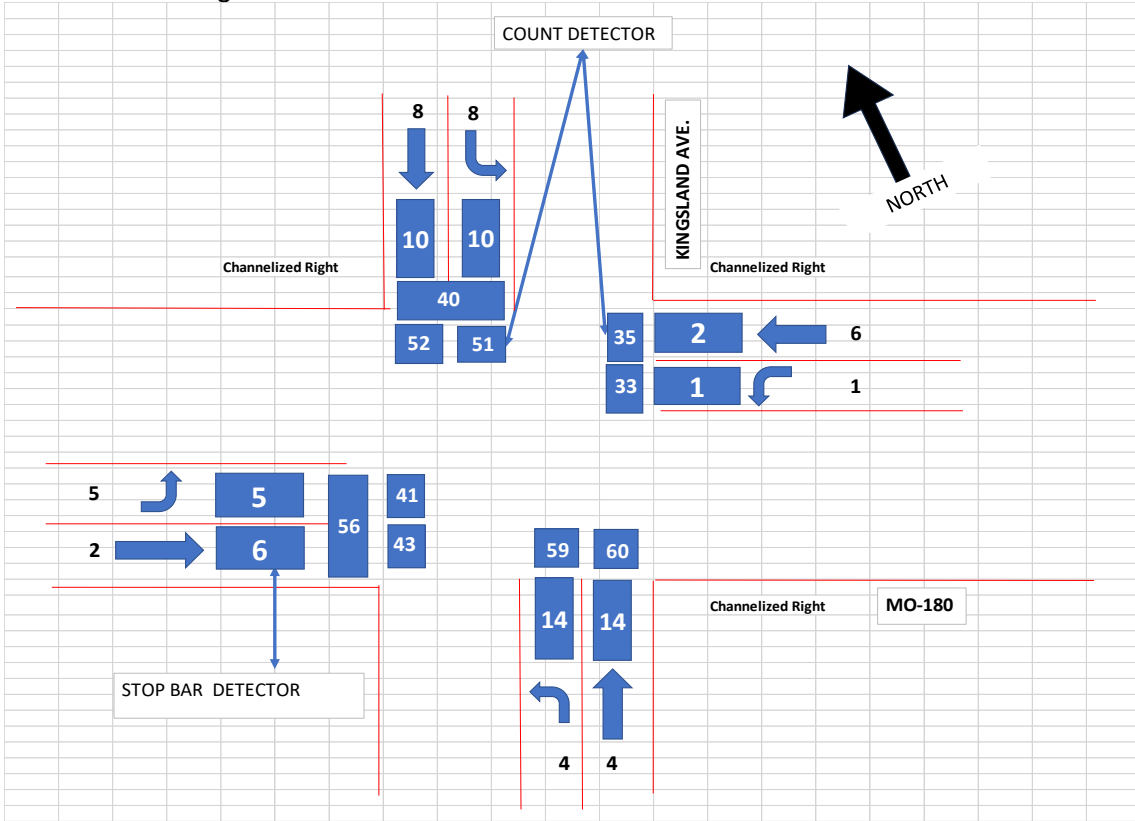


4. MO 180 and Ferguson

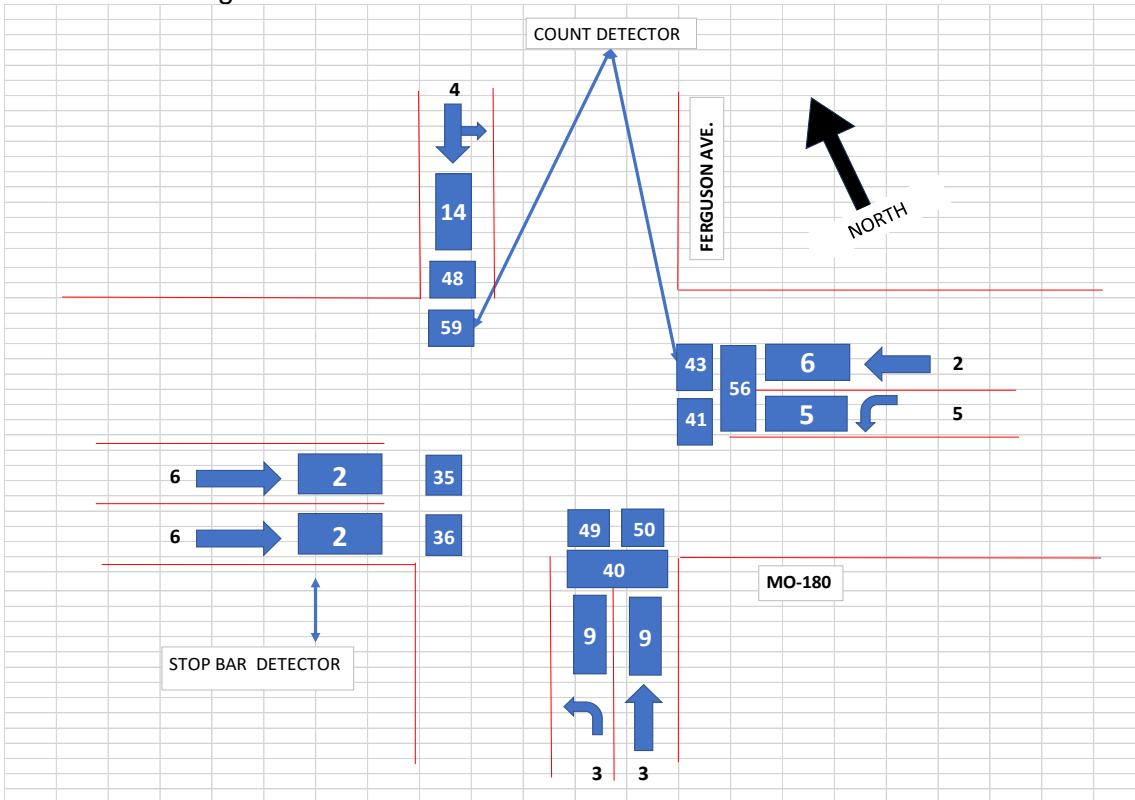


5. MO 180 and Spur-Pennsylvania

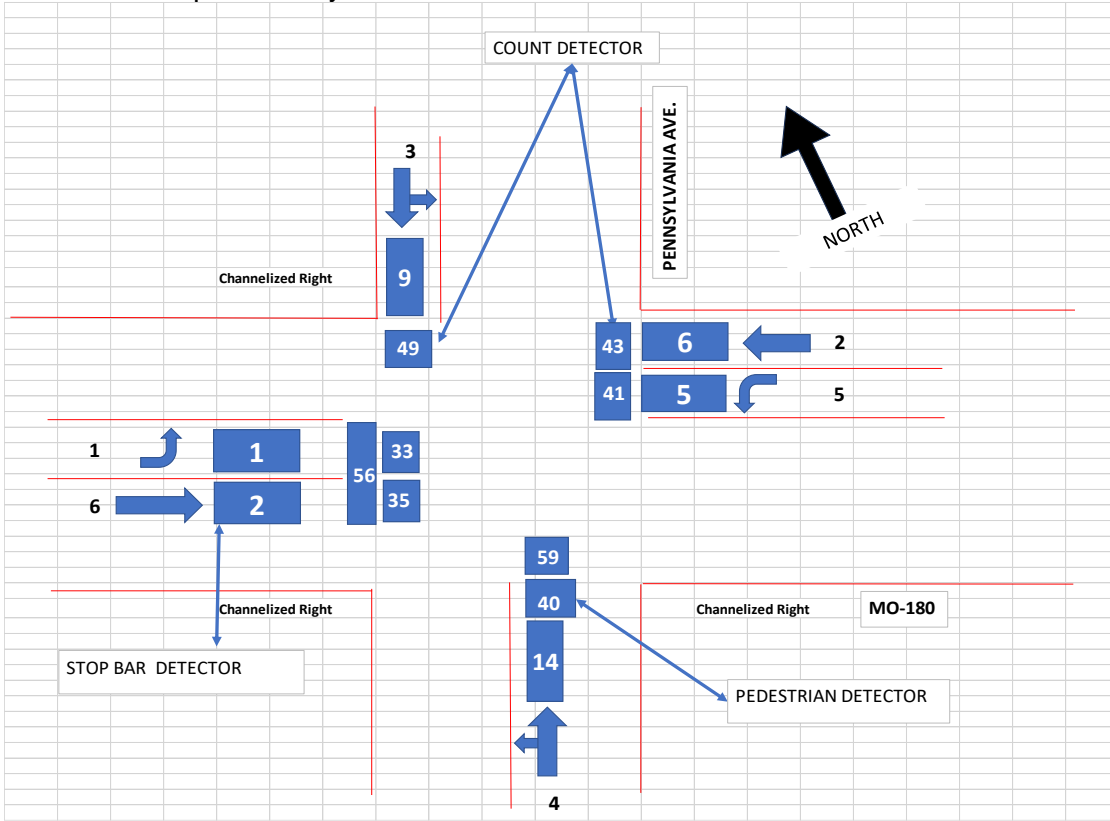


6. MO 180 and Normandy

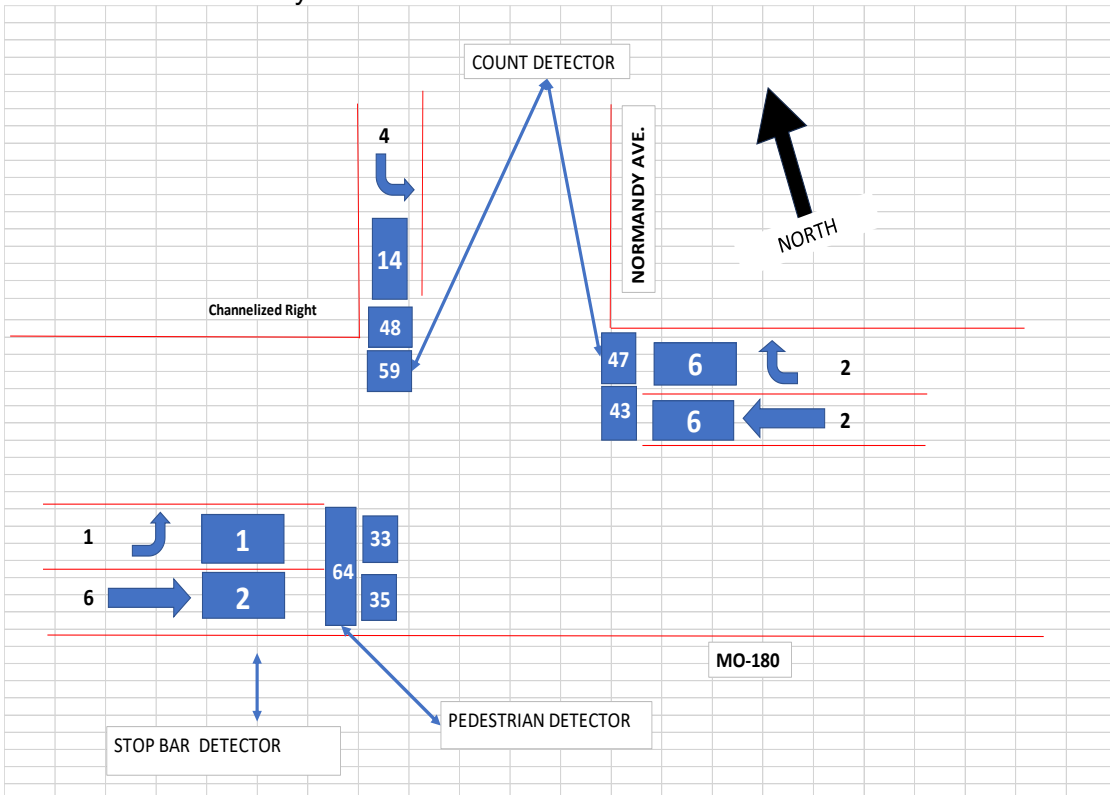


7. MO 180 and Hanley

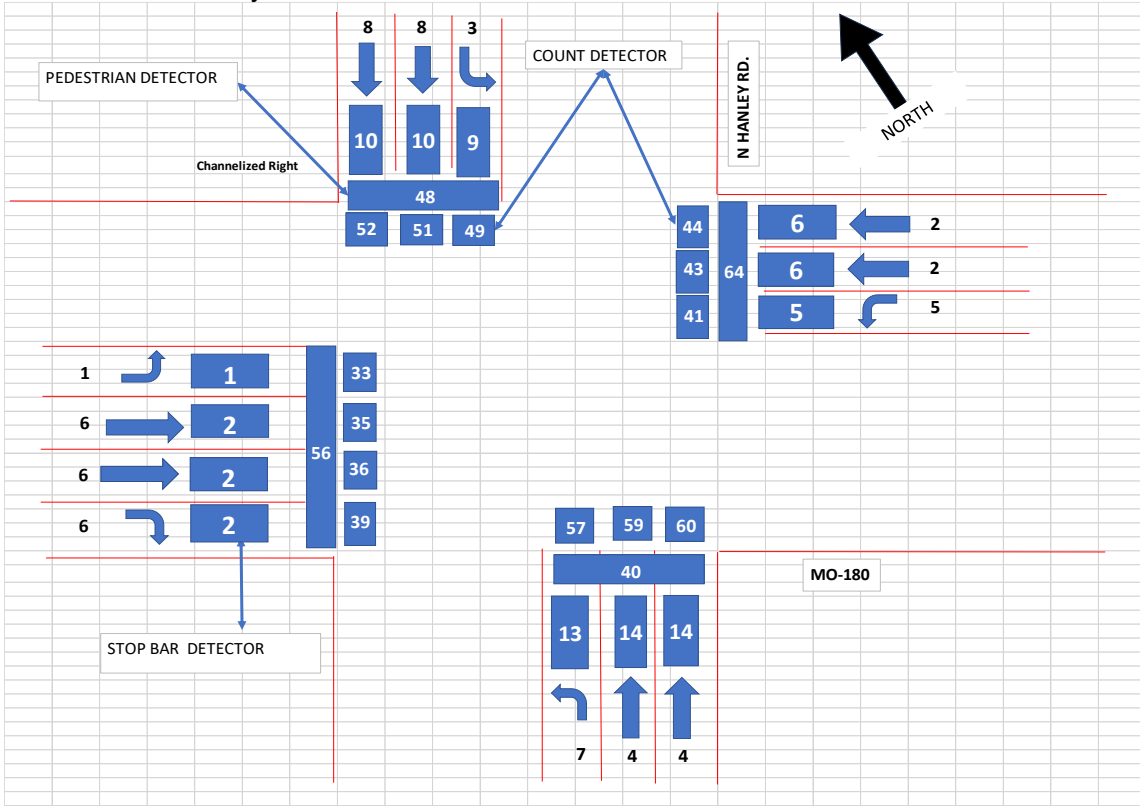


8. MO 180 and Lackland

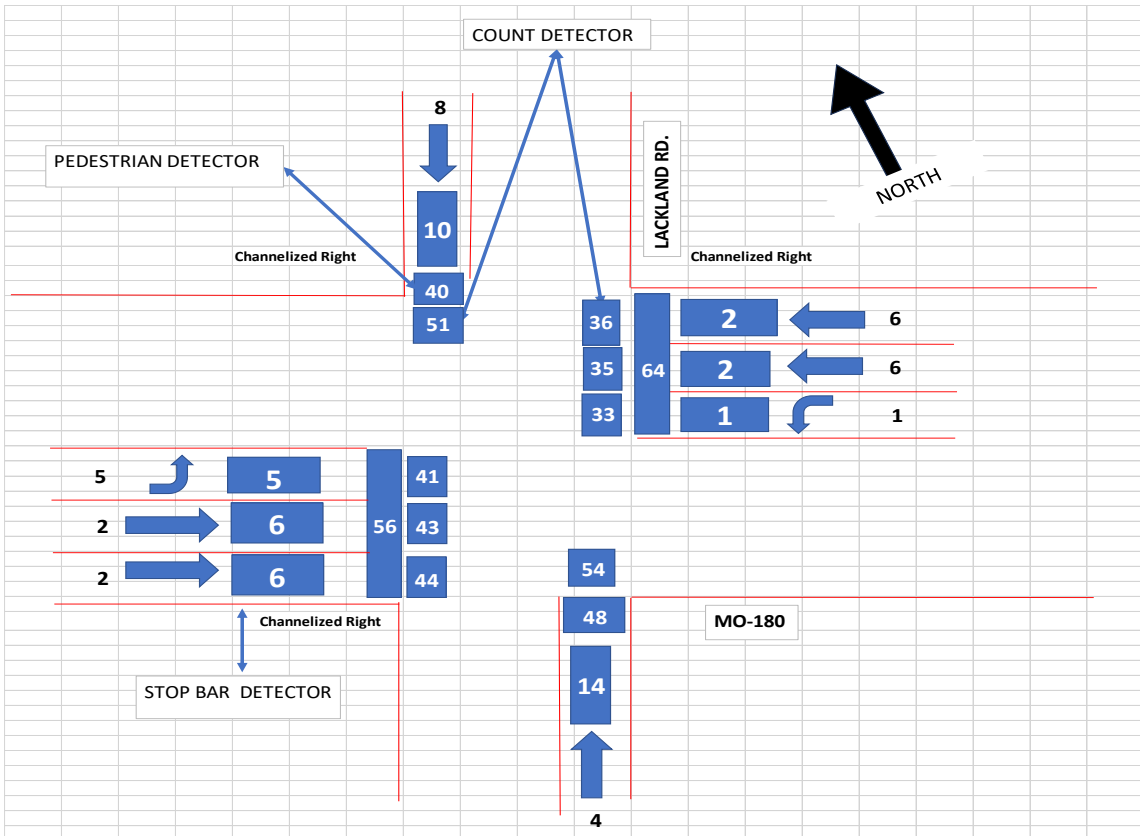


9. MO 180 and I-170

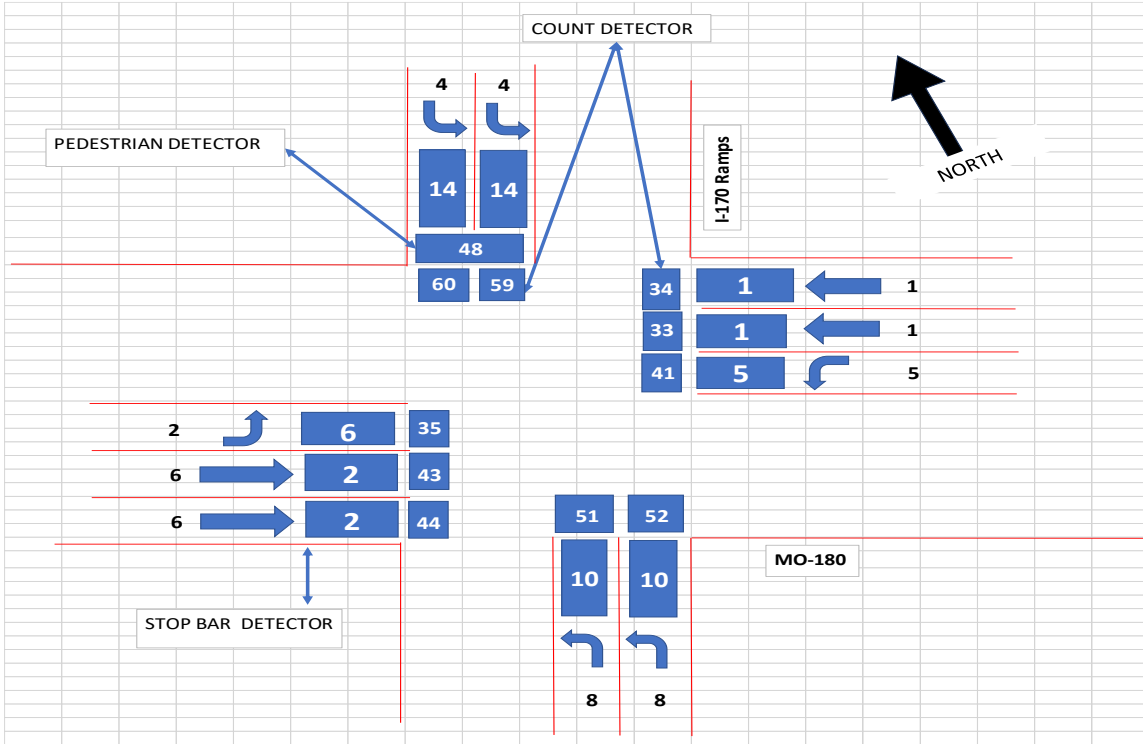


10. MO 180 and Brown

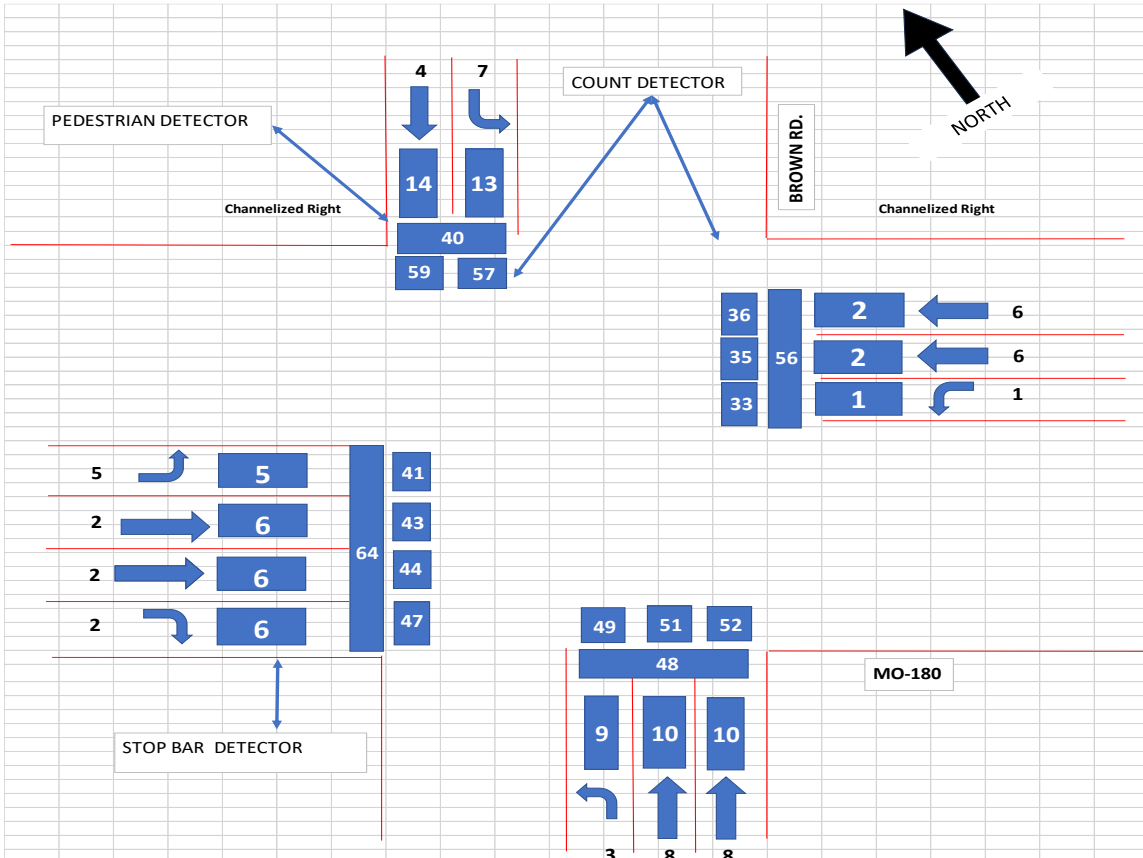


11. MO 180 and McKibbin

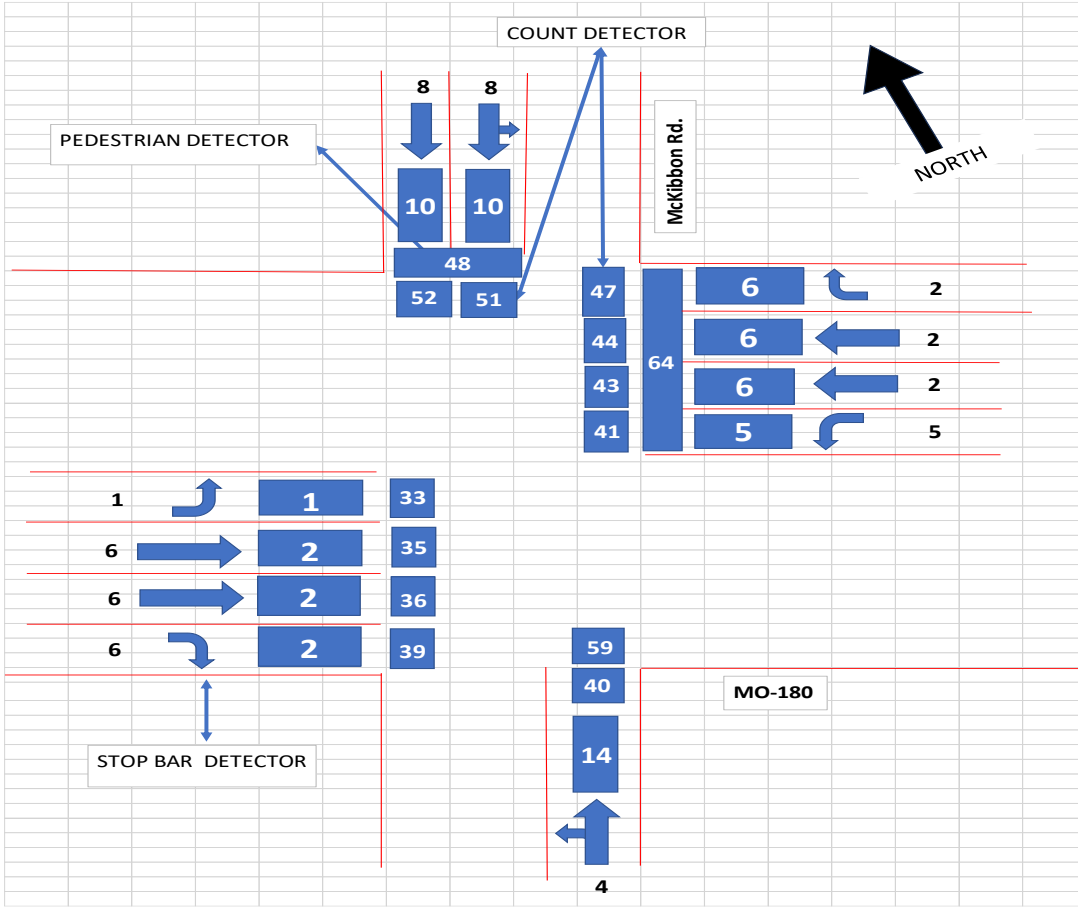


12. MO 180 and St. John's Crossing

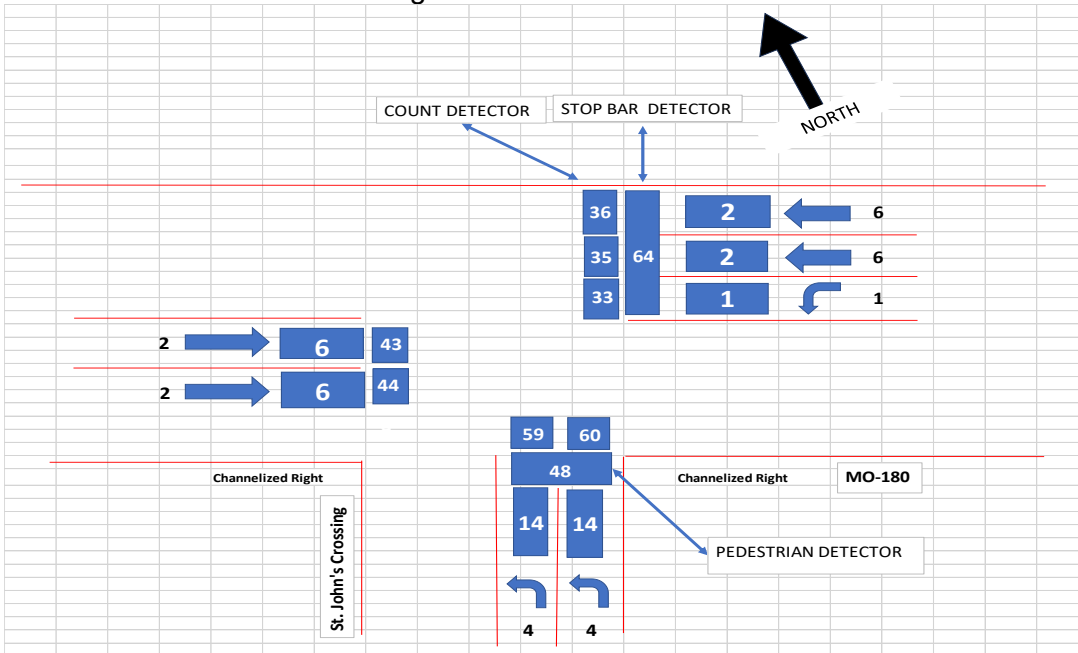


13. MO 180 and Woodson

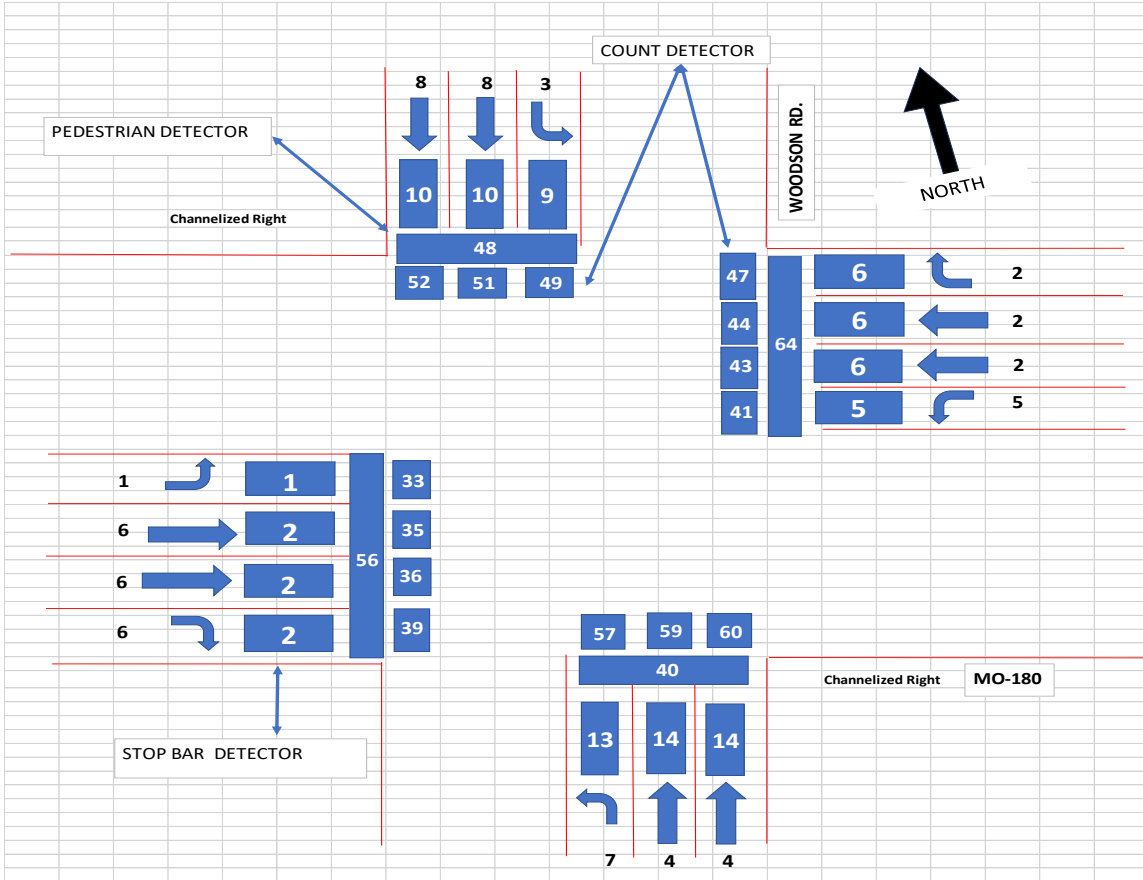


14. MO 180 and Edmundson

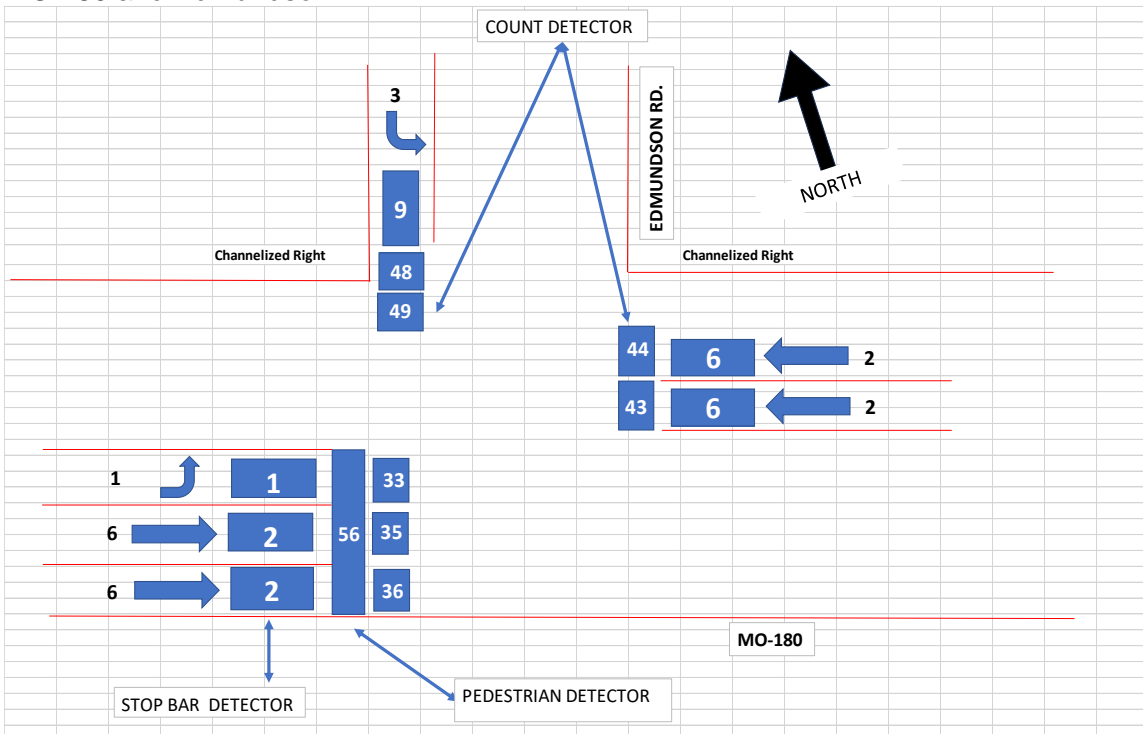

15. MO 180 and Lynntown

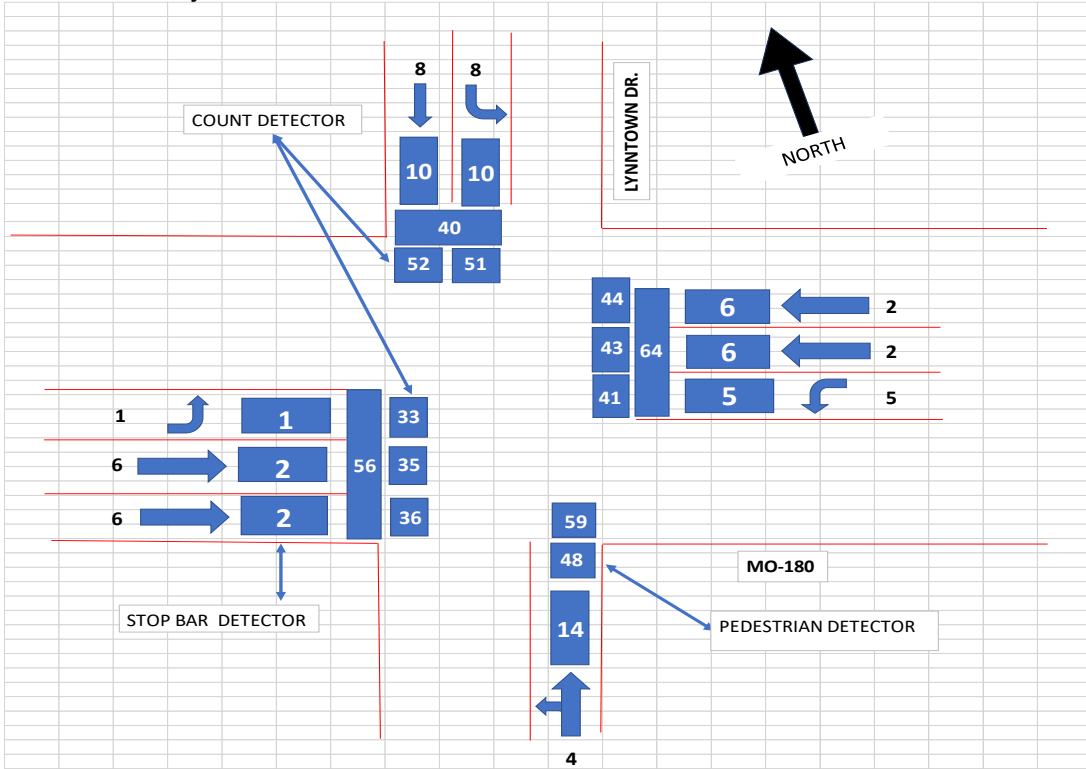


16. MO 180 and Wismer

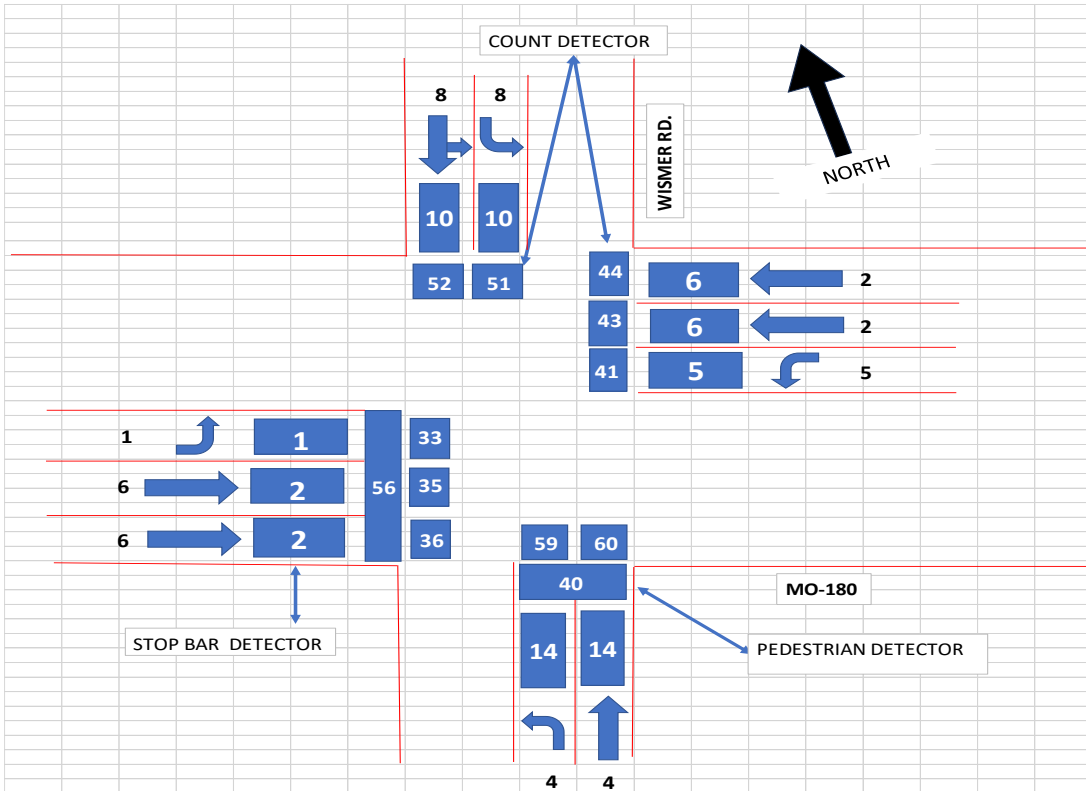


17. MO 180 and Geraldine-Fire Station (Not Applicable)


18. MO 180 and St. Gregory

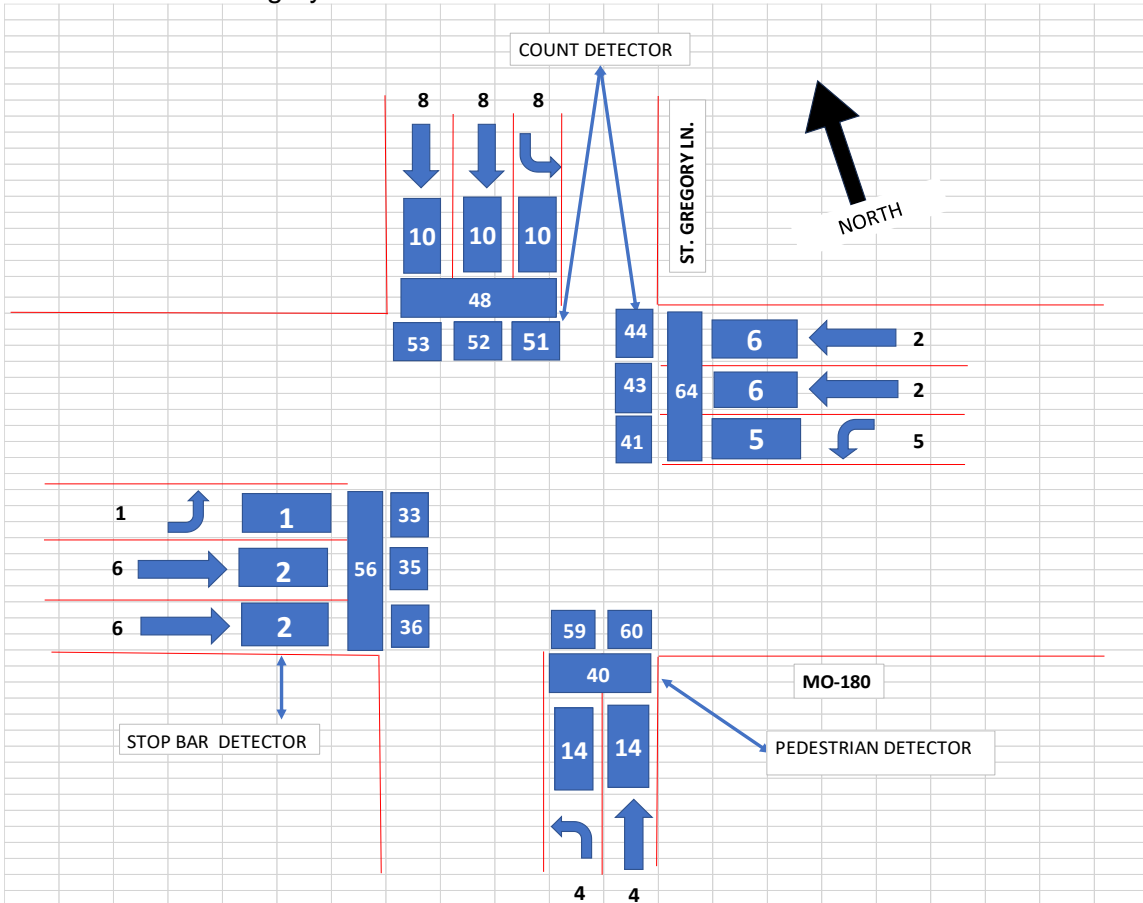


19. MO 180 and San Carlos

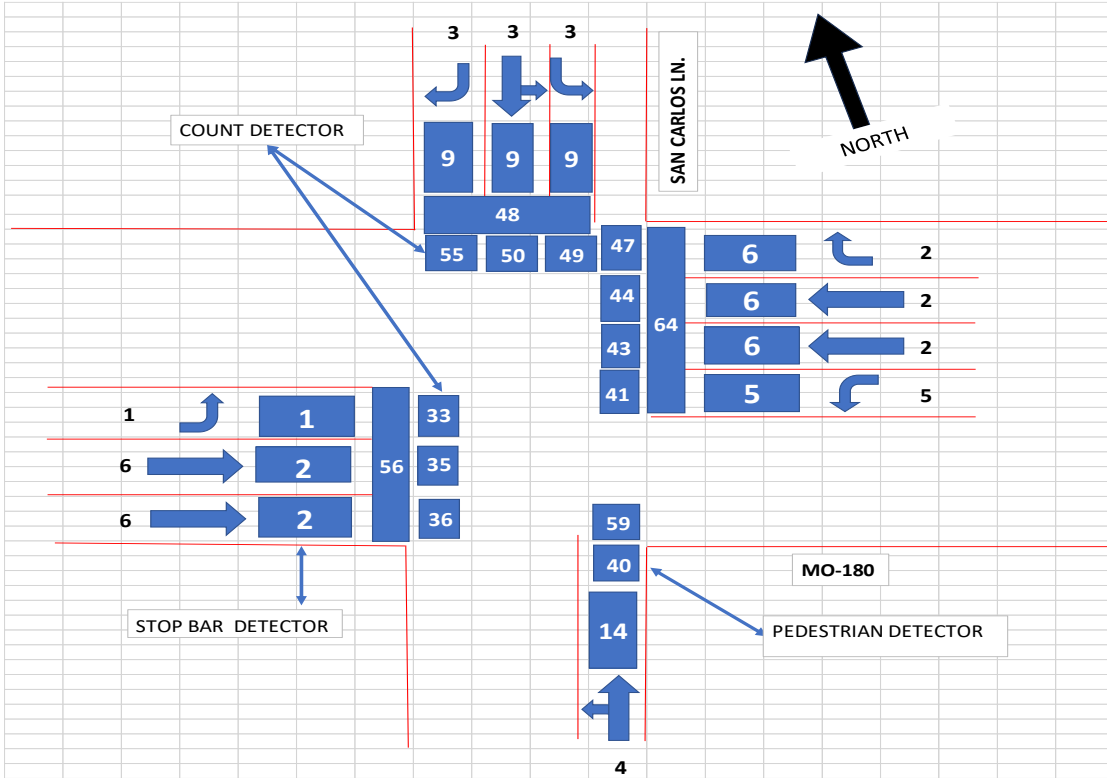


20. MO 180 and Ashby

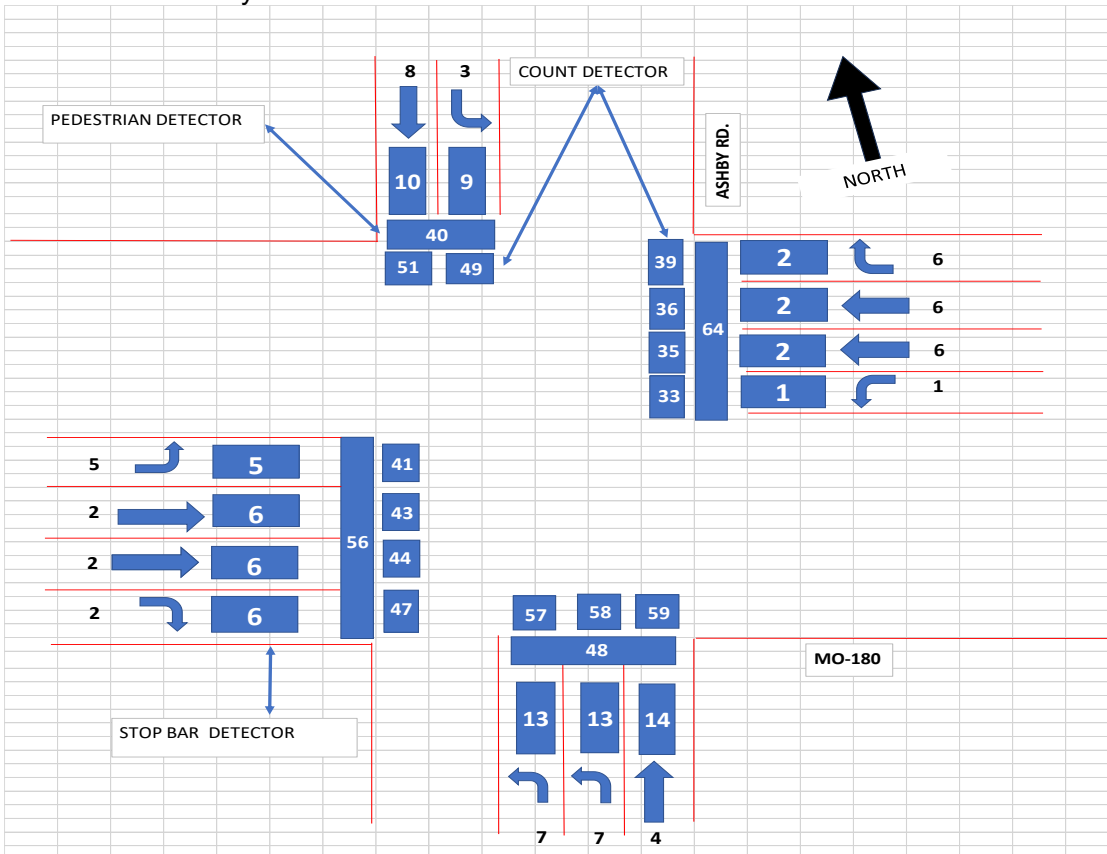


21. MO 180 and St. Timothy

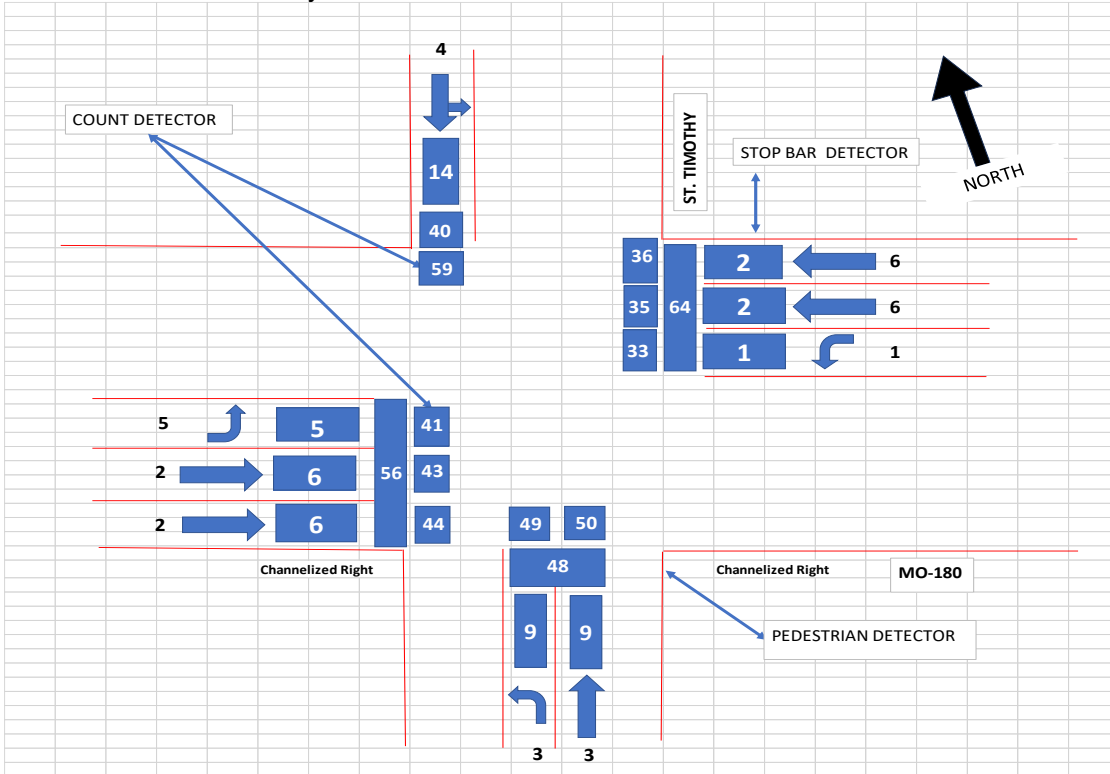


22. MO 180 and Cypress

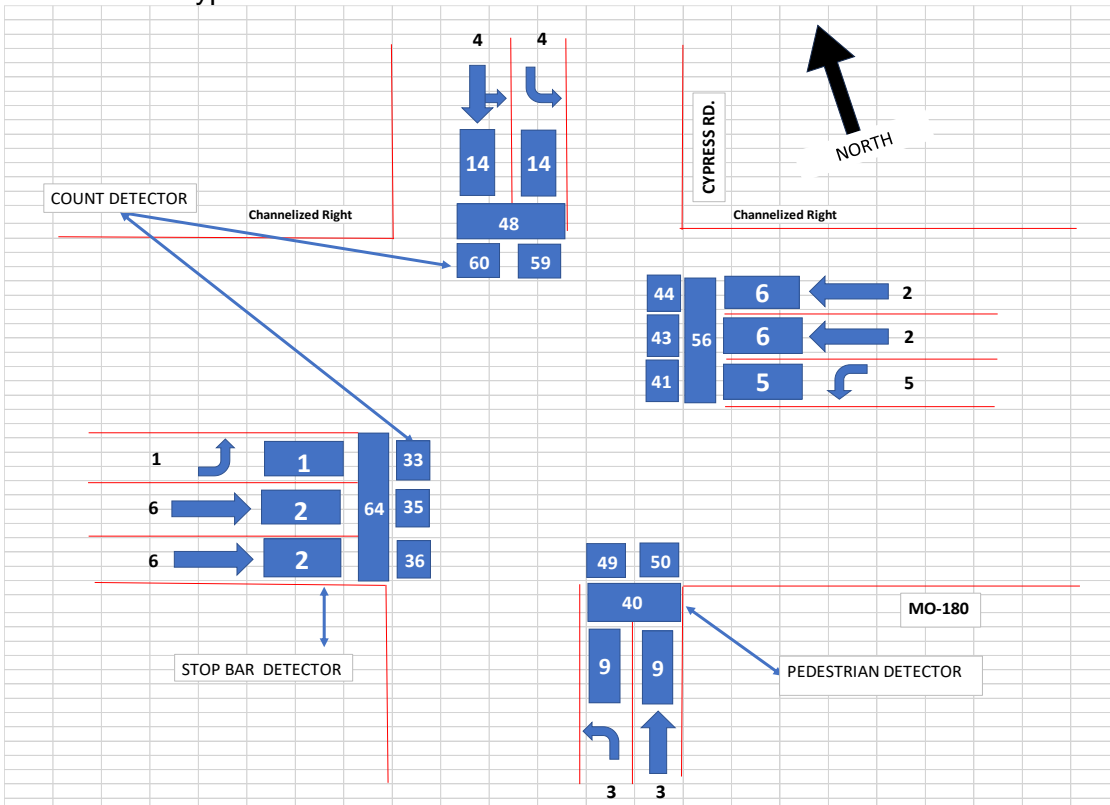


23. MO 180 and Adie

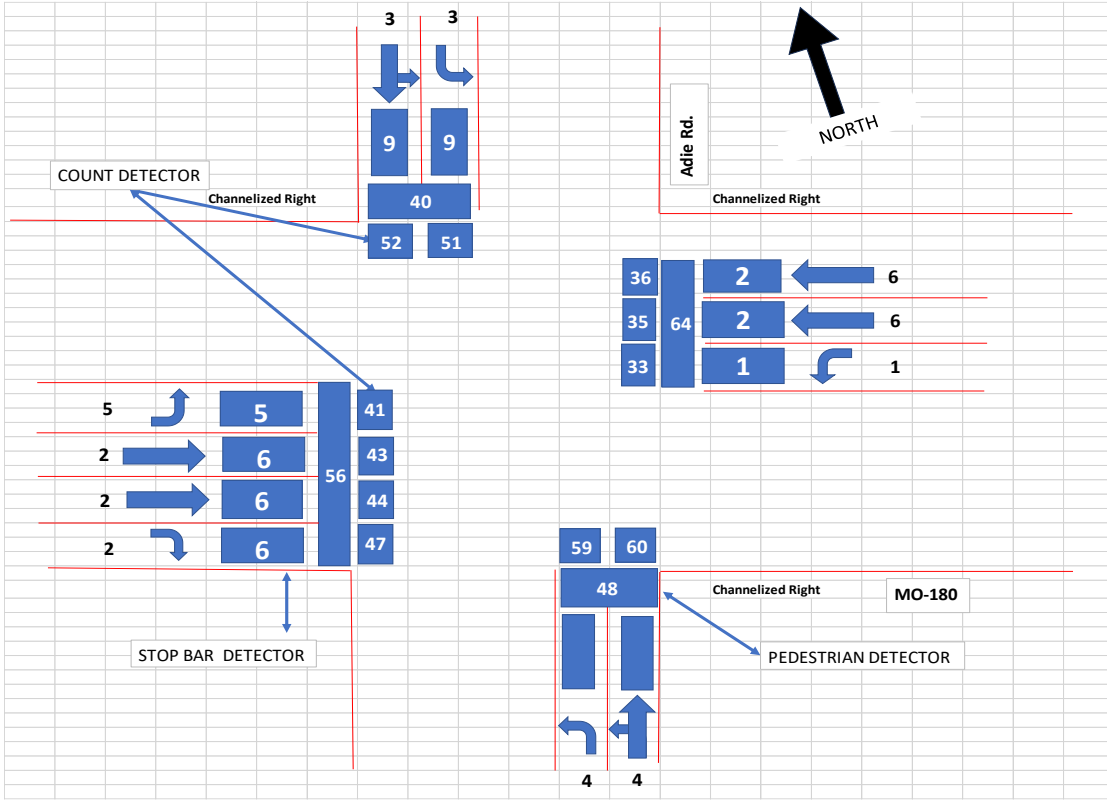


24. MO 180 and Northwest Plaza

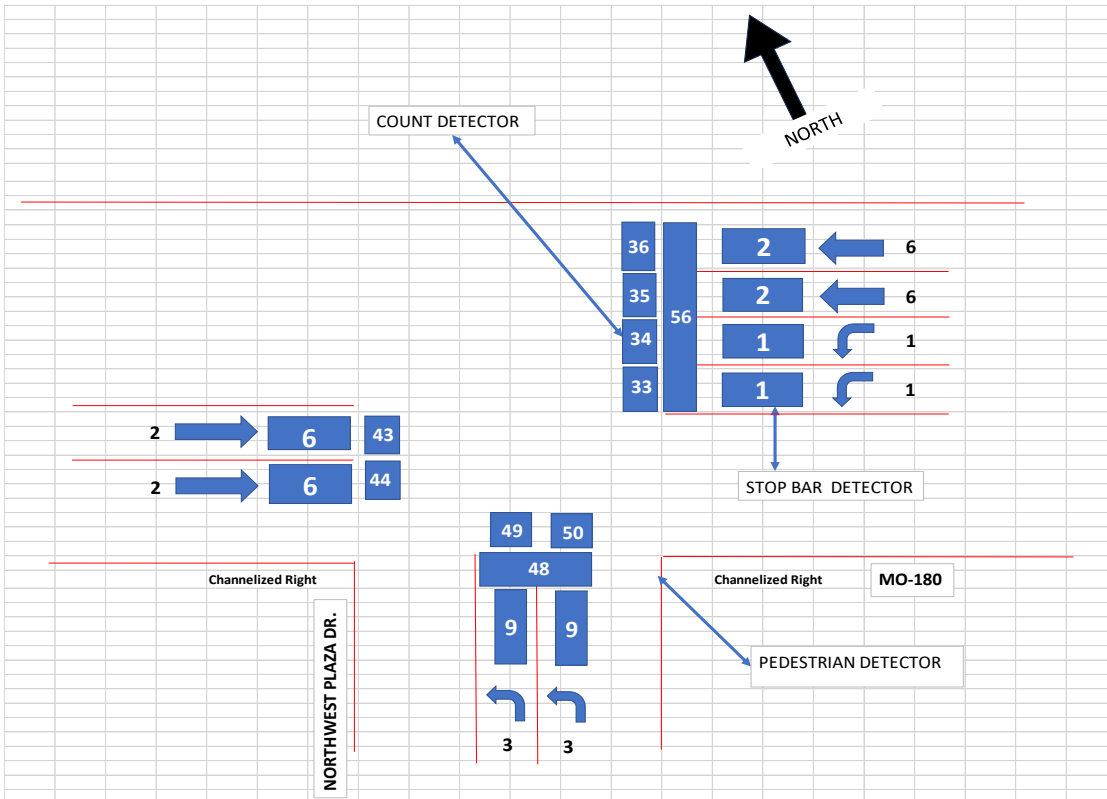


25. A. MO 180 and 67-Lindbergh NB

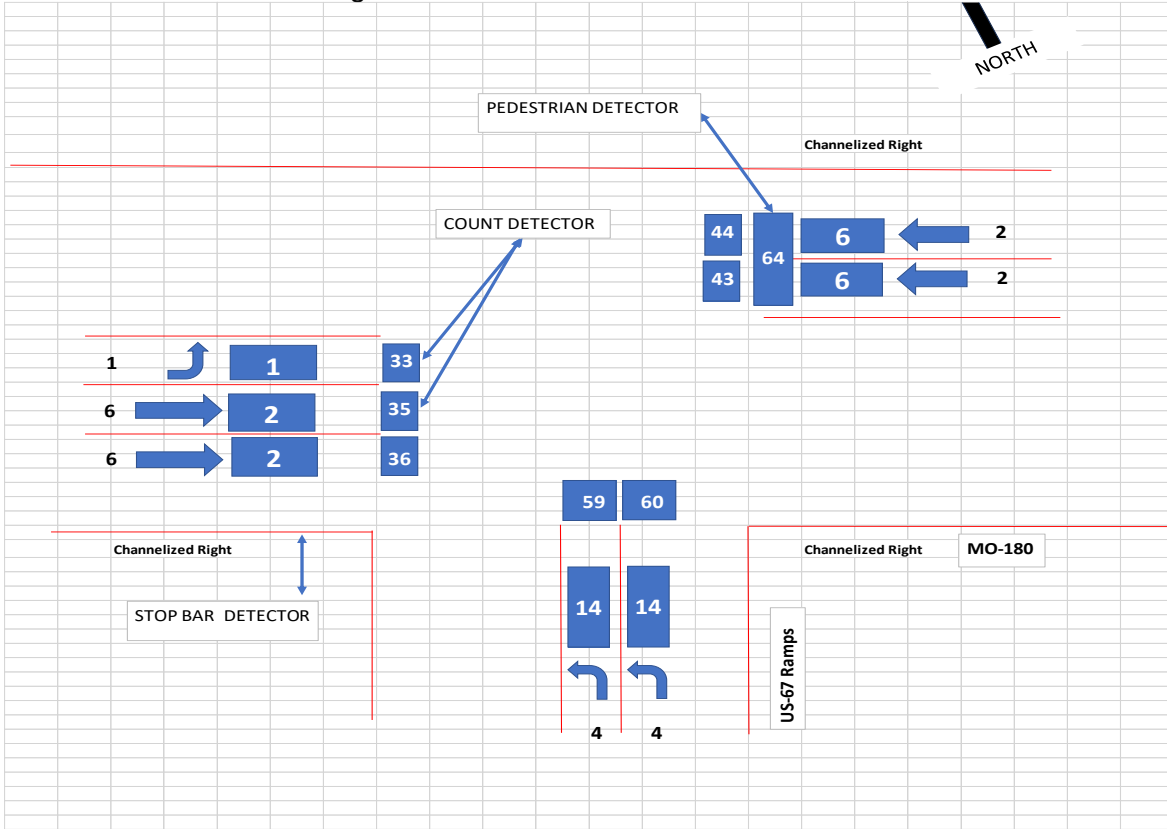


B. MO 180 and 67-Lindbergh SB

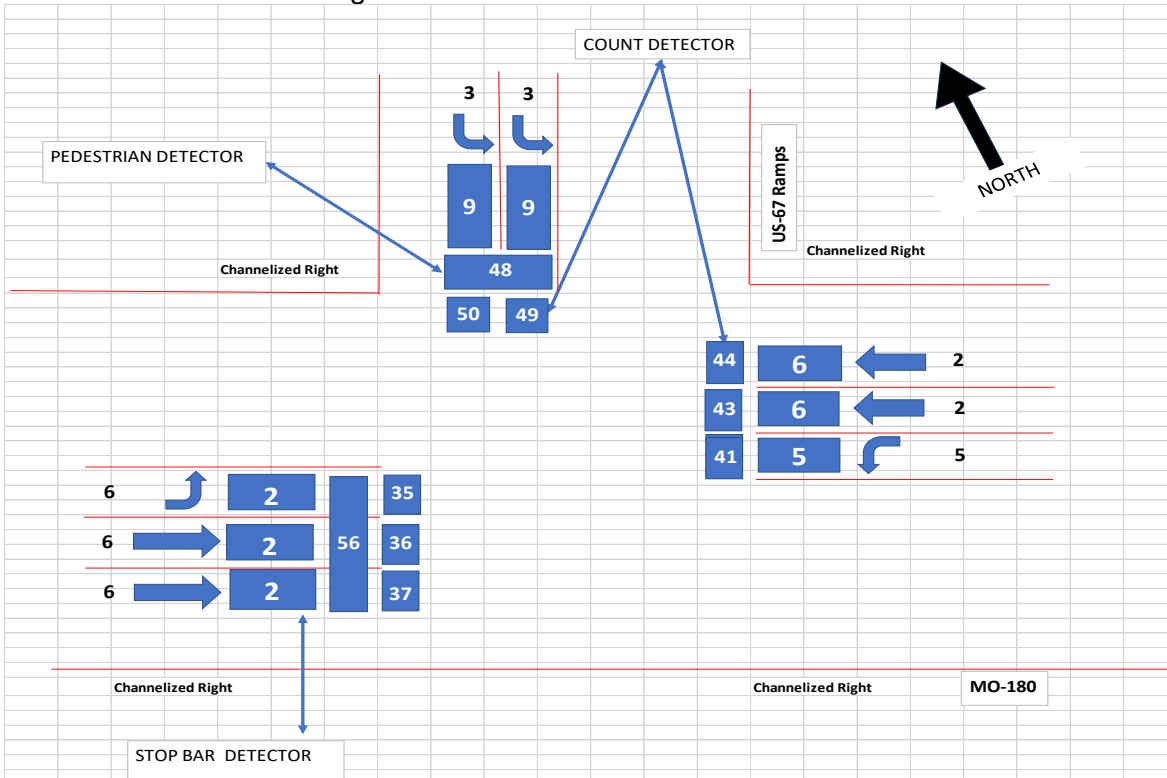


26. MO 180 and Home Depot

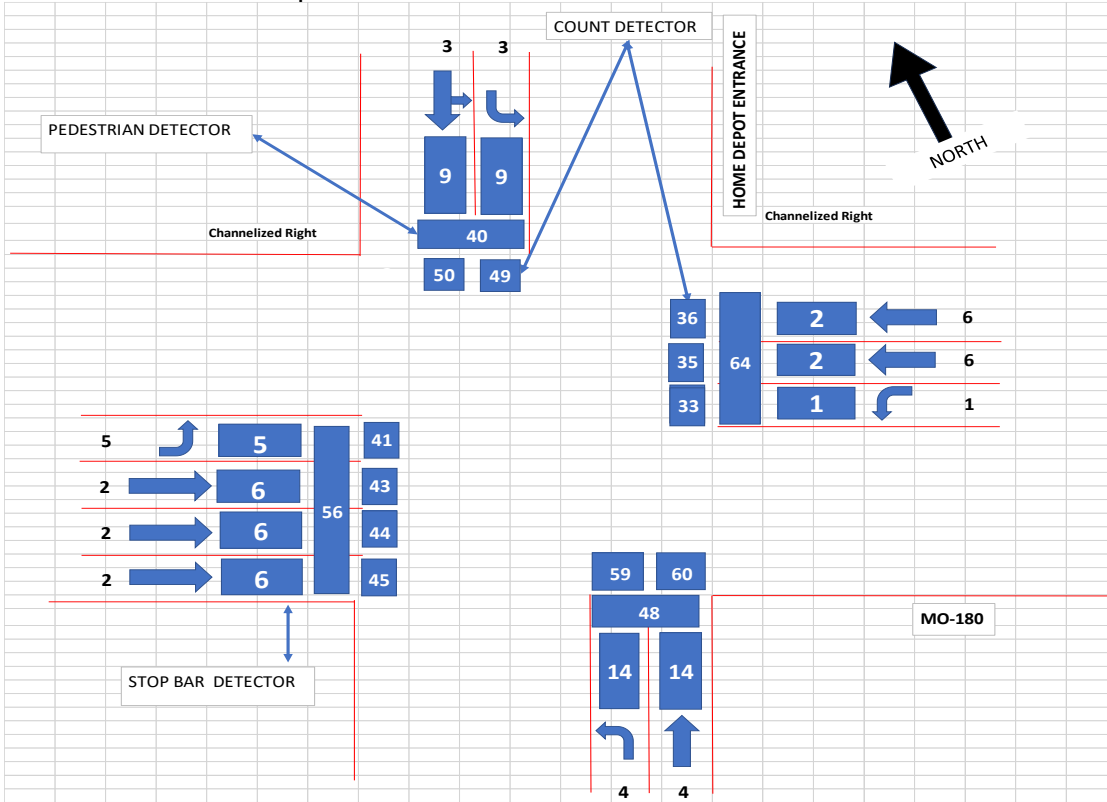


27. MO 180 and Fee Fee

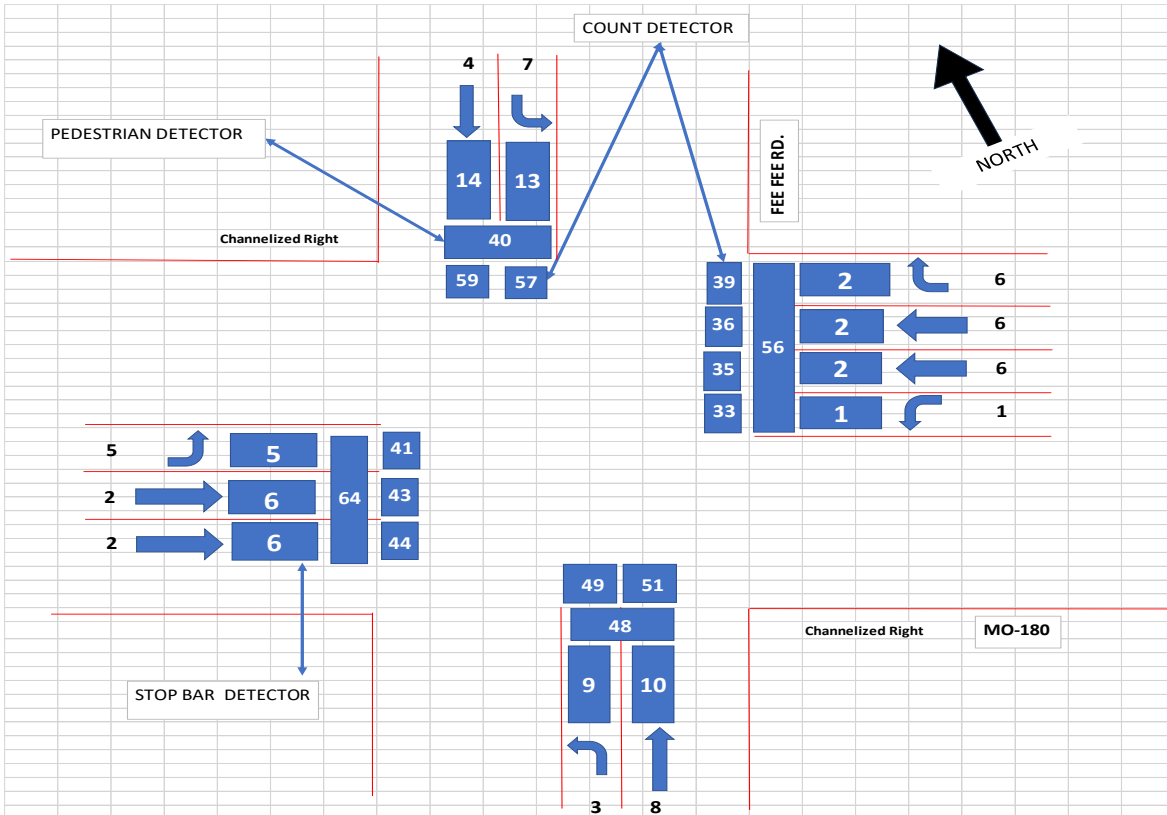


28. MO 180 and Mark Twain

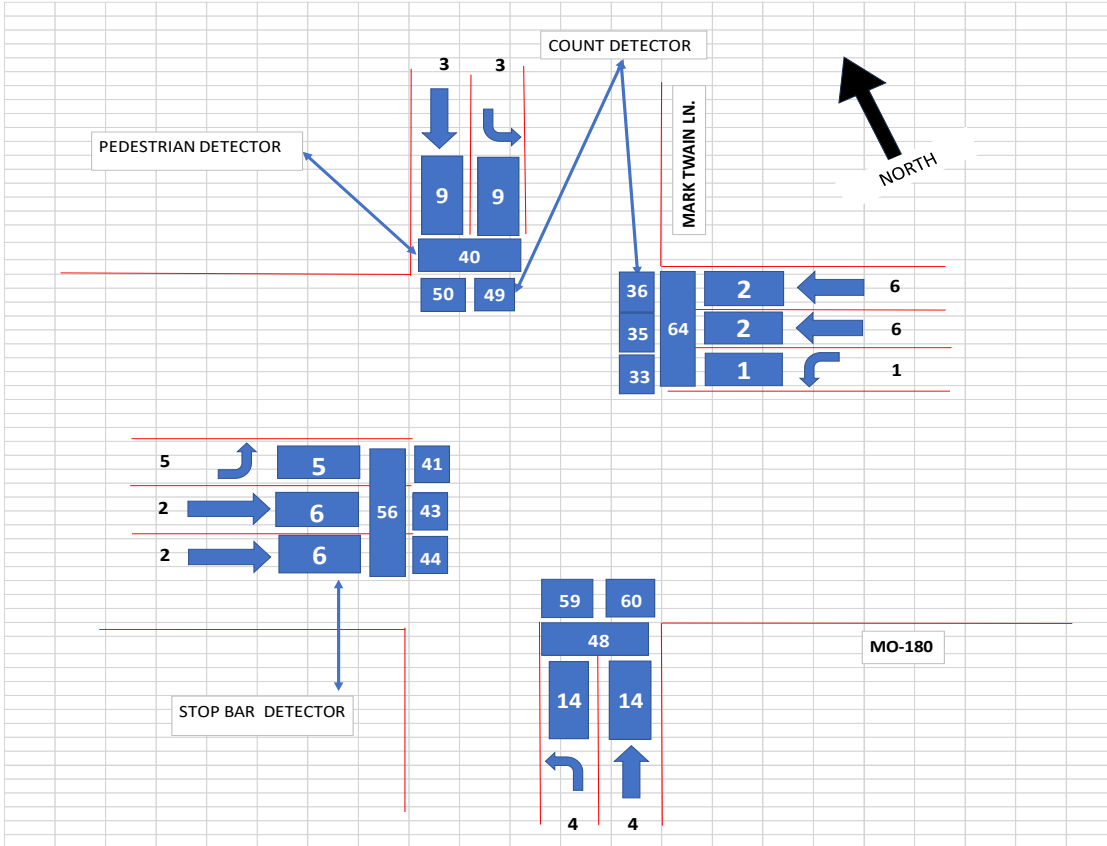


29. MO 180 and I-70 EB Ramp

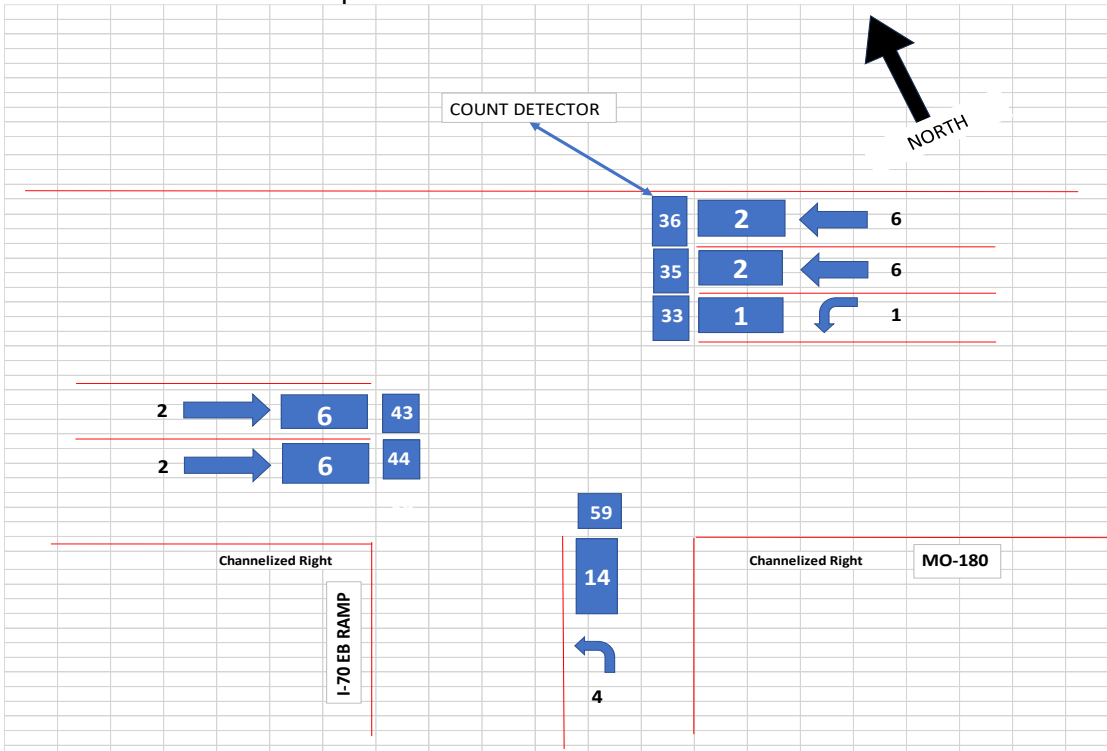


30. MO 180 and I-70 WB Ramp

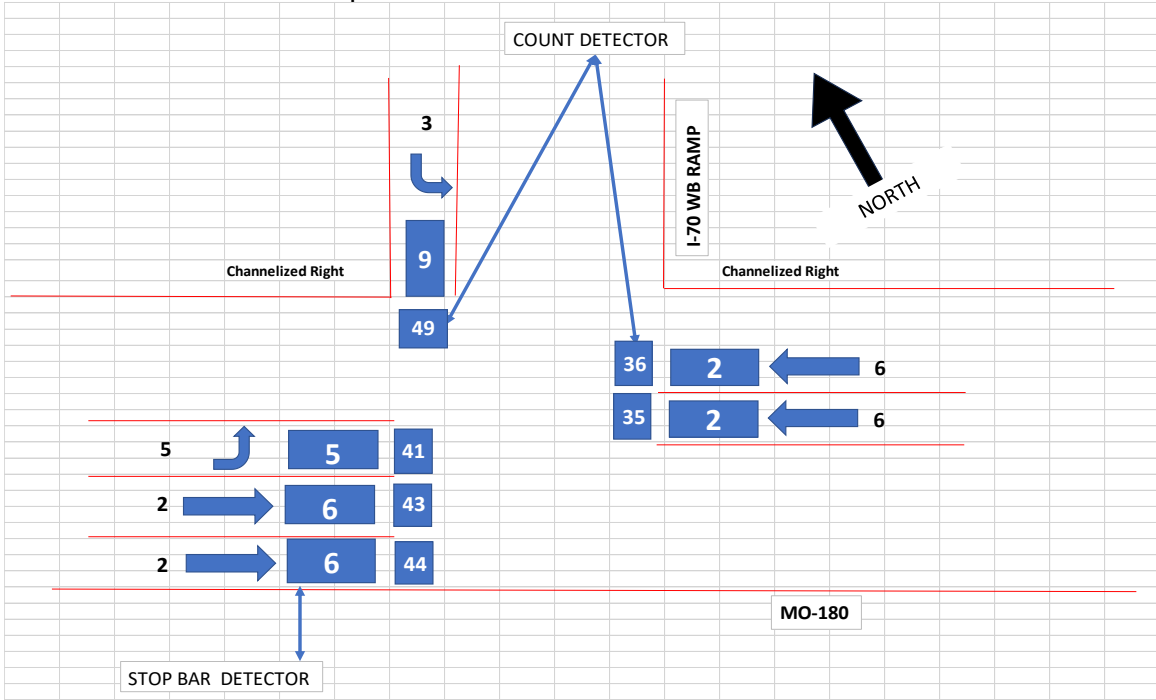


31. MO 180 and Harmony

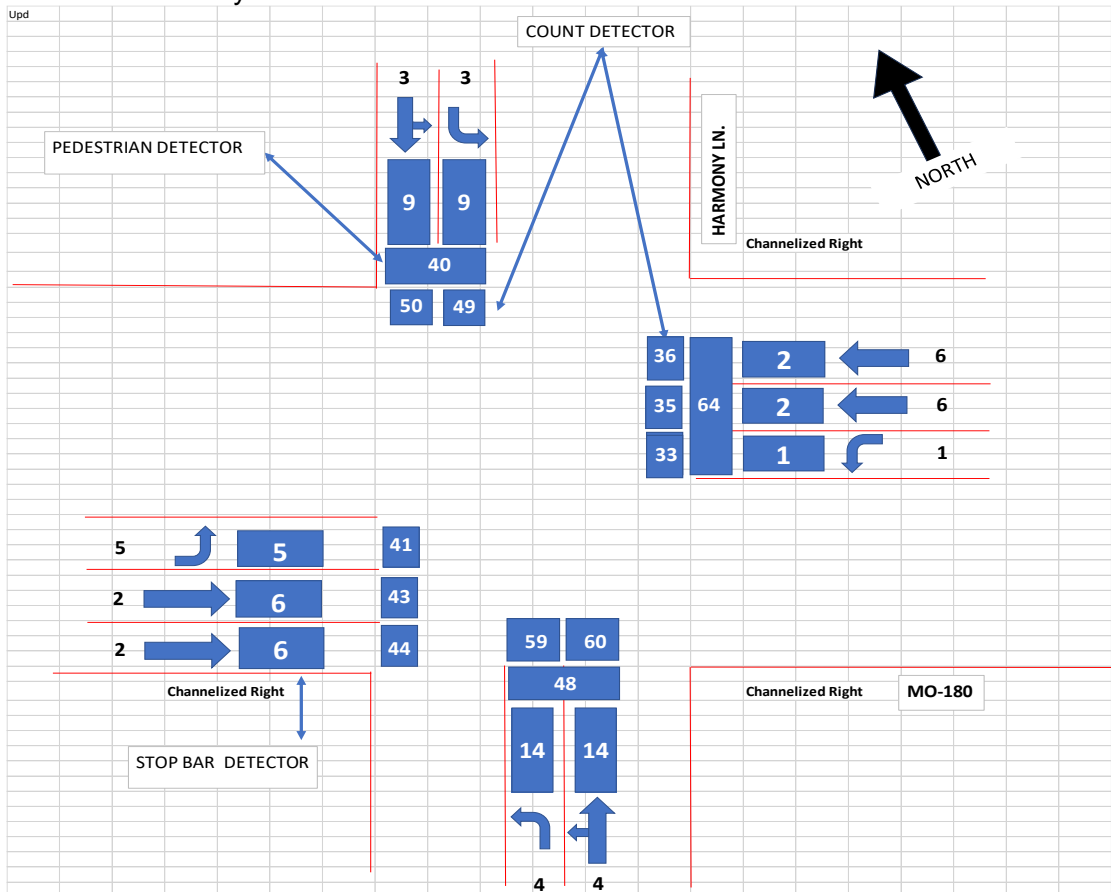


32. MO 180 and Hilltop Plaza

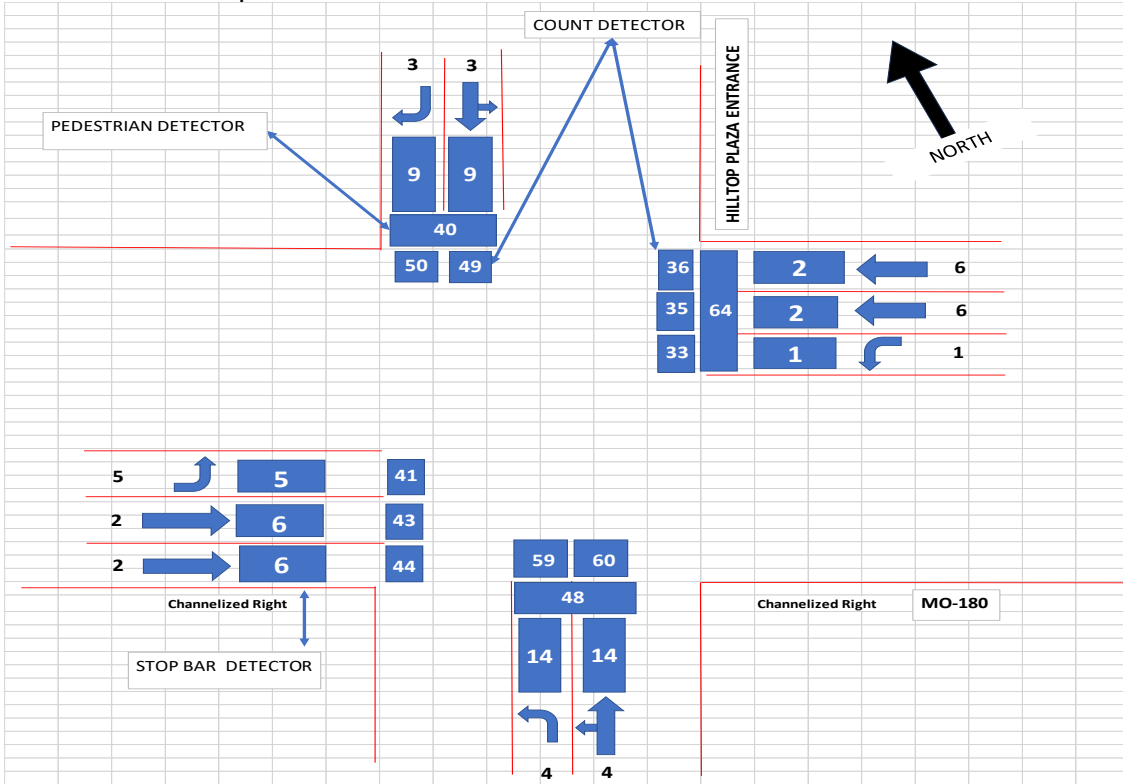


33. MO 180 and McKelvey

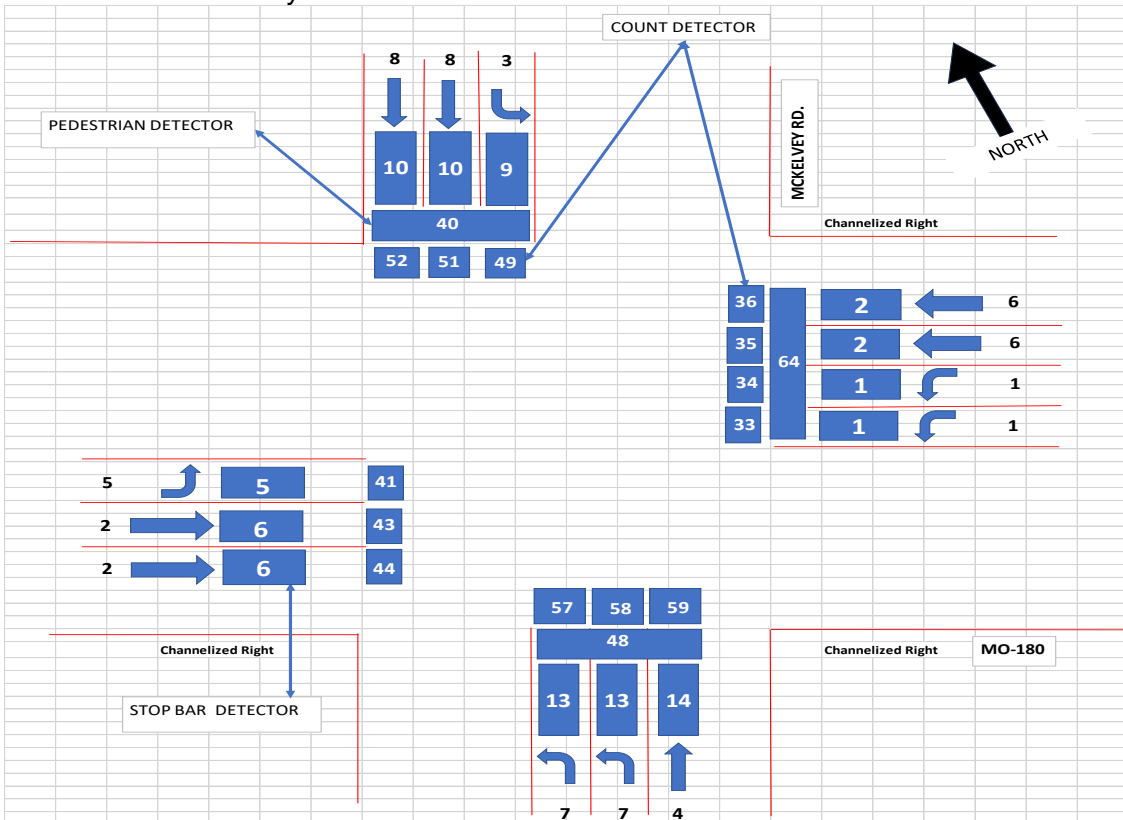


34. MO 180 and Depaul Center

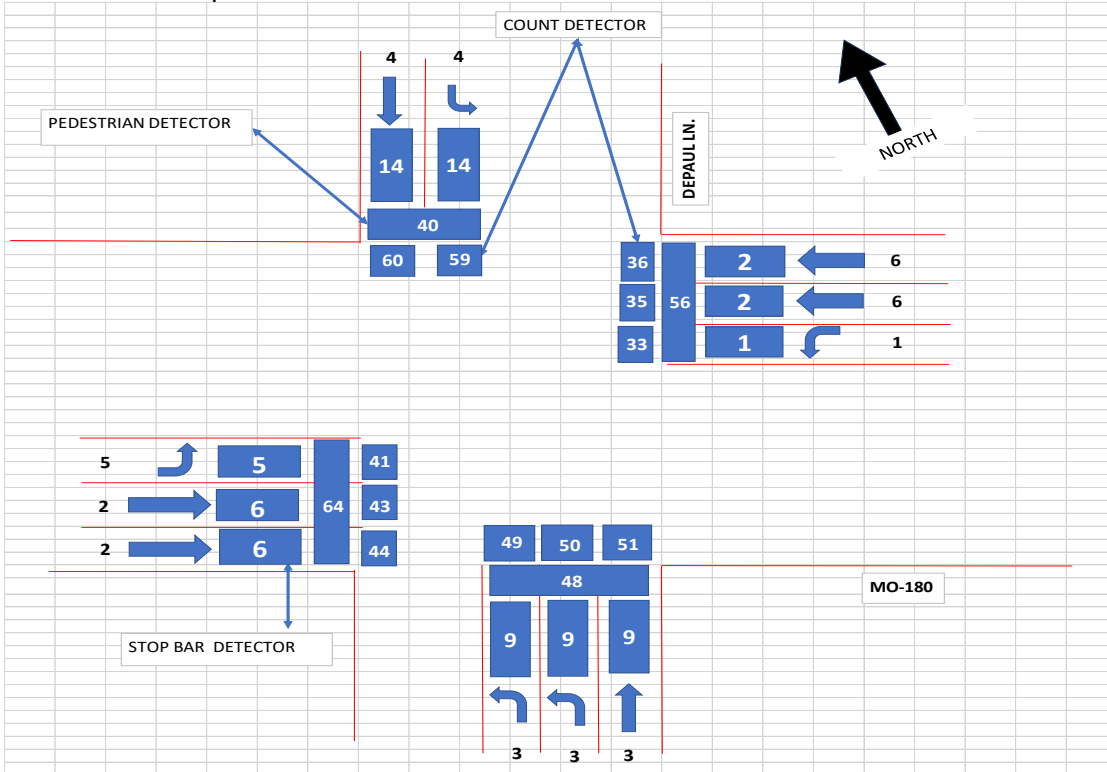


35. MO 180 and Rte B- Mareshell

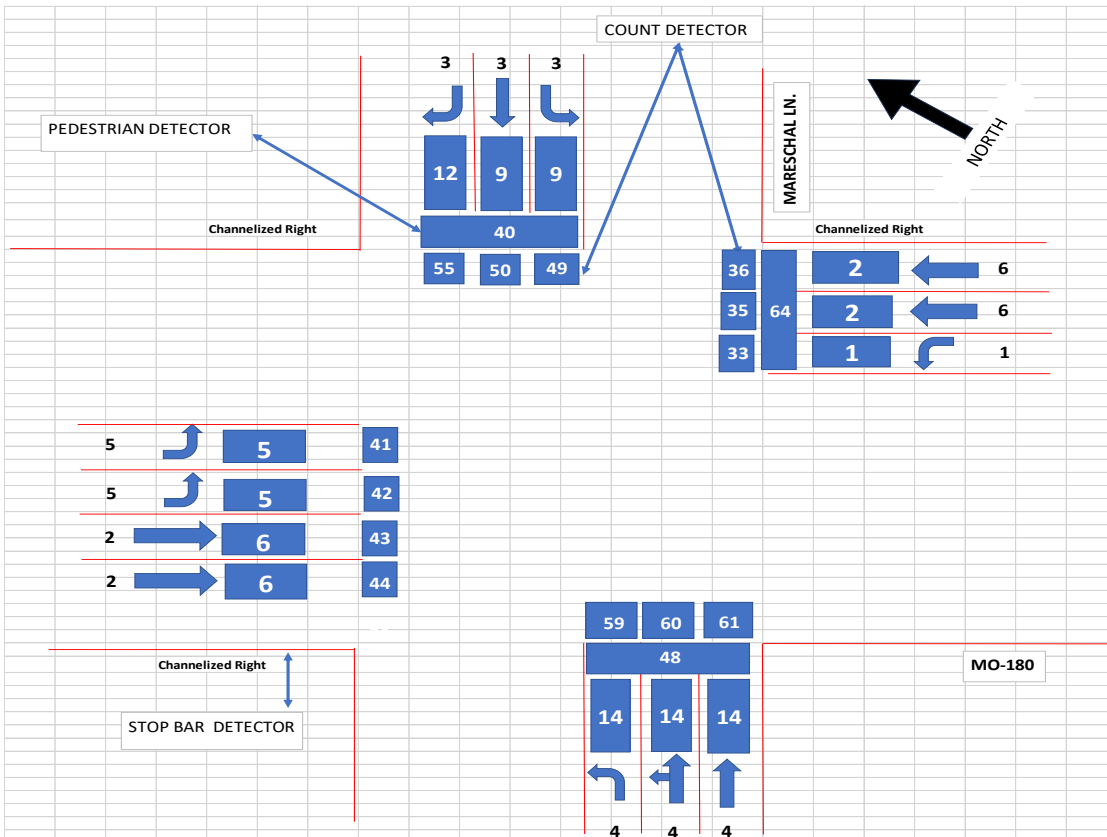


36. MO 180 and I-270 NB Ramp

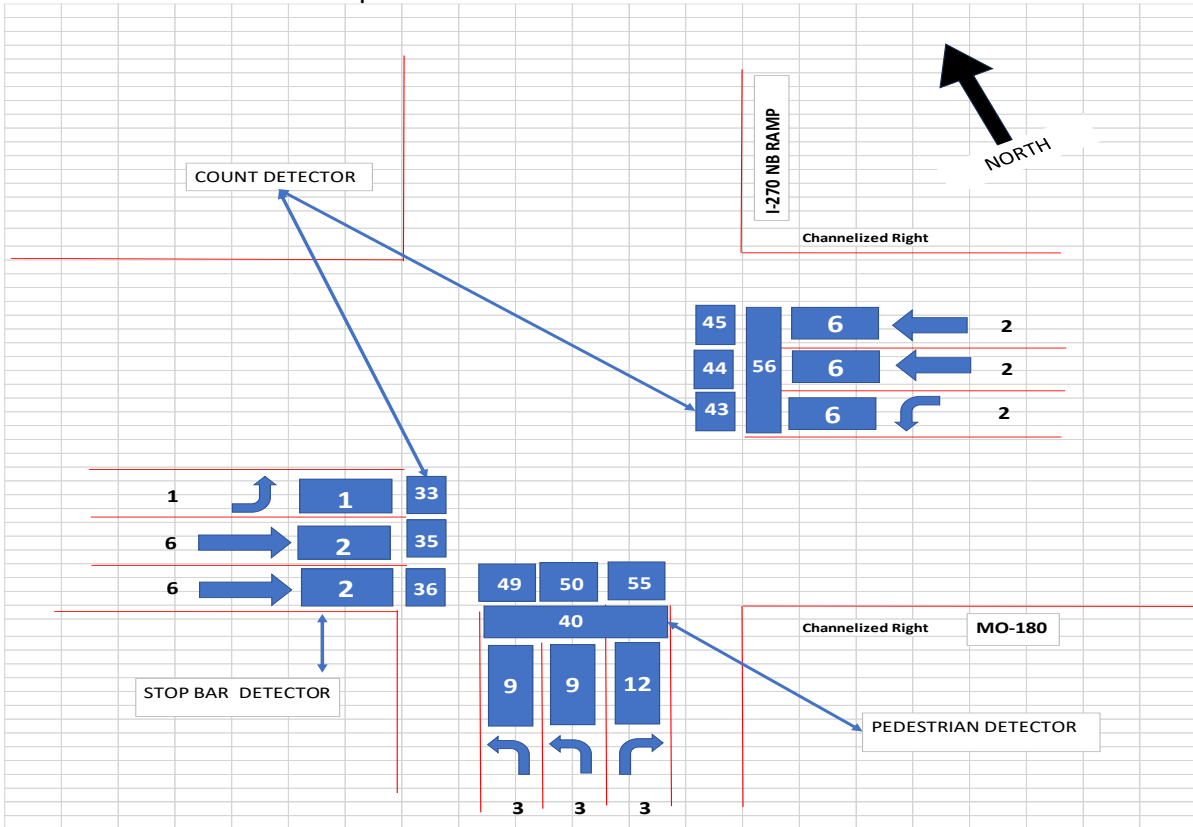

37. MO 180 and I-270 SB Ramp

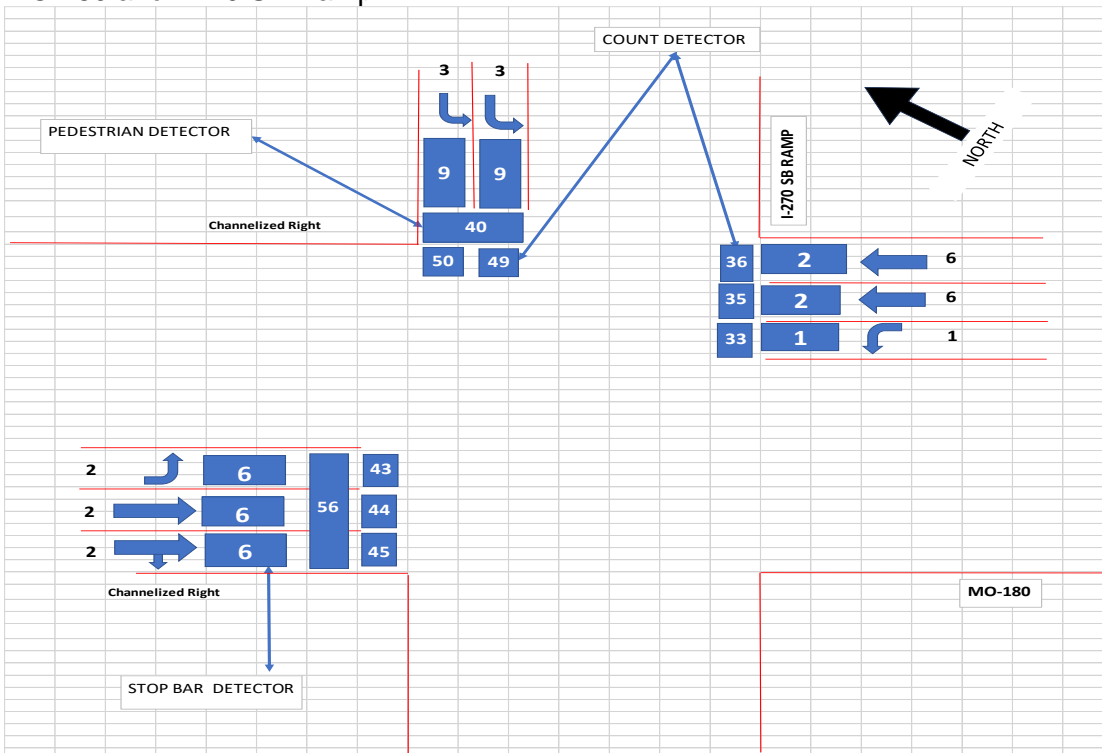

38. MO 180 and Penridge-Boenker

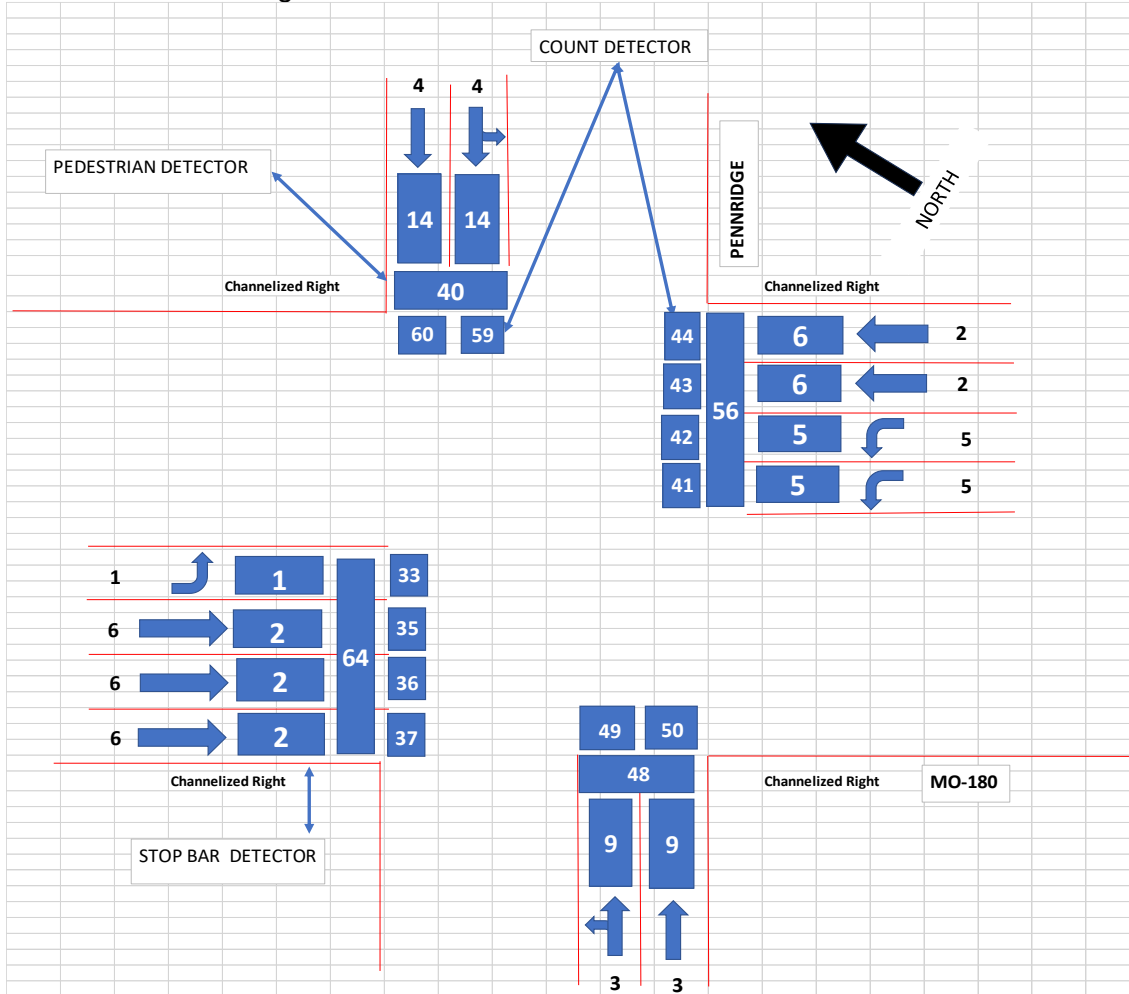

3.0 Performance Measures. In addition to presence detection, the detection system shall be capable of providing data to an advanced traffic signal controller that can perform at a minimum the following calculations in real time for each detection zone without the addition of another device:

- Speed
- Volume
- Lane Occupancy
- Vehicle Classification
- Other available performance measures

3.1 For speed calculations thru movements are required for all detection installations. Turning movement measurements are required for all detection installations. For volume measurements/calculations both mainline thru and all turning movements are required. All values are to be assigned to detector channels within the controller. Other performance measures must be clearly defined. In all cases all performance measures must be ultimately available in an easily usable, exportable format. Turning movement counts shall be installed per the detector setup diagram(s) above to include all lanes. The Contractor shall provide documentation to the Engineer to confirm the volumes are configured and operational through the detection system. The

Contractor shall also provide a final schedule of detector assignments in the .pdf format to the Engineer and the Commission's signal maintenance supervisor. Performance measurement data must be configured and fed into the Commission's ATSPM platform with data storage confirmed, see Section 5.0. If utilized on the project, the Contractor's Traffic Engineer shall assist in this task.

4.0 Video Detection. The Contractor shall install video detection for stop bar detection. The following provisions shall apply:

4.1.1 Description. The Contractor shall furnish and install all equipment, materials, software, and other miscellaneous items that are required to provide a fully functional Video Detection System for the control of vehicular and pedestrian traffic signals.

4.1.2 Material. The video detection system shall consist of power supply, hard-wired video cameras, all necessary video and power cabling with end connectors, mounting brackets, surge protection as recommended by the manufacturer, video detection processors/extension modules capable of processing the number of camera and phase combination video sources shown on the project plans. The video detection system will be defined as the complete assembly of all required equipment and components for detection of vehicles. Each video detection system shall consist of the video camera(s), lightning arrester for video cabling, processor unit(s), control device (track ball or keypad; no mouse allowed), software and license for system control via a computer (if applicable), communication components, and a color monitor. The video detection system shall have the most current available firmware installed. All camera views shall be obtainable without requiring the disconnection and reconnection of cables within the system. The video detection systems in the list below are the only systems that are tested, fully functional, and approved for use in the St. Louis District.

- Autoscope Vision
- Iteris Vantage Next

4.1.3 Installation Requirements. The video detection system shall be installed per the manufacturer's recommendations. The installer shall be certified by the video detection system's manufacturer to install the system. All CAT5 cable runs (if used) shall be continuous without splice from the cabinet to the camera. A factory certified representative from the supplier shall be present for on-site assistance for a minimum of one day during installation. The bottom of the video camera shall be mounted per manufacturer's recommendations.

A separate grounded 120 VAC service outlet shall be provided in the controller cabinet for supplying power to the parts of the video detection system requiring AC power. Use of the grounded service outlet located on the cabinet door will not be permitted. The video detection system must integrate/be compatible with an Advanced Transportation Signal Controller (ATC).

The preferred camera location for each approach is shown per plan. The contractor may adjust location if needed due to constraints with cabling, mounting or optimal camera view. Camera location adjustments shall be approved by MoDOT's representative prior to installation. For intersections with existing video detection systems, the existing camera mounting locations should be considered first for adjusted locations.

The Contractor shall also be advised that if the Iteris Vantage Next video detection system is selected for locations utilizing existing signal cabinets, the Contractor shall also procure an upgraded power supply for the video detection system per the Manufacturer's recommendations.

4.1.4 Detection Zones. The detection zones shall be created by drawing the detection zones on the video image. A graphical user interface shall be built into the video detection system and displayed on a video monitor or computer. It shall be possible to edit previously defined detector configurations to fine-tune detection zone placement. When a vehicle is detected by crossing a detection zone, there shall be a visual change on the video display, such as a flashing symbol or a change in color or intensity to verify proper operation of the video detection system.

4.1.5 Performance. Overall performance of the video detection system shall be comparable to inductive loops. Using camera optics and in the absence of occlusion, the video detection system shall be able to detect vehicle presence with 98% accuracy under normal day and night conditions with only slight deterioration in performance under adverse weather conditions, including fog, snow, and rain. When visibility exceeds the capabilities of the camera, the video detection system shall default to placing a call on all detectors. Supportive documentation is required to meet this specification and shall be provided to the Engineer before installation.

4.1.6 Monitor. The monitor shall be an LCD active matrix with a minimum 7" diagonal screen color monitor, an NTSC-M system and BNC video in-out connections built into the housing. The unit shall be compact and lightweight, securely mounted to the cabinet shelving, have low power consumption, constructed to operate under extreme temperature conditions, and run on AC power. AC adaptor shall be included. The monitor shall be installed to automatically power on when the cabinet door is opened and automatically power off when the cabinet door is closed. A manual on/off switch shall be provided.

4.1.7 Video Camera and Housing. The camera shall produce a color video image of vehicles during daylight hours, with an optional production of black and white images during nighttime hours. The video shall produce a clear image for scenes with a luminance from a minimum range of 0.18 to 929 foot-candles (2.0 to 10,000 lux). The camera shall provide a minimum resolution of 430 lines horizontal (TVL) and 350 lines vertical under NTSC operation. The camera shall include an electronic shutter or auto iris control based on average scene luminance and shall be equipped with an auto iris lens. sun shield that prevents sunlight from directly entering the lens. The sun shield shall include a provision for water diversion to prevent water from flowing in the camera field of view and shall be able to slide forward and back.

4.1.8 Video Detection System Connections. All bus connections in the video detection system shall be corrosion resistant. Serial communications to a computer shall be through an RS-232/RS-422 serial port through a subminiature "D" connector with a computer running supplied system software. The port shall have the capability to access detection system data as well as the real-time imagery needed to show detector actuations. The processor shall have a RJ-45 plug using Ethernet 10/100 protocols. The equipment shall be provided with either a NEMA TS1 or NEMA TS2 interface as shown on the plans.

For TS1 systems, the video detection system shall be equipped with a TS1 detector interface for a minimum of 32 detector outputs. Logic output levels shall be compatible with the TS1. A subminiature "D" connector on the video detection system shall be used for interfacing to these outputs.

For TS2 systems, the video detection system shall be equipped with a TS2 Type 1 detector interface, where detector information is transmitted serially via an RS-485 data path. A 15-pin subminiature "D" connector, meeting the requirements of the TS2 standard, shall be used for the

serial detector output. A minimum of 32 detector outputs is required, with the capability of expansion to 64 outputs if required based on the design plans.

The contractor shall be responsible for any changes or additions to either an existing or new cabinet in order to provide a properly functional video detection system and monitor display. This may include, but is not limited to, additional SDLC connectors, an MMU (malfunction management unit), shelf relocation and component reorganization. No direct pay for any changes or additions. All required connections will be considered part of the video detection system installation.

4.1.9 Documentation. The contractor shall provide one bound copy and one electronic version (.pdf format) of the user’s manual.



5.0 Communication with Advanced Transportation Management System (ATMS). The detection systems and all performance measure data should be fed directly into the Commission’s current and upcoming ATSPM platforms. All data must be online and verified by contractor to be fully operational and available for data output reporting via the Commission’s ATSPM platform. In addition, the data storage for long-term storage use should be configured properly on the Commission’s ATSPM platform. The Contractor shall be responsible for ensuring the firmware of all detection works with the Commission’s ATSPM platform. If utilized on the project, the Contractor’s Traffic Engineer shall assist in this task.

6.0 Technical Support for Detection System. The detection system(s) chosen for installation shall be free of defects in material and workmanship. For five (5) years, technical support from factory certified personnel or factory certified installers shall be available from the supplier. Ongoing software support by the supplier shall include updates for the processor unit and computer software and shall be provided at no cost during this two-year period. The update of the processor unit software to be NTCIP compliant shall be included. Detection system(s) must not be within 5 years of end of support or sale by manufacturer.

7.0 Construction Requirements. Construction requirements shall conform to Sec 902.

8.0 Method of Measurement. Method of measurement shall conform to Sec 902.

9.0 Basis of Payment. Measurement and payment for work covered by this specification shall include all equipment, materials, tools, labor, programming, testing, and documentation necessary to provide a detection system **per intersection** and shall be paid at the contract unit price as follows:

Item No.	Type	Description
 REVIS 902-99.02	Each	Traffic Signal Video Detection System (3 Cameras)
 REVIS 902-99.02	Each	Traffic Signal Video Detection System (4 Cameras)


J. **SL District Traffic Signal Advanced Detection System**

1.0 Description. This work shall consist of providing detectors for signalized installations that will support Advance Traffic Signal Performance Measures (ATSPM) on the Commission’s St. Louis District roadways. Detectors shall be in accordance with the Missouri Standard Specifications for Highway Construction and installed to provide detection at locations as shown

on the plans or as directed by the Engineer in accordance with Section 902. If any information conflicts between Section 902 and this JSP, the JSP shall supersede.

2.0 Detector Zones. Advanced detection zones shall be configured and placed as described in the plans (D-37C sheets). The following zones are listed in order of priority and shall be prioritized when programming:

1. Dilemma Zone (for approaches posted at 45 miles per hour (mph) or higher or as directed by the Engineer)
2. 5 Second Advance Detector (shall be applied as per plan or as directed by the Engineer)
3. 8 Second Advance Detector (shall be applied as per plan or as directed by the Engineer)
4. Advance Data Collector (Performance Measures)

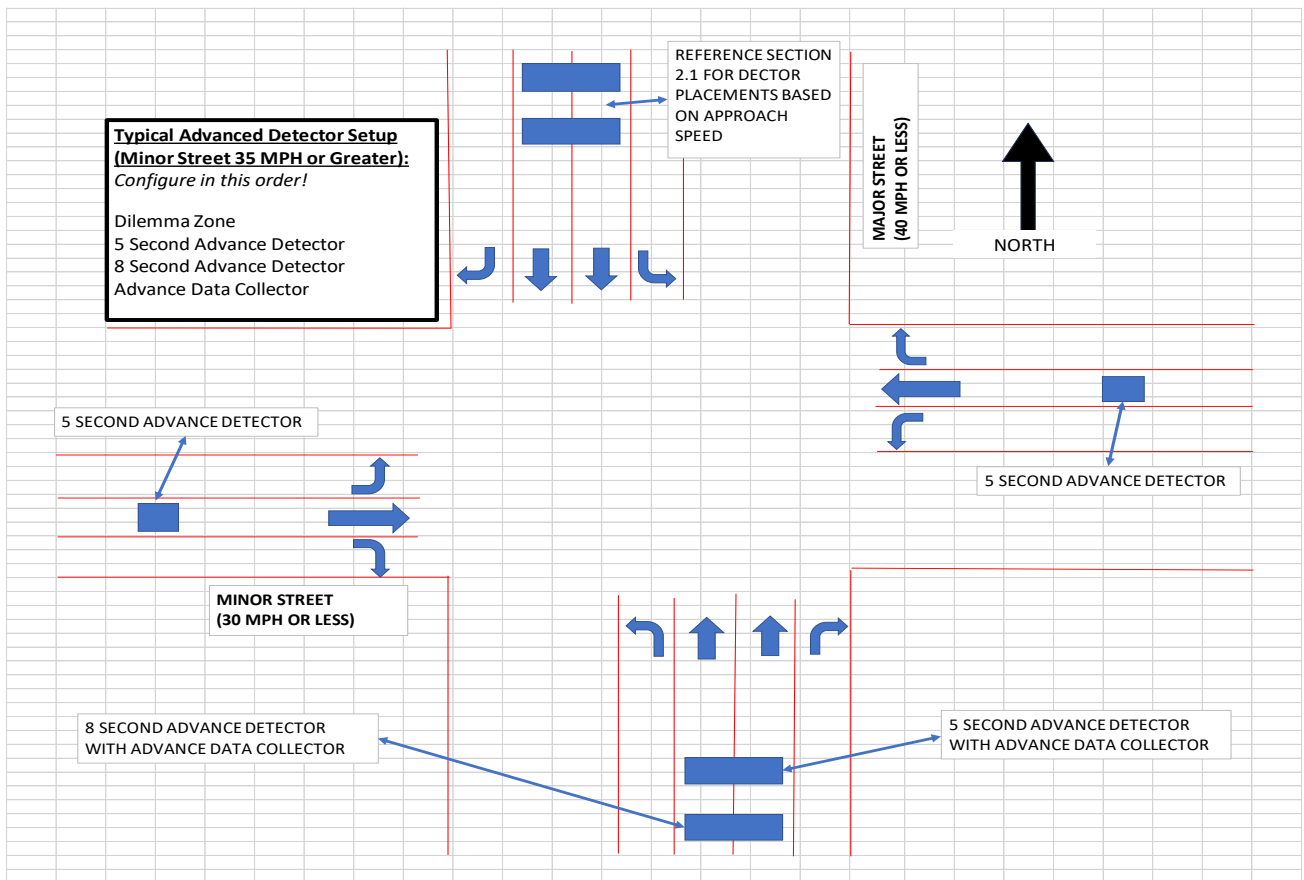


2.1 Detector Zones. Advanced detection zones shall be placed at 5 seconds and 8 seconds travel time before stop bar per below Table unless directed otherwise in the plans or by the Engineer. If curvature of the road or obstructions prevent tracking of vehicles, priority should be given to detection at the 5 second and 8 second distances.

Description	Call	Extend	Data Collector
5 Second Advance Detector	Yes	Yes	No
8 Second Advance Detector	No	Yes	No
Advance Data Collector	No	No	Yes (Can double as advance detector)

Approach Speed (MPH)	Advance Detector Placement 5 secs Travel time	Advance Detector Placement 8 seconds travel time
20 mph	150	N/A
25 mph	185	N/A
30 mph	220	N/A
35 mph	260	415
40 mph	295	470
45 mph	330	530
50 mph	370	590
55 mph	405	645
60 mph	440	705

2.2 Dilemma Zones. Dilemma zone detection shall be required for approaches posted at 45 miles per hour (mph) or higher or as directed by the Engineer for high speed dilemma zone detection:

Dilemma zone detectors shall be placed at 5 secs and 8 seconds travel time before stop bar per below Table unless directed otherwise in the plans or by the Engineer. Dilemma zones shall be prioritized over other advanced detection zones.

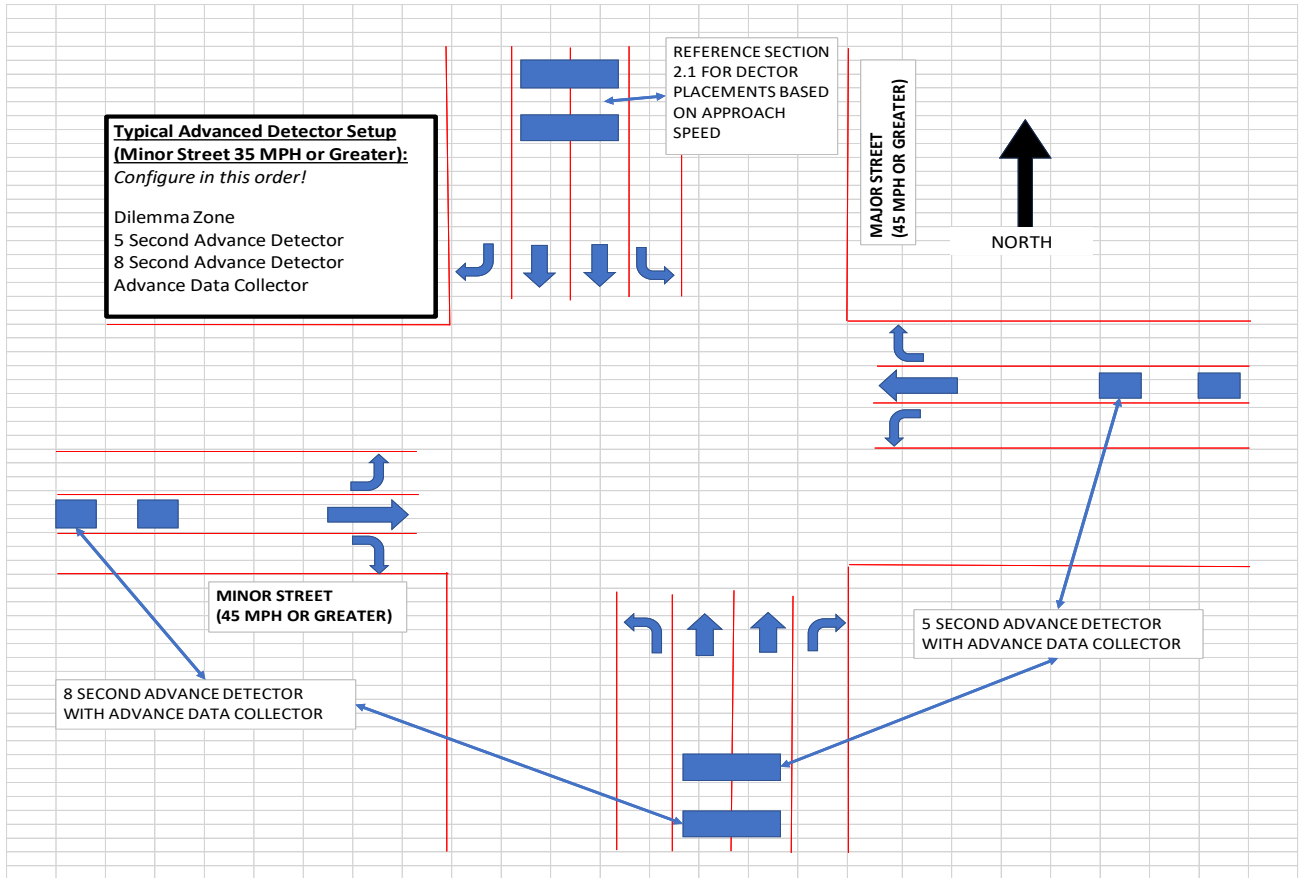

Description	Call	Extend	Data Collector
5 Second Dilemma Zone	Yes	Yes	No
8 Second Dilemma Zone	No	Yes	No
Advance Data Collector	No	No	Yes (Can double as dilemma zone detector)

Approach Speed (MPH)	Advance Detector Placement 5 secs Travel time	Advance Detector Placement 8 seconds travel time
45 mph	330	530
50 mph	370	590
55 mph	405	645
60 mph	440	705

2.3 Advance Detector Output Assignments. Advance detector outputs shall be assigned per the following table or as directed by the Engineer.

Advance Detection Output Assignments	
Detector Output	Phase #
17	1 (SPM)
18	6 (5 SEC)
19	6 (8 SEC)
20	
21	5 (SPM)
22	2 (5 SEC)
23	2 (8 SEC)
24	
25	3 (SPM)
26	8 (5 SEC)
27	8 (8 SEC)
28	
29	7 (SPM)
30	4 (5 SEC)
31	4 (8 SEC)
32	

3.0 Performance Measures. In addition to advanced detection, the detection system shall be capable of providing data to an advanced traffic signal controller that can perform at a minimum the following calculations in real time for each detection zone without the addition of another device:

- Speed and volume data
- Other available performance measures

3.1 For speed calculations thru movements are required for all detection installations. All values are to be assigned to detector channels within the controller. Other performance measures must be clearly defined. In all cases all performances measures must be ultimately available in an easily usable, exportable format. The Contractor shall provide documentation to the Engineer to confirm the volumes are configured and operational through the detection system. The Contractor shall also provide a final schedule of detector assignments in the .pdf format to the Engineer and the Commission’s signal maintenance supervisor. Performance measurement data must be configured and fed into the Commission’s ATSPM platform with data storage confirmed, see Section 5.0. If utilized on the project, the Contractor’s Traffic Engineer shall assist in this task.

4.0 Advanced Detection. The Contractor shall install radar detection for advanced detection. The following provisions shall apply:

4.1.1 Description. Provide, install, and test Continuous Tracking Advance Detector (CTAD) units and cabinet interface to detect range, speed, and vehicle estimated time of arrival (ETA) to the stop bar for vehicles or clusters of vehicles moving in the user selected direction of travel. The

CTAD shall also detect instantaneous roadway efficiency. This specification sets forth the provisions for a radar detection system that detects vehicles, pedestrians, bicycles, and motorcycles on roadways and provides vehicle presence and full-motion tracking.

4.2.1 Advanced Detector. The radar detection systems in the list below are the only systems approved for use in the St. Louis District. Installation of radar detection systems shall follow both the below specifications and the manufacturer's instructions.

- WAVETRONIX SmartSensor
 - Advance (approved for approaches 40 mph or lower)
 - Advance Extended (approved for approaches 45 mph or higher)
- Iteris Vector (approved for approaches 40 mph or lower)

Provide a radar detection system with the following features.

- Shall be able to track/detect a minimum of 64 objects
- Shall be able to operate in a temperature range between -30 degrees and 165 degrees F
- The detection zones shall be configurable based off several factors' such as classification, ETA, speed, presence, and delay.
- The radar sensor shall be forward fire
- The sensor shall operate in the 25 GHz band
- The sensor shall be housed in a sealed IP-67 enclosure
- In addition to the specifications listed in Section 4.3.2.1, the detection range shall also cover the dilemma zone distances prescribed in section 2.1.

4.2.2 Power and Communications.

- Power and communications cabling shall be installed per manufacturer specifications
- The radar sensor shall operate at 24 VDC
- Power consumption shall be no more than 38 watts
- If required, the advance detection System shall include all equipment to communicate wirelessly.

4.2.3 Contact Closure Card. Any contact closure card shall be compatible with a NEMA detector rack and shall be installed per manufacturer specifications.

4.2.4 Lightning Surge Protection. The CTAD shall include surge protection hardware installed per manufacturer specifications. The hardware shall be accepted by the engineer before installation in the cabinet.

4.3 Construction Requirements.

4.3.1 Mounting Location. All mounting hardware shall be installed per manufacturers specifications. The CTAD shall be mounted as follows:

- at a height that is within the manufacturer's recommended mounting heights.
- The radar shall be positioned so that all detection zones needed for an approach can be captured.
- in a forward-fire position, looking towards either approaching or departing traffic.

4.3.1.1 The preferred mounting location for each approach is shown per plan. The contractor may adjust location if needed due to constraints with cabling, mounting or optimal detection view. Radar mounting location adjustments shall be approved by MoDOT's representative prior to installation. The contractor shall notify the MoDOT representative if advanced detection, as described in section 2.0 and 2.1, cannot be achieved for an approach by relocating the mounting location.

4.3.2 Induction Card Rack Interface. Install the contact closure card in the existing induction card rack and configure based on manufacturer's instructions to provide all needed detection outputs. Any power supply cards for the induction card rack needed for proper operation of the CTAD shall be provided and installed by the contractor.

4.3.3 Support. A factory certified representative from the supplier shall be present for on-site assistance for a minimum of one day during installation and shall provide two (2) days of local training after the CTAD has been installed and are operational.

4.3.4 Acceptance Testing. The contractor shall develop a proposed test procedure for the CTAD and submit it to the Engineer for approval. It must include visual verification of vehicle detections being received. Each detector shall be tested separately. Revise the proposed test procedure until it is acceptable to the Engineer. Provide all equipment and personnel needed to safely conduct the tests. Arrange for the Engineer's representative to witness the tests. Give the Engineer a report documenting the result of the tests.

4.4 Documentation and Software.

4.4.1 Prior to purchasing the CTAD system, the contractor shall submit five copies of catalog cut sheets and the environmental testing results to the Engineer for approval.

4.4.2 The contractor shall provide five copies of the operation and maintenance manuals for the CTAD system.

4.4.3 Contractor shall provide one copy of the software and any cables needed to interface with the system.

4.4.4 Contractor shall provide the CTAD installation kit, if applicable, to the Commission upon completion and acceptance of the project.

5.0 Communication with Advanced Transportation Management System (ATMS). The detection systems and all performance measure data should be fed directly into the Commission's current and upcoming ATSPM platforms. All data must be online and verified by contractor to be fully operational and available for data output reporting via the Commission's ATSPM platform. In addition, the data storage for long-term storage use should be configured properly on the Commission's ATSPM platform. The Contractor shall be responsible for ensuring the firmware of all detection works with the Commission's ATSPM platform. If utilized on the project, the Contractor's Traffic Engineer shall assist in this task.

6.0 Technical Support for Detection System. The detection system(s) chosen for installation shall be free of defects in material and workmanship. For five (5) years, technical support from factory certified personnel or factory certified installers shall be available from the supplier. Ongoing software support by the supplier shall include updates for the processor unit and computer software and shall be provided at no cost during this two-year period. The update of the

processor unit software to be NTCIP compliant shall be included. Detection system(s) must not be within 5 years of end of support or sale by manufacturer.

7.0 Construction Requirements. Construction requirements shall conform to Sec 902.

8.0 Method of Measurement. Method of measurement shall conform to Sec 902.

9.0 Basis of Payment. Measurement and payment for work covered by this specification shall include all equipment, materials, tools, labor, programming, testing, and documentation necessary to provide a detection system **per intersection** and shall be paid at the contract unit price as follows:

	Item No.	Type	Description
1 REVISÉ	902-99.02	Each	Traffic Signal Advanced Detection System (2 Units)
1 REVISÉ	902-99.02	Each	Traffic Signal Advanced Detection System (3 Units)
1 REVISÉ	902-99.02	Each	Traffic Signal Advanced Detection System (4 Units)

K. Disposition of Existing Signal Equipment

1.0 Description. All controllers, cabinets, cabinet equipment, network equipment, DMS equipment, antennas, radios, modems, and other equipment noted in the plans shall be removed by the contractor.

2.0 Signal Equipment. All equipment is to be transported to the Commission’s maintenance lot located at 2309a Barrett Station Road, Ballwin, Missouri 63021. The contractor shall notify the Commission’s representative 24 hours prior to each delivery by contacting MoDOT’s Signal Shop, sltrs@modot.mo.gov.

3.0 The contractor shall exercise reasonable care in the handling of the equipment during removal and transportation. Should any of the equipment be damaged by the contractor's negligence, it shall be replaced at the contractor's expense. The contractor shall dispose of any other equipment. Delivery shall be within 2 working days of removal. All items returned shall be tagged with the date removed, project number and location/intersection.

4.0 Basis of Payment. Payment for removal, handling and transportation of all equipment specified shall be considered completely covered by the contract unit price for “Removal of Improvements” per lump sum.

Item No.	Type	Description
202-20.10	Lump Sum	Removal of Improvements

L. Coordination with MoDOT Signal Shop for Cabinet Entry

1.0 Description. Commission-furnished color-coded pad locks have been placed on all of MoDOT’s signal cabinets in addition to the key used to unlock the door handle. To gain access to the appropriate cabinets during the project all contractors shall coordinate with MoDOT’s signal shop to obtain the proper keys and locks.

1.0.1 Signal Equipment. Red locks and keys are provided when a contractor has modified the signal cabinet and MoDOT staff shall not have access to the cabinet until it is accepted for maintenance. The blue keys are provided for entry into the cabinet where MoDOT's Signal Shop group deems the access to be minor in nature (entry to the cabinet to make a simple network switch connection, for example).

1.0.2 Completion of Project. At the completion of the project all keys and pad locks distributed to contractor during the project shall be returned to the Signal Shop supervisor or their representative and keys shall not be reproduced.

2.0 Contact. Initial contact must be made at least seven calendar days before work begins, preferably when the project has the notice to proceed or during the pre-construction meeting, if applicable. MoDOT's Signal Shop supervisors shall be notified prior to work beginning. Contact the signal shop via email at sltrs@modot.mo.gov to coordinate which padlocks are to be used.

3.0 Basis of Payment. No direct payment shall be made for compliance with this provision.

M. Traffic Signal Maintenance and Programming

1.0 Description. Traffic signal maintenance and programming for this project shall be in accordance with Section 902 of the Standard Specifications, and specifically as follows.

2.0 Contractor Maintenance Responsibilities.

2.1 Traffic Signal Maintenance. Once any part of an existing traffic signal within the limits of this project has otherwise been modified and/or adjusted by the contractor or the contractor begins work at an intersection with traffic signals already in operation, then the contractor shall be solely responsible for that traffic signal's maintenance. All traffic signal maintenance shall be the responsibility of the contractor as specified in 902.2 and 902.3, until the Commission accepts the traffic signal for maintenance or as directed by the Engineer. Traffic signals to be accepted for maintenance by the contractor are listed in the below schedule:

Commission Traffic Signals to be Maintained by the Contractor:

1. MO 180 and Ogden
2. MO 180 and Lucas & Hunt
3. MO 180 and Kingsland-Metro
4. MO 180 and Ferguson
5. MO 180 and Spur-Pennsylvania
6. MO 180 and Normandy
7. MO 180 and Hanley
8. MO 180 and Lackland
9. MO 180 and I-170
10. MO 180 and Brown
11. MO 180 and McKibbin
12. MO 180 and St. John's Crossing
13. MO 180 and Woodson
14. MO 180 and Edmundson
15. MO 180 and Lynntown
16. MO 180 and Wismer

17. MO 180 and Geraldine-Fire Station
18. MO 180 and St. Gregory
19. MO 180 and San Carlos
20. MO 180 and Ashby
21. MO 180 and St. Timothy
22. MO 180 and Cypress
23. MO 180 and Adie
24. MO 180 and Northwest Plaza
25. MO 180 and 67-Lindbergh
26. MO 180 and Home Depot
27. MO 180 and Fee Fee
28. MO 180 and Mark Twain
29. MO 180 and I-70 EB Ramp
30. MO 180 and I-70 WB Ramp
31. MO 180 and Harmony
32. MO 180 and Hilltop Plaza
33. MO 180 and McKelvey
34. MO 180 and Depaul Center
35. MO 180 and Rte B- Mareshell
36. MO 180 and I-270 NB Ramp
37. MO 180 and I-270 SB Ramp
38. MO 180 and Pennridge-Boenker

2.2 Traffic Signal Controller Programming. If the contractor modifies and/or adjusts an existing traffic signal controller's programming or makes any roadway changes to reduce the traffic capacity through a signalized intersection within the limits of a project or utilizes a project defined detour that utilizes the traffic signals within the below schedule, the contractor shall be solely responsible for those traffic signal controller programs. All controller programming shall be the responsibility of the contractor as specified in 902.2 or until final acceptance of the project or until released from the responsibility by the Engineer. Traffic signal controller programs to be administered by the contractor are listed in the below schedule:

Traffic Signal Controller Programs to be Administered by the Contractor:

1. MO 180 and Ogden
2. MO 180 and Lucas & Hunt
3. MO 180 and Kingsland-Metro
4. MO 180 and Ferguson
5. MO 180 and Spur-Pennsylvania
6. MO 180 and Normandy
7. MO 180 and Hanley
8. MO 180 and Lackland
9. MO 180 and I-170
10. MO 180 and Brown
11. MO 180 and McKibbon
12. MO 180 and St. John's Crossing
13. MO 180 and Woodson
14. MO 180 and Edmundson
15. MO 180 and Lynntown
16. MO 180 and Wismer
17. MO 180 and Geraldine-Fire Station

18. MO 180 and St. Gregory
19. MO 180 and San Carlos
20. MO 180 and Ashby
21. MO 180 and St. Timothy
22. MO 180 and Cypress
23. MO 180 and Adie
24. MO 180 and Northwest Plaza
25. MO 180 and 67-Lindbergh
26. MO 180 and Home Depot
27. MO 180 and Fee Fee
28. MO 180 and Mark Twain
29. MO 180 and I-70 EB Ramp
30. MO 180 and I-70 WB Ramp
31. MO 180 and Harmony
32. MO 180 and Hilltop Plaza
33. MO 180 and McKelvey
34. MO 180 and Depaul Center
35. MO 180 and Rte B- Mareshell
36. MO 180 and I-270 NB Ramp
37. MO 180 and I-270 SB Ramp
38. MO 180 and Penridge-Boenker

2.3 Contractor’s Traffic Engineer. If traffic signals are listed in the schedule outlined in section 2.2, the contractor shall have an experienced traffic Engineer with a Professional Engineer’s (PE) license in Missouri as well as a Professional Traffic Operations Engineer (PTOE) certification (hereafter referred to as “contractor’s traffic Engineer”) with the noted experience outlined to section 3.0. MoDOT shall approve the traffic Engineer prior to them being hired.

2.4 Traffic Signal Complaints The contractor shall respond to malfunction complaints or traffic signal timing complaints for those locations detailed in section 2.1 and/or section 2.2 of this provision and as specified in Section 902.21.1. Response time shall be 1 hour for complaints received by the contractor between 6 a.m. and 6 p.m. on non-holiday weekdays, and 2 hours for all other times. For cases due to travel times or other extenuating circumstances additional time may be acceptable within reason but must be approved by a Commission Traffic Operations Engineers. These timeframes will replace the ‘24 hour’ response time in Section 105.14 for any traffic signal-related incidents, where the entire cost of the work, if performed by MoDOT personnel or a third party, will be computed as described in Section 108.9 and deducted from the payments due the contractor.

2.5 Traffic Signal Contacts. The contractor must supply to the Engineer and to the Commission’s Transportation Management Center (TMC) a contact name and phone number who will be responsible for receiving traffic signal timing complaints for the Engineer. These complaints may be forwarded directly to the contractor by someone other than the Engineer’s representative and will not relieve the contractor from properly responding based on the response times of this provision. The contractor shall respond to the Engineer and its representative within 12 hours of the complaint and its remedy. The contractor shall submit to the Engineer’s representative a weekly report of complaints received and remedies performed throughout the duration of the project.

2.6 Existing Traffic Signal Controller Programming. The contractor shall request an electronic report from the Engineer on the existing phasing and timing of each traffic signal, which may be

the contractor's responsibility to program. The contractor shall give the Engineer 2 weeks' notice to supply the electronic report. The Engineer's representative shall be available to the contractor before any changes are made to a traffic signal or controller to answer any questions about the report. In lieu of the report, the contractor's traffic Engineer may obtain this information from the appropriate agency's central traffic signal control system.

2.7 Traffic Mitigation Plan. The contractor shall notify the Engineer 2 weeks prior to the date of any work impacting the Commission's traffic signals as described in Section 2.1 and/or 2.2. The contractor shall meet with the Engineer's representatives to discuss their traffic mitigation plan at least 1 week before the date of the first impacts and as needed between construction stages. The traffic mitigation plan should at a minimum include:

- Proposed Timing Plan changes and any models
- Anticipated locations of concern
- A map in electronic format displaying the locations and names of the traffic signals and owning agency as detailed in sections 2.1 and/or section 2.2.
- Other traffic mitigation efforts

2.8 Notification of Changes to Traffic Signal System. The contractor shall notify the Engineer or representative of the changes no later than 1 working day after changes are programmed if unable to provide advance notice as specified in 902.2.

3.0 Contractor's Traffic Engineer Qualifications.

3.1 Credentials. The contractor shall have an experienced traffic Engineer with a Professional Engineer's (PE) license in Missouri as well as a Professional Traffic Operations Engineer (PTOE) certification.

3.2 Experience. Any proposed contractor traffic Engineer shall be able to demonstrate personal successful previous experience in the following tasks:

3.2.1 Response. The contractor's traffic Engineer shall have the ability to be on site within 1 hour of being requested.

3.2.2 Corridor Management. Time/space diagram manipulation to successfully adjust offsets and splits for rapidly changing traffic demands.

3.2.3 Controller Programming. Ability to program by hand and by software NTCIP-compatible controllers.

3.2.4 Intersection Programming. Implementation of adjusted and/or new timing plans because of changing traffic demand.

3.2.5 Traffic Signal Software. Use and understanding of all traffic signal controllers and central traffic signal control systems utilized by the Commission.

3.3 Proposed Traffic Engineers. The contractor shall submit the names(s) of proposed traffic engineer(s) and the name(s) of all other personnel on their proposed staff along with detailed experience in all tasks outlined in Paragraph 3.2 above. The Engineer reserves the right to reject any contractor traffic engineer, before the start of work, who does not have sufficient experience or, at any point during the project, which does not satisfy the requirements set forth within this Job

Special Provision. A list of potential traffic engineers shall be submitted for review to the Project Manager and the Commission's Traffic Engineers prior to bid.

4.0 Contractor's Traffic Engineer Responsibilities.

4.1 VPN Access. The approved contractor's traffic Engineer and any staff assigned to manage the traffic signals during the project are encouraged to apply for VPN (Virtual Private Network) access with the Engineer once the project is awarded. If approved, the Engineer will assign a unique IP address to the contractor's traffic Engineer, which will allow for remote access to the Commission's central traffic signal control systems as appropriate and the ability to interface with the noted traffic signals on this project.

4.2 Traffic Signal Timing Complaints. The contractor's traffic Engineer shall respond to any traffic signal timing complaints regarding signals outlined in section 2.2 of this provision.

4.3 Traffic Signal Coordination. The contractor's traffic Engineer shall be solely responsible for maintaining the coordination at any affected traffic signal to the satisfaction of the Commission's Traffic Operations Engineers or representative until completion of work as set forth in section 2.2 of this provision. Maintenance of coordination may include the synchronization of the affected controller's internal time clocks to the second using an atomic clock, or other means approved by the Commission's Traffic Operations Engineers. If time clock synchronization is used, the contractor shall verify all affected controllers are synchronized at least 1 time per week with a report to the Engineer or representative. This report will be in the form of a documentation record as spelled out in the Work Zone Traffic Management Plan.

4.4 Traffic Signal Controller Programming. The contractor's traffic Engineer shall be responsible for implementing traffic signal controller programming at each intersection listed in section 2.2 for any of the following scenarios:

- Intersection Impact
- Construction Stage Traffic Switch
- Response to Customer Concern
- New Intersection Turn-On (along with any subsequent revisions)
- Final completion of improvements
- As otherwise directed by the Engineer or the Commission's Traffic Operations Engineers

Proposed timing plans should be submitted to the Commission's Traffic Operations Engineers for review prior to field implementation.

4.5 Central Traffic Signal Control System Setup. If a traffic signal cabinet is reconfigured, the contractor's traffic Engineer shall archive the existing controller programming in the Commission's central traffic signal control system. If the signal controller type is changed, the contractor's traffic Engineer shall archive the existing controller programming and convert any new controllers to the proper controller interface type in the Commission's central traffic signal control system. If only signal timing adjustments are made, all database versions shall be clearly labeled and saved separately from the default version, and the final timing program shall be uploaded into the Commission's central traffic signal control system and set as the default database. In addition, the contractor's traffic Engineer shall update any intersection diagrams (i.e., XPL) whose intersection controls were modified during construction.

4.6 Controller Program Test Period. The intersection program shall operate properly with no faults or malfunctions for a period of 15 consecutive days as a condition of being accepted for maintenance by the Commission. Any programming faults shall be corrected by the contractor's traffic Engineer per the response protocols of this provision and the 15 days will start over.

4.7 Cabinet Photos. The contractor's traffic Engineer shall obtain cabinet photos of any new or modified traffic signal cabinet affected by the project. The photos shall be captured of the following perspectives and delivered in the .jpg format electronically and via thumb drive to the Commission's Traffic Operations Engineers.

- Power Meter 1 – Away from power meter with meter centered
- Power Meter 2 – Close up with power meter number
- Cabinet 1 – Away with cabinet centered and door closed
- Cabinet 2 – Close up of entire cabinet with door opened
- Cabinet 3 – Close up of center cabinet interior
- Cabinet 4 – Close up of left cabinet interior
- Cabinet 5 – Close up of right cabinet interior
- Cabinet 6 – Close up of back panel
- Cabinet 7 – Close up of switch
- Cabinet 8-Close up of wall interconnect center

4.8 RRFB/PHB Timing. The contractor's traffic Engineer shall calculate the duration of flash time for any new or modified RRFB's (rectangular rapid flashing beacons) affected by the project. The contractor's traffic engineer shall be responsible for calculating phase intervals and programming traffic signal controllers for new/modified PHB's (pedestrian hybrid beacons) affected by the project.

4.9 Detection. The contractor's traffic Engineer shall assist the contractor in setting up detection as per plan and/or SL District Traffic Signal Detection System JSP. The contractor's traffic Engineer shall verify that all detectors work properly and that each detector input into the traffic signal controller is programmed regarding its intended use. The contractor's traffic Engineer is responsible for optimizing the detector operation by utilizing various detector settings in the traffic signal controller.

4.10 Signal Performance Measures. The contractor's traffic Engineer shall setup traffic signal controllers on the Commission's advanced traffic signal performance measures module unless directed otherwise by the Commission's Traffic Operations Engineers. This includes any work on the Commission's advanced traffic signal performance measures module, traffic signal controller(s), and video detection processor(s). The contractor's traffic Engineer shall provide proof of each traffic signal setup in the module to the Commission's Traffic Operations Engineers. The contractor's traffic Engineer shall setup any traffic signal detectors as system detectors in the Commission's central traffic signal control system.

4.11 Preemption Controller Programming. If preemption is to be provided at a traffic signal, the contractor's traffic Engineer shall program the preemption settings in the traffic signal controller per MoDOT EPG guidelines and at the direction of the Commission's Traffic Operations Engineers. The contractor's traffic Engineer shall test the preempt settings at the traffic signal cabinet to verify proper operation.

5.0 Post Project Report. The contractor shall submit to the Engineer a post project report, four to six weeks after the final traffic signal adjustments have been completed. The report shall include

at a minimum an observation report, summary of timing changes and locations, summary of complaints, and any other pertinent information regarding the contractor's efforts for managing these traffic signal corridors in one electronic document.

6.0 Deliverables. All deliverables mentioned in this provision shall be submitted to the Engineer in a timely manner to the satisfaction of the Engineer prior to receiving full compensation for this work. All deliverables must be submitted to the Engineer via USB.

- Experience submittal
- Preliminary Traffic Mitigation Plan
- Notification of Detour Implementation
- Time Base Reports, As Needed
- Complaint Resolutions
- Audible pedestrian signal voice message files
- Traffic Signal Database versions (in PDF format)
- Traffic signal photos
- Notification of Restoration to Normal Operations
- Post Project Report

7.0 Construction Requirements. Construction requirements shall conform to Sections 902, 1061 and 1092.

8.0 Method of Measurement. Method of measurement shall conform to Section 902.

9.0 Basis of Payment. Payment will be considered full compensation for all contractor services, installation, and labor to complete the described work:

Item No.	Type	Description
902-99.01	Lump Sum	Traffic Signal Maintenance and Programming

N. Contractor Quality Control

1.0 The contractor shall perform Quality Control (QC) testing in accordance with the specifications and as specified herein. The contractor shall submit a Quality Control Plan (QC Plan) to the engineer for approval that includes all items listed in Section 2.0, prior to beginning work.

2.0 Quality Control Plan.

- (a) The name and contact information of the person in responsible charge of the QC testing.
- (b) A list of the QC technicians who will perform testing on the project, including the fields in which they are certified to perform testing.
- (c) A proposed independent third party testing firm for dispute resolution, including all contact information.
- (d) A list of Hold Points, when specified by the engineer.
- (e) The MoDOT Standard Inspection and Testing Plan (ITP). This shall be the version that is posted at the time of bid on the MoDOT website (www.modot.org/quality).

3.0 Quality Control Testing and Reporting. Testing shall be performed per the test method and frequency specified in the ITP. All personnel who perform sampling or testing shall be certified in the MoDOT Technician Certification Program for each test that they perform.

3.1 Reporting of Test Results. All QC test reports shall be submitted as soon as practical, but no later than the day following the test. Test data shall be immediately provided to the engineer upon request at any time, including prior to the submission of the test report. No payment will be made for the work performed until acceptable QC test results have been received by the engineer and confirmed by QA test results.

3.1.1 Test results shall be reported on electronic forms provided by MoDOT. Forms and Contractor Reporting Excel2Oracle Reports (CRE2O) can be found on the MoDOT website. All required forms, reports and material certifications shall be uploaded to a Microsoft SharePoint® site provided by MoDOT, and organized in the file structure established by MoDOT.

3.2 Non-Conformance Reporting. A Non-Conformance Report (NCR) shall be submitted by the contractor when the contractor proposes to incorporate material into the work that does not meet the testing requirements or for any work that does not comply with the contract terms or specifications.

3.2.1 Non-Conformance Reporting shall be submitted electronically on the Non-Conformance Report form provided on the MoDOT Website. The NCR shall be uploaded to the MoDOT SharePoint® site and an email notification sent to the engineer.

3.2.2 The contractor shall propose a resolution to the non-conforming material or work. Acceptance of a resolution by the engineer is required before closure of the non-conformance report.

4.0 Work Planning and Scheduling.

4.1 Two-week Schedule. Each week, the contractor shall submit to the engineer a schedule that outlines the planned project activities for the following two-week period. The two-week schedule shall detail all work and traffic control events planned for that period and any Hold Points specified by the engineer.

4.2 Weekly Meeting. When work is active, the contractor shall hold a weekly project meeting with the engineer to review the planned activities for the following week and to resolve any outstanding issues. Attendees shall include the engineer, the contractor superintendent or project manager and any foreman leading major activities. This meeting may be waived when, in the opinion of the engineer, a meeting is not necessary. Attendees may join the meeting in person, by phone or video conference.

4.3 Pre-Activity Meeting. A pre-activity meeting is required in advance of the start of each new activity, except when waived by the engineer. The purpose of this meeting is to review construction details of the new activity. At a minimum, the discussion topics shall include: safety precautions, QC testing, traffic impacts, and any required Hold Points. Attendees shall include the engineer, the contractor superintendent and the foreman who will be leading the new activity. Pre-activity meetings may be held in conjunction with the weekly project meeting.

4.4 Hold Points. Hold Points are events that require approval by the engineer prior to continuation of work. Hold Points occur at definable stages of work when, in the opinion of the engineer, a review of the preceding work is necessary before continuation to the next stage.

4.4.1 A list of typical Hold Point events is available on the MoDOT website. Use of the Hold Point process will only be required for the project-specific list of Hold Points, if any, that the engineer submits to the contractor in advance of the work. The engineer may make changes to the Hold Point list at any time.

4.4.2 Prior to all Hold Point inspections, the contractor shall verify the work has been completed in accordance with the contract and specifications. If the engineer identifies any corrective actions needed during a Hold Point inspection, the corrections shall be completed prior to continuing work. The engineer may require a new Hold Point to be scheduled if the corrections require a follow-up inspection. Re-scheduling of Hold Points require a minimum 24-hour advance notification from the contractor unless otherwise allowed by the engineer.

5.0 Quality Assurance Testing and Inspection. MoDOT will perform quality assurance testing and inspection of the work, except as specified herein. The contractor shall utilize the inspection checklists provided in the ITP as a guide to minimize findings by MoDOT inspection staff. Submittal of completed checklists is not required, except as specified in 5.1.

5.1 Inspection and testing required in the production of concrete for the project shall be the responsibility of the contractor. Submittal of the 501 Concrete Plant Checklist is required.

6.0 Basis of Payment. No direct payment will be made for compliance with this provision.

O. Utilities JSP-93-26F

1.0 Description. For informational purposes only, the following is a list of names, addresses, and telephone numbers of the known utility companies in the area of the construction work for this improvement:

<u>Utility Name</u>	<u>Known Required Adjustment</u>	<u>Type</u>
Ameren Missouri (Overhead) Ric Behnen Telephone: (314) 713-4904 Email: RBehnen@ameren.com	None	Power
Ameren Missouri (Underground) Paul Aten Telephone: (618) 444-6123 Email: paten@ameren.com		

AT&T – Distribution Braeden Battles Telephone: (314) 972-2729 Email: bb6379@att.com	None	Communications
AT&T – Transmission Lenny Vohs Phone: (816) 275-4014 Email: lv2121@att.com	None	Communications
Charter Communications (Spectrum) George Bugg Phone: (314) 780-2921 Email: george.bugg@charter.com	None	Communications
Spire Nick Eggert Phone: 314-330-5720 Email: Nicholas.Eggert@spireenergy.com	None	Gas
Missouri American Water Company (MAWC) Dave Pruitt Phone: (314) 996-2396 Email: dave.pruitt@amwater.com	None	Water
Metropolitan Sewer District (MSD) James Derby Phone: (314) 768-2789 Email: jcderb@stlmsd.com	None	Sewer

1.1 The existence and approximate location of utility facilities known to exist, as shown on the plans, are based upon the best information available to the Commission at this time. This information is provided by the Commission "as-is" and the Commission expressly disclaims any representation or warranty as to the completeness, accuracy, or suitability of the information for any use. Reliance upon this information is done at the risk and peril of the user, and the Commission shall not be liable for any damages that may arise from any error in the information. It is, therefore, the responsibility of the contractor to verify the above listing information indicating existence, location, and status of any facility. Such verification includes direct contact with the listed utilities.

P. Traffic Management Coordination

1.0 Description. The contractor shall coordinate traffic management between this project and any other projects which affect Route 180, including all future projects.

1.1 This list of projects is not all inclusive. The contractor shall be aware that there may be other projects including, but not limited to, utility, St. Louis County, Jefferson County, private, MoDOT maintenance, permit, or other projects that may impact project construction or traffic control in the

vicinity of this project. It shall be the responsibility of the contractor to determine what, if any, projects other than the ones listed above may impact this project and work to coordinate construction and traffic management efforts between this project and any other project involved.

1.2 Each Contractor shall conduct their work so as not to interfere with or hinder the progress or completion of the work being performed by other Contractors. In case of dispute, the Engineer shall be the referee and the Engineer's decision shall be final and binding on all.

2.0 Site Construction. The Contractor shall arrange the work and shall place and dispose of the materials being used so as not to interfere with the operations of the other contractors.

3.0 Basis of Payment. No direct payment will be made to the contractor to recover the cost of equipment, labor, materials, or time required to fulfill the above provisions, unless specified elsewhere in the contract document.

Q. MoDOT ITS Equipment within Project Limits

1.0 Description. MoDOT owned fiber optic cable and conduit, critical MoDOT power supplies and power cables, and pull boxes for fiber and power cabling, are present within the limits of this project. Damage or interruption of these items can cause extensive outages to the MoDOT network.

2.0 Construction Requirements. The contractor shall exercise reasonable care while completing work near these facilities and shall take steps necessary to protect these facilities from damage for all items that are not specifically identified as being removed and/or relocated in the plans. Should any of the existing wiring or conduit be damaged by the contractor, it shall be replaced at the contractor's expense and the system in full operation within 4 hours of when the damage occurred. If it is mutually agreed upon between the Commission and the Contractor that the repairs will require more than 4 hours to complete, a mutually agreed upon time for repairs to be complete will be determined.

2.1 The contractor shall not modify any existing network or electrical connections within equipment cabinets, unless coordinated with MoDOT ITS staff. Existing connections include, but are not limited to, fiber jumpers, CAT5(e) cables, power supplies and power strips. The connection to specific fiber and copper ports on network equipment shall also not be modified, unless coordinated with MoDOT ITS staff, as the network equipment has been configured specifically for each equipment cabinet. Significant network outages and unnecessary troubleshooting to investigate outages can occur, even with minor changes to existing connections within the cabinet.

3.0 Liquidated Damages. In the event of damage, if the system is not repaired and in full operation within 4 hours of the damage occurring, or within the timeframe agreed upon, the contractor will be charged with a liquidated damage specified in the amount of \$100 per hour for each full hour that the system is not fully operational. This damage will be assessed independently of the liquidated damages specified elsewhere in the contract.

3.1 The MoDOT engineer will also have the option of issuing a work order for MoDOT's on-call ITS maintenance contractor to make repairs, if it is the engineer's opinion that the contractor creating the damage will not be able to make repairs in a timely manner. The ITS maintenance contractor will then bill the contractor causing the damage directly.

4.0 Basis of Payment. No direct payment shall be made for compliance with this provision.

R. Pull Ropes

1.0 Description. Provide polypropylene pull ropes through existing and new conduits used for this project for future maintenance with a minimum tensile strength of 1,125 lbs. Pull ropes should not be added to conduits not used for this project.

2.0 Basis of Payment. Measurement and payment for work covered by this specification shall include all equipment, tools, and materials necessary and shall be paid at the contract unit price as follows:

Item No.	Type	Description
910-99.02	Each	Pull Ropes

S. As-built Drawings

1.0 Description. Contractor shall provide as-built drawings at the completion of the construction. Any installed and modified as-built conduits and cables including any conflicting or damaged conduit shall be shown in the as-built drawings. Any changes or modifications to equipment locations as shown in the plans shall be marked on the as-built drawings. As-built drawings shall be sealed by a Professional Engineer and submitted electronically both in DGN and PDF format.

2.0 Basis of Payment. Measurement and payment for work covered by this specification shall be paid at the contract unit price for “as-built” per lump sum:

Item No.	Type	Description
910-99.01	Lump Sum	As-built Drawings

T. Remove In-Pavement Wireless Detection System-Sensys Travel-Time

1.0 Description. The contractor shall remove the existing Sensys Travel Time Access Points (AP), repeaters and related devices inside the signal cabinet(s) at the below noted intersections, tag them properly and deliver those to MoDOT SL District Signal Shop at the Barrett Station Road Complex. All Sensys Travel Time related cables shall be removed and disposed properly by the contractor. If the existing Sensys In-Pavement Sensors are being impacted by this project’s pavement improvements, those pucks must be removed, disposed and the whole shall be filled properly by the contractor. If the pavement improvement is not impacting those In-pavement sensors, they can be leave-in-place or covered by the new pavement.

Sensys Travel Time In-Pavement Wireless System should be removed from the following intersections:

- a) MO 180 and De Paul Ln
- b) MO 180 and I-70 EB Ramp
- c) MO 180 and I-170

2.0 Construction Requirements.

2.1 The contractor **shall remove the existing** Sensys Travel Time Access Points (AP), repeaters and related devices inside the signal cabinet(s) at the noted intersections, tag them properly and deliver those to MoDOT SL District Signal Shop at the Barrett Station Road Complex. This work shall be coordinated with MoDOT SL District Signal Shop Supervisor.

2.2 The existing Sensys Intersection Detection or Bluetooth Systems shall NOT be disturbed unless otherwise noted in the plans.

3.0 Measurement and Payment.

3.1 Measurement and payment for items covered by this specification include the training, documentation, and acceptance testing, in addition to all materials and equipment necessary to restore the system to be fully operational. No direct pay for installation of any device or any epoxy required by the manufacturer to construct a fully functional system. No Direct Pay - Included with Removal of Improvements (LS).

U. Coordination with ITS Staff and Utility Locates

1.0 Description. Any work that will impact the existing communications network must be coordinated with the Commission's St. Louis District ITS staff. This includes but not limited to removal and replacement of any existing communications equipment, adding new devices and changes to power sources or disconnects. Minor modifications to the existing communications network can have significant impacts on the system and operation of other ITS and traffic signal systems.

1.1 MoDOT is a member of MO-One-Call System. Prior to any excavation or work within MoDOT Right-Of-way, the contractor must contact MO-One Call at 1-800-DIG-RITE and request for Utility Locates within noted project limits. If the scope of work contains modification, addition and/or expansion of existing underground MoDOT ITS, lighting, or signal facilities, the contractor must notify the MoDOT Utilities Locate staff prior to any work, in order for MoDOT to update MoDOT utility location records with Missouri One Call.

2.0 Contact. The contractor shall notify the ITS group via an email to SLITS@modot.mo.gov at least 2 days before any work that may impact the existing network communications. The contractor shall include the Job#, location and brief scope of work in the email's subject line. The engineer shall be notified prior to making contact with ITS staff. For MoDOT Utility location updates, the contractor must contact MoDOT TMC at 314-275-1500 and ask for Utility Locate Section at least seven calendar days before performing any work.

3.0 The ITS and network devices located within the project limits are a crucial part of the traffic operation system for this area. It is imperative that the downtime be kept to a minimum when adding, removing, or modifying any existing ITS and network devices. This may require the contractor to perform work that will affect existing network devices during nighttime and/or weekend hours, at the discretion of the Engineer. Allowable timeframes for this work will be subject to the need for ITS devices in the area to be used to manage other traffic impacting work zones.

4.0 Basis of Payment. No direct payment shall be made for compliance with this provision.

 ADDED V. **Conduit Repair**

1.0 Description. At locations noted on the plans, the contractor shall adjust the conduit system routing or repair the existing conduit system. Conduit system routing adjustment may involve lowering the conduit in place or minor horizontal adjustments to avoid other construction. Adjustment may require installing new conduit and splicing it to existing conduit. When existing cabling cannot be removed, split duct conduit shall be used. Adjustments to the existing conduit system may also involve removal of existing pull boxes or adjusting existing pull boxes to the new grade. Removal of existing pull boxes, when applicable, will be paid for by the removal of improvement bid item.

2.0 Materials. The materials used shall be per MoDOT Approved Product List (APL) and meet all MoDOT Specifications. If the materials are not in the APL, the contractor shall submit the material specification documents to the Engineer for review and approval before construction.

2.1 Couplings. Coupler used to join new conduits to existing conduits shall be designed by the manufacturer to join conduits of the type and size to be joined.

2.2 Use PVC conduit meeting the requirements of Sec 1060.

2.3 Use HDPE conduit meeting the requirements of Sec 1060. Use orange conduit for communication cable and black for power cable.

2.4 Split Duct Conduit. Split duct conduit shall be designed by the manufacturer for repairing damaged conduits in a manner that will protect the cabling. The split duct material shall be approved by the Engineer.

3.0 Construction Requirements.

3.1 Construction requirements shall conform to Sec 902.16.

3.2 The Contractor shall submit in writing his anticipated method of splicing the conduit to the Engineer for approval prior to performing the work.

3.3 Adjust Existing Pull Box to New Grade. As shown on the plans, the contractor shall adjust the existing pull box elevation to match new sidewalk or surrounding surface. This work shall be coordinated with the new sidewalk elevation or surface for a safe condition.

3.4 If the existing conduit system contains fiber optic cable, before and after fiber testing, using the OTDR (Optical Time-Domain Reflectometer) is required to ensure the existing fiber cable is not degraded. The fiber testing reports shall be submitted to the ITS group via an email to SLITS@modot.mo.gov. If the fiber cable is degraded, the fiber optic cable shall be replaced between splice points approved by the Engineer.

3.5 At locations where connection of a new trenched conduit to an existing conduit is shown, or require, a watertight connection shall be made using a mechanical coupler.

3.6 Pull Box Removal. If an existing pull box must be removed, the existing pull box shall be carefully broken up and removed without damaging existing conduits or cabling. Once the new conduit is installed and connected to the existing conduit, the void around the conduit shall be

backfilled with Grade A crushed stone or gravel to 6 inches above the conduit. Above the stone or gravel complete backfilling with clean fill free of large stones or rubble.

3.7 If the existing conduit and cabling are shallow to the surface and within new sidewalk construction segment, the contractor shall hand dig or break up the existing sidewalk by hand and carefully without damaging the existing conduit and cable, lower the existing conduit at least 10 inches from bottom of proposed sidewalk, backfilled with Grade A crushed stone or gravel to 6 inches above the conduit and then construct the new sidewalk.

3.8 Before backfilling around the adjusted or repaired conduit, the Engineer must be contacted and given time to inspect the conduit. Notify the Engineer that the location is ready for inspection via email. Send pictures of the adjusted or repaired conduit. Based on the pictures, the Engineer may approve backfilling or may make a site visit. Do not backfill until email approval is provided.

3.9 The contractor shall backfill excavated areas with clean fill free of large stones or rubble. The finished grade shall match the surrounding grade to maintain existing drainage patterns and the work area will be restored to match the surrounding area.

3.10 The contractor shall exercise reasonable care relocating MoDOT ITS Assets. Damage to any MoDOT facilities within the area of work caused by the contractor will be deemed by the Engineer as either "non-emergency" or "emergency" upon notification of the damages. Repair to damages will be performed as follows:

- a) Non-Emergency: Contractor will have 4 hours to propose a repair plan to the Engineer for a complete repair within 3 business days.
- b) Emergency: Upon notification of the damage, Contractor must immediately submit a repair plan to the Engineer which will take no more than 4 hours to respond on-site and complete repairs within 48 hours of notification of damage.
- c) In either case, if the proposed plan is unacceptable for any reason to MoDOT, repairs will be made by MoDOT with all costs billed to the Contractor.

3.11 The ITS conduit systems located within the project limits are a crucial part of the traffic operation system for this area. It is imperative that the downtime be kept to a minimum when replacing, removing, or modifying any existing ITS facilities.

4.0 Basis of Payment. Measurement and payment for work covered by this specification includes equipment, tools, materials, necessary to install and splice existing conduit sufficient for pulling new cable. Payment will be made as follows:

Item No.	Type	Description
902-99.03	L.F.	Conduit Repair