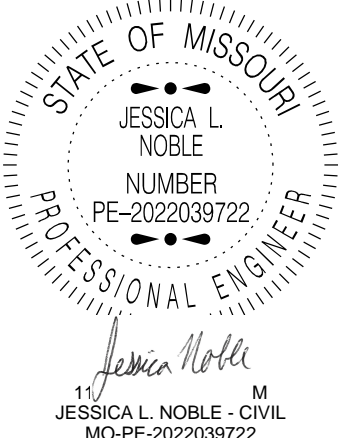


TABLE OF CONTENTS

A. Construction Requirements

 <p>11 JESSICA L. NOBLE - CIVIL M MO-PE-2022039722</p>	<p>MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION 105 W. CAPITOL AVE. JEFFERSON CITY, MO 65101 Phone (888) 275-6636</p>
	<p>If a seal is present on this sheet, JSP's has been electronically sealed and dated.</p>
	<p>JOB NO. J5P3560 Cole County, MO Date Prepared: 11/1/2024</p>
<p>Only the following items of the Job Special Provisions (Bridge) are authenticated by this seal: All</p>	

JOB SPECIAL PROVISIONS (BRIDGE)

A. CONSTRUCTION REQUIREMENTS

1.0 Description. This provision contains general construction requirements for this project.

2.0 Construction Requirements. The plans and the asbestos and lead inspection report for the existing structure(s) and the geotechnical report for the new structure(s) are included in the contract in the bridge electronic deliverables zip file for informational purposes only.

2.1 In order to assure the least traffic interference, the work shall be scheduled so that the bridge closure is for the absolute minimum amount of time required to complete the work. The bridge shall not be closed until material is available for continuous construction and the contractor is prepared to diligently pursue the work until the closed bridge is opened to traffic.

2.2 Provisions shall be made to prevent any debris and material from falling into the waterway. If determined necessary by the engineer, any debris and material that falls below the bridge outside the previously specified limits shall be removed as approved by the engineer at the contractor's expense.


2.3 Provisions shall be made to prevent damage to any existing utilities. Any damage sustained to the utilities as a result of the contractor's operations shall be the responsibility of the contractor. All costs of repair and disruption of service shall be as determined by the utility owners and as approved by the engineer.

3.0 Method of Measurement. No measurement will be made.

4.0 Basis of Payment. Payment for the above described work will be considered completely covered by the contract unit price for other items included in the contract.

TABLE OF CONTENTS

- A. Construction Requirements
- B. Deflection And Haunching
- C. Non-Destructive Testing

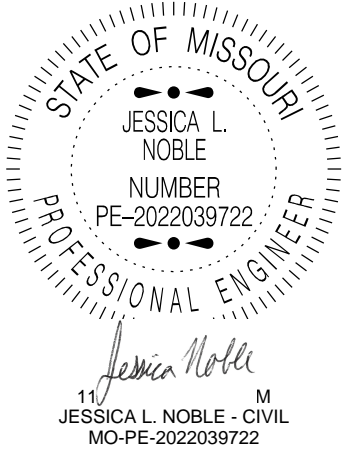	MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION 105 W. CAPITOL AVE. JEFFERSON CITY, MO 65101 Phone (888) 275-6636
	If a seal is present on this sheet, JSP's has been electronically sealed and dated.
	JOB NO. JCD0157 Cole County, MO Date Prepared: 10/27/2024
Only the following items of the Job Special Provisions (Bridge) are authenticated by this seal: All	

JOB SPECIAL PROVISIONS (BRIDGE)

A. CONSTRUCTION REQUIREMENTS

1.0 Description. This provision contains general construction requirements for this project.

2.0 Construction Requirements. The plans and the asbestos and lead inspection report for the existing structure(s) are included in the contract in the bridge electronic deliverables zip file for informational purposes only.

2.1 In order to assure the least traffic interference, the work shall be scheduled so that the bridge closure is for the absolute minimum amount of time required to complete the work. The bridge shall not be closed until material is available for continuous construction and the contractor is prepared to diligently pursue the work until the closed bridge is opened to traffic.

2.2 The existing slab for the bridge(s) to be redecked was constructed as composite or non-composite as shown in the table below.

Bridge No.	Type of deck
G03021	Composite

2.3 Provisions shall be made to prevent any debris and material from falling into the waterway. If determined necessary by the engineer, any debris and material that falls below the bridge outside the previously specified limits shall be removed as approved by the engineer at the contractor's expense.

2.4 Any damage sustained to the remaining structure as a result of the contractor's operations shall be repaired or the material replaced as approved by the engineer at the contractor's expense.

2.5 Provisions shall be made to prevent damage to any existing utilities. Any damage sustained to the utilities as a result of the contractor's operations shall be the responsibility of the contractor. All costs of repair and disruption of service shall be as determined by the utility owners and as approved by the engineer.

3.0 Coating Information.

3.1 Environmental Contact. Environmental Section may be contacted at the below address or phone number. The Missouri Department of Health may be contacted at (573) 751-6102.

MoDOT - Design Division - Environmental Section
P.O. Box 270
105 W. Capitol Ave., Jefferson City, MO 65102
Telephone: (573) 526-4778

3.2 Approved Smelter and Hazardous Waste Treatment, Storage and Disposal Facility. The following is the approved smelter and hazardous waste treatment, storage and disposal facility:

Doe Run Company - Resource Recycling Division - Buick Facility
Highway KK
Boss, MO 65440
Telephone: (573) 626-4813

4.0 Method of Measurement. No measurement will be made.

5.0 Basis of Payment. Payment for the above described work will be considered completely covered by the contract unit price for other items included in the contract.

B. DEFLECTION AND HAUNCHING

1.0 Description. The contractor shall determine haunching based on field measurements, existing bridge plans and/or adjusted dead load deflections based on the difference between the new and existing dead load weights. A spreadsheet showing adjusted girder or beam deflections due to the weight of the new deck and barriers is included in the contract in the bridge electronic deliverables zip file.

2.0 Construction Requirements. In order to properly form the haunches for the new deck, the contractor shall survey top of deck elevations above each girder or beam including centerline of roadway and along each girder or beam line (top or bottom flange) prior to deck removal followed by surveying elevations of the girders or beams (top or bottom flange) after deck removal.

3.0 Method of Measurement. No measurement will be made.

4.0 Basis of Payment. Payment for the above described work will be considered completely covered by the contract unit price for other items included in the contract.

C. NON-DESTRUCTIVE TESTING

1.0 Description. This work shall consist of performing non-destructive testing on the welds of all existing top flange cover plates.

2.0 Construction Requirements.

2.1 After the concrete deck is removed, the steel that is to remain will be inspected by the engineer. In addition to this inspection, the welds and adjacent base metal at the ends of the top cover plates shall have non-destructive (magnetic particle) testing performed. Non-destructive testing shall be performed by an acceptable testing agency. The contractor shall submit to the engineer and Bridge Division (Fabrication@modot.mo.gov) the following documentation for each individual performing non-destructive testing (NDT): their certifications, current eye exam and the NDT company written practice, including the Level III individual certification used for written practice. Personnel performing the tests shall be qualified for SNT-TC-1A Level II.

2.2 The length of weld to be tested and the base metal, one inch either side of the weld, shall be cleaned of all rust prior to the testing. On cover plates with square ends, the weld shall be tested one inch from each corner along the ends of the cover plate plus 6 inches back along the side from each corner of the plate. On cover plates with tapered ends, the weld shall be tested along the end of the cover plate, along tapered edges and 6 inches back along the cover plate from end of taper.

2.3 If fatigue cracks are found, the cracks are expected to be very small and may be located in the base metal at the toe of the welds. Any cracks discovered by testing, regardless of length, shall be marked and reported to the engineer. All repairs shall be made by a certified welder in

JOB SPECIAL PROVISIONS (BRIDGE)

accordance with [Sec 712.6](#). Any repair work and retesting of the repair work required, as a result of this inspection, will be paid for in accordance with [Sec 109](#). This shall not relieve the contractor from responsibility to repair any damage caused by this work at the contractor's expense. Any delay or inconvenience caused by this inspection requirement will be non-compensable and effect on time of performance non-excusable.

3.0 Method of Measurement. Measurement of non-destructive testing will be to the nearest linear foot. The extent of non-destructive testing may vary from the estimated quantities, but the contract unit price shall prevail regardless of the variation. Final measurements will not be made except for authorized changes during construction, or where appreciable errors are found in the contract quantity. The revision or correction will be computed and added to or deducted from the contract quantity.

4.0 Basis of Payment. Accepted quantities of non-destructive testing will be paid for at the contract unit price. Payment for the above described work, including all material, equipment, labor and any other incidental work necessary to complete this item, will be considered completely covered by the contract unit price for Non-Destructive Testing.