


DESIGN DESIGNATION

A.A.D.T. - 2025 = 3486
 A.A.D.T. - 2035 = 3601
 D.H.V. = 8.84%
 T = 5.90%
 V = 55 M.P.H.

FUNCTIONAL CLASSIFICATION - MINOR COLLECTOR

NO NEW R/W

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION PLANS FOR PROPOSED STATE HIGHWAY BUTLER COUNTY



INDEX OF SHEETS

DESCRIPTION	SHEET NUMBER
TITLE SHEET	1
TYPICAL SECTIONS (TS) (1 SHEETS)---	2
QUANTITIES (QU) (3 SHEETS)-----	3
SPECIAL SHEETS (SS)-----	4-5
TRAFFIC CONTROL (TC)-----	6
SIGNING (SN)-----	7



DATE PREPARED
12/5/2024
 ROUTE STATE
M MO
 DISTRICT SHEET NO.
SE 1
 COUNTY
BUTLER
 JOB NO.
JSE0090
 CONTRACT ID.


PROJECT NO.
 BRIDGE NO.

DESCRIPTION	DATE

**CONVENTIONAL SYMBOLS
 (USED IN PLANS)**

	EXISTING	NEW
BUILDINGS AND STRUCTURES		
GUARD RAIL		
GUARD CABLE		
CONCRETE RIGHT-OF-WAY MARKER		
STEEL RIGHT-OF-WAY MARKER		
LOCATION SURVEY MARKER		
UTILITIES		
FIBER OPTICS	-FO-	-FO-
OVERHEAD CABLE TV	-OTV-	-OTV-
UNDERGROUND CABLE TV	-UTV-	-UTV-
OVERHEAD TELEPHONE	-OT-	-OT-
UNDERGROUND TELEPHONE	-UT-	-UT-
OVERHEAD POWER	-OE-	-OE-
UNDERGROUND POWER	-UE-	-UE-
SANITARY SEWER	-S-	-S-
STORM SEWER	-SS-	-SS-
GAS	-G-	-G-
WATER	-W-	-W-
MANHOLE		
FIRE HYDRANT		
WATER VALVE		
WATER METER		
DROP INLET		
DITCH BLOCK		
GROUND MOUNTED SIGN		
LIGHT POLE		
H-FRAME POWER POLE		
TELEPHONE PEDESTAL		
FENCE		
CHAIN LINK		
WOVEN WIRE		
GATE POST		
BENCHMARK		

T 25 N
 T 24 N

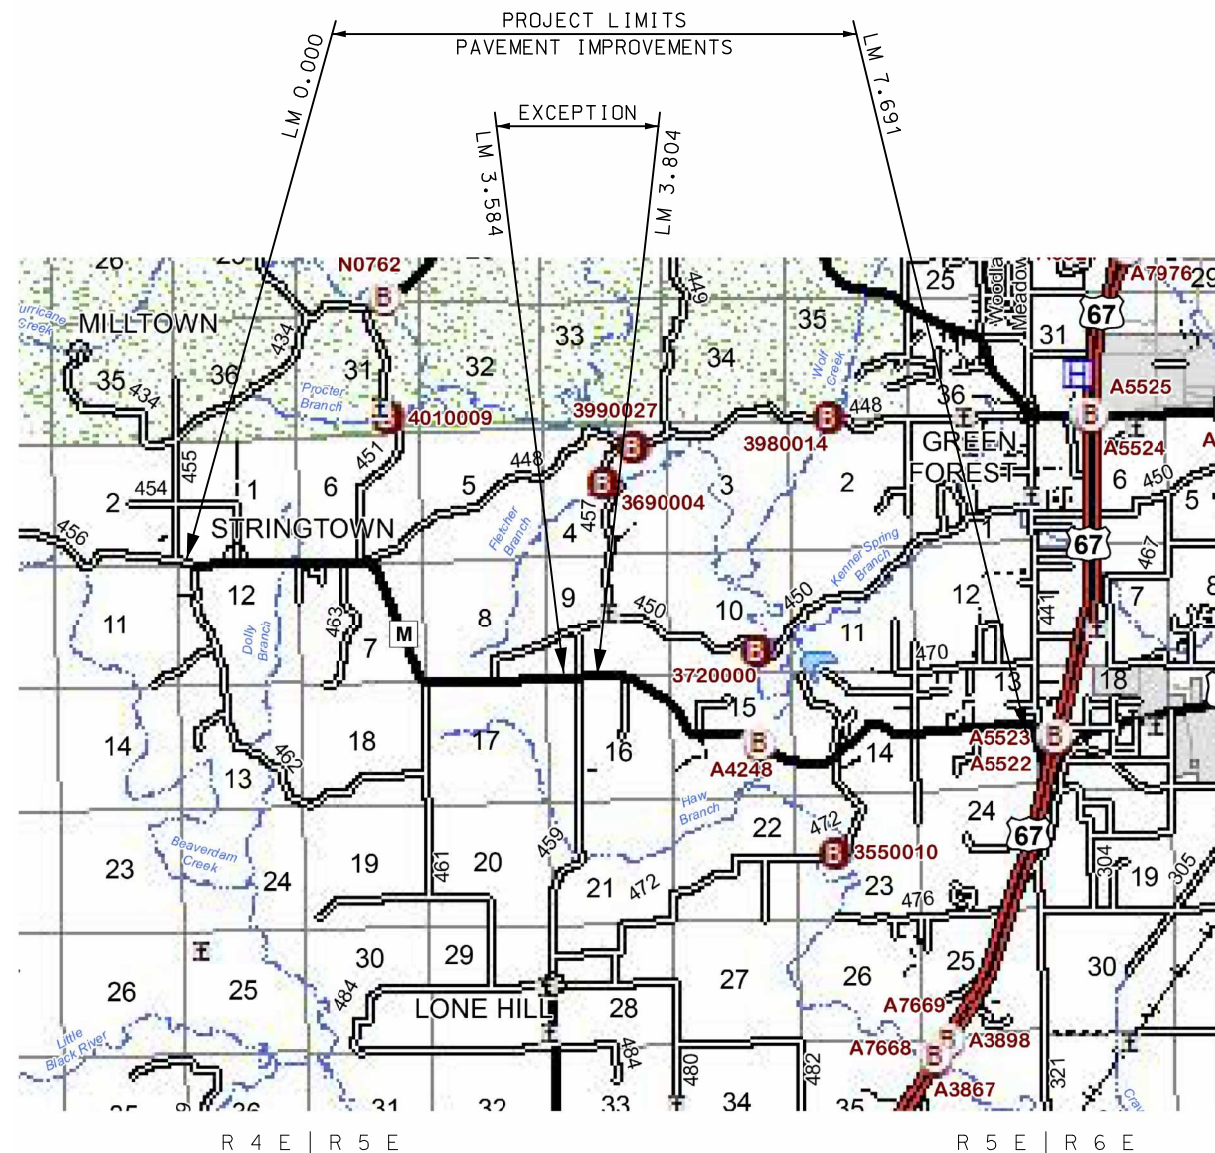

THE EXISTENCE AND APPROXIMATE LOCATION OF UTILITY FACILITIES KNOWN TO EXIST, AS SHOWN ON THE PLANS, ARE BASED ON THE BEST INFORMATION AVAILABLE TO THE COMMISSION AT THIS TIME. THIS INFORMATION IS PROVIDED BY THE COMMISSION "AS-IS" AND THE COMMISSION EXPRESSLY DISCLAIMS ANY REPRESENTATION OR WARRANTY AS TO THE COMPLETENESS, ACCURACY, OR SUITABILITY OF THE INFORMATION FOR ANY USE. RELIANCE UPON THIS INFORMATION IS DONE AT THE RISK AND PERIL OF THE USER, AND THE COMMISSION SHALL NOT BE LIABLE FOR ANY DAMAGES THAT MAY ARISE FROM ANY ERROR IN THE INFORMATION. IT IS, THEREFORE, THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY THE EXISTENCE, LOCATION AND STATUS OF ANY FACILITY. SUCH VERIFICATION INCLUDES DIRECT CONTACT WITH THE LISTED UTILITIES.

LENGTH OF PROJECT

BEGINNING OF PROJECT	LOG MILE 0.000
END OF PROJECT	LOG MILE 7.691
APPARENT LENGTH	40608.48 FEET
EQUATIONS AND EXCEPTIONS:	
LM 3.584 TO LM 3.804 = 0.22 MI (1161.60 FT)	

TOTAL CORRECTIONS	-1161.60 FEET
NET LENGTH OF PROJECT	39446.88 FEET
STATE LENGTH	7.471 MILES
FOR INFORMATION ONLY	
ESTIMATED DISTURBED ACRES	0 ACRES

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
 JEFFERSON CITY, MO 65102
 1-888-ASK-MODOT (1-888-275-6636)

MOBILIZATION
LUMP SUM 1


REMOVAL OF IMPROVEMENTS				
LOG MI	LOG MI	LOC	DESCRIPTION	REMARKS
0.404		CL	24' X 25' PVMT REMOVAL	AT CROSS ROAD CULVERT
4.392		CL	24' X 25' PVMT REMOVAL	AT CROSS ROAD CULVERT
4.588		CL	24' X 25' PVMT REMOVAL	AT CROSS ROAD CULVERT
5.418	5.484	LT/RT	4 TRANS, 4 TYPE A CRASHWORTHY, 150' GUARDRAIL	A4248
7.565		CL	24' X 25' PVMT REMOVAL	AT CROSS ROAD CULVERT
LUMP SUM 1				

COLDMILLING								
LOG MI	LOG MI	LOC	LENGTH FT	WIDTH FT	AREA SF	MODIFIED COLDMILLING DEPTH TRANSITIONS SY	COLDMILLING BIT PVMT (3" THICK OR LESS) SY	REMARKS
0.000	0.006	CL	VAR	VAR	1540.00		171.1	PROJECT BEGIN - CRD 456/CRD 462
0.006	0.015	CL	50.00	24.00		133.3		
3.575	3.584	CL	50.00	24.00		133.3		
3.804	3.813	CL	50.00	24.00		133.3		
5.409	5.418	CL	50.00	26.00		144.4		BRIDGE# A4248
5.484	5.493	CL	50.00	26.00		144.4		BRIDGE# A4248
7.682	7.691	CL	50.00	24.00		133.3		END PROJECT
0.000	7.691	CL	10.00	VAR		1013.3		16 PAVED CRD/ST; AVG W = 57'
0.000	7.691	CL	2.00	VAR		346.7		39 PAVED ENTRANCES; AVG W = 40'
TOTAL						2182	172	

LOG MILES ARE APPROXIMATE. EXACT LOCATIONS TO BE DETERMINED BY ENGINEER.

PAVEMENT										
LOG MI	LOG MI	LOC	LENGTH FT	WIDTH FT	AREA SF	THICK IN	SURFACE LEVELING PG64-22 2.061 TON/CY TONS	TACK 0.08 GAL/SY GAL	GRAVEL (A) OR CRUSHED STONE (B) TONS	REMARKS
0.000	0.006	CL	VAR	VAR	1540.00	1.00	9.8	13.7		
0.006	3.584	CL	18891.84	24.00		1.00	2884.15	4030.3		
3.804	5.000	CL	6314.88	24.00		1.00	964.07	1347.2		
5.000	5.418	CL	2207.04	26.00		1.00	365.02	510.1		
5.484	6.310	CL	4361.28	26.00		1.00	721.31	1007.9		
6.310	7.691	CL	7291.68	24.00		1.00	1113.2	1555.6		
0.000	7.691		10.00	VAR		3.00	29.39			2 NON PAVED CRD/ST; AVG W = 77'
0.000	7.691		10.00	VAR		1.00	58.01	81.1		16 PAVED CRD/ST; AVG W = 57'
0.000	7.691		2.00	VAR		1.00	19.85	27.7		39 PAVED ENTRANCES; AVG W = 40'
0.000	7.691		2.00	VAR		1.00			156.0	78 NON PAVED ENTRANCES WITHOUT APRON; AVG W = 28'
SUB-TOTAL							6164.80	8573.6	156.0	
0.000	7.691	CL		VAR		VAR	123.30			SAFETY EDGE *SEE STANDARD PLANS
0.000	7.691	CL		VAR		VAR	769.10			RUTTING & IRREGULARITIES - 100 TONS/MILE
TOTAL							7057.2	8574	156	

LOG MILES ARE APPROXIMATE. EXACT LOCATIONS TO BE DETERMINED BY ENGINEER.



DATE PREPARED
12/5/2024

ROUTE M STATE MO
DISTRICT SE SHEET NO. 3

COUNTY
BUTLER

JOB NO.
JSE0090

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION

DATE

DESCRIPTION

DATE

DESCRIPTION

DATE

DESCRIPTION

DATE

DESCRIPTION

DATE

DESCRIPTION

DATE

DESCRIPTION

DATE

DESCRIPTION

DATE

DESCRIPTION

DATE

DESCRIPTION

DATE

DESCRIPTION

DATE

DESCRIPTION

DATE

DESCRIPTION

DATE

DESCRIPTION

DATE

DESCRIPTION

DATE

DESCRIPTION


DATE

DESCRIPTION

DATE

DESCRIPTION

DATE

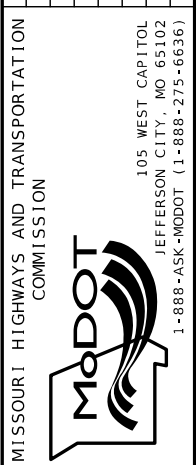


SUMMARY OF QUANTITIES
SHEET 1 OF 3

WARNING SIGNS										GUIDE SIGNS										EFFECTIVE: 07-01-2024		
SIGN	SIZE IN.	AREA SQ.FT.	QTY EACH	TOTAL AREA SQ.FT.	QTY RELOC EACH	TOTAL RELOC SQ.FT.	SIGN NUM.	DESCRIPTION		SIGN	SIZE IN.	AREA SQ.FT.	QTY EACH	TOTAL AREA SQ.FT.	QTY RELOC EACH	TOTAL RELOC SQ.FT.	SIGN NUM.	DESCRIPTION	ITEM NUMBER	TOTAL QTY	DESCRIPTION	
WO1-1L	48X48	16.00						TURN (SYMBOL LEFT)		E05-1	36X48	12.00						GORE EXIT	6122008		IMPACT ATTENUATOR 40 MPH (SAND BARRELS)	
WO1-1R	48X48	16.00						TURN (SYMBOL RIGHT)		E05-2	48X36	12.00						EXIT OPEN	6122009		IMPACT ATTENUATOR 45 MPH (SAND BARRELS)	
WO1-2L	48X48	16.00						CURVE (SYMBOL LEFT)		E05-2a	48X36	12.00						EXIT CLOSED	6122010		IMPACT ATTENUATOR 50 MPH (SAND BARRELS)	
WO1-2R	48X48	16.00						CURVE (SYMBOL RIGHT)		GO20-1	60X24	10.00	2	20.00				ROAD WORK NEXT XX MILES	6122012		IMPACT ATTENUATOR 55 MPH (SAND BARRELS)	
WO1-3L	48X48	16.00						REVERSE TURN (SYMBOL LEFT)		GO20-2	48X24	8.00	2	16.00				END ROAD WORK	6122014		IMPACT ATTENUATOR 60 MPH (SAND BARRELS)	
WO1-3R	48X48	16.00						REVERSE TURN (SYMBOL RIGHT)		GO20-4	36X18	4.50						PILOT CAR FOLLOW ME	6122017		IMPACT ATTENUATOR 65 MPH (SAND BARRELS)	
WO1-4L	48X48	16.00						REVERSE CURVE (SYMBOL LEFT)		GO20-4a	42X30	8.75						PILOT CAR IN USE WAIT & FOLLOW	6122019		IMPACT ATTENUATOR 70 MPH (SAND BARRELS)	
WO1-4R	48X48	16.00						REVERSE CURVE (SYMBOL RIGHT)		GO20-4a	18X12	1.50	15	22.50				PILOT CAR IN USE WAIT & FOLLOW	6122020		REPLACEMENT SAND BARREL	
WO1-4bL	48X48	16.00						DOUBLE ARROW REVERSE CURVE (SYMBOL LEFT)		GO20-5aP	36X24	6.00						WORK ZONE (PLAQUE)	6122030		IMPACT ATTENUATOR (RELOCATION)	
WO1-4bR	48X48	16.00						DOUBLE ARROW REVERSE CURVE (SYMBOL RIGHT)		MO4-8a	24X18	3.00						END DETOUR	6123001		TRUCK MOUNTED ATTENUATOR (TMA)	
WO1-4cL	48X48	16.00						TRIPLE ARROW REVERSE CURVE (SYMBOL LEFT)		MO4-9L	48X36	12.00						DETOUR (LEFT)	6161008		ADVANCED WARNING RAIL SYSTEM	
WO1-4cR	48X48	16.00						TRIPLE ARROW REVERSE CURVE (SYMBOL RIGHT)		MO4-9R	48X36	12.00						DETOUR (RIGHT)	6161012		BUOYS (BOATS KEEP OUT)	
WO1-6	60X30	12.50						HORIZONTAL ARROW (SYMBOL)		MO4-9P	48X12	4.00						STREET NAME (PLAQUE)	6161013		BUOYS (NO WAKE)	
WO1-6a	72X36	18.00						HORIZ. ARROW (SYMBOL ON PERMANENT BARRICADE)		MO4-10L	48X18	6.00						DETOUR ARROW (LEFT)	6161014	150	SPECIAL SIGN ASSEMBLY (BOATS KEEP OUT)	
WO1-7	60X30	12.50						DOUBLE HEAD HORIZONTAL ARROW (SYMBOL)		MO4-10R	48X18	6.00						DETOUR ARROW (RIGHT)	6161025		CHANNELIZER (TRIM LINE)	
WO1-7a	72X36	18.00						DOUBLE HEAD HORIZ. ARROW (SYMBOL ON PERM. BARR.)		REGULATORY SIGNS										6161030		TYPE III MOVEABLE BARRICADE
WO1-8	18X24	3.00						CHEVRON (SYMBOL)		R1-1	48X48	13.25						STOP	6161033		DIRECTION INDICATOR BARRICADE	
WO1-8a	30X36	7.50						CHEVRON (SYMBOL FOR DIVIDED HIGHWAYS)		R1-2	48TRI.	6.93						YIELD	6161040		FLASHING ARROW PANEL	
WO3-1	48X48	16.00						STOP AHEAD (SYMBOL)		R1-2a	36X36	9.00						TO ONCOMING TRAFFIC (PLAQUE)	6161047		TYPE III OBJECT MARKER	
WO3-2	48X48	16.00						YIELD AHEAD (SYMBOL)		R1-3P	30X12	2.50						ALL WAY (PLAQUE)	6161055		SEQUENTIAL FLASHING WARNING LIGHT	
WO3-3	48X48	16.00						SIGNAL AHEAD (SYMBOL)		R2-1	36X48	12.00						SPEED LIMIT XX	6161070		TUBULAR MARKER	
WO3-4	48X48	16.00	10	160.00				BE PREPARED TO STOP		R3-1	48X48	16.00						NO RIGHT TURN (SYMBOL)	6161095		RADAR SPEED ADVISORY SYSTEM	
WO3-5	48X48	16.00						SPEED LIMIT AHEAD		R3-2	48X48	16.00						NO LEFT TURN (SYMBOL)	6161096		CHANGEABLE MESSAGE SIGN, COMMISSION FURNISHED/RETAINED	
WO4-1L	48X48	16.00						MERGE (SYMBOL FROM LEFT)		R3-3	36X36	9.00						NO TURNS	6161098A		CHANGEABLE MESSAGE SIGN WITHOUT COMM. INTERFACE- CONTRACTOR FURNISHED/RETAINED	
WO4-1R	48X48	16.00						MERGE (SYMBOL FROM RIGHT)		R3-4	48X48	16.00						NO U-TURN (SYMBOL)	6161099		CHANGEABLE MESSAGE SIGN WITH COMM. INTERFACE- CONTRACTOR FURNISHED/RETAINED	
WO4-1aL	48X48	16.00						MERGE (LEFT)		R3-7L	30X30	6.25						LEFT LANE MUST TURN LEFT	6162000A		WORK ZONE TRAFFIC SIGNAL SYSTEM	
WO4-1aR	48X48	16.00						MERGE (RIGHT)		R3-7R	30X30	6.25						RIGHT LANE MUST TURN RIGHT	6162002		TEMPORARY LONG-TERM RUMBLE STRIPS	
WO5-1	48X48	16.00						ROAD/BRIDGE/RAMP NARROWS		R4-1	36X48	12.00						DO NOT PASS	6173600D		TEMPORARY TRAFFIC BARRIER CONTRACTOR FURNISHED/COMMISSION RETAINED	
WO5-3	48X48	16.00						ONE LANE BRIDGE		R4-2	36X48	12.00						PASS WITH CARE	6174000A		TEMP. TRAFFIC BARRIER HEIGHT TRANSITION	
WO5-5	48X48	16.00						NARROW LANES		R4-7a	36X48	12.00						KEEP RIGHT (HORIZONTAL ARROW)	6175010A		RELOCATING TEMPORARY TRAFFIC BARRIER	
WO6-1	48X48	16.00						DIVIDED HIGHWAY (SYMBOL)		R4-8a	36X48	12.00						KEEP LEFT (HORIZONTAL ARROW)	6176000B		TEMPORARY TRAFFIC BARRIER COMMISSION FURNISHED/RETAINED	
WO6-2	48X48	16.00						DIVIDED HIGHWAY END (SYMBOL)		R5-1	30X30	6.25						DO NOT ENTER	6177000B		TEMP. TRAFFIC BARRIER HEIGHT TRANSITION COMMISSION FURNISHED/RETAINED	
WO6-3	48X48	16.00						TWO WAY TRAFFIC (SYMBOL)		R5-1a	36X24	6.00						WRONG WAY	6208064A		TEMPORARY RAISED PAVEMENT MARKER	
WO7-3a	30X24	5.00						NEXT XX MILES (PLAQUE)		R6-1L	54X18	6.75						ONE WAY ARROW (LEFT)	9029400		TEMPORARY TRAFFIC SIGNALS	
WO8-1	48X48	16.00						BUMP		R6-1R	54X18	6.75						ONE WAY ARROW (RIGHT)	9029401		TEMPORARY TRAFFIC SIGNALS AND LIGHTING	
WO8-2	48X48	16.00						DIP		R6-2L	24X30	5.00						ONE WAY (LEFT)	6122040	4	WORK ZONE CRASH CUSHION (NARROW)	
WO8-3	48X48	16.00						PAVEMENT ENDS		R6-2R	24X30	5.00						ONE WAY (RIGHT)				
WO8-4	48X48	16.00						SOFT SHOULDER		R9-9	24X12	2.00						SIDEWALK CLOSED				
WO8-5	48X48	16.00						SLIPPERY WHEN WET (SYMBOL)		R9-11L	24X18	3.00						SIDEWALK CLOSED AHEAD, (ARROW LEFT) CROSS HERE				
WO8-6	48X48	16.00						TRUCK CROSSING		R9-11R	24X18	3.00						SIDEWALK CLOSED AHEAD, (ARROW RIGHT) CROSS HERE				
WO8-6c	48X48	16.00						TRUCK ENTRANCE		R10-6	24X36	6.00						STOP HERE ON RED (45° ARROW)				
WO8-7	36X36	9.00						LOOSE GRAVEL		R11-2	48X30	10.00						ROAD CLOSED				
WO8-7a	36X36	9.00						FRESH OIL / LOOSE GRAVEL		R11-3a	60X30	12.50						ROAD CLOSED XX MILES AHEAD				
WO8-9	48X48	16.00						LOW SHOULDER		R11-4	60X30	12.50						LOCAL TRAFFIC ONLY				
WO8-11	48X48	16.00	14	224.00				UNEVEN LANES		CONST-3A	60X48	20.00						ROAD CLOSED TO THRU TRAFFIC				
WO8-12	48X48	16.00	8	128.00				NO CENTER LINE		CONST-3X	56X12	4.67						FINE SIGN				
WO8-15	48X48	16.00						GROOVED PAVEMENT		MISCELLANEOUS SIGNS										6122040	4	WORK ZONE CRASH CUSHION (NARROW)
WO8-15P	30X24	5.00						MOTORCYCLE (PLAQUE)		CONST-5	48X36	12.00						POINT OF PRESENCE				
WO8-17L	48X48	16.00						SHOULDER DROP-OFF (SYMBOL LEFT)		CONST-5	96X48	32.00						POINT OF PRESENCE				
WO8-17R	48X48	16.00						SHOULDER DROP-OFF (SYMBOL RIGHT)		CONST-8	48X36	12.00	2	24.00				WORK ZONE NO PHONE ZONE				
W10-1	42RND.	9.62						RAILROAD CROSSING		GO20-4a	24X18	3.00	30	90				PILOT CAR IN USE WAIT & FOLLOW				
WO12-1	24X24	4.00						DOUBLE DOWN ARROW (SYMBOL)														
WO12-2	48X48	16.00						LOW CLEARANCE (SYMBOL)														
WO12-2x	24X18	3.00						LOW CLEARANCE (PLAQUE)														
WO12-2a	84X24	14.00						OVERHEAD LOW CLEARANCE (FEET AND INCHES)														
WO12-4	120X60	50.00						LOW CLEARANCE XX FT XX IN XX MILES AHEAD														
WO12-5	120X60	50.00						WIDTH RESTRICTION XX FT XX IN XX MILES AHEAD														
WO13-1	30X30	6.25						ADVISORY SPEED (PLAQUE)														
WO16-2	30X24	5.00						XXX FEET (PLAQUE)														
WO16-3	30X24	5.00						X MILE (PLAQUE)														
WO20-1	48X48	16.00	14	224.00				ROAD/BRIDGE/RAMP WORK AHEAD														
WO20-2	48X48	16.00						DETOUR AHEAD														
WO20-3	48X48	16.00						ROAD CLOSED AHEAD														
WO20-4	48X48	16.00	6	96.00				ONE LANE ROAD AHEAD		616-10.05								TOTAL				
WO20-5a	48X48	16.00						RIGHT/CENTER/LEFT LANE CLOSED AHEAD		CONSTRUCTION SIGNS								1238				
WO20-5a	48X48	16.00						2 RIGHT/CENTER/LEFT LANES CLOSED AHEAD		616-10.10								TOTAL				
WO20-6a	48X48	16.00						RIGHT/CENTER/LEFT LANE CLOSED		RELOCATED SIGNS								*				
WO20-7a	48X48	16.00	14	224.00				FLAGGER (SYMBOL)														
WO21-2	36X36	9.00						FRESH OIL														
WO21-5	48X48	16.00						SHOULDER WORK / SHOULDER WORK AHEAD														
WO22-1	48X48	16.00						BLASTING ZONE AHEAD														
WO22-2	42X36	10.50						TURN OFF 2-WAY RADIO AND PHONE														
WO22-3	42X36	10.50						END BLASTING ZONE														
GO22-1	21X15	2.19	4	8.76				WET PAINT (ARROW PIVOTS)														

* NO DIRECT PAY FOR RELOCATION

FOR TRAFFIC CONTROL PLANS FOR THIS PROJECT USE STANDARD PLANS 616.20 FOR SHEET 1 THROUGH 5



DATE PREPARED
12/5/2024
ROUTE M STATE MO
DISTRICT SE SHEET NO. 3
COUNTY BUTLER
JOB NO. JSE0090
CONTRACT ID.


PROJECT NO.
BRIDGE NO.

DESCRIPTION	DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)


SUMMARY OF QUANTITIES
SHEET 3 OF 3

BEGIN PROJECT

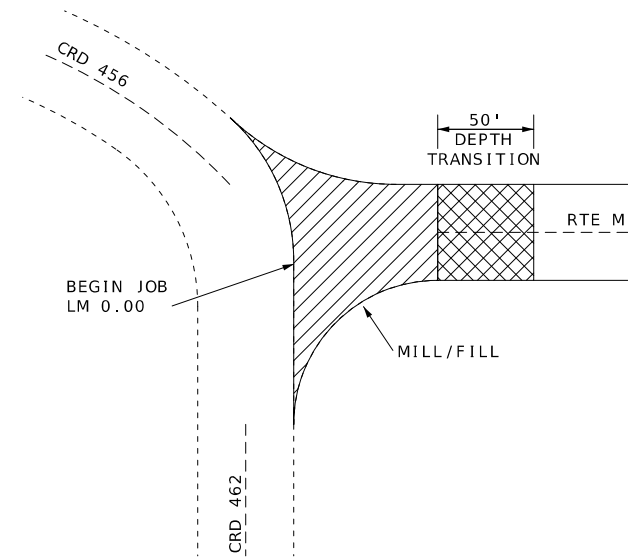


PLAN VIEW AT RTE M/CRD 456/CRD 462

CRD 459

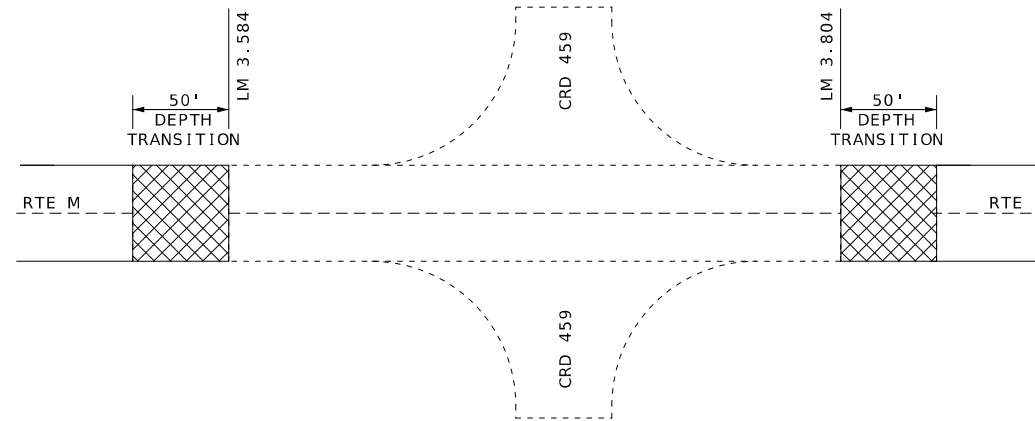


PLAN VIEW AT RTE M/CRD 459

END PROJECT




PLAN VIEW AT RTE M

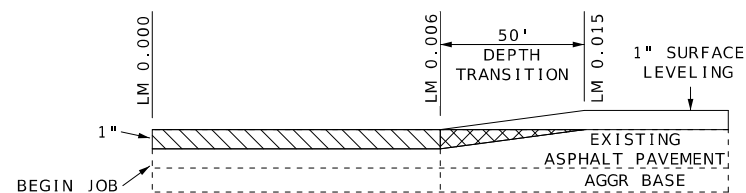


TYPICAL
RTE M/CRD 456/CRD 462



TYPICAL
RTE M

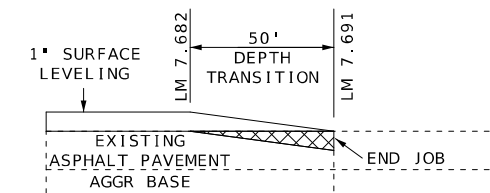


TYPICAL
RTE M

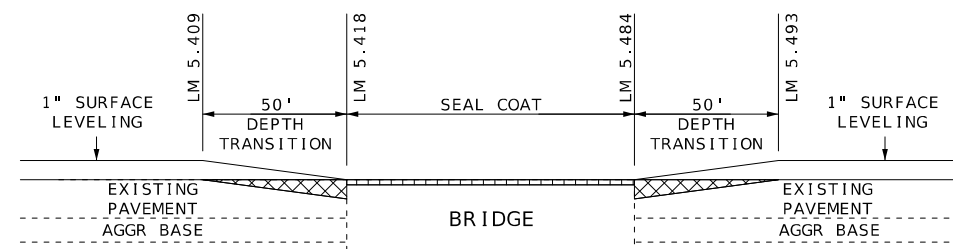


TYPICAL AT BRIDGE
A4248 LOG MILE 5.418 TO LOG MILE 5.484

CROSS ROAD CULVERTS

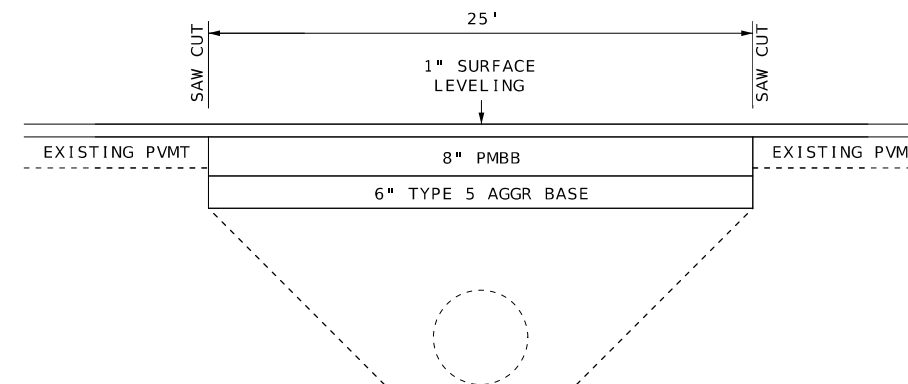

TYPICAL
LOG MILE 0.404, LOG MILE 4.392
LOG MILE 4.588, LOG MILE 7.565

- MILL/FILL
- MODIFIED COLDMILLING



CURTIS DEWAYNE WOOLSEY
12/12/2024 2:14:16 PM
CURTIS DEWAYNE WOOLSEY - CIVIL
MO-PE-201018834

DATE PREPARED
12/5/2024

ROUTE M STATE MO

DISTRICT SE SHEET NO. 4

COUNTY BUTLER

JOB NO. JSE0090

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION

DATE











MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL JEFFERSON CITY, MO 65102

1-888-ASK-MODOT (1-888-275-6636)



SPECIAL SHEET
SHEET 1 OF 2

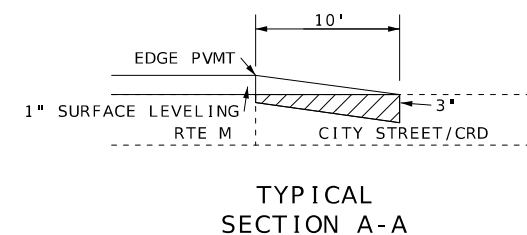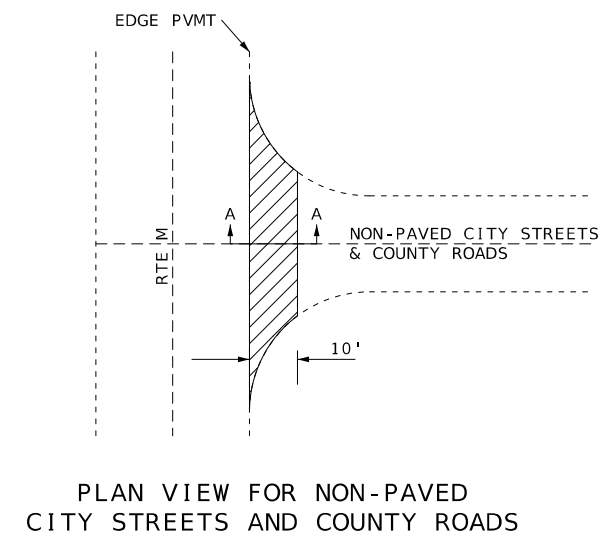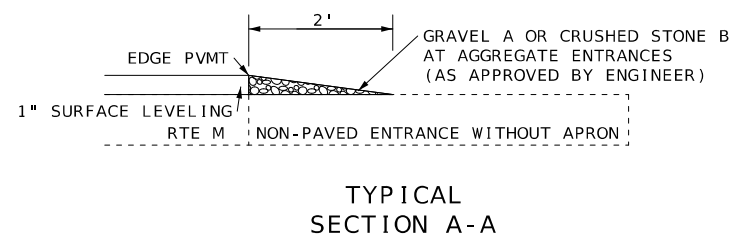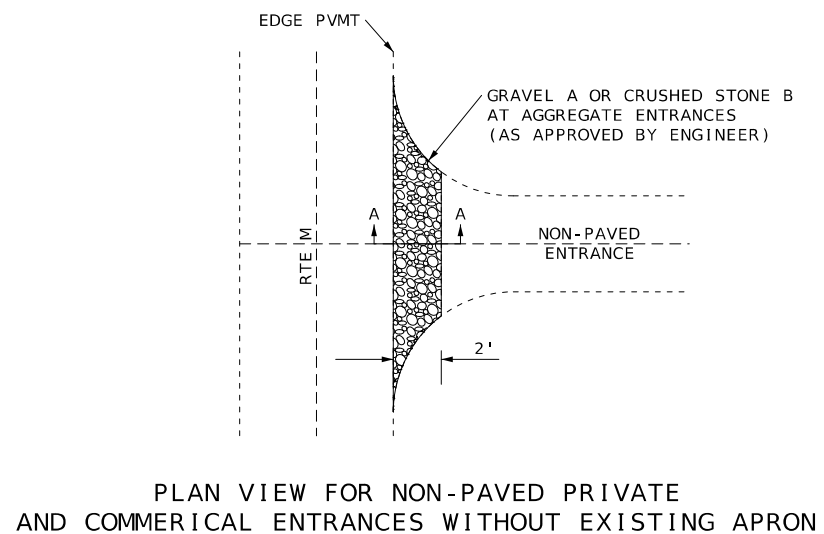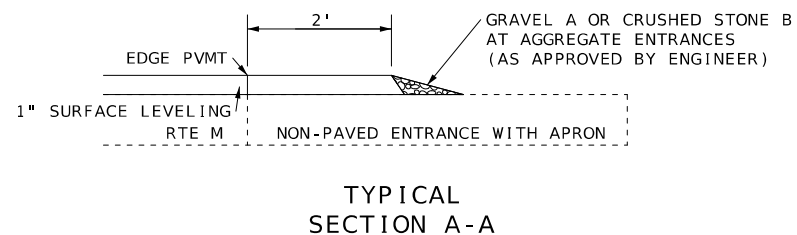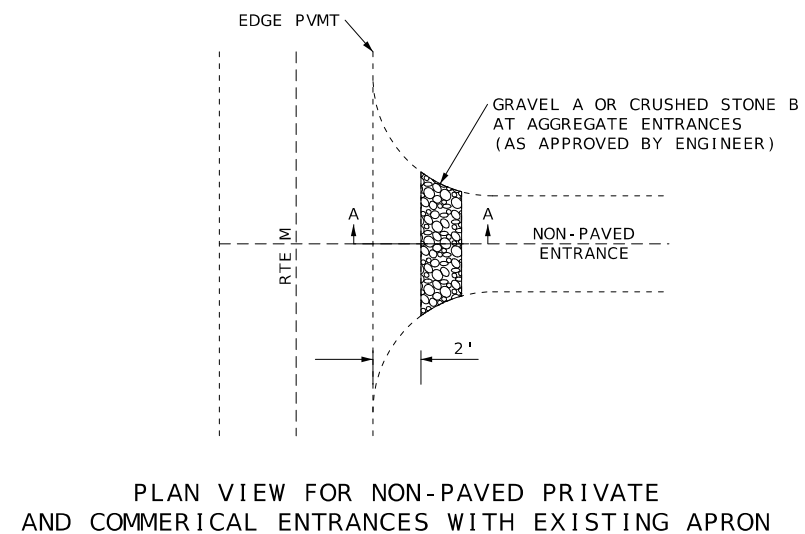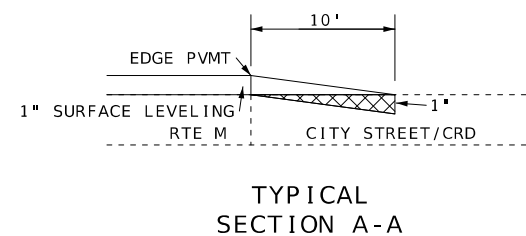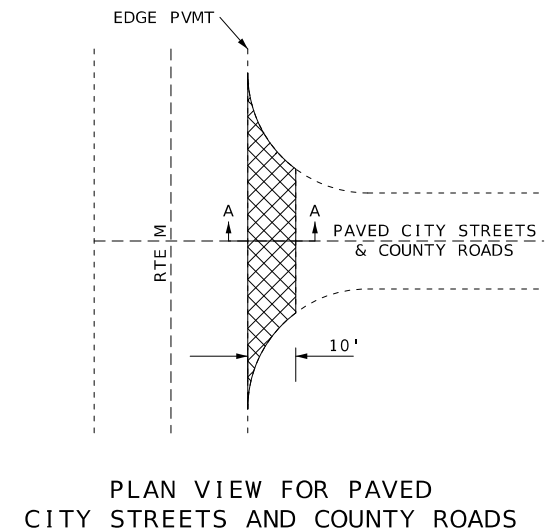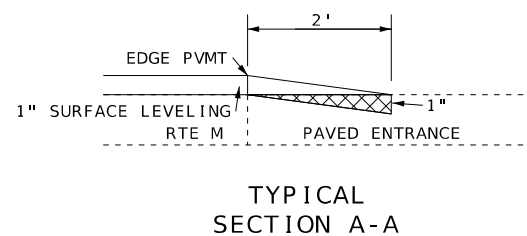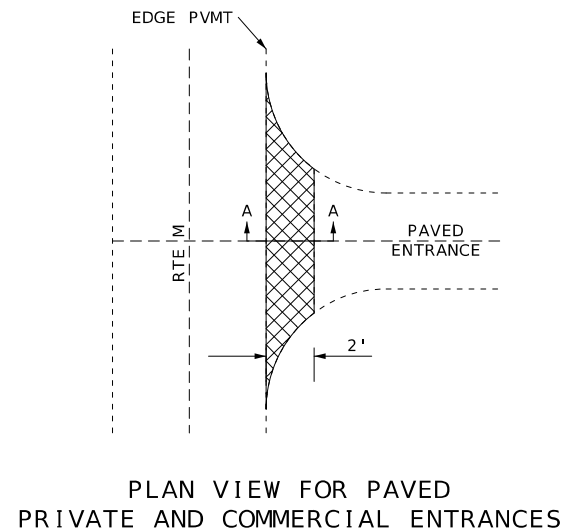


- GRAVEL A OR CRUSHED STONE B
- GRADING
- COLDMILLING

NOTES:

ALL GRADING NECESSARY FOR THE PROPER CONSTRUCTION OF HOT MIX AND AGGREGATE APRONS SHALL BE CONSIDERED INCIDENTAL WORK AND AT NO DIRECT PAY.

THE WIDTH OF ALL HOT MIX AND AGGREGATE APRONS MAY BE ADJUSTED BY THE ENGINEER AS NECESSARY TO OBTAIN SUITABLE TRANSITIONS.



CURTIS DEWAYNE WOOLSEY
 PE-2001018834
 PROFESSIONAL ENGINEER

DATE PREPARED
 12/5/2024

ROUTE
 M STATE
 MO

DISTRICT
 SE SHEET NO.
 5

COUNTY
 BUTLER

JOB NO.
 JSE0090

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
 JEFFERSON CITY, MO 65102
 1-888-ASK-MODOT (1-888-275-6636)

SPECIAL SHEET
 SHEET 2 OF 2

