



ESTIMATE FACTORS FOR ASPHALTIC MIXTURES	
TRAVELWAY - SP125C PG64-22	2.025 TONS/CY
SHOULDERS - BP-1 PG64-22	2.047 TONS/CY
TACK COAT	0.08 GAL/SY
FOR INFORMATIONAL PURPOSES ONLY	
MAILBOXES TO BE RELOCATED: LM 300.379 LT LM 309.722 RT	

\* - SAFETY EDGE - SEE STANDARD 401.00

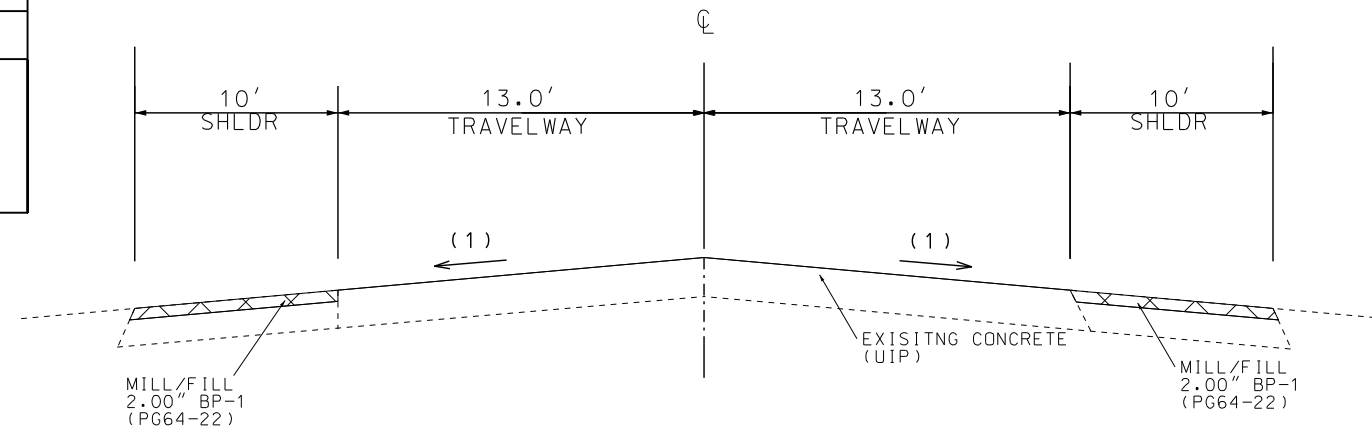

TYPICAL SECTION  
MO 5  
CONCRETE SECTION

LOG MILE 298.590 TO LOG MILE 298.740  
LOG MILE 298.756 TO LOG MILE 298.813

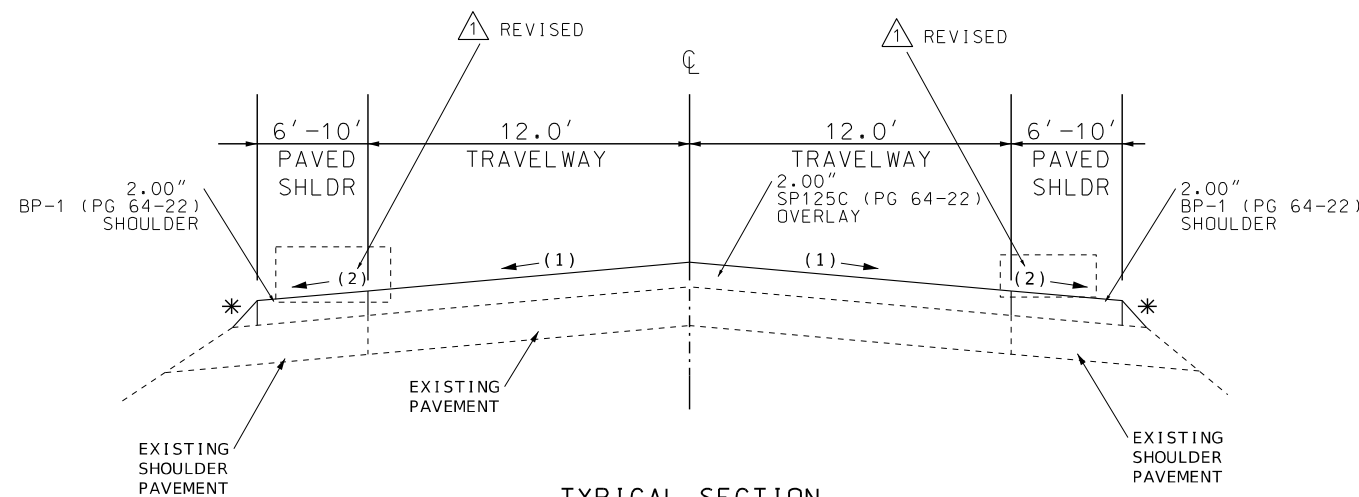

TYPICAL SECTION  
MO 5

LOG MILE 298.813 TO LOG MILE 299.173  
LOG MILE 299.185 TO LOG MILE 304.216  
LOG MILE 304.255 TO LOG MILE 310.365  
LOG MILE 310.627 TO LOG MILE 310.715

NOTES:

SURFACE PLACEMENT SHALL BE ONE PASS PER LANE  
NO S.E. CORRECTION.

EXISTING TYPICALS ARE FOR INFORMATION ONLY.  
PAVEMENT LAYERS MAY VARY FROM TYPICALS.

(1) MATCH EXISTING TRAVELWAY CROSS SLOPE

(2) MATCH EXISTING SHOULDER CROSS SLOPE 


LOG MILE LOCATIONS APPROXIMATE. ADJUST AS  
DIRECTED BY ENGINEER TO FIT FIELD CONDITIONS.

DRAWING NOT TO SCALE. FOLLOW DIMENSIONS.

DATE PREPARED 2/11/2025	
ROUTE 5	STATE MO
DISTRICT SE	SHEET NO. 2
COUNTY WRIGHT/DOUGLAS	
JOB NO. J9P3605	
CONTRACT ID.	
PROJECT NO.	
BRIDGE NO.	

DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION  
COMMISSION



105 WEST CAPITOL  
JEFFERSON CITY, MO 65102  
1-888-ASK-MODOT (1-888-275-6636)