
TABLE OF CONTENTS

- A. Construction Requirements
- B. Galvanizing Structural Steel

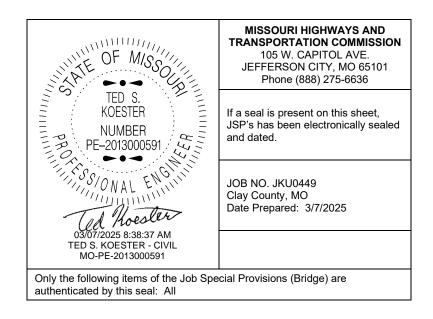

JOB SPECIAL PROVISIONS (BRIDGE)

A. <u>CONSTRUCTION REQUIREMENTS</u>

1.0 Description. This provision contains general construction requirements for this project.

2.0 Construction Requirements. The plans and the asbestos and lead inspection report(s) for the existing structure(s) and the geotechnical report for the new structure(s) are included in the contract in the bridge electronic deliverables zip file for informational purposes only.

2.1 In order to assure the least traffic interference, the work shall be scheduled so that the bridge closure is for the absolute minimum amount of time required to complete the work. The bridge shall not be closed until material is available for continuous construction and the contractor is prepared to diligently pursue the work until the closed bridge is opened to traffic.

2.2 Provisions shall be made to prevent any debris and material from falling into the waterway. If determined necessary by the engineer, any debris and material that falls below the bridge outside the previously specified limits shall be removed as approved by the engineer at the contractor's expense.

2.3 Provisions shall be made to prevent damage to any existing utilities. Any damage sustained to the utilities as a result of the contractor's operations shall be the responsibility of the contractor. All costs of repair and disruption of service shall be as determined by the utility owners and as approved by the engineer.

2.4 A washer shall be required under head and nut when any reaming is performed for bolt installation.

3.1 Environmental Contact. Environmental Section may be contacted at the below address or phone number. The Missouri Department of Health may be contacted at (573) 751-6102.

MoDOT - Design Division - Environmental Section P.O. Box 270 105 W. Capitol Ave., Jefferson City, MO 65102 Telephone: (573) 526-4778

3.2 Approved Smelter and Hazardous Waste Treatment, Storage and Disposal Facility. The following is the approved smelter and hazardous waste treatment, storage and disposal facility:

Doe Run Company - Resource Recycling Division - Buick Facility Highway KK Boss, MO 65440 Telephone: (573) 626-4813

4.0 Method of Measurement. No measurement will be made.

5.0 Basis of Payment. Payment for the above described work will be considered completely covered by the contract unit price for other items included in the contract.

B. <u>GALVANIZING STRUCTURAL STEEL</u>

1.0 Description. This job special provision contains general requirements for galvanizing structural steel as shown on the plans and shall be in addition to the requirements of Sec 712.

	Route 33
JOB SPECIAL PROVISIONS (BRIDGE)	Clay County

Job No JKU0449

2.0 Material. All new structural steel shall be galvanized in accordance with ASTM A 123 and Sec 1081. Repairs to the galvanized coating shall be in accordance with ASTM A 780, hot-stick zinc alloy method. Zinc rich paints will not be allowed. Protective coatings specified in Sec 1081 will not be required for the new galvanized structural steel.

3.0 Construction Requirements.

3.1 Shear studs shall be placed in the shop so that they may be galvanized with the beam.

4.0 Method of Measurement. No measurement will be made.

5.0 Basis of Payment. Payment for the above described work, including all material, equipment, labor and any other incidental work necessary to complete this item, will be considered completely covered by the contract lump sum price for Galvanizing Structural Steel.