

RIGHT TURN LANE PAVEMENT - MO 210						
START START	END STA	LENGTH FT	LANE WIDTH FT	OPTIONAL PAVEMENT SY	6 IN TYPE 5 AGG BASE SY	NOTES
506+99.15	508+65.94	166.79	12	111.19	111.19	RIGHT TURN LANE TAPER, INCLUDES SHOULDER
508+65.79	512+46.27	380.48	12	507.31	507.31	RIGHT TURN LANE, INCLUDES SHOULDER
		TOTAL		618.50	619.00	

SUBGRADE COMPACTION (6 INCH DEPTH)				
STA START	STA END	LENGTH FT	WIDTH FT	SUBGRADE COMPACTION SY
506+99.15	508+65.94	166.79	10	185.32
508+65.94	511+93.10	327.16	10	363.51
		TOTAL		549.00

FULL DEPTH PAVEMENT REPAIR								
STA START	STA END	FURNISHING AND PLACING CONC. MATERIAL FOR FULL DEPTH PVM'T REPAIR SY	SUBGRADE COMPACTION 6 INCH DEPTH SY	TYPE 5 AGG. FOR PVM'T REPAIR SY	FULL DEPTH PVM'T REPAIR SAW CUTS LF	DOWEL BAR EA	DOWEL BAR WITH BASKETS EA	TIE BARS EA
506+99.15	511+93.10	60	6	6	300	40	20	25
TOTAL		60	6	6	300	40	20	25

*FULL DEPTH PAVEMENT REPAIR VARIOUS LOCATIONS

PARTIAL DEPTH PAVEMENT REPAIR			
STA START	STA END	REMOVAL FOR CLASS C SY	FURN. /PLACING BIT. MATL. TON
506+99.15	511+93.10	60	7.0
TOTAL		60	7.0

*PARTIAL DEPTH PAVEMENT REPAIR VARIOUS LOCATIONS

TEMPOARY EROSION CONTORL				
LOCATION	ROCK DITCH CHECK LF	SILT FENCE LF	SEDIMENT REMOVAL CY	NOTES
MO 210		477	5	SOUTHWEST OF 291 AND 210 INTERCHANGE
MO 210	4		1	SOUTHWEST OF 291 AND 210 INTERCHANGE
TOTAL	4	477	6	

*1 CY OF SEDIMENT REMOVAL PER 100 LF OF SILT FENCE PER DITCH CHECK

CONCRETE MEDIAN			
LOG MILE	DIRECTION	LOCATION	CONCRETE ISLAND SY
519+08.11	NORTH	NE CONCRETE ISLAND	389.84
512+61.24	NORTH	NW CONCRETE ISLAND	60.05
512+14.14	SOUTH	SW CONCRETE ISLAND	387.34
518+98.34	SOUTH	SE CONCRETE ISLAND	46.85
519+05.71	EAST	CONCRETE MEDIAN STRIP	241.78
PAY TOTAL			884.1


CONTRACTOR FURNISHED SURVEYING AND STAKING 1 LUMP SUM

MOBLIZATION 1 LUMP SUM

EARTHWORK				
LOCATION	CLASS A EXCAVATION CY	UNSUITABLE MATERIAL CY	COMPACTING EMBANKMENT CY	EMBANKMENT IN PLACE CY
MO 210	10.56	234.85	292.957	338.87
TOTAL	11		293	339

NOTE: EXISTING SHOULDER CONSIDERED PART OF
CLASS A EXCAVATION IS THE UNSUITABLE MATERIAL
AND IS INCLUDED IN REMOVAL OF IMPROVEMENTS.

SUBGRADE COMPACTION 100 F	
	1.67
	3.27
TOTAL	5.00

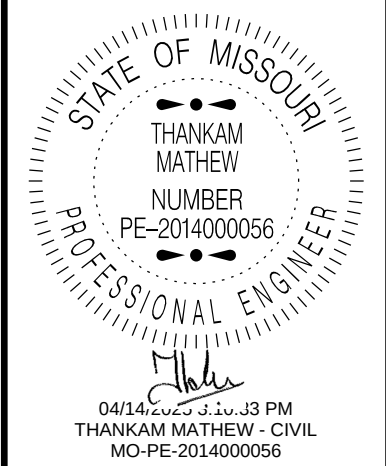

DATE PREPARED 4/14/2025	
ROUTE 210	STATE MO
DISTRICT KC	SHEET NO. 03
COUNTY JACKSON	
JOB NO. JKU0132	
CONTRACT ID.	
PROJECT NO.	
BRIDGE NO.	

DATE	DESCRIPTION
4/11	ADDENDUM 1

MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)