

Job No.: JKU0390


Route: Various

County: Various

JOB SPECIAL PROVISIONS TABLE OF CONTENTS

(Job Special Provisions shall prevail over General Provisions whenever in conflict therewith.)

A.	General - Federal JSP-09-02K	1
B.	Contract Liquidated Damages	1
C.	Work Zone Traffic Management	2
D.	Emergency Provisions and Incident Management	5
E.	Project Contact for Contractor/Bidder Questions	6
F.	Project Details and Quantities	6
G.	Contractor Quality Control NJSP-15-42	17
H.	Supplemental Revisions JSP-18-01FF	19
I.	Pavement Marking Log	26
J.	Seal Coat Completion of Work JSP-15-08	26
K.	Bridge Deck Drains	26
L.	Multi-Year, Multi-Location Project – Special Requirements NJSP-22-02	26
M.	DBE Prompt Payment Reporting JSP-24-05B	28
N.	Seal Coat with Lightweight Haydite, Grade B1	29
O.	The Kansas City Southern Railway Company Requirements	30
P.	Union Pacific Railroad Requirements	37

 <i>Heather R. Barrows</i> 04/30/2025 1:35:04 PM HEATHER R. BARROWS - CIVIL MO-PE-2016040670	MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION 105 W. CAPITOL AVE. JEFFERSON CITY, MO 65102 Phone 1-888-275-6636
	If a seal is present on this sheet, JSP's have been electronically sealed and dated.
	JOB NUMBER: JKU0390 CASS, CLAY, RAY, JACKSON, AND PLATTE COUNTY, MO DATE PREPARED: 3/31/25
	ADDENDUM:

Only the following items of the Job Special Provisions (Roadway) are
authenticated by this seal: ALL

JOB
SPECIAL PROVISION

A. General - Federal JSP-09-02K

1.0 Description. The Federal Government is participating in the cost of construction of this project. All applicable Federal laws, and the regulations made pursuant to such laws, shall be observed by the contractor, and the work will be subject to the inspection of the appropriate Federal Agency in the same manner as provided in Sec 105.10 of the Missouri Standard Specifications for Highway Construction with all revisions applicable to this bid and contract.

1.1 This contract requires payment of the prevailing hourly rate of wages for each craft or type of work required to execute the contract as determined by the Missouri Department of Labor and Industrial Relations and requires adherence to a schedule of minimum wages as determined by the United States Department of Labor. For work performed anywhere on this project, the contractor and the contractor's subcontractors shall pay the higher of these two applicable wage rates. State Wage Rates, Information on the Required Federal Aid Provisions, and the current Federal Wage Rates are available on the Missouri Department of Transportation web page at www.modot.org under "Doing Business with MoDOT", "Contractor Resources". Effective Wage Rates will be posted 10 days prior to the applicable bid opening. These supplemental bidding documents have important legal consequences. It shall be conclusively presumed that they are in the bidder's possession, and they have been reviewed and used by the bidder in the preparation of any bid submitted on this project.

1.2 The following documents are available on the Missouri Department of Transportation web page at www.modot.org under "Doing Business with MoDOT"; "Standards and Specifications". The effective version shall be determined by the letting date of the project.

General Provisions & Supplemental Specifications

Supplemental Plans to July 2024 Missouri Standard Plans
For Highway Construction

These supplemental bidding documents contain all current revisions to the published versions and have important legal consequences. It shall be conclusively presumed that they are in the bidder's possession, and they have been reviewed and used by the bidder in the preparation of any bid submitted on this project.

B. Contract Liquidated Damages

1.0 Description. Liquidated Damages for failure or delay in completing the work on time for this contract shall be in accordance with Sec 108.8. The liquidated damages include separate amounts for road user costs and contract administrative costs incurred by the Commission.

2.0 Period of Performance. Prosecution of work is expected to begin on the date specified below in accordance with Sec 108.2. Regardless of when the work is begun on this contract, all work on all projects shall be completed on or before the date specified below. Completion by this date shall be in accordance with the requirements of Sec 108.7.1.

Notice to Proceed: August 11, 2025
Contract Completion Date: October 1, 2026

2.1 Calendar Days and Completion Dates. Completion of the project is required as specified herein. The count of calendar days will begin on the date the contractor starts any construction operations on the project.

Project	Calendar Days	Daily Road User Cost
JKU0390	113	\$1,800

3.0 Liquidated Damages for Contract Administrative Costs. Should the contractor fail to complete the work on or before the contract completion date specified in Section 2.0, or within the number of calendar days specified in Section 2.1, whichever occurs first, the contractor will be charged contract administrative liquidated damages in accordance with Sec 108.8 in the amount of **\$750** per calendar day for each calendar day, or partial day thereof, that the work is not fully completed. For projects in combination, these damages will be charged in full for failure to complete one or more projects within the specified contract completion date or calendar days.

4.0 Liquidated Damages for Road User Costs. Should the contractor fail to complete the work on or before the contract completion date specified in Section 2.0, or within the number of calendar days specified in Section 2.1, whichever occurs first, the contractor will be charged road user costs in accordance with Sec 108.8 in the amount specified in Section 2.1 for each calendar day, or partial day thereof, that the work is not fully completed. These damages are in addition to the contract administrative damages and any other damages as specified elsewhere in this contract.

C. Work Zone Traffic Management

1.0 Description. Work zone traffic management shall be in accordance with applicable portions of Division 100 and Division 600 of the Standard Specifications, and specifically as follows.

1.1 Maintaining Work Zones and Work Zone Reviews. The Work Zone Specialist (WZS) shall maintain work zones in accordance with Sec 616.3.3 and as further stated herein. The WZS shall coordinate and implement any changes approved by the engineer. The WZS shall ensure all traffic control devices are maintained in accordance with Sec 616, the work zone is operated within the hours specified by the engineer, and will not deviate from the specified hours without prior approval of the engineer. The WZS is responsible to manage work zone delay in accordance with these project provisions. When requested by the engineer, the WZS shall submit a weekly report that includes a review of work zone operations for the week. The report shall identify any problems encountered and corrective actions taken. Work zones are subject to unannounced inspections by the engineer and other departmental staff to corroborate the validity of the WZS's review and may require immediate corrective measures and/or additional work zone monitoring.

1.2 Work Zone Deficiencies. Failure to make corrections on time may result in the engineer suspending work. The suspension will be non-excusable and non-compensable regardless if road user costs are being charged for closures.

2.0 Traffic Management Schedule.

2.1 Traffic management schedules shall be submitted to the engineer for review prior to the start of work and prior to any revisions to the traffic management schedule. The traffic management

schedule shall include the proposed traffic control measures, the hours traffic control will be in place, and work hours.

2.2 The traffic management schedule shall conform to the limitations specified in Sec 616 regarding lane closures, traffic shifts, road closures and other width, height and weight restrictions.

2.3 The engineer shall be notified as soon as practical of any postponement due to weather, material or other circumstances.

2.4 In order to ensure minimal traffic interference, the contractor shall schedule lane closures for the absolute minimum amount of time required to complete the work. Lanes shall not be closed until material is available for continuous construction and the contractor is prepared to diligently pursue the work until the closed lane is opened to traffic.

2.5 Traffic Congestion. The contractor shall, upon approval of the engineer, take proactive measures to reduce traffic congestion in the work zone. The contractor shall immediately implement appropriate mitigation strategies whenever traffic congestion reaches an excess of 10 minutes to prevent congestion from escalating to 15 minute or above threshold. If disruption of the traffic flow occurs and traffic is backed up in queues of 15 minute delays or longer, then the contractor shall immediately review the construction operations which contributed directly to disruption of the traffic flow and make adjustments to the operations to prevent the queues from reoccurring. Traffic delays may be monitored by physical presence on site or by utilizing real-time travel data through the work zone that generate text and/or email notifications where available. The engineer monitoring the work zone may also notify the contractor of delays that require prompt mitigation. The contractor may work with the engineer to determine what other alternative solutions or time periods would be acceptable.

2.5.1 Traffic Safety.

2.5.1.1 Recurring Congestion. Where traffic queues routinely extend to within 1000 feet of the ROAD WORK AHEAD, or similar, sign on a divided highway or to within 500 feet of the ROAD WORK AHEAD, or similar, sign on an undivided highway, the contractor shall extend the advance warning area, as approved by the engineer.

2.5.1.2 Non-Recurring Congestion. When traffic queues extend to within 1000 feet of the ROAD WORK AHEAD, or similar, sign on a divided highway or to within 500 feet of the ROAD WORK AHEAD, or similar, sign on an undivided highway infrequently, the contractor shall deploy a means of providing advance warning of the traffic congestion, as approved by the engineer. The warning location shall be no less than 1000 feet and no more than 0.5 mile in advance of the end of the traffic queue on divided highways and no less than 500 feet and no more than 0.5 mile in advance of the end of the traffic queue on undivided highways.

3.0 Work Hour Restrictions.

3.1 Except for emergency work, as determined by the engineer, and long term lane closures required by project phasing, all lanes shall be scheduled to be open to traffic during the five major holiday periods shown below, from 12:00 noon on the last working day preceding the holiday until 6:00 a.m. on the first working day subsequent to the holiday unless otherwise approved by the engineer.

Memorial Day
 Labor Day
 Thanksgiving
 Christmas
 New Year's Day

3.1.1 Independence Day. The lane restrictions specified in Section 3.1 shall also apply to Independence Day, except that the restricted periods shall be as follows:

When Independence Day falls on:	The Holiday is Observed on:	Halt Lane Closures beginning at:	Allow Lane Closures to resume at:
Sunday	Monday	Noon on Friday	6:00 a.m. on Tuesday
Monday	Monday	Noon on Friday	6:00 a.m. on Tuesday
Tuesday	Tuesday	Noon on Monday	6:00 a.m. on Wednesday
Wednesday	Wednesday	Noon on Tuesday	6:00 a.m. on Thursday
Thursday	Thursday	Noon on Wednesday	6:00 a.m. on Friday
Friday	Friday	Noon on Thursday	6:00 a.m. on Monday
Saturday	Friday	Noon on Thursday	6:00 a.m. on Monday

3.2 The contractor shall not perform any construction operation on the roadway, , including the hauling of material within the project limits, during restricted periods, holiday periods or other special events specified in the contract documents.

3.3 The contractor shall be aware that traffic volume data indicates construction operations on the roadbed between the following hours will likely result in traffic queues greater than 15 minutes. Based on this, the contractor's operations will be restricted accordingly unless it can be successfully demonstrated the operations can be performed without a 15 minute queue in traffic. It shall be the responsibility of the engineer to determine if the above work hours may be modified. Working hours for evenings, weekends and holidays will be determined by the engineer. The contractor may not work during the following listed hours:

Route D Eastbound at the entrance to Lawson Middle School and Lawson High School:
 7:00 a.m. – 8:30 a.m. and 2:00 p.m. - 4:00 p.m. Monday through Friday

Route D Westbound at the entrance to Lawson Middle School and Lawson High School:
 7:00 a.m. – 9:00 a.m. and 2:30 p.m. - 4:00 p.m. Monday through Friday

4.0 Detours and Lane Closures.

4.1 When a changeable message sign (CMS) is provided, the contractor shall use the CMS to notify motorists of future traffic disruption and possible traffic delays one week before traffic is shifted to a detour or prior to lane closures. The CMS shall be installed at a location as approved or directed by the engineer. If a CMS with Communication Interface is required, then the CMS shall be capable of communication prior to installation on right of way. All messages planned for use in the work zone shall be approved and authorized by the engineer or its designee prior to deployment. When permanent dynamic message signs (DMS) owned and operated by MoDOT are located near the project, they may also be used to provide warning and information for the work zone. Permanent DMS shall be operated by the TMC, and any messages planned for use on DMS shall be approved and authorized by the TMC at least 72 hours in advance of the work.

4.2 At least one lane of traffic in each direction shall be maintained at all times except for brief intervals of time required when the movement of the contractor's equipment will seriously hinder the safe movement of traffic. Periods during which the contractor will be allowed to interrupt traffic will be designated by the engineer.

5.0 Basis of Payment. No direct payment will be made to the contractor to recover the cost of equipment, labor, materials, or time required to fulfill the above provisions, unless specified elsewhere in the contract document. All authorized changes in the traffic control plan shall be provided for as specified in Sec 616.

D. Emergency Provisions and Incident Management

1.0 The contractor shall have communication equipment on the construction site or immediate access to other communication systems to request assistance from law enforcement or other emergency agencies for incident management. In case of traffic accidents or the need for law enforcement to direct or restore traffic flow through the job site, the contractor shall notify law enforcement or other emergency agencies immediately as needed. The area engineer's office shall also be notified when the contractor requests emergency assistance.

2.0 In addition to the 911 emergency telephone number for ambulance, fire or law enforcement services, the following agencies may also be notified for accident or emergency situation within the project limits.

Missouri Highway Patrol 816-622-0800

Cass County			
City of Cleveland	City of Drexel	City of Garden City	City of Strasburg
Fire: 816-572-6147	Fire: 816-619-2662	Fire: 816-862-6366	Fire: 816-540-9108
Police: 816-618-3059	Police: 816-619-4444	Police: 816-773-8201	Police: 816-865-3484
Cass County Sheriff Department 816-380-5200			

Clay County	
City of Lawson	City of Smithville
Fire: 816-580-3903	Fire: 816-532-4902
Police: 816-580-7210	Police: 816-532-0500
Clay County Sheriff Department 816-407-3750	

Ray County
City of Hardin
Fire: 660-398-4597
Police: 660-398-4715
Ray County Sheriff Department 816-290-5323

Jackson County
City of Oak Grove
Fire: 816-690-6990
Police: 816-690-3773
Jackson County Sheriff Department 816-541-8017

Job No.: JKU0390

Route: Various

County: Various

Platte County
City of Parkville
Fire: 816-741-2900
Police: 816-741-4454
Platte County Sheriff Department 816-858-2424

2.1 This list is not all inclusive. Notification of the need for wrecker or tow truck services will remain the responsibility of the appropriate law enforcement agency.

2.2 The contractor shall notify law enforcement and emergency agencies before the start of construction to request their cooperation and to provide coordination of services when emergencies arise during the construction at the project site. When the contractor completes this notification with law enforcement and emergency agencies, a report shall be furnished to the engineer on the status of incident management.

3.0 No direct pay will be made to the contractor to recover the cost of the communication equipment, labor, materials or time required to fulfill the above provisions.

E. Project Contact for Contractor/Bidder Questions

All questions concerning this project during the bidding process shall be forwarded to the project contact listed below.

Heather Barrows, Project Contact
Kansas City District
600 NE Colbern Road
Lee's Summit, MO 64086

Telephone Number: 816-607-2209
Email: heather.barrows@modot.mo.gov

All questions concerning the bid document preparation can be directed to the Central Office – Design at (573) 751-2876.


F. Project Details and Quantities

1.0 Description. This project consists of placing bituminous material followed by placing cover aggregate material as described here in and in accordance with Section 409 of the Missouri Standard Specifications for Highway Construction. The project limits and total length of pavement limits are shown in the sketches below:


County: Various

[illegible]


JACKSON COUNTY

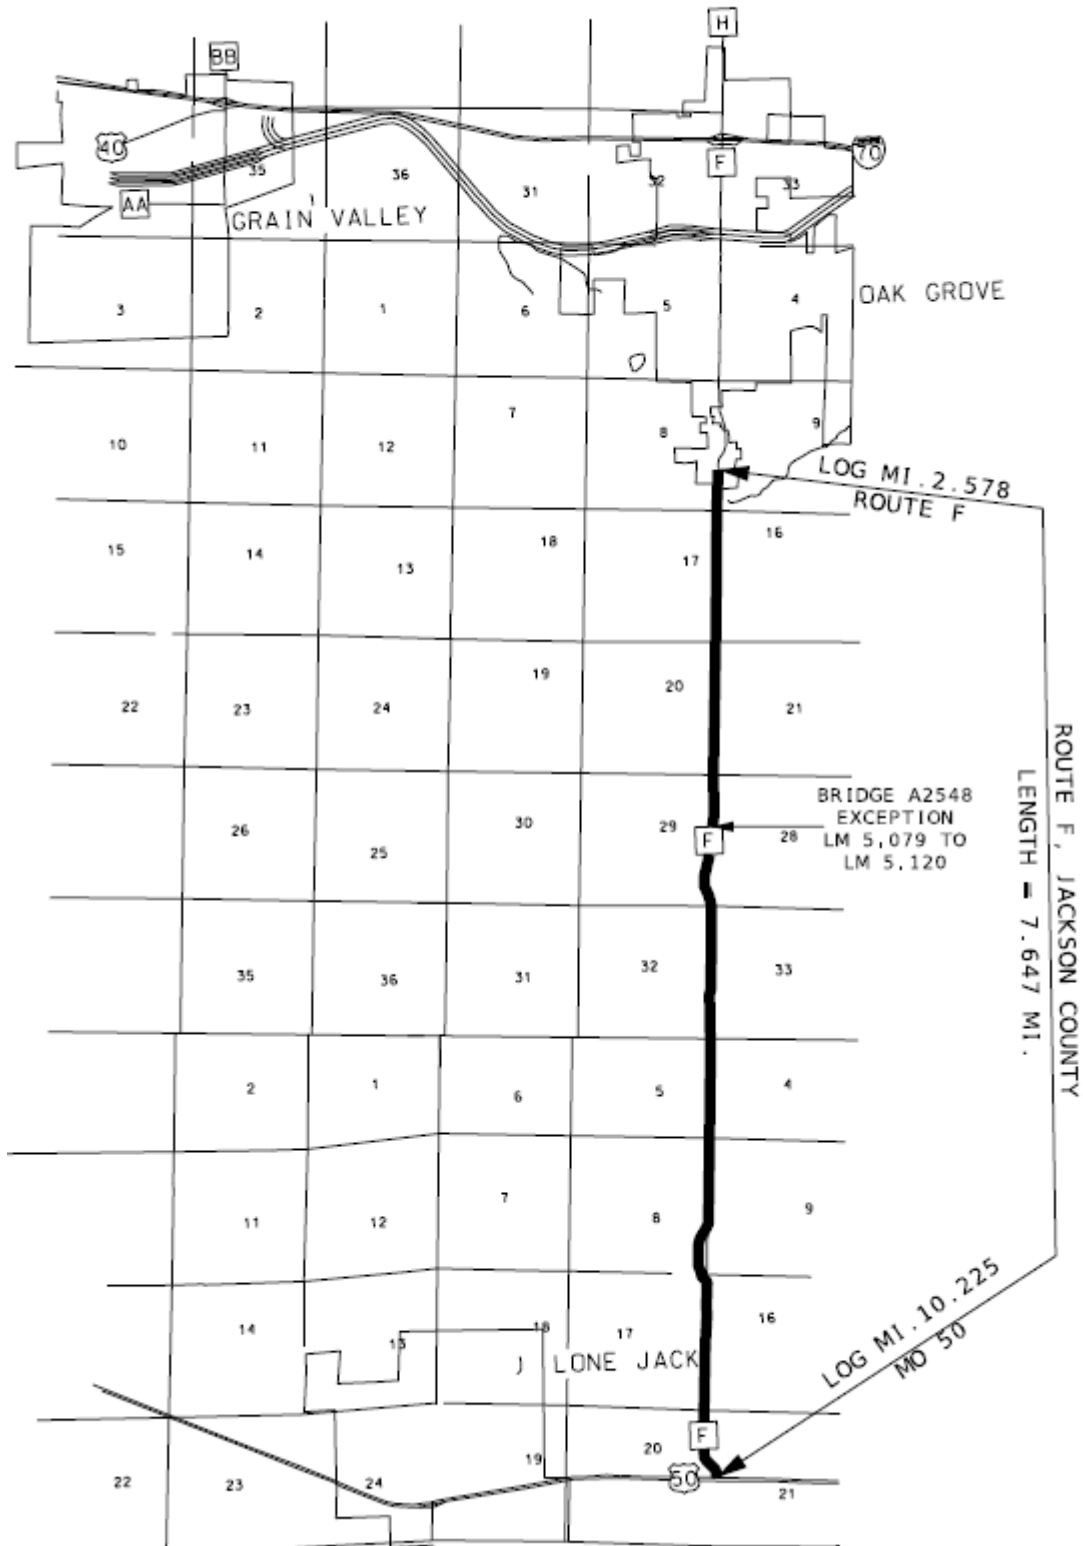

PLATTE COUNTY

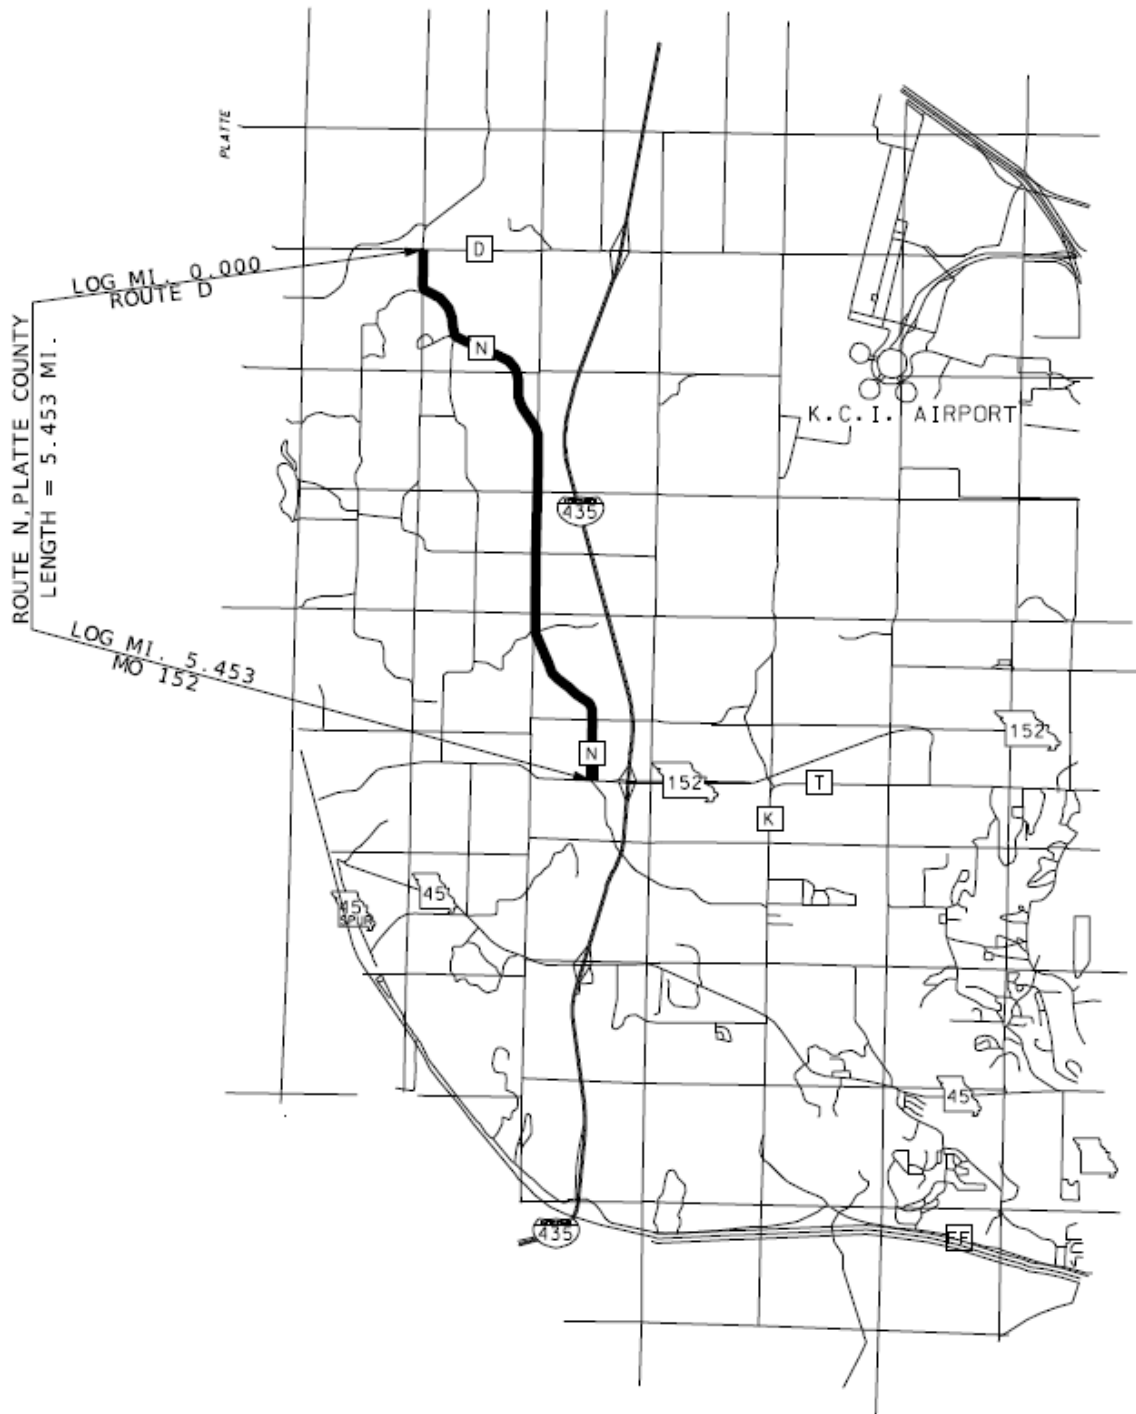

County: Various

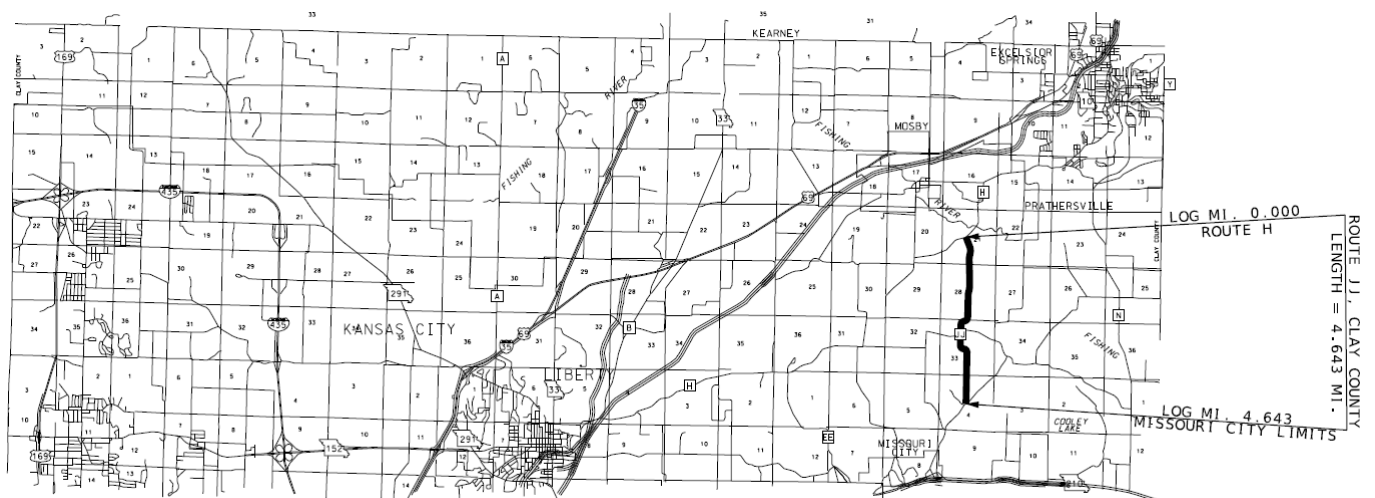
[illegible]

Job No.: JKU0390


Route: Various

County: Various

CASS COUNTY

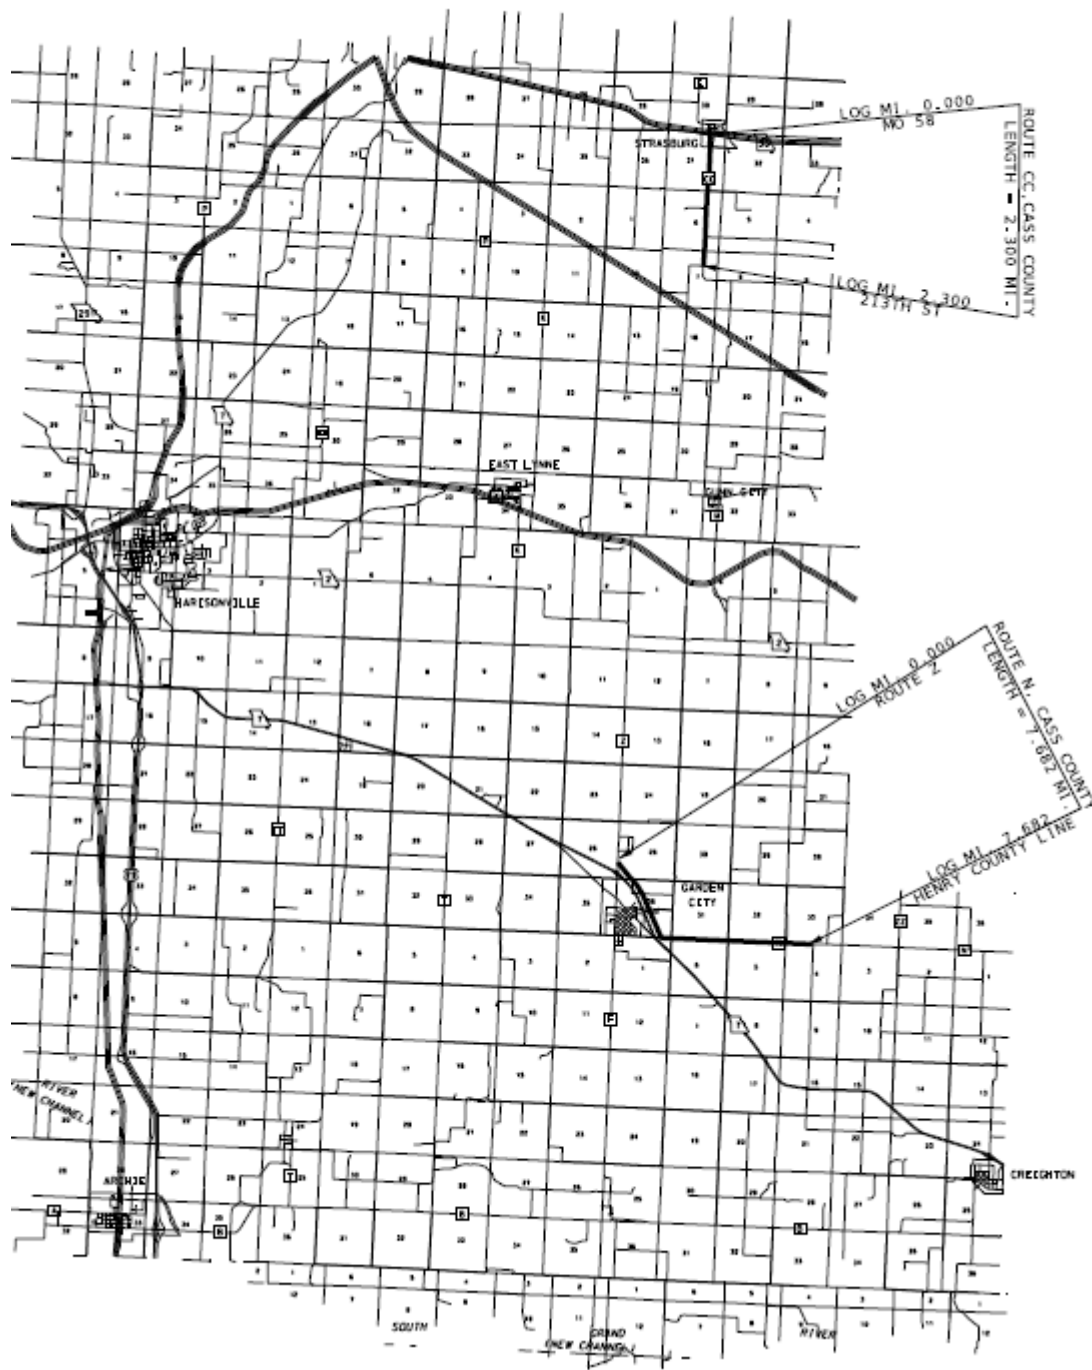


Job No.: JKU0390
Route: Various
County: Various

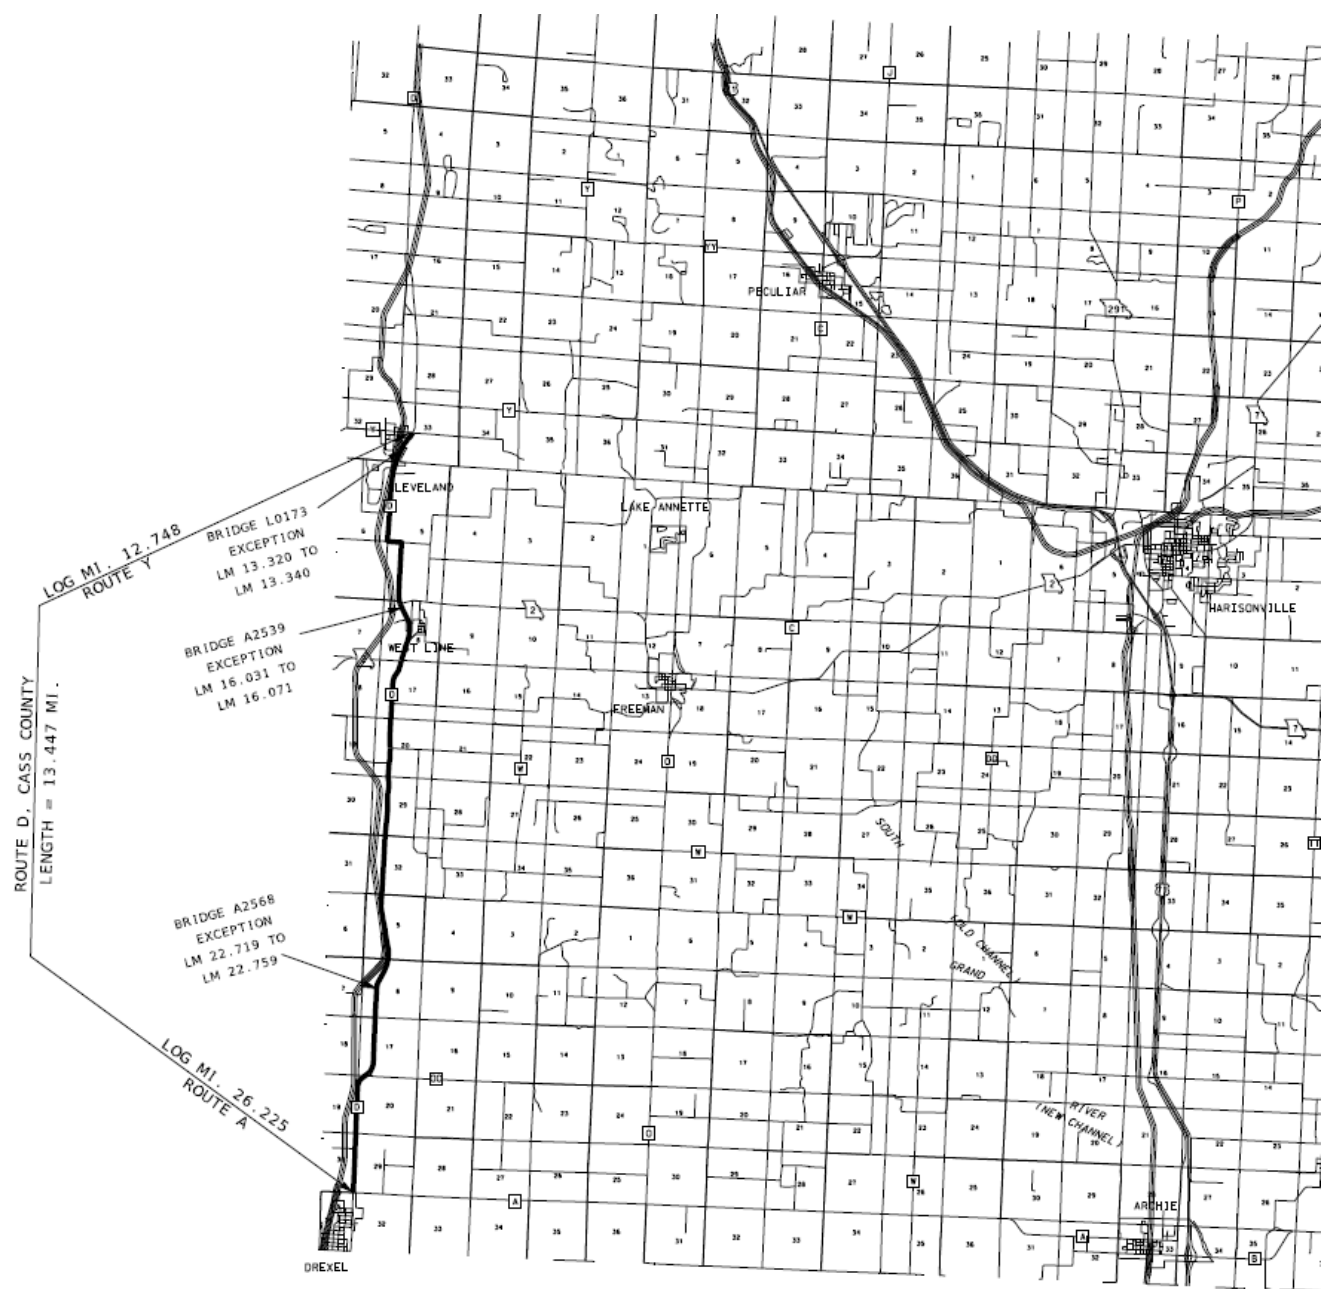

EXCEPTIONS				
APPROX. LOG MILE		ROUTE	LENGTH (MI)	REMARKS
FROM	TO			
CASS COUNTY ROUTE D				
13.320	13.340	D	0.020	BRIDGE EXCEPTION - L0173
16.031	16.071	D	0.040	BRIDGE EXCEPTION - A2539
22.719	22.759	D	0.040	BRIDGE EXCEPTION - A2568
CLAY COUNTY ROUTE D				
0.418	0.457	D	0.039	CONCRETE EXCEPTION
CLAY COUNTY ROUTE W				
1.720	1.861	W	0.141	BRIDGE EXCEPTION - A3632
5.758	5.878	W	0.120	BRIDGE EXCEPTION - A3633
JACKSON COUNTY ROUTE F				
5.079	5.120	F	0.041	BRIDGE EXCEPTION - A2548

2.0 Application Rate and Typical.

AGGREGATE APPLICATION RATE	8 LBS/YD ²
BINDER APPLICATION RATE	0.35 GAL/YD ²

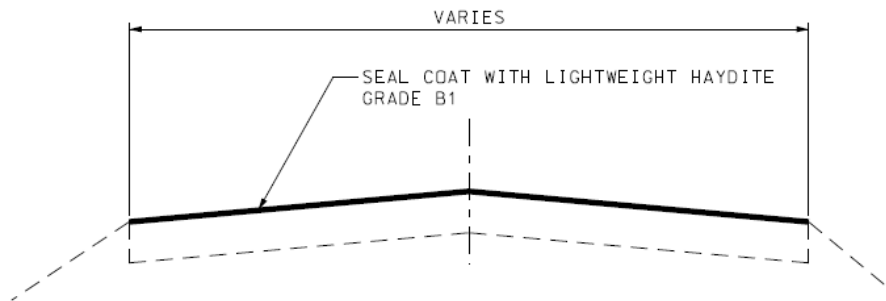

3.0 Pavement Quantities.

3.1 Pavement quantities are as follows:

SEAL COAT QUANTITIES							
APPROX.				AVERAGE	LIGHTWEIGHT	0.35 GAL/SY EMULSIFIED	
LOG MILE			LENGTH	WIDTH	HAYDITE, GRADE B1	ASPHALT SEAL COAT	
FROM	TO	ROUTE	(MI)	(FT)	(SY)	(GAL)	REMARKS
ROUTE CC CASS COUNTY							
0.000	2.300	CC	2.3	20	27080	9478	FROM MO 58 TO END OF ROUTE CC INCLUDES RADIUS
			PAY TOTAL		27080	9478	
ROUTE N CASS COUNTY							
0.000	1.642	N	1.642	22	21399	7490	FROM ROUTE Z TO LANE WIDTH CHANGE INCLUDES RADIUS
1.642	7.682	N	6.04	20	70869	24804	FROM LANE WIDTH CHANGE TO HENRY COUNTY LINE
			PAY TOTAL		92268	32294	
ROUTE D CASS COUNTY							
12.748	13.320	D	0.572	20	6902	2416	FROM ROUTE Y TO BRIDGE L0173 INCLUDES RADIUS
13.340	13.459	D	0.119	20	1396	489	BRIDGE L0173 TO TURN LANE
13.459	16.031	D	2.572	20	30178	10562	TURN LANE TO BRIDGE A2539
16.071	22.719	D	6.648	20	78003	27301	FROM BRIDGE A2539 TO BRIDGE A2568
22.759	26.225	D	3.466	20	40809	14283	FROM BRIDGE A2568 TO ROUTE A INCLUDES RADIUS
			PAY TOTAL		157288	55051	
ROUTE JJ CLAY COUNTY							
0.000	4.643	JJ	4.643	20	54729	19155	FROM ROUTE H TO MISSOURI CITY LIMITS INCLUDES RADIUS
			PAY TOTAL		54729	19155	
ROUTE D CLAY/RAY COUNTY							
0.000	0.418	D	0.418	36	8977	3142	FROM US 69 TO CONCRETE EXCEPTION INCLUDES RADIUS
0.457	1.137	D	0.68	36	14362	5027	FROM CONCRETE EXCEPTION TO WEST STREET
1.137	1.716	D	0.579	30	10190	3567	FROM WEST STREET TO SHEPHERD ROAD
1.716	2.296	D	0.58	26	8847	3096	FROM SHEPHERD ROAD TO ROUTE KK
			PAY TOTAL		42376	14832	
ROUTE W CLAY COUNTY							
0.000	1.720	W	1.72	22	22389	7836	FROM US 169 TO BRIDGE A3632 INCLUDES RADIUS
1.861	5.758	W	3.897	22	50297	17604	FROM BRIDGE A3632 TO BRIDGE A3633
5.878	6.837	W	0.959	22	12377	4332	FROM BRIDGE A3633 TO LANE WIDTH CHANGE
6.837	7.554	W	0.717	20	8621	3017	FROM LANE WIDTH CHANGE TO ROUTE C INCLUDES RADIUS
			PAY TOTAL		93684	32789	
ROUTE F JACKSON COUNTY							
2.578	5.079	F	2.501	24	35214	12325	FROM 0.125 MI. SOUTH OF 31ST ST TO BRIDGE A2548
5.120	10.225	F	5.105	24	72082	25229	FROM BRIDGE A2548 TO US 50 INCLUDES RADIUS
			PAY TOTAL		107296	37554	
ROUTE N PLATTE COUNTY							
0.000	4.500	N	4.5	20	52800	18480	FROM ROUTE D TO LANE WIDTH CHANGE
4.500	4.561	N	0.061	30	1074	376	TURN LANE WIDTH CHANGE
4.561	5.120	N	0.559	20	6559	2296	FROM FIRE HOUSE TO LANE WIDTH CHANGE
5.120	5.453	N	0.333	50	9768	3419	FROM LANE WIDTH CHANGE TO MO 152
			PAY TOTAL		70201	24571	
ROUTE A RAY COUNTY							
29.695	31.418	A	1.723	20	20217	7076	FROM ROUTE E TO LANE WIDTH CHANGE
31.418	33.620	A	2.202	22	28562	9997	FROM LANE WIDTH CHANGE TO MO 10 INCLUDES RADIUS
			PAY TOTAL		48779	17073	

4.0 Temporary Traffic Control Plans. See [Standard Plan 616.20](#) for standard temporary traffic control requirements.

4.1 Construction signs and channelizers are as follows:

CONSTRUCTION SIGNING						
SIGN NO.	SIGN	SIZE (in.)	AREA (FT.2)	QTY.	TOTAL AREA (FT. ²)	DESCRIPTION
1*	GO20-1	60 X 24	10	2	20	ROAD WORK NEXT XX MILES & XX MILES
2**	WO20-1	48 X 48	16	24	384	ROAD WORK AHEAD
7	WO20-4	48 X 48	16	6	96	ONE LANE ROAD AHEAD
8	WO20-7a	48 X 48	16	24	384	FLAGGER (SYMBOL)
11	WO3-4	48 X 48	16	20	320	BE PREPARED TO STOP
26	GO20-2	48 X 24	8	2	16	END ROAD WORK
35	WO8-12	48 X 48	16	14	224	NO CENTER LINE
57***	WO8-7a	36 X 36	9	2	18	FRESH OIL LOOSE GRAVEL
58	GO20-4a	42 X 30	8.75	20	175	PILOT CAR IN USE WAIT & FOLLOW
58	GO20-4a	18 X 12	1.5	2	3	PILOT CAR IN USE WAIT & FOLLOW
59	CONST-8	48 X 36	12	2	24	WORK ZONE NO PHONE ZONE
	GO22-1	21 X 15	2.19	4	9	WET PAINT (ARROW PIVOTS)
					1673	CONSTRUCTION SIGNS SUBTOTAL
ITEM NO. 616-10.05					1673	USE
ITEM NO. 616-10.25					1225	CHANNELIZERS (TRIM-LINE)
* - IF LESS THAN TWO (2) MILES, DELETE SIGN NO. 1.						
** - ADDITIONAL SIGN NO. 2 USED AS SHOWN ON TRAFFIC CONTROL SHEET 3 OF 5 AND AS DIRECTED BY ENGINEER.						
*** - FRESH OIL/LOOSE GRAVEL SIGN SHALL BE PLACED AT THE START OF THE PROJECT AND AT ONE MILE						

4.2 Other Traffic Control Devices and Mobilization are as follows:

ITEM NO.	QTY.	DESCRIPTION
616-10.98A	2	CHANGEABLE MESSAGE SIGN
618-10.00	LUMP SUM	MOBILIZATION

5.0 Pavement Marking. Pavement marking quantities are as follows:

Job No.: JKU0390

Route: Various

County: Various

STANDARD WATERBORNE PAVEMENT MARKING PAINT, TYPE P BEADS								
APPROX. LOG MILE		ROUTE	LENGTH (FT)	4" INT. YELLOW LF	4" SOLID YELLOW LF	4" SOLID WHITE LF	4" INT. WHITE LF	REMARKS
FROM	TO							
ROUTE CC CASS COUNTY								
0.00	2.300	CC	12144	1902	15407	24288	0	
		SUB TOTAL		17309		24288		
ROUTE N CASS COUNTY								
0.00	7.682	N	40561	3961	60942	81122	0	
		SUB TOTAL		64903		81122		
ROUTE D CASS COUNTY								
12.748	26.225	D	71159	10746	88250	142423	0	
		SUB TOTAL		98996		142423		
ROUTE JJ CLAY COUNTY								
0.00	4.643	JJ	24515	0	49030	49030	0	
		SUB TOTAL		49030		49030		
ROUTE D CLAY/RAY COUNTY								
0.00	2.296	D	12123	2348	401	19188	0	
		SUB TOTAL		2749		19188		
ROUTE W CLAY COUNTY								
0.00	7.554	W	39885	5490	52964	79242	0	
		SUB TOTAL		58454		79242		
ROUTE F JACKSON COUNTY								
2.578	10.225	F	40376	4734	53571	80752	0	
		SUB TOTAL		58305		80752		
ROUTE N PLATTE COUNTY								
0.00	5.453	N	28792	1826	50815	57357	149	
		SUB TOTAL		52641		57506		
		PAY TOTAL		402387		533551		

PAVEMENT MARKING - PREFORMED THERMOPLASTIC PAVEMENT MARKING						
LOG MILE	LOG MILE	ROUTE	LEFT/RIGHT ARROW EACH	30" MIDBLOCK EACH	YIELD TRIANGLES EACH	REMARKS
0.040	0.060	CLAY COUNTY ROUTE W	1			RIGHT TURN ARROW AT CORBY LN
4.521	4.521	PLATTE COUNTY ROUTE N	1			LEFT TURN ARROW AT NW TIFFANY PARK RD
5.421	5.421	PLATTE COUNTY ROUTE N	1			LEFT TURN ARROW AT 435 RAMP
1.349	1.349	CLAY/RAY COUNTY ROUTE D		5		INTERSECTION OF ROUTE D AND N PENNSYLVANIA
1.608	1.620	CLAY/RAY COUNTY ROUTE D		5	12	CROSSWALK TO LAWSON SCHOOLS
		SUBTOTAL	3	10	12	
		PAY TOTAL	3	10	12	

G. Contractor Quality Control NJSP-15-42

1.0 The contractor shall perform Quality Control (QC) testing in accordance with the specifications and as specified herein. The contractor shall submit a Quality Control Plan (QC Plan) to the engineer for approval that includes all items listed in Section 2.0, prior to beginning work.

2.0 Quality Control Plan.

- (a) The name and contact information of the person in responsible charge of the QC testing.
- (b) A list of the QC technicians who will perform testing on the project, including the fields in which they are certified to perform testing.
- (c) A proposed independent third party testing firm for dispute resolution, including all contact information.
- (d) A list of Hold Points, when specified by the engineer.
- (e) The MoDOT Standard Inspection and Testing Plan (ITP). This shall be the version that is posted at the time of bid on the MoDOT website (www.modot.org/quality).

3.0 Quality Control Testing and Reporting. Testing shall be performed per the test method and frequency specified in the ITP. All personnel who perform sampling or testing shall be certified in the MoDOT Technician Certification Program for each test that they perform.

3.1 Reporting of Test Results. All QC test reports shall be submitted as soon as practical, but no later than the day following the test. Test data shall be immediately provided to the engineer upon request at any time, including prior to the submission of the test report. No payment will be made for the work performed until acceptable QC test results have been received by the engineer and confirmed by QA test results.

3.1.1 Test results shall be reported on electronic forms provided by MoDOT. Forms and Contractor Reporting Excel2Oracle Reports (CRE2O) can be found on the MoDOT website. All required forms, reports and material certifications shall be uploaded to a Microsoft SharePoint® site provided by MoDOT, and organized in the file structure established by MoDOT.

3.2 Non-Conformance Reporting. A Non-Conformance Report (NCR) shall be submitted by the contractor when the contractor proposes to incorporate material into the work that does not meet the testing requirements or for any work that does not comply with the contract terms or specifications.

3.2.1 Non-Conformance Reporting shall be submitted electronically on the Non-Conformance Report form provided on the MoDOT Website. The NCR shall be uploaded to the MoDOT SharePoint® site and an email notification sent to the engineer.

3.2.2 The contractor shall propose a resolution to the non-conforming material or work. Acceptance of a resolution by the engineer is required before closure of the non-conformance report.

4.0 Work Planning and Scheduling.

4.1 Two-week Schedule. Each week, the contractor shall submit to the engineer a schedule that outlines the planned project activities for the following two-week period. The two-week schedule shall detail all work and traffic control events planned for that period and any Hold Points specified by the engineer.

4.2 Weekly Meeting. When work is active, the contractor shall hold a weekly project meeting with the engineer to review the planned activities for the following week and to resolve any outstanding issues. Attendees shall include the engineer, the contractor superintendent or project manager and any foreman leading major activities. This meeting may be waived when, in the opinion of the engineer, a meeting is not necessary. Attendees may join the meeting in person, by phone or video conference.

4.3 Pre-Activity Meeting. A pre-activity meeting is required in advance of the start of each new activity, except when waived by the engineer. The purpose of this meeting is to review construction details of the new activity. At a minimum, the discussion topics shall include: safety precautions, QC testing, traffic impacts, and any required Hold Points. Attendees shall include the engineer, the contractor superintendent and the foreman who will be leading the new activity. Pre-activity meetings may be held in conjunction with the weekly project meeting.

4.4 Hold Points. Hold Points are events that require approval by the engineer prior to continuation of work. Hold Points occur at definable stages of work when, in the opinion of the engineer, a review of the preceding work is necessary before continuation to the next stage.

4.4.1 A list of typical Hold Point events is available on the MoDOT website. Use of the Hold Point process will only be required for the project-specific list of Hold Points, if any, that the engineer submits to the contractor in advance of the work. The engineer may make changes to the Hold Point list at any time.

4.4.2 Prior to all Hold Point inspections, the contractor shall verify the work has been completed in accordance with the contract and specifications. If the engineer identifies any corrective actions needed during a Hold Point inspection, the corrections shall be completed prior to continuing work. The engineer may require a new Hold Point to be scheduled if the corrections require a follow-up inspection. Re-scheduling of Hold Points require a minimum 24-hour advance notification from the contractor unless otherwise allowed by the engineer.

5.0 Quality Assurance Testing and Inspection. MoDOT will perform quality assurance testing and inspection of the work, except as specified herein. The contractor shall utilize the inspection checklists provided in the ITP as a guide to minimize findings by MoDOT inspection staff. Submittal of completed checklists is not required, except as specified in 5.1.

5.1 Inspection and testing required in the production of concrete for the project shall be the responsibility of the contractor. Submittal of the 501 Concrete Plant Checklist is required.

6.0 Basis of Payment. No direct payment will be made for compliance with this provision.

H. Supplemental Revisions JSP-18-01FF

- Compliance with [2 CFR 200.216 – Prohibition on Certain Telecommunications and Video Surveillance Services or Equipment](#).

The Missouri Highways and Transportation Commission shall not enter into a contract (or extend or renew a contract) using federal funds to procure or obtain equipment, services, or systems that uses covered telecommunications equipment or services as substantial or as critical technology as part of any system where the video surveillance and telecommunications equipment was produced by Huawei Technologies Company, ZTE Corporation, Hytera Communications Corporation, Hangzhou Hikvision Digital Technology Company, or Dahua Technology Company (or any subsidiary or affiliate of such entities).

- Stormwater Compliance Requirements

1.0 Description. This provision requires the contractor to provide a Water Pollution Control Manager (WPCM) for any project that includes land disturbance on the project site and the total area of land disturbance, both on the project site, and all Off-site support areas, is one (1) acre or more. Regardless of the area of Off-site disturbance, if no land disturbance occurs on the project site, these provisions do not apply. When a WPCM is required, all sections within this provision shall be applicable, including assessment of specified Liquidated Damages for failure to correct Stormwater Deficiencies, as specified herein. This provision is in addition to any other stormwater, environmental, and land disturbance requirements specified elsewhere in the contract.

1.1 Definitions. The project site is defined as all areas designated on the plans, including temporary and permanent easements. The project site is equivalent to the “permitted site”, as defined in MoDOT’s State Operating Permit. An Off-site area is defined as any location off the project site the contractor utilizes for a dedicated project support function, such as, but not limited to, staging area, plant site, borrow area, or waste area.

1.2 Reporting of Off-Site Land Disturbance. If the project includes any planned land disturbance on the project site, prior to the start of work, the contractor shall submit a written report to the engineer that discloses all Off-site support areas where land disturbance is planned, the total acreage of anticipated land disturbance on those sites, and the land disturbance permit number(s). Upon request by the engineer, the contractor shall submit a copy of its land disturbance permit(s) for Off-site locations. Based on the total acreage of land disturbance, both on and Off-site, the engineer shall determine if these Stormwater Compliance Requirements shall apply. The Contractor shall immediately report any changes to the planned area of Off-site land disturbance. The Contractor is responsible for obtaining its own separate land disturbance permit for Off-site areas.

2.0 Water Pollution Control Manager (WPCM). The Contractor shall designate a competent person to serve as the Water Pollution Control Manager (WPCM) for projects meeting the

description in Section 1.0. The Contractor shall ensure the WPCM completes all duties listed in Section 2.1.

2.1 Duties of the WPCM:

- a. Be familiar with the stormwater requirements including the current MoDOT State Operating Permit for construction stormwater discharges/land disturbance activities; MoDOT's statewide Stormwater Pollution Prevention Plan (SWPPP); the Corps of Engineers Section 404 Permit, when applicable; the project specific SWPPP, the Project's Erosion & Sediment Control Plan; all applicable special provisions, specifications, and standard drawings; and this provision;
- b. Successfully complete the MoDOT Stormwater Training Course within the last 4 years. The MoDOT Stormwater Training is a free online course available at MoDOT.org;
- c. Attend the Pre-Activity Meeting for Grading and Land Disturbance and all subsequent Weekly Meetings in which grading activities are discussed;
- d. Oversee and ensure all work is performed in accordance with the Project-specific SWPPP and all updates thereto, or as designated by the engineer;
- e. Review the project site for compliance with the Project SWPPP, as needed, from the start of any grading operations until final stabilization is achieved, and take necessary actions to correct any known deficiencies to prevent pollution of the waters of the state or adjacent property owners prior to the engineer's weekly inspections;
- f. Review and acknowledge receipt of each MoDOT Inspection Report (Land Disturbance Inspection Record) for the Project within forty eight (48) hours of receiving the report and ensure that all Stormwater Deficiencies noted on the report are corrected as soon as possible, but no later than stated in Section 5.0.

3.0 Pre-Activity Meeting for Grading/Land Disturbance and Required Hold Point. A Pre-Activity meeting for grading/land disturbance shall be held prior to the start of any land disturbance operations. No land disturbance operations shall commence prior to the Pre-Activity meeting except work necessary to install perimeter controls and entrances. Discussion items at the pre-activity meeting shall include a review of the Project SWPPP, the planned order of grading operations, proposed areas of initial disturbance, identification of all necessary BMPs that shall be installed prior to commencement of grading operations, and any issues relating to compliance with the Stormwater requirements that could arise in the course of construction activity at the project.

3.1 Hold Point. Following the pre-activity meeting for grading/land disturbance and subsequent installation of the initial BMPs identified at the pre-activity meeting, a Hold Point shall occur prior to the start of any land disturbance operations to allow the engineer and WPCM the time needed to perform an on-site review of the installation of the BMPs to ensure compliance with the SWPPP is met. Land disturbance operations shall not begin until authorization is given by the engineer.

4.0 Inspection Reports. Weekly and post run-off inspections will be performed by the engineer and each Inspection Report (Land Disturbance Inspection Record) will be entered into a web-based Stormwater Compliance database. The WPCM will be granted access to this database

and shall promptly review all reports, including any noted deficiencies, and shall acknowledge receipt of the report as required in Section 2.1 (f.).

5.0 Stormwater Deficiency Corrections. All stormwater deficiencies identified in the Inspection Report shall be corrected by the contractor within 7 days of the inspection date or any extended period granted by the engineer when weather or field conditions prohibit the corrective work. If the contractor does not initiate corrective measures within 5 calendar days of the inspection date or any extended period granted by the engineer, all work shall cease on the project except for work to correct these deficiencies, unless otherwise allowed by the engineer. All impact costs related to this halting of work, including, but not limited to stand-by time for equipment, shall be borne by the Contractor. Work shall not resume until the engineer approves the corrective work.

5.1 Liquidated Damages. If the Contractor fails to complete the correction of all Stormwater Deficiencies listed on the MoDOT Inspection Report within the specified time limit, the Commission will be damaged in various ways, including but not limited to, potential liability, required mitigation, environmental clean-up, fines, and penalties. These damages are not reasonably capable of being computed or quantified. Therefore, the contractor will be charged with liquidated damages specified in the amount of \$2,000 per day for failure to correct one or more of the Stormwater Deficiencies listed on the Inspection Report within the specified time limit. In addition to the stipulated damages, the stoppage of work shall remain in effect until all corrections are complete.

6.0 Basis of Payment. No direct payment will be made for compliance with this provision.

- ***Delete Sec 106.9 in its entirety and substitute the following:***

106.9 Buy America Requirements.

Buy America Requirements are waived if the total amount of Federal financial assistance applied to the project, through awards or subawards, is below \$500,000.

106.9.1 Buy America Requirements for Iron and Steel.

On all federal-aid projects, the contractor's attention is directed to Title 23 CFR 635.410 *Buy America Requirements*. Where steel or iron products are to be permanently incorporated into the contract work, steel and iron material shall be manufactured, from the initial melting stage through the application of coatings, in the USA except for "minimal use" as described herein. Furthermore, any coating process of the steel or iron shall be performed in the USA. Under a general waiver from FHWA the use of pig iron and processed, pelletized, and reduced iron ore manufactured outside of the USA will be permitted in the domestic manufacturing process for steel or iron material.

106.9.1.1 Buy America Requirements for Iron and Steel for Manufactured items.

A manufactured item will be considered iron and steel if it is "predominantly" iron or steel. Predominantly iron or steel means that the cost of iron or steel content of a product is more than 50 percent of the total cost of all its components.

106.9.2 Any sources other than the USA as defined will be considered foreign. The required domestic manufacturing process shall include formation of ingots and any subsequent process. Coatings shall include any surface finish that protects or adds value to the product.

106.9.3 “Minimal use” of foreign steel, iron or coating processes will be permitted, provided the cost of such products does not exceed 1/10 of one percent (0.1 percent) of the total contract cost or \$2,500.00, whichever is greater. If foreign steel, iron, or coating processes are used, invoices to document the cost of the foreign portion, as delivered to the project, shall be provided and the engineer’s written approval obtained prior to placing the material in any work.

106.9.4 Buy America requirements include a step certification for all fabrication processes of all steel or iron materials that are accepted per Sec 1000. The AASHTO Product Evaluation and Audit Solutions compliance program verifies that all steel and iron products fabrication processes conform to 23 CFR 635.410 Buy America Requirements and is an acceptable standard per 23 CFR 635.410(d). AASHTO Product Evaluation and Audit Solutions compliant suppliers will not be required to submit step certification documentation with the shipment for some selected steel and iron materials. The AASHTO Product Evaluation and Audit Solutions compliant supplier shall maintain the step certification documentation on file and shall provide this documentation to the engineer upon request.

106.9.4.1 Items designated as Category 1 will consist of steel girders, piling, and reinforcing steel installed on site. Category 1 items require supporting documentation prior to incorporation into the project showing all steps of manufacturing, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410 Buy America Requirements. This includes the Mill Test Report from the original producing steel mill and certifications documenting the manufacturing process for all subsequent fabrication, including coatings. The certification shall include language that certifies the following. That all steel and iron materials permanently incorporated in this project was procured and processed domestically and all manufacturing processes, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410.

106.9.4.2 Items designated as Category 2 will include all other steel or iron products not in Category 1 and permanently incorporated in the project. Category 2 items shall consist of, but not be limited to items such as fencing, guardrail, signing, lighting and signal supports. The prime contractor is required to submit a material of origin form certification prior to incorporation into the project from the fabricator for each item that the product is domestic. The Certificate of Materials Origin form ([link to certificate form](#)) from the fabricator must show all steps of manufacturing, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410 Buy America Requirements and be signed by a fabricator representative. The engineer reserves the right to request additional information and documentation to verify that all Buy America requirements have been satisfied. These documents shall be submitted upon request by the engineer and retained for a period of 3 years after the last reimbursement of the material.

106.9.4.3 Any minor miscellaneous steel or iron items that are not included in the materials specifications shall be certified by the prime contractor as being procured domestically. Examples of these items would be bolts for sign posts, anchorage inserts, etc. The certification shall read “I certify that all steel and iron materials permanently incorporated in this project during all manufacturing processes, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410 Buy America Requirements procured and processed domestically in accordance with CFR Title 23 Section 635.410 Buy America Requirements. Any foreign steel used was submitted and accepted under minor usage”. The certification shall be signed by an authorized representative of the prime contractor.

106.9.5 When permitted in the contract, alternate bids may be submitted for foreign steel and iron products. The award of the contract when alternate bids are permitted will be based on the lowest total bid of the contract based on furnishing domestic steel or iron products or 125 percent of the lowest total bid based on furnishing foreign steel or iron products. If foreign steel or iron products are awarded in the contract, domestic steel or iron products may be used; however, payment will be at the contract unit price for foreign steel or iron products.

106.9.6 Buy America Requirements for Construction Materials other than iron and steel materials. Construction materials means articles, materials, or supplies that consist of only one of the items listed. Minor additions of articles, materials, supplies, or binding agents to a construction material do not change the categorization of the construction material. Upon request by the engineer, the contractor shall submit a domestic certification for all construction materials listed that are incorporated into the project.

- a. Non-ferrous metals
- b. Plastic and Polymer-based products (including polyvinylchloride, composite building materials, and polymers used in fiber optic cables)
- c. Glass (including optic glass)
- d. Fiber optic cable (including drop cable)
- e. Optical fiber
- f. Lumber
- g. Engineered wood
- h. Drywall

106.9.6.1 Minimal Use allowance for Construction Materials other than iron or steel.

"The total value of the non-compliant products is no more than the lesser of \$1,000,000 or 5% of total applicable costs for the project." The contractor shall submit to the engineer any non-domestic materials and their total material cost to the engineer. The contractor and the engineer will both track these totals to assure that the minimal usage allowance is not exceeded.

106.9.7 Buy America Requirements for Manufactured Products.

Manufactured products means:

- a. Articles, materials, or supplies that have been:
 - i. Processed into a specific form and shape; or
 - ii. Combined with other articles, materials, or supplies to create a product with different properties than the individual articles, materials, or supplies.
- b. If an item is classified as an iron or steel product, a construction material, or a section 70917(c) material under § 184.4(e) and the definitions set forth in this section, then it is not a manufactured product. However, an article, material, or supply classified as a manufactured product under § 184.4(e) and paragraph (1) of this definition may include components that are construction materials, iron or steel products, or section 70917(c) materials.

106.9.7.1 Manufactured products are exempt from Buy America requirements. To qualify as a manufactured product, items that consist of two or more of the listed construction materials that have been combined together through a manufacturing process, and items that include at least one of the listed materials combined with a material that is not listed through a manufacturing process, should be treated as manufactured products, rather than as construction materials.

106.9.7.2 Manufactured items are covered under a general waiver to exclude them from Buy America Requirements. To qualify for the exemption the components must comprise of 55% of the value of materials in the item. The final assembly must also be performed domestically.

- Pavement Marking Paint Requirements for Standard Waterborne and Temporary

1.0 Description. High Build acrylic waterborne pavement marking paint shall be used in lieu of standard acrylic waterborne pavement marking paint for all Standard Waterborne Pavement Marking Paint items and all Temporary Pavement Marking Paint items. Paint thickness, bead type, bead application rate, retroreflectivity requirements, and all other specifications shall remain as stated in the Missouri Standard Specifications for Highway Construction, except as otherwise amended in the contract documents.

2.0 Material Requirements. Material requirements for Sec 620.20.2.5 Standard Waterborne Paint, and Sec 620.10.2 Temporary Pavement Marking Paint shall be per Sec 1048.20.1.2 High Build Acrylic Waterborne Pavement Marking Paint.

- Third-Party Test Waiver for Concrete Aggregate

1.0 Description. Third party tests may be allowed for determining the durability factor for concrete pavement and concrete masonry aggregate.

2.0 Material. All aggregate for concrete shall be in accordance with Sec 1005.

2.1 MoDOT personnel shall be present at the time of sampling at the quarry. The aggregate sample shall be placed in an approved tamper-evident container (provided by the quarry) for shipment to the third-party testing facility.

2.2 AASHTO T 161 Method B Resistance of Concrete to Rapid Freezing and Thawing, shall be used to determine the aggregate durability factor. All concrete beams for testing shall be 3-inch wide by 4-inch deep by 16-inch long or 3.5-inch wide by 4.5-inch deep by 16-inch long. All beams for testing shall receive a 35-day wet cure fully immersed in saturated lime water prior to initiating the testing process.

2.3 Concrete test beams shall be made using a MoDOT approved concrete pavement mix design.

3.0 Testing Facility Requirements. All third-party test facilities shall meet the requirements outlined in this provision.

3.1 The testing facility shall be AASHTO accredited.

3.1.1 For tests ran after January 1, 2025, accreditation documentation shall be on file with the Construction and Materials Division prior to any tests being performed.

3.1.2 Construction and Materials Division may consider tests completed prior to January 1, 2025, to be acceptable if all sections of this provision are met, with the exception of 3.1.1. Accreditation documentation shall be provided with the test results for tests completed prior to January 1, 2025. No tests completed prior to September 1, 2024, will be accepted.

3.2 The testing facility shall provide their testing process, list of equipment, equipment calibration documentation, and testing certifications or qualifications of technicians performing the AASHTO T 161 Procedure B tests. The testing facility shall provide details on their freezing and thawing apparatus including the time and temperature profile of their freeze-thaw chamber. The profile shall include the temperature set points throughout the entirety of the freeze-thaw cycle. The profile shall show the cycle time at which the apparatus drains/fills with water and the cycle time at which the apparatus begins cooling the specimens.

3.3 Results, no more than five years old, from the third-party test facility shall compare within ± 2.0 percent of an independent test from another AASHTO accredited test facility or with MoDOT test records, in order to be approved for use (e.g. test facility results in a durability factor of 79, MoDOT's recent durability test factor is 81; this compared within +2 percent). The independent testing facility shall be in accordance with this provision. The comparison test can be from a different sample of the same ledge combination.

3.4 When there is a dispute between the third party durability test results and MoDOT durability test results, the MoDOT durability test result shall govern.

3.5 Test results shall be submitted to MoDOT's Construction and Materials division electronically for final approval. Test results shall include raw data for all measurements of relative modulus of elasticity and percent length change for each individual concrete specimen. Raw data shall include initial measurements made at zero cycles and every subsequent measurement of concrete specimens. Raw data shall include the cycle count and date each measurement was taken. Test results shall also include properties of the concrete mixture as required by AASHTO T 161. This shall include the gradation of the coarse aggregate sample. If AASHTO T 152 is used to measure fresh air content, then the aggregate correction factor for the mix determined in accordance with AASHTO T 152 shall also be included.

4.0 Method of Measurement. There is no method of measurement for this provision. The testing requirements and number of specimens shall be in accordance with AASHTO T 161 Procedure B.

5.0 Basis of Payment. No direct payment will be made to the contractor or quarry to recover the cost of aggregate samples, sample shipments, testing equipment, labor to prepare samples or test samples, or developing the durability report.

- ***Delete paragraph 15.0 of the General Provision Disadvantaged Business Enterprise (DBE) Program Requirements and substitute the following:***

15.0 Bidder's List Quote Summary. MoDOT is a recipient of federal funds and is required by 49 CFR 26.11 to provide data about its DBE program. All bidders who seek to work on federally assisted contracts must submit data about all DBE and non-DBEs in accordance with Sec 102.7.9. MoDOT will not compare the submitted Bidder's List Quote Summary to any other documents or submittals, pre or post award. All information will be used by MoDOT in accordance with 49 CFR 26.11 for reporting to USDOT and to aid in overall DBE goal setting.

- ***Add Sec 102.7.9 to include the following:***

102.7.9 Bidder's List Quote Summary. Each bidder shall submit with each bid a summary of all subcontractors, suppliers, manufacturers, and truckers considered on federally funded projects pursuant to 49 CFR 26.11. The bidder will provide the firm's name, the corresponding North American Industry Classification System (NAICS) code(s) the firm(s) were considered for, and whether or not they were used in the bid. The information submitted should be the most complete information available at the time of bid. The information shall be disclosed on the Bidder's List Quote Summary form provided in the bidding documents and submitted in accordance with Sec 102.10. Failure to disclose this information may result in a bid being declared irregular.

I. Pavement Marking Log

1.0 Description. The contractor shall log the locations of existing pavement marking prior to any construction operations that may affect the existing pavement marking. The log shall contain all existing pavement marking and shall include center stripes, no passing stripes, lane lines, turn arrows, hash bars, cross walks, and stop bars. The contractor shall provide a copy of the existing pavement marking log to the engineer. The contractor shall place the new pavement marking at the same locations as the existing pavement marking, unless otherwise directed by the engineer or shown on the plans.

2.0 Basis of Payment. No direct payment will be made for logging of existing pavement marking.

J. Seal Coat Completion of Work JSP-15-08

1.0 Description. This project contains work which may be completed in multiple construction seasons.

2.0 Completion of Work. The contractor shall not start any work that cannot be completed in a single construction season without prior approval of the engineer.

3.0 Basis of Payment. There will be no direct pay for compliance with this provision.

K. Bridge Deck Drains

1.0 Description. The contractor shall block all bridge deck drains in such a way to prevent all materials from entering the drains and areas under the bridge.

2.0 Basis of Payment. No direct payment will be made for blocking bridge deck drains.

L. Multi-Year, Multi-Location Project – Special Requirements NJSP-22-02

1.0 Description. Whereas this project is identified by a single Job Number, and the project requires work be performed at multiple Locations, and the contract allows for work to be performed in multiple calendar years, these special requirements and allowances shall apply. A Location is generally identified in the contract or plans by Route and County but may be otherwise identified.

2.0 Winter Shut-Down Period. A Winter Shut-Down Period is required if all work on the project is not completed prior to October 1 of the calendar year in which the Notice to Proceed is made. The date range of the Winter Shut-Down Period shall be determined by the contractor and shall

be shown on the contractor's most current Progress Schedule. The contractor's designated Winter Shut-Down Period shall begin no later than October 1 of the calendar year in which the Notice to Proceed is made and shall end on or after March 15 of the following year. No work shall be performed during the Winter Shut-Down Period, except for maintenance work that may be required per Sec 104.7 or 105.13 unless approved by the Engineer. Regardless of the length of the Winter Shut-Down Period, all work shall be complete prior to the contract Completion Date. All weather limitations specified elsewhere in the contract shall apply.

3.0 Completion of Work per Location. This contract includes work at multiple Locations, with non-contiguous project limits defined at each Location. Once work begins at a Location, the contractor shall diligently pursue completion of the work at that Location until all work is complete. If work at a Location begins prior to the Winter Shut-Down Period, all work at that Location shall be fully completed prior to the Winter Shut-Down Period, including permanent or temporary pavement marking. Work shall not begin at a Location if the long-range forecast is not conducive for completion of all work at that Location prior to the Winter Shut-Down Period.

3.1 Partial Acceptance per Location. Upon request by the contractor, a Location of work will be evaluated by the engineer for partial acceptance in accordance with Sec 105.15.1 after completion of all work at that Location.

4.0 Administration of Calendar Days. The total number of Calendar Days allowed to complete the work on this project and administration of Calendar Days shall be as specified in the Contract Liquidated Damages job special provision, except as specified herein. The count of Calendar Days will be paused during the Winter Shut-Down Period. The count of Calendar Days will be paused when work is complete at all Locations in which work had begun.

5.0 Pavement Marking. Pavement marking shall be as specified elsewhere in the contract, except as specified herein.

5.1 Temporary Raised Pavement Markers. All Temporary Raised Pavement Markers shall be removed as part of the Temporary Pavement Marking prior to the Winter Shut-Down Period. If Temporary Pavement Marking is required during the Winter Shut-Down Period, the contractor shall use and maintain Temporary Pavement Marking Paint at the contractor's expense.

5.2 Cold Weather Pavement Marking Paint. If permanent pavement marking paint cannot be completed due to weather limitations specified in Sec 620.20.2.4, the contractor shall apply cold weather paint, as specified in Sec 620.10.6, in lieu of Standard Waterborne Paint, at no additional cost to the Commission. Retroreflectivity acceptance requirements and payment adjustments for Standard Waterborne Paint shall apply when using Cold weather paint. Cold weather paint that meets all contract requirements will be accepted in lieu of Standard Waterborne Paint and paid for as such. If retroreflectivity does not meet the minimum requirements for Standard Waterborne Paint but does meet the minimum requirements for Temporary Pavement Marking Paint, the Cold weather paint shall be considered Temporary Pavement Marking Paint and shall be re-marked with Standard Pavement Marking Paint when temperatures allow. No payment will be made until the Standard Pavement Marking Paint or Cold Weather Paint is accepted.

6.0 Basis of Payment. No additional payment will be made for compliance with these Special Requirements and Allowances provisions.

M. DBE Prompt Payment Reporting JSP-24-05B

1.0 Description.

1.1 This provision will only apply to contracts that have a Disadvantaged Business Enterprise (DBE) goal greater than 0% and have at least one DBE subcontractor.

1.2 MoDOT monitors the payments made by prime contractors and subcontractors to DBEs for compliance with DBE payment monitoring rules as outlined in 49 CFR 26.37. To facilitate this monitoring, MoDOT requires prime contractors to report their remitted payments to DBEs and subcontractors to report their remitted payments to lower-tier DBEs.

1.3 Tracking of DBE payments are made through the Signet™ application (Signet). Signet is a third-party service, supported by the vendor, for usage by the prime contractor and all subcontractors. Signet is only a reporting tool; it does not process financial transactions. MoDOT does not provide direct technical support for Signet. Information about Signet may be found at <https://signet-help.zendesk.com/hc/en-us>.

1.4 Upon completion of the first pay estimate on the contract, Signet will automatically send an email to the prime contractor prompting registration. The prime will be required to pay a one-time, fixed fee of \$1,000 for this contract directly to the Signet vendor. Use of Signet to track DBE payments will be available for the life of the contract, regardless of the contract value, contract duration, number of subcontractors, or payments reported. No additional fee will be charged to subcontractors that are required to report payments or DBEs that are required to verify payments through Signet. The contractor may also, at no additional cost, report payments through Signet to subcontractors that are not DBEs.

1.5 After each estimate, when contractor reporting of payments is complete, the subcontractor will receive an email notifying them of the payment and requesting verification of the reported payment. A subcontractor that has not completed registration with Signet will be prompted to do so at this time.

1.6 Users will be set up automatically based on information in MoDOT's vendor list. Additional users under each contractor may be added once registration has been completed within Signet. The current vendor list can be found at <https://www.modot.org/bid-opening-info>.

1.7 For purposes of this requirement, payer is defined as the prime contractor or subcontractor that reports a payment in Signet to a vendor that is either a subcontractor, trucker, manufacturer, regular dealer, or broker. Payee is defined as the vendor that receives notification of payment through Signet from the prime contractor or a higher-tier subcontractor. Payment is defined as issuing an Electronic Funds Transfer (EFT) or mailing a check to a payee.

2.0 Requirements. Payers must report remitted payment to DBEs within Signet, for work performed by the DBE subcontractor, DBE trucking, materials supplied from a DBE manufacturer, dealer, or broker, as well as a return of retainage (and/or other amounts withheld), within 15 calendar days.

2.1 Prime contractors must report remitted payments to DBEs within 15 calendar days of each payment it receives from MoDOT. Prime contractors must also report payments to non-DBE subcontractors if that subcontractor is making payment to a lower tier DBE subcontractor, trucker, manufacturer, regular dealer, or broker.

2.2 The payer must report the following information within Signet:

- a. The name of the payee.
- b. The dollar amount of the payment to the payee.
- c. The date the payment was made.
- d. Any retainage or other amount withheld (if any) and the reason for the withholding (if other than retainage).
- e. The DBE function performed for this payment (e.g., contracting, trucking, or supplying as a manufacturer, dealer, or broker).
- f. Other information required by Signet.

The payer must report its return of retainage (and/or other amounts withheld) in separate, standalone payment entries (i.e., without being comingled with a payment for work performed or materials supplied).

2.3 In the event that no work has been completed by a DBE during the estimate period, such that no payment is due to a DBE subcontractor, trucker, manufacturer, regular dealer, or broker, then the prime contractor will mark payment complete within Signet, and no other payments are required to be reported.

2.4 Each subcontractor making a payment to a lower-tier DBE must report remitted payments within Signet, as detailed in Section 2.2, within 15 days of receipt of each payment from the prime contractor.

2.5 DBE payees must verify in Signet each payment reported by a payer within 15 calendar days of the payment being reported by the payer. This verification includes whether the payment was received, and if so, whether it was as expected.

3.0 Basis of Payment. A fixed cost of \$1,000 will be paid on this contract for the required software to report payments to DBEs through Signet. Regardless of the number of projects in a contract, a single payment will be made under item 108-10.00, SIGNET DBE REPORTING, per lump sum. The engineer reserves the right to underrun this item for any reason. Any additional costs for registration, software, usage, time, labor, or other costs will be considered incidental and no direct payment will be made.

N. Seal Coat with Lightweight Haydite, Grade B1

1.0 Description. All work shall be in accordance with [Sec 409](#), Flexible Pavements.

2.0 Material. Haydite shall be used as the aggregate type. The lightweight Haydite shall meet all applicable specifications of [Sec 1003](#), Aggregate For Seal Coat, except [Sec 1003.2.3](#) shall not apply.

O. The Kansas City Southern Railway Company Requirements

To report an emergency on The Canadian Pacific Kansas City Railway Company right-of-way call: (800) 527-9464. This Project is located on Route F on the Mexico Subdivision, MP 458.61, designated as DOT # 293571C near Oak Grove, MO. **Current FRA data shows 3 daytime trains and 7 nighttime trains and 0 passenger trains per day.**

1.0 Authority of Railroad Engineer and State Engineer.

1.1 The authorized representative of The Canadian Pacific Kansas City Railway Company, herein called "Railroad Engineer", shall have final authority in all matters affecting the safety of employees of The Kansas City Southern Railway Company, herein called "Railroad", the public, and the safe maintenance and operation of railroad traffic including the adequacy of the foundations and structures supporting the railroad tracks. The Railroad designates the following individual as the Railroad Engineer for this project. Except as otherwise provided in this document, herein called "Railroad Requirements", the Missouri Highway and Transportation Commission's Contractor, herein called "Contractor", shall address all notices to the Railroad concerning this Project to the following person:

Mr. Justin Meyer
Senior Vice President, Engineering and Mechanical
The Kansas City Southern Railway Company
427 West 12th Street
Kansas City, MO 64105
c/o Mr. Kyle Spree
Office: (612) 468-6486
E-mail: kylespree@cpkcr.com

1.2 The authorized representative, herein called "Engineer", of the Missouri Highways and Transportation Commission, herein called "Commission", shall have authority over all other matters as prescribed herein and in the project plans and specifications.

1.3 The Railroad's right of way (hereinafter, "Railroad ROW") is located within this Project, which requires the Contractor to perform work on Railroad ROW. Therefore, the Contractor shall coordinate its work activities with the activities of the Railroad as required in this document.

1.4 Indemnification of Railroad by Contractor.

1.4.a. The term Contractor as used herein includes any and all subcontractors.

1.4.b. The Contractor agrees to defend, indemnify and hold harmless Railroad, its directors, officers, employees, agents, successors and assigns from and against any injury or death of persons whomsoever or from any loss or damage to the Railroad's property, right of way, tracks and other facilities, herein called "Railroad's property," and from the Railroad's liability or loss incurred for damage to any other property in Railroad's care, custody or control in or upon Railroad's property, caused by acts or omissions of the Contractor in performing work on this Project, whether on, over, under or in the vicinity of the Railroad's property.

1.4.c. In the event the Contractor shall fail to restore the Railroad's property immediately to a condition acceptable to the Railroad when any such loss or damage to the Railroad's property is called to the Contractor's attention by the Railroad, then the Railroad may perform such corrective work at the cost of the Contractor. The term "loss or damage" as used herein shall include, but not be limited to, the erosion and silting of, water damage to, and the accidental or intentional placing or dropping of objects on the Railroad's property.

2.0 Right of Entry. At least forty-five (45) days in advance of the date the contractor proposes to begin work on the Railroad's Property, the contractor shall enter into a Right of Entry Agreement with Railroad prior to working on Railroad property. Request application for Right of Entry Agreement from:

Denise Case – Permit Manager
JLL – Rail Practice Group
4200 Buckingham Road, Suite 110
Fort Worth, TX 76155
Phone: (817) 230-2614
Email: denise.case@am.jll.com

Online Permit Application: https://jllrpg.360works.com/fmi/webd/rpo_web_kcs.fmp12

2.1 Right of Entry Fee. A Two Thousand Dollar (\$2,000) non-refundable fee must accompany the application, made payable to CPKC, or the application will be returned.

3.0 Construction Requirements. The Contractor's work on the Railroad's ROW shall be performed in accordance with these Railroad Requirements. The Contractor shall supply adequate equipment, labor and materials to perform the proposed work at the job site. The Contractor shall take special precaution and care to prevent any debris or material from falling on the Railroad's right of way. The safe operation of the Railroad shall take precedence over all work and nothing shall be done by the Contractor that will endanger the Railroad's operations. The Contractor shall protect the Railroad property from any damage resulting from the Contractor's acts or omissions during the highway Project.

4.0 Contractor Plans and Procedures. Before performing any excavation, demolition, blasting, lifting of structural members or construction of falsework on or over Railroad's ROW or adjacent to the Railroad's ROW that may interfere with the safe operation of the trains, the Contractor shall submit its excavation, shoring, demolition, blasting, lifting of structural members and falsework plans and relevant procedures to the Engineer for review, and to the Railroad Engineer for review and approval. These plans and procedures shall be signed and sealed by a Professional engineer licensed in the State of Missouri. However, such approval shall not relieve the Contractor from any liability relating to this Project. During the course of the Project, the Contractor shall submit any proposed changes to the approved plans or procedures to the Engineer for review and to the Railroad Engineer for review and approval. Any clearing and grubbing to increase the sight distance for a safer construction operation, or erection of temporary structures within the Railroad property shall not be done prior to the approval of the Railroad. The Railroad Engineer shall make a decision within 30 days. Should the Railroad Engineer deny the plans and requires a resubmittal, the Railroad Engineer shall provide approval or denial and requirement for resubmittal within 30 days after receipt of the revised plans.

4.1 The Contractor shall be required to take special precautions and care in connection with excavating and shoring. Excavations for construction of footings, piers, columns, walls or other facilities that require shoring shall comply with requirements of OSHA, AREMA and Section IV,

Design and Construction of Shoring Adjacent to and on Railroad Right-Of-Way contained within the "KCS Guidelines for the Design and Construction of Railroad Overpasses and Underpasses".

4.2 The Contractor shall abide by the following minimum temporary clearances during the course of construction:

- (a) 14 feet horizontal from centerline of track
- (b) 22 feet vertical above top of rail.

4.3 The Contractor shall comply with the Railroad's rules and regulations concerning protection of persons and property and the Contractor shall consult with the Railroad Engineer concerning the Railroad's rules and regulations. Any questions arising about coordination of work between the Contractor and the Railroad Engineer or between the Contractor and others shall be taken up with the Engineer and the Contractor, Railroad Engineer and Engineer shall agree upon a method of coordination before commencing the work.

4.4 Prior to commencing any work upon, over or under the Railroad's ROW, the Contractor shall furnish to the Railroad Engineer evidence that the Contractor's insurance is in compliance with Section 6 of this special provision.

4.5 The Contractor shall be required to maintain all ditches and drainage structures free of silt or other obstructions which may result from Contractor's operations; to promptly repair eroded areas within Railroad's ROW and to repair any other damage to the property of the Railroad or its tenants which may result from Contractor's operations. All such maintenance and repair of damages due to the Contractor's operations shall be done at the Contractor's expense. If the Contractor's method of erosion control differs from the approved plans, the Contractor shall submit a proposed method of erosion control and have the method reviewed by the Railroad and Commission prior to beginning any grading work on the Project site. Erosion control methods must comply with all applicable local, state and federal regulations.

4.6 The Contractor shall, reasonably throughout each work day and at the end of each work day when performing work near the Railroad's tracks, inspect the track area and clean up any debris that may have been dropped on or within ten (10) feet of Railroad's tracks. Upon completion of the Project, the Contractor shall return the Railroad ROW and all other Railroad property to a condition equal to or better than existed prior to commencement of the work. Contractor shall remove all waste, excess materials, false work and other temporary structures, and equipment, leaving the location of the work cleaned to the reasonable satisfaction of Railroad. The Contractor shall repair to the reasonable satisfaction of Railroad Engineer, and at the Contractor's sole cost and expense, any and all damages to the Railroad's property caused during construction of the Project.

5.0 Site Inspections By Railroad's Designated Representative.

5.1 In addition to the office review of construction submittals, site inspections may be performed by Railroad's Designated Representative at milestone events during construction, including but not limited to the following:

- (a) Preconstruction meetings.
- (b) Excavations, shoring placement/removal, pile driving, drilling of caissons or drilledshafts adjacent to tracks.

- (c) Reinforcement and concrete placement for near track piers.
- (d) Erection of precast concrete or steel overpass bridge superstructure.
- (e) Reinforcement and concrete placement of overpass bridge decks.
- (f) Completion of the bridge structure.

5.2 The Railroad Designated Representative can either be an employee of the Railroad or a hired outside consultant. Site inspection is not limited to the milestone events listed above. Site visits to check progress of the work may be performed at any time throughout the construction as deemed necessary by the Railroad.

5.3 In addition to the project schedule required by the Commission, the Contractor shall provide to the Engineer a detailed construction schedule for its work on Railroad ROW, including the proposed temporary horizontal and vertical clearances and construction sequence for all work to be performed on Railroad ROW. The Contractor shall submit a copy of this detailed construction schedule to Railroad's Designated Representative for review prior to the start of the work. This schedule shall also include the anticipated dates when the milestone events listed in subsection 5.1 will occur. The Contractor shall update the schedule for these milestone events as necessary, but at least monthly, and shall provide a copy of all updates to the Railroad so that site visits may be scheduled. The Commission shall reimburse the Railroad all costs associated with Site Inspection work by the Railroad.

6.0 Safety and Railroad Flagging.

6.1 The safe operation of the Railroad shall take precedence over Commission's work on, under and above the Railroad ROW. Contractor shall not, without Railroad's prior consent, come within 50 feet of Railroad's tracks. All work of the Contractor to be performed on, above, below or adjacent to the Railroad ROW shall be coordinated with Railroad so as to avoid, to the greatest extent possible, interference with railroad operations and to assure, at a minimum, sufficient advance notice to Railroad to ensure operational safety. Contractor shall be solely responsible with complying with any applicable laws, rules and regulations, including but not limited to OSHA regulations governing multi-employer work sites.

6.2 While on the Railroad's ROW, Contractor shall comply with Railroad's rules and regulations concerning protection of persons and property. Railroad shall make its applicable rules available to the Contractor for review and copying.

6.3 Except as authorized by Railroad the Contractor shall not work within the "Minimum Clearance Zone" of any track. The "Minimum Clearance Zone" is defined as an area measured 50 feet, horizontally, on either side of the centerline of track with unlimited vertical distance within the horizontal limits. Additionally, Contractor will locate all equipment, devices, and materials at a sufficient distance from any track to ensure that no apparatus or part of any equipment, device, or material, such as the boom of a crane or a dragline, could under any circumstances encroach on the "Minimum Clearance Zone" of any track. A railroad flagger will also be required when any equipment or its attachment or booms, even though stationed outside the above-mentioned 50 feet of the nearest rail but within the railroad ROW, has a potential to come within the 50 feet of the nearest rail.

6.4 Flagging services provided by a Railroad-qualified flagging contractor will be required whenever agents, employees or equipment of the Contractor or any of its contractors or subcontractors on this Project shall be within Fifty (50') of the nearest rail or if conditions as noted in item 6.3 above arise, unless specifically waived in writing by the Railroad.

6.5 Contractor shall notify the Railroad concerning any flagging services that will be required during the course of the Project, but the Contractor shall make all arrangements for flagging protection directly with a Railroad-qualified flagging contractor. Railroad's designation of a flagging contractor as a "Railroad-qualified" flagging contractor shall be construed solely as Railroad's willingness to allow that flagging contractor to provide flagging services on Railroad's property without further proof of qualification, and shall not be construed as an endorsement or other verification of the abilities or qualifications of that flagging contractor. Under these Railroad Requirements, all flagging contractors utilized on the Project shall be treated solely as independent contractors of the Contractor for all purposes under these Railroad Requirements.

6.6 The Contractor shall contract directly with any of the Railroad-qualified flagging contractors and pay them directly. The Contractor shall provide at least one month's notice prior to the first use of flaggers. Current Railroad-qualified flagging contractors are:

Railpros Field Services

Joel Ashcraft 417-362-9007 joel.ashcraft@railpros.com

Jon Norris 601-502-6985 jon.norris@railpros.com

6.7 Contractor may also obtain a list of Railroad-qualified flagging contractors together with their address and telephone numbers for flagging purposes at the proposed site by written request, sent at least 30 (thirty) days in advance, by U.S. mail or by e-mail addressed to:

Mr. Kyle Spree
Manager of Public Works
The Canadian Pacific Kansas City Railway Company
120 South 6th Street Suite 500
Minneapolis, MN 55402
Office: 612-468-6486
E-mail: kyle.spree@cpkc.com

6.8 Contractor shall clear the tracks when directed to do so by the flagger. The presence of the flagger will not relieve Contractor of its duty to keep all of its agents, employees and contractors clear of the tracks when trains are in dangerous proximity to the area where construction is occurring.

6.9 All railroad tracks within and adjacent to the Project site are active, and rail traffic over these facilities shall be maintained throughout the Project. Railroad signal facilities within the project limits shall be protected at all times. KCS shall be notified if any of its facilities are in conflict with the planned work. Activities may include both through moves and switching moves to local customers. Railroad traffic and operations will occur continuously throughout the day and night on the tracks. The Contractor shall coordinate and schedule the work so that construction activities do not interfere with railroad operations. Any and all costs associated with delays caused to the train traffic by the Contractor shall be reimbursed by the Contractor. The Commission or the Contractor may audit these costs.

6.10 The Contractor shall notify Railroad of the completion of work on Railroad ROW within 30 days after the completion of work on Railroad ROW. Railroad shall inspect Railroad's property within 30 days after the Contractor has given this notice, to verify the Contractor's compliance with these Railroad Requirements. Railroad shall notify the Engineer of any outstanding issues to be addressed on Railroad ROW. Engineer will notify the Contractor of work to be completed.

7.0 Insurance Requirements. The amount of work to be performed upon, over or under Railroad's right of way is estimated to be one percent of the Contractor's total bid for the Project. In addition to any other forms of insurance or bonds required under the terms of the contract and specifications, the Contractor shall be required to carry insurance of the following kinds:

(a) Commercial General Liability Insurance, including contractual liability and products completed/operations, against claims arising out of bodily injury, illness and death and from damage to or destruction of property of others, including loss of use thereof, with minimum limits for bodily injury and property damage of \$2,000,000 for each occurrence, with an aggregate of \$10,000,000.

1. The definition of "insured contract" shall be amended to remove any exclusion or other limitation for any work being done within 50 feet of railroad property.

2. No other endorsement limiting the coverage required by paragraph (a) of section 7.0 of these Railroad Requirements shall be included on the policy with regard to the work being performed under the contract between the contractor and the Commission.

(b) Business Automobile Policy Insurance, including owned, non-owned, and hired vehicles with minimum limits for bodily injury and property damage of \$2,000,000 per occurrence, on all vehicles used on Railroad's property during the term of the contract between the contractor and the Commission.

(c) Worker's Compensation Insurance or coverage as required under the Worker's Compensation Act of the State of Missouri. The policy shall include occupational disease to required statutory limits, employer's liability of \$1,000,000 to include FELA, if appropriate, and an "all states" endorsement.

(d) A Railroad Protective Liability policy issued in the name of the Railroad with limits of \$2,000,000 for bodily injury and property damage per occurrence, with an aggregate of \$10,000,000. The policy shall remain in force during the construction phase of the Project and shall be provided prior to start of work. The following provisions apply to the endorsements to this policy:

1. The policy shall be endorsed to include the Pollution Exclusion Amendment (ISO form CG 28 31 10 93).

2. The policy shall be endorsed to include the Limited Seepage and Pollution Endorsement.

3. The policy shall be endorsed to remove any exclusion for punitive damages.

4. The policy shall be endorsed to include Evacuation Expense Coverage Endorsement.

5. No other endorsements restricting coverage shall be added to the policy, except as authorized by paragraph 7.1.2 of these Railroad Requirements.

6. The Contractor shall provide the original policy to the Railroad before performing any work or services under the contract between the Contractor and the Commission.

7.1 Evidence of Insurance. The Declarations shall include the description of operations matching the Project description in the Contractor's contract with the Commission and shall include the appropriate Commission project and contract identification numbers. The job number and Project location shall appear on the Declarations and shall include the city, state and appropriate highway designation as follows:

Route D Ray County, near Lawson, MO
Job No. JKU0390
Mexico Subdivision, MP 469.58, DOT# 375447A

7.1.1 The name and address of the Contractor shall appear on the Declarations. The name and address of the Commission shall be identified on the Declarations as the "Involved Governmental Authority or Other Contracting Party".

7.1.2 Other endorsements/forms that will be accepted are:

- (a) Broad Form Nuclear Exclusion – Form IL 00 21.
- (b) 30-day Advance Notice of Non-renewal or cancellation.
- (c) Required State Cancellation Endorsement.
- (d) Quick Reference or Index Form CL/IL 240.

7.1.3 Endorsements/forms that will NOT be acceptable are:

- (a) Any Pollution Exclusion Endorsement except CG 28 31.
- (b) Any Punitive or Exemplary Damages Exclusion.
- (c) Known injury or Damage Exclusion form CG 00 59.
- (d) Any Common Policy Conditions form.
- (e) Any other endorsement/form not specifically authorized in this special provision.

7.1.4 If any part of the work is sublet, similar insurance and evidence thereof as specified above, shall be provided by or on behalf of the subcontractor to cover the subcontractor's operations on the Railroad ROW, including such operations by any Railroad-qualified flagging contractor.

7.1.5 Prior to entry on the Railroad's ROW, the Contractor shall submit the original Railroad Protective Liability Insurance Policy to the Commission and to the Railroad at the addresses below, for review by the Commission and approval by the Railroad. In addition, the Contractor

shall submit certificates of insurance evidencing the Contractor's and any subcontractor's Commercial General Liability Insurance to the Railroad and the Commission at the addresses below, for review by the Commission and approval by the Railroad. The certificates of insurance shall state that the insurance coverage shall not be suspended, voided, canceled or reduced in coverage or limits without 30 days advance written notice to the Railroad and the Commission. No work shall be permitted on the Railroad's right-of-way until the Railroad has reviewed and approved the evidence of insurance required herein.

Railroad

Mr. Kyle Spree
CPKC Limited
120 South 6th Street Suite 500
Minneapolis, MN 55402
P.O. Box 219335
Kansas City, MO 64121-9335

Commission

Mr. Brandi Baldwin
State Construction & Material Engineer
MoDOT
P.O. Box 270
Jefferson City, MO 65102

8.0 Failure to Comply. If the Contractor violates or fails to comply with any of these Railroad Requirements, then the provisions in paragraphs (a) and (b) of this section shall apply, and shall remain in effect until the Contractor has remedied the situation to the satisfaction of the Railroad Engineer and the Engineer.

(a) The Railroad Engineer may require that the Contractor shall vacate the Railroad's property.

(b) The Engineer may withhold all monies due to the Contractor until the Contractor has remedied the situation to the satisfaction of the Railroad Engineer and the Engineer.

9.0 Payment for Cost of Compliance. No separate payment will be made for any extra cost incurred by the Contractor on account of compliance with these Railroad Requirements. The Contractor shall include all such costs in its contract unit price for other items included in its contract with the Commission.

P. Union Pacific Railroad Requirements

1.0 Introduction.

1.1 These Railroad Requirements set forth terms and conditions agreed upon between the Union Pacific Railroad Company (Railroad) and the Missouri Highways and Transportation Commission (Commission), under which the Railroad will allow the Commission's contractors to enter in and upon the Railroad's real property, right of way, tracks and other facilities (Railroad's Property) to perform the contractor's work relating to this project.

1.2 To report an emergency on the Railroad, call: (888) 877-7267.

1.3 The project location is at Railroad Milepost 473.58 on Railroad's Trenton Sub, designated as USDOT Crossing # 605508B **Current FRA data shows 5 daytime trains and 4 nighttime trains and 0 passenger trains per day.**

1.4 Definitions of terms set forth in the current edition of the Missouri Standard Specifications for Highway Construction shall be applicable to those terms as used in these Railroad Requirements.

2.0 Authority of Railroad Representative and Engineer.

2.1 The authorized representative of the Railroad, herein called "Railroad Representative", shall have final authority in all matters affecting the safe maintenance and operation of railroad traffic including the adequacy of the foundations and structures supporting the railroad tracks.

2.1.1 The Railroad designates the following individual as the Railroad Representative for this project. Except as otherwise provided in these Railroad Requirements, the contractor shall address all notices concerning this project to the Railroad Representative, as follows:

Leo Craig,
Public Projects
Telephone: Direct - (817) 901-9560
E-mail: lcraig@olsson.com

2.1.2 The Railroad, or the individual identified above, may designate a different individual to act as the Railroad Representative for this project, and may change the address information stated above, by giving written notice of the changes to the contractor and to the Engineer, as provided in these Railroad Requirements.

2.2 The authorized representative of the Commission (Engineer) shall have authority over all other matters as prescribed herein and in the project specifications.

3.0 Contractor's Indemnity Obligations to the Railroad.

3.1 The contractor agrees to indemnify, defend and hold harmless the Railroad from and against any injury or death of persons whomsoever, or from any loss or damage to the Railroad's Property, caused by acts or omissions of the contractor in performing work on this project, whether on, over, under or in the vicinity of the Railroad's Property. In the event the contractor shall fail to restore the Railroad's Property immediately to a condition acceptable to the Railroad when any such loss or damage to the Railroad's Property is called to the contractor's attention by the Railroad, then the Railroad may perform such corrective work at the cost of the contractor. The Railroad shall have the right to bring an action directly against the contractor to recover any loss or damage sustained by the Railroad by reason of the contractor's breach of agreements contained in these Railroad Requirements. In addition to such remedies of the Railroad, the Commission will withhold from final payment due to the contractor the amount reasonably necessary to reimburse the Railroad for such loss or damage or for performing such work. The term "loss or damage" as used herein shall include, but not be limited to, the erosion and silting of, water damage to, and the accidental or intentional placing or dropping of objects on the Railroad's Property.

4.0 Notice of Starting Work.

4.1 The contractor shall not commence any work on the Railroad's right of way until contractor has complied with the following conditions (no particular order):

4.1.1 At least thirty (30) days in advance of the date the contractor proposes to begin work on the Railroad's Property, the contractor has given written notice of the contractor's proposed start

date and time to the Railroad Representative, and Railroad's Manager of Track Maintenance (see paragraph 12.2.3 below), with a copy to the Engineer.

4.1.2 The Commission has obtained written approval from the Railroad's Representative for the contractor's insurance coverage as required by Section 17 of these Railroad Requirements, and authorization for the contractor to begin work on the Railroad's Property.

4.1.3 The contractor has determined whether fiber optic cable systems are buried on the Railroad's Property. If fiber optic cable systems are buried on the Railroad's Property, then the contractor has contacted the Railroad at the 24 hour number, 800-336-9193, has contacted the telecommunications company involved, has arranged for a cable locator, and has made arrangements for relocation or other protection of the fiber optic cable system on the Railroad's Property.

4.1.4 Union Pacific Property Access Training must have been completed by each person on UPRR right of way. A valid copy of certification must be with the individual anytime they are on the job site. For guidance on completing the training, visit the website provided:

<https://www.up.com/aboutup/community/safety/erailsafe/up-pat/index.htm>

4.2 Right of Entry. At least thirty (30) days in advance of the date the contractor proposes to begin work on the Railroad's Property, the contractor shall enter into a Contractor's Right of Entry Agreement (CROE) with Railroad prior to working on Railroad property. Submit the following information to the Railroad Representative:

- a. MoDOT manager contact information
- b. Contractor contact information
- c. Site location (include address, DOT#)
- d. Site map
- e. Brief description of scope of work
- f. Proposed schedule for work on UP right of way

4.2.1 After reviewing the information, the Railroad Representative will send all of the information to UP Real Estate for processing. UP Real Estate will draft the CROE agreement and send it to the contractor for signature. The signed contract and administrative fee must then be returned to UP Real Estate.

4.2.2 Administrative Fee. Upon the execution and delivery of this CROE agreement, Contractor shall pay the Railroad Two Thousand Two hundred Dollars (\$2,200) as reimbursement for clerical, administrative and handling expenses in connection with the processing of this CROE agreement.

4.2.3 If applicable to the project, the contractor must submit a demolition and falsework plan as well as means and methods to the Railroad for review and approval. These plans can be submitted along with the Right of Entry application; however, the Right of Entry will not be approved until the demolition and falsework plan is approved by the Railroad.

5.0 Interference with Railroad's Operations.

5.1 The Railroad's right of way is located within the limits of this project. The contractor shall take care to ensure that it will not drop any debris or material on the Railroad's Property.

5.2 The contractor shall arrange and conduct all of the contractor's work so that it causes no interference with the Railroad's operations, including train, signal, telephone, telegraphic services, damage to the Railroad's Property, poles, wires and other facilities of tenants on the Railroad's Property. Whenever the contractor's work may directly affect the operations or safety of trains, the contractor shall submit a written description of the method of doing such work to the Railroad Representative for approval, but such approval shall not relieve the contractor from liability resulting from the contractor's work. Any work to be performed by the contractor that requires flagging service shall be deferred by the contractor until the flagging services are available at the job site.

5.3 Whenever the contractor's work upon the Railroad's Property will unavoidably cause an impediment to the Railroad's operations, such as requiring the use of runaround tracks or reduced train speed, the contractor should schedule and conduct these operations so that this impediment is reduced to the absolute minimum.

5.4 If conditions arising from, or in connection with the work require immediate and unusual provisions to protect the Railroad's operations and property, the contractor shall make such provisions. If in the judgment of the Railroad Representative, or the Engineer if the Railroad Representative is absent, such provision is insufficient, then the Railroad Representative or Engineer may require or provide such provisions as he/she deems necessary. In any event, the contractor shall make such provisions at the contractor's expense, and without cost to the Railroad or the Commission.

6.0 Track Clearances.

6.1 During construction, the contractor shall maintain not less than the minimum track clearances as shown on the project plans. However, before undertaking any work within the Railroad's Property and before placing any obstruction over any track, the contractor shall:

6.1.1 Notify the Railroad Representative and the Railroad's Manager of Track Maintenance at least ten (10) days in advance of the proposed work.

6.1.2 Receive assurance from the Railroad's Manager of Track Maintenance that arrangements have been made for flagging service as may be necessary.

6.1.3. Receive permission from the Railroad Representative to proceed with the work, as provided in section 4.0.

6.1.4. Confirm that the Engineer has received copies of the contractor's notice to the Railroad, and of the Railroads' response.

6.1.5 Note that temporary Work Zone traffic control must not circumvent the active warning devices at this location.

6.1.6 Temporary traffic control must comply with MUTCD standards. Any time work is within 25' of the track, the potential to foul the track exists or a pilot car is used traversing the crossing will require a Railroad flag person to be present. Traffic control must be returned to normal operations through the crossing area before releasing the Railroad's flag person.

7.0 Construction Procedures.

7.1. General. The contractor's work on the Railroad's property shall be performed in accordance with these Railroad Requirements and shall be subject to the Railroad's inspection and review. The contractor shall submit plans that shall be signed, sealed, and stamped in accordance with the laws relating to Architects and Professional Engineers, Chapter 327, RSMo, for the demolition of any structure over Railroad right of way, and for temporary shoring and falsework that may affect the Railroad's facilities or traffic.

7.2 Excavation. The contractor shall maintain the subgrade of an operated track with the beam edge at least 12 feet from centerline of track and not more than 26 inches below top of rail, unless the existing section fails to meet this specification, in which case the contractor shall maintain the existing section.

8.0 Maintenance of Railroad Facilities. Within the project limits, the contractor shall maintain Railroad's Property, including all ditches and drainage structures, free of silt or other obstructions that may result from contractor's operations. The contractor shall promptly repair eroded areas within the Railroad's Property and repair any other damage to the Railroad's Property or the Railroad's tenants. The contractor shall perform all such maintenance and repair of damages due to the contractor's operations at the contractor's expense.

9.0 Storage of Materials and Equipment.

9.1 The contractor shall obtain permission from the Railroad Representative before storing any materials or equipment anywhere on Railroad's Property. The Railroad will not ordinarily permit storage within twenty-five feet (25') from the centerline of any track, or within three hundred feet (300') from any grade crossing. The Railroad will not be liable for damage to such material and equipment from any cause, and the Railroad Representative may move such material and equipment or require the contractor to move it, at the contractor's expense.

9.2 The contractor shall not leave unattended any grading or construction machinery parked upon Railroad's Property, unless it is effectively immobilized so that unauthorized persons cannot move such machinery.

10.0 Cleanup. Upon completion of the work, the contractor shall remove from within the limits of the Railroad's Property all machinery, equipment, surplus materials, falsework, rubbish or temporary buildings of the contractor's and shall leave Railroad's Property in a neat condition satisfactory to the Railroad Representative.

11.0 Damages. The Railroad shall not assume liability for any damages to the contractor, contractor's work, employees, servants, equipment and materials caused by the Railroad's traffic. However, the preceding sentence shall not exempt the Railroad from liability for any loss, damage or injury proximately caused by the Railroad's intentional misconduct or sole or gross negligence. The contractor shall directly reimburse the Railroad for any cost the Railroad reasonably incurs for repairing damages to the Railroad's Property or to property of the Railroad's tenants, caused by or resulting from the operations of the contractor relating to this project.

12.0 Flagging Services.

12.1 When Flagging is Required. The Railroad has sole authority to determine the need for flagging to protect the Railroad's operations. Whenever the Railroad requires flagging services with reference to any of the contractor's work on this project, the contractor shall not perform any such work until all required flaggers are present at the job site.

12.1.1 In general, the Railroad may require flagging services whenever the contractor's personnel or equipment are, or are likely to be, working on the Railroad's Property, or across, over, adjacent to, or under a track, or when such work has disturbed or is likely to disturb a railroad structure or the railroad roadbed or surface and alignment of any track to such extent that the movement of trains must be controlled by flagging, to prevent unreasonable risks of accidental hazard to the Railroad's operations or personnel.

12.1.2 Normally, the Railroad will assign one flagger to a project; but in some cases, more than one may be necessary, such as yard limits where the Railroad may assign up to three flaggers. However, if the contractor works within distances that violate instructions given by the Railroad Representative, or performs work upon or adjacent to Railroad's Property that has not been scheduled with the Railroad Representative, the Railroad may require flagging services full time until the project is completed.

12.1.3 If flagging is determined to be required by the Manager of Track Maintenance (MTM), and the MTM advises that third party flagging is to be used, then third-party flagging must be used. If flagging is determined to be required by the MTM and the MTM advises that an agreement employee flagging is to be used, then an agreement flagger will be put up for bid (and scheduled accordingly).

UPRR Third Party Flagging Policy Link

https://www.up.com/real_estate/third-party-flagging/index.htm

12.2 Scheduling and Notification of Flagging Services.

12.2.1 The contractor shall arrange with the Railroad all flagging services required by the Railroad to accomplish the contractor's work on this project.

12.2.2 Before the contractor begins work on the Railroad's Property, the contractor shall furnish to the Railroad Representative and the Engineer a schedule for all work required to complete the contractor's portion of the project within the Railroad's Property, and shall arrange for a job site meeting between the contractor, the Engineer, and the Railroad Representative. Until the contractor has provided its work schedule and met on-site with the Railroad Representative and the Engineer, the Railroad may withhold all flagging services from the contractor's proposed job site.

12.2.3 Before the contractor first begins any work upon or adjacent to the Railroad's Property, the contractor shall give not less than thirty (30) days advance notice to the Railroad, and to the Engineer, of its intent to begin such work. The contractor shall address all notices relating to flagging as instructed in the fully executed CROE agreement.

12.2.4 The Railroad usually assigns one flagger to work at the job site on a continuous basis until the contractor no longer needs flagging services. The contractor shall not call for flagging services on a spot basis. The Railroad's assigned flagger shall notify the Engineer when flagging services have begun and ended. The flagger shall give these notices immediately upon arrival at the job site on the first day, and before departing from the job site on the last day of each separate period when the Railroad provides flagging services, or as soon as possible thereafter. The Engineer shall document these notifications in the project records.

12.2.5 After the contractor has begun work that requires flagging services, the contractor shall give not less than ten (10) day's advance written notice to the Railroad before discontinuing flagging services and terminating the obligation to pay for flagging services. The contractor shall

simultaneously provide a copy of this notice to the Engineer. If the contractor's work on or adjacent to the Railroad's Property is suspended at any time, or for any reason, then before the contractor resumes any work on or adjacent to the Railroad's Property, the contractor shall give advance, written notice to the Railroad and to the Engineer of its intent to resume such work. This notice shall provide sufficient details of the contractor's proposed work to enable the Railroad Representative to determine whether flagging services will be required before the contractor resumes its work on or adjacent to the Railroad's Property. The contractor shall give this required notice at least three (3) working days before it intends to resume such work; however, The Railroad may take up to thirty (30) days after the contractor has given this notice before resuming flagging services at the job site. The requirements of this paragraph 12.2.5 shall not apply if the suspension and resumption of the contractor's work were previously scheduled with the Railroad pursuant to paragraph 12.2.2 of these Railroad Requirements, or the suspension was caused by an emergency as provided in paragraph 12.2.6 of these Railroad Requirements.

12.2.6 If, after the Railroad has assigned a flagger to the project site in accordance with section 12.0, any emergency requires the flagger's presence elsewhere, then the contractor shall suspend work on the Railroad's Property until the flagger is again available. Any additional costs to the contractor resulting from such delay shall be borne by the contractor and not by the Railroad.

12.3 Payment for Flagging Services.

12.3.1 The Commission will pay the Railroad directly for the cost of flagging services associated with this project by deducting the amount from the Commission's payments to the contractor. If a third-party flagger is used, the contractor has the option to pay the flagger directly but must notify the MoDOT Engineer of such payments for flagging.

12.3.2 The estimated cost of flagging services is approximately \$1,600 per day, based on an 8-hour workday and a 40-hour work week. The Railroad shall charge not more than its actual cost of providing these flagging services, which includes the base pay for the flagger or flaggers who actually performed the required flagging services, the Railroad's reasonable overhead costs, and the reasonable costs actually incurred for the flagger's travel expenses, meals and lodging if required. The Railroad may charge a maximum of one hour of travel time each way per day per flagger, for travel to and from the job site. A flagger's work in excess of 8 hours per day or 40 hours per week, but not more than 12 hours per day, will result in overtime pay at 1.5 times that employee's regular hourly rate. A flagger's work in excess of 12 hours per day will result in overtime pay at 2.0 times that employee's regular hourly rate. If a flagger performs required flagging services on a holiday, then the overtime pay rate shall be 2.5 times that employee's regular hourly rate. The Commission or contractor also shall reimburse the Railroad for its actual expenses reasonably incurred in preparing and handling invoices to the Commission or contractor for the cost of these flagging services. The Railroad's charges to the Commission or contractor shall comply with applicable provisions of the current FAPG issued by the FHWA.

12.3.3 The Railroad shall submit progress invoices to the Engineer during the time the Railroad requires flagging services. The Railroad shall submit its final invoice for flagging services to the Engineer within one hundred eighty (180) days after the contractor has notified the Railroad and the Commission that all its work over the Railroad's Property is complete, in accordance with section 18.0 below. If the Commission does not receive the Railroad's final flagging invoice within this time period, then the Railroad shall obtain payment directly from the contractor.

12.3.4 If a dispute arises between the Railroad, the Commission and the contractor concerning the amount charged for flagging service, then the Commission may deduct the full amount of the Railroad's invoice from the contractor's payment until the dispute is resolved.

12.4 Flagging Complaints. The contractor and the Railroad shall attempt to resolve any complaints concerning flagging services in a timely manner. If the contractor disputes the need for a flagger, the contractor shall notify the Railroad Representative and the Engineer. The contractor shall confirm any verbal complaints in writing within five (5) working days, by sending a copy to the Railroad Representative and to the Engineer.

13.0 Temporary Construction Grade Crossing.

13.1 When the contractor has no reasonable alternate method of transporting construction materials and personnel across the Railroad's track, the contractor shall make all necessary arrangements with the Railroad for the installation, maintenance, and removal of one temporary grade crossing for a construction haul road. The contractor shall bear all costs incidental to such crossings, including flagging, whether services are performed by contractor's own forces or by the Railroad's personnel. The contractor shall execute the Railroad's standard Road Crossing Agreement covering terms and conditions for the temporary crossing.

13.2 Neither the contractor nor the Railroad shall construct any crossing for use by the contractor for transporting materials or equipment across the tracks of the Railroad until the Railroad Representative specifically authorizes the installation, maintenance, necessary watching and flagging thereof and removal, which shall be done at the contractor's expense.

14.0 Work for the Benefit of the Contractors. The project plans show all temporary or permanent changes in wire lines or other facilities that are necessary to complete the project, or these changes will be covered by appropriate plan revisions approved by the Commission and the Railroad. If the contractor desires any further changes, the contractor shall make separate arrangements with the Railroad for those changes, at the contractor's expense.

15.0 Cooperation and Delays. The contractor shall arrange a schedule with the Railroad for accomplishing staged construction involving work by the Railroad or tenants of the Railroad. In arranging a schedule, the contractor shall request information from the Railroad, and the Railroad shall promptly provide information concerning the minimum lead time required for assembling crews and materials. The contractor shall schedule adequate time for those activities. The contractor shall not make any claim against the Railroad for hindrance or delay on account of railway traffic for:

15.1 Any work the Railroad performs.

15.2 Other delay incident to or necessary for the safe maintenance of railway traffic.

15.3 Any delays due to compliance with these Railroad Requirements.

16.0 Trainman's Walkways. The contractor shall maintain along the outer side of each exterior track of multiple operated tracks, and on each side of single operated track, an unobstructed continuous space suitable for trainman's use in walking along trains, extending to a line not less than 12 feet from the centerline of the track. Before the close of each workday, the contractor shall remove all temporary impediments to walkways and track drainage encroachments or obstructions that were allowed during work hours when flagging services were available.

Whenever the contractor excavates or maintains any excavation near the walkway, the contractor shall install a handrail with 12 feet minimum clearance from the centerline of the track.

17.0 Insurance.

17.1 General Insurance Provisions. The contractor shall, at its sole cost and expense, procure and continuously maintain in force during this project, the insurance coverage required under this section 17 until the contractor has completed all project work on the Railroad's Property, has removed all equipment and materials from the Railroad's Property, and has cleaned and restored the Railroad's Property to the satisfaction of the Engineer and the Railroad Representative. The amount of work to be performed upon, over or under the Railroad's Property is estimated to be one percent (1%) of the contractor's total bid for the project.

17.2 Commercial General Liability Insurance. The contractor shall maintain commercial general liability ("CGL") insurance with a limit of not less than \$5,000,000 for each occurrence and an aggregate limit of not less than \$10,000,000. CGL insurance must be written on ISO occurrence form CG 00 01 12 04 (or a substitute form providing equivalent coverage). The policy must contain the following endorsement, which must be stated on the certificate of insurance: "Contractual Liability Railroad's" ISO form CG 24 17 10 01 (or a substitute form providing equivalent coverage) showing "Union Pacific Railroad Company Property" as the Designated Job Site.

17.3 Business Automobile Coverage Insurance. The contractor shall maintain business auto coverage written on ISO form CA 00 01 (or a substitute form providing equivalent liability coverage) with a combined single limit of not less than \$5,000,000 for each accident. The policy must contain the following endorsements, which must be stated on the certificate of insurance: "Coverage For Certain Operations In Connection With Railroad's" ISO form CA 20 70 10 01 (or a substitute form providing equivalent coverage) showing "Union Pacific Property" as the Designated Job Site; and Motor Carrier Act Endorsement - Hazardous Materials Clean Up (MCS-90) if required by law.

17.4 Alternate Liability Insurance Limits. Instead of the minimum limits of insurance coverage described above in subsections 17.2 and 17.3, Railroad will accept CGL insurance limits of at least \$2,000,000 for each occurrence or claim and an aggregate limit of at least \$2,000,000, and will accept Business Automobile Insurance containing a combined single limit of at least \$2,000,000 per occurrence or claim, if the contractor will secure Railroad Protective Liability Insurance coverage with a combined single limit of \$5,000,000 per occurrence and an aggregate limit of \$10,000,000. The contractor's election to maintain these alternate liability insurance limits shall not affect the applicability of any other terms and conditions set forth in these Railroad Requirements.

17.5 Workers' Compensation and Employers' Liability Insurance. The contractor shall maintain workers' compensation insurance coverage, with not less than the minimum statutory liability required under the workers' compensation laws of the State of Missouri. The contractor shall maintain Employers' Liability (Part B) insurance coverage with limits of at least \$500,000 for each accident, a \$500,000 disease policy limit, and \$500,000 for each employee. If the contractor is self-insured, then the contractor shall provide evidence of state approval and excess workers' compensation coverage, which must include coverage for liability arising out of the U. S. Longshoremen's and Harbor Workers' Act, the Jones Act, and the Outer Continental Shelf Land Act, if applicable. The policy must contain the following endorsement, which must be stated on the certificate of insurance: "Alternate Employer Endorsement" ISO form WC 00 03 01 A (or a

substitute form providing equivalent coverage) showing the Railroad in the schedule as the alternate employer (or a substitute form providing equivalent coverage).

17.6 Railroad Protective Liability Insurance. The contractor must maintain Railroad Protective Liability insurance written on ISO occurrence form CG 00 35 12 04 (or a substitute form providing equivalent coverage) on behalf of the Railroad as named insured, with a limit of not less than \$2,000,000 per occurrence and an aggregate limit of \$6,000,000. Before commencing any work on the Railroad's Property, the contractor shall submit the original insurance policy to the Railroad, or may submit a binder stating that the required Railroad Protective Liability policy is in place until the contractor delivers the original policy to the Railroad. The contractor shall cause the Railroad Protective Liability Insurance policy to include a description of the named insured, the work, and the job site, as follows:

17.6.1 Named Insured: Union Pacific Railroad Company.

17.6.2 Description and Designation:

Seal coat pavement under UP bridge.

Clay County Route D

Job No. JKU0390

USDOT # 605508B MP 473.58 Trenton Sub in Lawson, MO.

17.7 Umbrella or Excess Insurance. If the contractor utilizes umbrella or excess insurance policies, these policies must "follow form" and afford no less coverage than the primary policy.

17.8 Pollution Liability Insurance. The contractor shall maintain pollution liability insurance coverage, which must be written on ISO form Pollution Liability Coverage Form Designated Sites CG 00 39 12 04 (or a substitute form providing equivalent liability coverage), with limits of at least \$5,000,000 per occurrence and an aggregate limit of \$10,000,000. If the scope of work as defined in this Project includes the disposal of any hazardous or non-hazardous materials from the job site, the contractor must furnish to the Railroad evidence of pollution legal liability insurance maintained by the disposal site operator for losses arising from the insured facility accepting the materials, with coverage in minimum amounts of \$1,000,000 per loss, and an annual aggregate of \$2,000,000.

17.9 Other Insurance Requirements.

17.9.1. Each policy required above (except workers' compensation and employers' liability) must include the Railroad as "Additional Insured" using ISO Additional Insured Endorsements CG 20 26, and CA 20 48 (or substitute forms providing equivalent coverage). The coverage provided to the Railroad as an additional insured shall, to the extent provided under ISO Additional Insured Endorsement CG 20 26 and CA 20 48, provide coverage for the Railroad's negligence whether sole or partial, active or passive.

17.9.2 Where allowable by law, the punitive damage exclusion shall be deleted, and the deletion shall be indicated on the certificate of insurance.

17.9.3 The contractor waives all rights of recovery, and its insurers also waive all rights of subrogation of damages against the Railroad and its agents, officers, directors and employees, except that these waivers shall not apply to punitive damages, nor to any loss, damage or injury proximately caused by the Railroad's intentional misconduct or sole or gross negligence. The certificate of insurance shall acknowledge these waivers.

17.9.4 Prior to commencing any work on the Railroad's Property, the contractor shall furnish the Railroad with one or more certificates of insurance, executed by a duly authorized representative of each insurer, showing compliance with the insurance requirements set forth in this Section 17.0.

17.9.5 The contractor shall only obtain insurance policies written by a reputable insurance company acceptable to the Railroad, or which currently has a Best's Insurance Guide Rating of A- and Class VII or better, and which is authorized to do business in the State of Missouri.

17.9.6 The fact that insurance is obtained by the contractor or by the Railroad on behalf of the contractor will not be deemed to release or diminish the liability of the contractor, including, without limitation, liability under the indemnity provisions contained in Section 3.0 of these Railroad Requirements. Damages recoverable by the Railroad from the contractor or any third party will not be limited by the amount of the required insurance coverage, except to the extent of any payments the Railroad has received pursuant to that insurance coverage obtained and paid for by the contractor.

17.10 Evidence of Insurance. The contractor shall provide evidence of insurance as required above to the addresses shown below, for review by the Commission and transmittal to the Railroad.

Railroad

Real Estate

Union Pacific Railroad Company

1400 Douglas St., MS 1690

Omaha, NE 68179-1690

Commission

Ms. Brandi Baldwin

State Construction and Materials Engineer

Missouri Department of Transportation

P.O. Box 270

Jefferson City, MO 65102

17.11 Except as otherwise specifically provided in these Railroad Requirements, the Railroad will not accept binders as evidence of insurance, and the contractor shall provide the Railroad with the original insurance policy.

17.12 Insurance Required of Subcontractors. If any part of the work is sublet, the contractor shall maintain and provide evidence of similar insurance, in the same amounts as required of the prime contractor, to cover the subcontractor's operations. The Railroad will accept endorsements to the prime contractor's policies specifically naming subcontractors and describing the subcontractor's operations, for this purpose.

17.13 Cancellation of Insurance. The contractor and its insurers shall not cancel any of the required insurance coverage, except by permission of the Commission and the Railroad, or after thirty (30) days' written notice to the Commission and the Railroad at the addresses shown in subsection 17.10.

18.0 Completion of Work on Railroad's Property. The contractor shall notify Engineer and Railroad's Representative when the contractor has completed its work on Railroad's Property.

19.0 Failure to Comply. If the contractor violates or fails to comply with any of the requirements of these Railroad Requirements, then the Railroad Engineer may require that the contractor vacate the Railroad's property and the Engineer may withhold all monies due to the contractor

Job No.: JKU0390

Route: Various

County: Various

until the contractor has remedied the situation to the satisfaction of the Railroad Engineer and the Engineer.

20.0 Payment for Cost of Compliance. The contractor is not entitled to any separate payment for any extra cost it may incur on account of compliance with these Railroad Requirements. The contractor shall include all such costs in the contract unit price for items properly authorized in the contract.