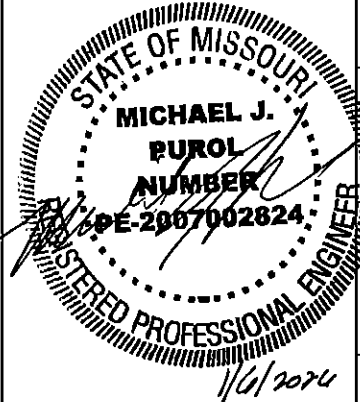


Job No.: JNE0028
Route: 15, H
County: Shelby

JOB SPECIAL PROVISIONS TABLE OF CONTENTS

(Job Special Provisions shall prevail over General Provisions whenever in conflict therewith.)

A.	General - Federal JSP-09-02L	1
B.	Contract Liquidated Damages	1
C.	Work Zone Traffic Management	2
D.	Emergency Provisions and Incident Management JSP-90-11A	5
E.	Project Contact for Contractor/Bidder Questions	5
F.	Supplemental Revisions JSP-18-01KK	6
G.	ADA Compliance and Final Acceptance of Constructed Facilities JSP-10-01C	13
H.	Lump Sum Temporary Traffic Control JSP-22-01B	14
I.	ADA Material Testing Frequency Modifications JSP-23-01A	16
J.	Contractor Quality Control NJSP-15-42	17
K.	Access to Commercial and Private Properties	19
L.	Damage to Existing Pavement, Side Roads and Entrances	19
M.	Contractor Furnished Surveying and Staking	20
N.	Curb Ramps and Sidewalk	20
O.	Linear Grading for ADA Facilities	21
P.	Positive Drainage	22
Q.	Removal and Replacement of Traffic Signs	22
R.	Reinforced Concrete Sidewalk	23
S.	Rectangular Rapid Flashing Beacon Assembly	24
T.	ADA Compliant Moveable Barricade	26
U.	Seeding and Mulching Requirements	26
V.	Shaping Slopes Class III (Modified Material Requirements) NJSP-20-03B	27
W.	Expansion Joint Plate	27
X.	Utilities	27

	MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION 105 W. CAPITOL AVE. JEFFERSON CITY, MO 65102 Phone 1-888-275-6636
	If a seal is present on this sheet, JSP's have been electronically sealed and dated.
	JOB NUMBER: JNE0028 SHELBY COUNTY, MO DATE PREPARED: 11/20/2025
	ADDENDUM DATE:
Only the following items of the Job Special Provisions (Roadway) are authenticated by this seal: ALL	

Job No.: JNE0028
Route: 15, H
County: Shelby

JOB
SPECIAL PROVISION

A. General - Federal JSP-09-02L

1.0 Description. The Federal Government is participating in the cost of construction of this project. All applicable Federal laws, and the regulations made pursuant to such laws, shall be observed by the contractor, and the work will be subject to the inspection of the appropriate Federal Agency in the same manner as provided in Sec 105.10 of the Missouri Standard Specifications for Highway Construction with all revisions applicable to this bid and contract.

1.1 This contract requires payment of the prevailing hourly rate of wages for each craft or type of work required to execute the contract as determined by the Missouri Department of Labor and Industrial Relations and requires adherence to a schedule of minimum wages as determined by the United States Department of Labor. For work performed anywhere on this project, the contractor and the contractor's subcontractors shall pay the higher of these two applicable wage rates. State Wage Rates, Information on the Required Federal Aid Provisions, and the current Federal Wage Rates are available on the Missouri Department of Transportation web page at www.modot.org under "Doing Business with MoDOT", "Contractor Resources". Effective Wage Rates will be posted 10 days prior to the applicable bid opening. These supplemental bidding documents have important legal consequences. It shall be conclusively presumed that they are in the bidder's possession, and they have been reviewed and used by the bidder in the preparation of any bid submitted on this project.

1.2 The following documents are available on the Missouri Department of Transportation web page at www.modot.org under "Doing Business with MoDOT"; "Standards and Specifications". The effective version shall be determined by the letting date of the project.

General Provisions & Supplemental Specifications

Supplemental Plans to July 2025 Missouri Standard Plans
For Highway Construction

These supplemental bidding documents contain all current revisions to the published versions and have important legal consequences. It shall be conclusively presumed that they are in the bidder's possession, and they have been reviewed and used by the bidder in the preparation of any bid submitted on this project.

B. Contract Liquidated Damages

1.0 Description. Liquidated Damages for failure or delay in completing the work on time for this contract shall be in accordance with Sec 108.8. The liquidated damages include separate amounts for road user costs and contract administrative costs incurred by the Commission.

2.0 Period of Performance. Prosecution of work is expected to begin on the date specified below in accordance with Sec 108.2. Regardless of when the work begins on this contract, all work on all projects

Job No.: JNE0028
Route: 15, H
County: Shelby

shall be completed on or before the date specified below. Completion by this date shall be in accordance with the requirements of Sec 108.7.1.

Notice to Proceed: April 20, 2026
Contract Completion Date: December 1, 2026

2.1 Calendar Days and Completion Dates. Completion of the project is required as specified herein. The count of calendar days will begin on the date the contractor starts any construction operations on the project.

Project	Calendar Days	Daily Road User Cost
JNE0028	80	\$2300

3.0 Liquidated Damages for Contract Administrative Costs. Should the contractor fail to complete the work on or before the contract completion date specified in Section 2.0, or within the number of calendar days specified in Section 2.1, whichever occurs first, the contractor will be charged contract administrative liquidated damages in accordance with Sec 108.8 in the amount of \$250 per calendar day for each calendar day, or partial day thereof, that the work is not fully completed. For projects in combination, these damages will be charged in full for failure to complete one or more projects within the specified contract completion date or calendar days.

4.0 Liquidated Damages for Road User Costs. Should the contractor fail to complete the work on or before the contract completion date specified in Section 2.0, or within the number of calendar days specified in Section 2.1, whichever occurs first, the contractor will be charged road user costs in accordance with Sec 108.8 in the amount specified in Section 2.1 for each calendar day, or partial day thereof, that the work is not fully completed. These damages are in addition to the contract administrative damages and any other damages as specified elsewhere in this contract.

C. Work Zone Traffic Management

1.0 Description. Work zone traffic management shall be in accordance with applicable portions of Division 100 and Division 600 of the Standard Specifications, and specifically as follows.

1.1 Maintaining Work Zones and Work Zone Reviews. The Work Zone Specialist (WZS) shall maintain work zones in accordance with Sec 616.3.3 and as further stated herein. The WZS shall coordinate and implement any changes approved by the engineer. The WZS shall ensure all traffic control devices are maintained in accordance with Sec 616, the work zone is operated within the hours specified by the engineer and will not deviate from the specified hours without prior approval of the engineer. The WZS is responsible for managing work zone delay in accordance with these project provisions. When requested by the engineer, the WZS shall submit a weekly report that includes a review of work zone operations for the week. The report shall identify any problems encountered and corrective actions taken. Work zones are subject to unannounced inspections by the engineer and other departmental staff to corroborate the validity of the WZS's review and may require immediate corrective measures and/or additional work zone monitoring.

Job No.: JNE0028
Route: 15, H
County: Shelby

1.2 Work Zone Deficiencies. Failure to make corrections on time may result in the engineer suspending work. The suspension will be non-excusable and non-compensable regardless if road user costs are being charged for closures.

2.0 Traffic Management Schedule.

2.1 Traffic management schedules shall be submitted to the engineer for review prior to the start of work and prior to any revisions to the traffic management schedule. The traffic management schedule shall include the proposed traffic control measures, the hours traffic control will be in place, and work hours.

2.2 The traffic management schedule shall conform to the limitations specified in Sec 616 regarding lane closures, traffic shifts, road closures and other width, height and weight restrictions.

2.3 The engineer shall be notified as soon as practical of any postponement due to weather, material or other circumstances.

2.4 In order to ensure minimal traffic interference, the contractor shall schedule lane closures for the absolute minimum amount of time required to complete the work. Lanes shall not be closed until material is available for continuous construction and the contractor is prepared to diligently pursue the work until the closed lane is opened to traffic.

2.5 Traffic Congestion. The contractor shall, upon approval of the engineer, take proactive measures to reduce traffic congestion in the work zone. The contractor shall immediately implement appropriate mitigation strategies whenever traffic congestion reaches an excess of 10 minutes to prevent congestion from escalating to 15 minute or above threshold. If disruption of the traffic flow occurs and traffic is backed up in queues of 15 minute delays or longer, then the contractor shall immediately review the construction operations which contributed directly to disruption of the traffic flow and make adjustments to the operations to prevent the queues from reoccurring. Traffic delays may be monitored by physical presence on site or by utilizing real-time travel data through the work zone that generate text and/or email notifications where available. The engineer monitoring the work zone may also notify the contractor of delays that require prompt mitigation. The contractor may work with the engineer to determine what other alternative solutions or time periods would be acceptable.

2.5.1 Traffic Safety.

2.5.1.1 Recurring Congestion. Where traffic queues routinely extend to within 1000 feet of the ROAD WORK AHEAD, or similar, sign on a divided highway or to within 500 feet of the ROAD WORK AHEAD, or similar, sign on an undivided highway, the contractor shall extend the advance warning area, as approved by the engineer.

2.5.1.2 Non-Recurring Congestion. When traffic queues extend to within 1000 feet of the ROAD WORK AHEAD, or similar, sign on a divided highway or to within 500 feet of the ROAD WORK AHEAD, or similar, sign on an undivided highway infrequently, the contractor shall deploy a means of providing advance warning of the traffic congestion, as approved by the engineer. The warning location shall be no less than 1000 feet and no more than 0.5 mile in advance of the end of the traffic queue on divided highways and no less than 500 feet and no more than 0.5 mile in advance of the end of the traffic queue on undivided highways.

Job No.: JNE0028
Route: 15, H
County: Shelby

3.0 Work Hour Restrictions.

3.1 Except for emergency work, as determined by the engineer, and long term lane closures required by project phasing, all lanes shall be scheduled to be open to traffic during the five major holiday periods shown below, from 12:00 noon on the last working day preceding the holiday until 6:00 a.m. on the first working day subsequent to the holiday unless otherwise approved by the engineer.

Memorial Day
Labor Day
Thanksgiving
Christmas
New Year's Day

3.1.1 **Independence Day.** The lane restrictions specified in Section 3.1 shall also apply to Independence Day, except that the restricted periods shall be as follows:

When Independence Day falls on:	The Holiday is Observed on:	Halt Lane Closures beginning at:	Allow Lane Closures to resume at:
Sunday	Monday	Noon on Friday	6:00 a.m. on Tuesday
Monday	Monday	Noon on Friday	6:00 a.m. on Tuesday
Tuesday	Tuesday	Noon on Monday	6:00 a.m. on Wednesday
Wednesday	Wednesday	Noon on Tuesday	6:00 a.m. on Thursday
Thursday	Thursday	Noon on Wednesday	6:00 a.m. on Friday
Friday	Friday	Noon on Thursday	6:00 a.m. on Monday
Saturday	Friday	Noon on Thursday	6:00 a.m. on Monday

3.2 The contractor shall not perform any construction operation on the roadway, including the hauling of material within the project limits, during restricted periods, holiday periods or other special events specified in the contract documents.

4.0 Detours and Lane Closures.

4.1 When a changeable message sign (CMS) is provided, the contractor shall use the CMS to notify motorists of future traffic disruption and possible traffic delays one week before traffic is shifted to a detour or prior to lane closures. The CMS shall be installed at a location as approved or directed by the engineer. If a CMS with Communication Interface is required, then the CMS shall be capable of communication prior to installation on right of way. All messages planned for use in the work zone shall be approved and authorized by the engineer or its designee prior to deployment. When permanent dynamic message signs (DMS) owned and operated by MoDOT are located near the project, they may also be used to provide warning and information for the work zone. Permanent DMS shall be operated by the TMC, and any messages planned for use on DMS shall be approved and authorized by the TMC at least 72 hours in advance of the work.

4.2 At least one lane of traffic in each direction shall be maintained at all times except for brief intervals of time required when the movement of the contractor's equipment will seriously hinder the safe

Job No.: JNE0028
Route: 15, H
County: Shelby

movement of traffic. Periods during which the contractor will be allowed to interrupt traffic will be designated by the engineer.

5.0 Basis of Payment. No direct payment will be made to the contractor to recover the cost of equipment, labor, materials, or time required to fulfill the above provisions, unless specified elsewhere in the contract document. All authorized changes in the traffic control plan shall be provided for as specified in Sec 616.

D. Emergency Provisions and Incident Management JSP-90-11A

1.0 The contractor shall have communication equipment on the construction site or immediate access to other communication systems to request assistance from law enforcement or other emergency agencies for incident management. In case of traffic accidents or the need for law enforcement to direct or restore traffic flow through the job site, the contractor shall notify law enforcement or other emergency agencies immediately as needed. The area engineer's office shall also be notified when the contractor requests emergency assistance.

2.0 In addition to the 911 emergency telephone number for ambulance, fire or law enforcement services, the following agencies may also be notified for accident or emergency situation within the project limits.

Missouri Highway Patrol 660-385-2132		
City of Shelbyville	Shelby County	
Fire: N/A	Fire: 573-588-2599	
Police: 573-588-2220	Sheriff: 573-633-2161	

2.1 This list is not all inclusive. Notification of the need for wrecker or tow truck services will remain the responsibility of the appropriate law enforcement agency.

2.2 The contractor shall notify law enforcement and emergency agencies before the start of construction to request their cooperation and to provide coordination of services when emergencies arise during the construction at the project site. When the contractor completes this notification with law enforcement and emergency agencies, a report shall be furnished to the engineer on the status of incident management.

3.0 No direct pay will be made to the contractor to recover the cost of the communication equipment, labor, materials or time required to fulfill the above provisions.

E. Project Contact for Contractor/Bidder Questions

1.0 All questions concerning this project during the bidding process shall be forwarded to the project contact listed below.

Christopher Knapp, P.E., Project Contact
NE District

Job No.: JNE0028
Route: 15, H
County: Shelby

P.O. Box 1067
Hannibal, MO 63401

Telephone Number: 573-248-2586
Email: Christopher.knapp@modot.mo.gov

1.1 All questions concerning the bid document preparation can be directed to the Central Office – Design as listed below.

Telephone Number: (573) 751-2876
Email: BCS@modot.mo.gov

F. Supplemental Revisions JSP-18-01KK

- **Compliance with 2 CFR 200.216 – Prohibition on Certain Telecommunications and Video Surveillance Services or Equipment.**

The Missouri Highways and Transportation Commission shall not enter into a contract (or extend or renew a contract) using federal funds to procure or obtain equipment, services, or systems that uses covered telecommunications equipment or services as substantial or as critical technology as part of any system where the video surveillance and telecommunications equipment was produced by Huawei Technologies Company, ZTE Corporation, Hytera Communications Corporation, Hangzhou Hikvision Digital Technology Company, or Dahua Technology Company (or any subsidiary or affiliate of such entities).

- **Stormwater Compliance Requirements**

1.0 Description. This provision requires the contractor to provide a Water Pollution Control Manager (WPCM) for any project that includes land disturbance on the project site and the total area of land disturbance, both on the project site, and all Off-site support areas, is one (1) acre or more. Regardless of the area of Off-site disturbance, if no land disturbance occurs on the project site, these provisions do not apply. When a WPCM is required, all sections within this provision shall be applicable, including assessment of specified Liquidated Damages for failure to correct Stormwater Deficiencies, as specified herein. This provision is in addition to any other stormwater, environmental, and land disturbance requirements specified elsewhere in the contract.

1.1 Definitions. The project site is defined as all areas designated on the plans, including temporary and permanent easements. The project site is equivalent to the "permitted site", as defined in MoDOT's State Operating Permit. An Off-site area is defined as any location off the project site the contractor utilizes for a dedicated project support function, such as, but not limited to, staging area, plant site, borrow area, or waste area.

1.2 Reporting of Off-Site Land Disturbance. If the project includes any planned land disturbance on the project site, prior to the start of work, the contractor shall submit a written report to the engineer that discloses all Off-site support areas where land disturbance is planned, the total acreage of anticipated land disturbance on those sites, and the land disturbance permit number(s). Upon request by the

Job No.: JNE0028
Route: 15, H
County: Shelby

engineer, the contractor shall submit a copy of its land disturbance permit(s) for Off-site locations. Based on the total acreage of land disturbance, both on and Off-site, the engineer shall determine if these Stormwater Compliance Requirements shall apply. The Contractor shall immediately report any changes to the planned area of Off-site land disturbance. The Contractor is responsible for obtaining its own separate land disturbance permit for Off-site areas.

2.0 Water Pollution Control Manager (WPCM). The Contractor shall designate a competent person to serve as the Water Pollution Control Manager (WPCM) for projects meeting the description in Section 1.0. The Contractor shall ensure the WPCM completes all duties listed in Section 2.1.

2.1 Duties of the WPCM:

- (a) Be familiar with the stormwater requirements including the current MoDOT State Operating Permit for construction stormwater discharges/land disturbance activities; MoDOT's statewide Stormwater Pollution Prevention Plan (SWPPP); the Corps of Engineers Section 404 Permit, when applicable; the project specific SWPPP, the Project's Erosion & Sediment Control Plan; all applicable special provisions, specifications, and standard drawings; and this provision;
- (b) Successfully complete the MoDOT Stormwater Training Course within the last 4 years. The MoDOT Stormwater Training is a free online course available at MoDOT.org;
- (c) Attend the Pre-Activity Meeting for Grading and Land Disturbance and all subsequent Weekly Meetings in which grading activities are discussed;
- (d) Oversee and ensure all work is performed in accordance with the Project-specific SWPPP and all updates thereto, or as designated by the engineer;
- (e) Review the project site for compliance with the Project SWPPP, as needed, from the start of any grading operations until final stabilization is achieved, and take necessary actions to correct any known deficiencies to prevent pollution of the waters of the state or adjacent property owners prior to the engineer's weekly inspections;
- (f) Review and acknowledge receipt of each MoDOT Inspection Report (Land Disturbance Inspection Record) for the Project within forty eight (48) hours of receiving the report and ensure that all Stormwater Deficiencies noted on the report are corrected as soon as possible, but no later than stated in Section 5.0.

3.0 Pre-Activity Meeting for Grading/Land Disturbance and Required Hold Point. A Pre-Activity meeting for grading/land disturbance shall be held prior to the start of any land disturbance operations. No land disturbance operations shall commence prior to the Pre-Activity meeting except work necessary to install perimeter controls and entrances. Discussion items at the pre-activity meeting shall include a review of the Project SWPPP, the planned order of grading operations, proposed areas of initial disturbance, identification of all necessary BMPs that shall be installed prior to commencement of grading operations, and any issues relating to compliance with the Stormwater requirements that could arise in the course of construction activity at the project.

3.1 Hold Point. Following the pre-activity meeting for grading/land disturbance and subsequent installation of the initial BMPs identified at the pre-activity meeting, a Hold Point shall occur prior to the

Job No.: JNE0028
Route: 15, H
County: Shelby

start of any land disturbance operations to allow the engineer and WPCM the time needed to perform an on-site review of the installation of the BMPs to ensure compliance with the SWPPP is met. Land disturbance operations shall not begin until authorization is given by the engineer.

4.0 Inspection Reports. Weekly and post run-off inspections will be performed by the engineer and each Inspection Report (Land Disturbance Inspection Record) will be entered into a web-based Stormwater Compliance database. The WPCM will be granted access to this database and shall promptly review all reports, including any noted deficiencies, and shall acknowledge receipt of the report as required in Section 2.1 (f.).

5.0 Stormwater Deficiency Corrections. All stormwater deficiencies identified in the Inspection Report shall be corrected by the contractor within 7 days of the inspection date or any extended period granted by the engineer when weather or field conditions prohibit the corrective work. If the contractor does not initiate corrective measures within 5 calendar days of the inspection date or any extended period granted by the engineer, all work shall cease on the project except for work to correct these deficiencies, unless otherwise allowed by the engineer. All impact costs related to this halting of work, including, but not limited to stand-by time for equipment, shall be borne by the Contractor. Work shall not resume until the engineer approves the corrective work.

5.1 Liquidated Damages. If the Contractor fails to complete the correction of all Stormwater Deficiencies listed on the MoDOT Inspection Report within the specified time limit, the Commission will be damaged in various ways, including but not limited to, potential liability, required mitigation, environmental clean-up, fines, and penalties. These damages are not reasonably capable of being computed or quantified. Therefore, the contractor will be charged with liquidated damages specified in the amount of \$2,000 per day for failure to correct one or more of the Stormwater Deficiencies listed on the Inspection Report within the specified time limit. In addition to the stipulated damages, the stoppage of work shall remain in effect until all corrections are complete.

6.0 Basis of Payment. No direct payment will be made for compliance with this provision.

- ***Delete Sec 106.9 in its entirety and substitute the following:***

106.9 Buy America Requirements.

Buy America Requirements are waived if the total amount of Federal financial assistance applied to the project, through awards or subawards, is below \$500,000.

106.9.1 Buy America Requirements for Iron or Steel Products.

The contractor's attention is directed to Title 23 CFR 635.410 *Buy America Requirements*. Where articles, materials or supplies that consist wholly or predominantly of iron or steel or a combination of both are to be permanently incorporated into the contract work, steel and iron material shall be manufactured, from the initial melting stage through the application of coatings, in the USA except for "minimal use" as described herein. Predominantly of iron or steel or a combination of both means that the cost of the iron and steel content exceeds 50 percent of the total cost of all its components. Under a general waiver from FHWA the use of pig iron and processed, pelletized, and reduced iron ore manufactured outside of the USA will be permitted in the domestic manufacturing process for steel or iron material.

Job No.: JNE0028
Route: 15, H
County: Shelby

106.9.1.1 Any sources other than the USA as defined will be considered foreign. The required domestic manufacturing process shall include formation of ingots and any subsequent process. Coatings shall include any surface finish that protects or adds value to the product.

106.9.1.2 "Minimal use" of foreign steel, iron or coating processes will be permitted, provided the cost of such products does not exceed 1/10 of one percent (0.1 percent) of the total contract cost or \$2,500.00, whichever is greater. If foreign steel, iron, or coating processes are used, invoices to document the cost of the foreign portion, as delivered to the project, shall be provided and the engineer's written approval obtained prior to placing the material in any work.

106.9.1.3 Buy America requirements include a step certification for all fabrication processes of all steel or iron materials that are accepted per Sec 1000. The AASHTO Product Evaluation and Audit Solutions compliance program verifies that all steel and iron products fabrication processes conform to 23 CFR 635.410 Buy America Requirements and is an acceptable standard per 23 CFR 635.410(d). AASHTO Product Evaluation and Audit Solutions compliant suppliers will not be required to submit step certification documentation with the shipment for some selected steel and iron materials. The AASHTO Product Evaluation and Audit Solutions compliant supplier shall maintain the step certification documentation on file and shall provide this documentation to the engineer upon request.

106.9.1.3.1 Items designated as Category 1 will consist of steel girders, piling, and reinforcing steel installed on site. Category 1 items require supporting documentation prior to incorporation into the project showing all steps of manufacturing, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410 Buy America Requirements. This includes the Mill Test Report from the original producing steel mill and certifications documenting the manufacturing process for all subsequent fabrication, including coatings. The certification shall include language that certifies all steel and iron materials permanently incorporated in this project was procured and processed domestically and all manufacturing processes, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410.

106.9.1.3.2 Items designated as Category 2 will include all other steel or iron products not in Category 1 and permanently incorporated in the project. Category 2 items shall consist of, but not be limited to items such as fencing, guardrail, signing, lighting and signal supports. The prime contractor is required to submit a material of origin form certification prior to incorporation into the project from the fabricator for each item that the product is domestic. The Certificate of Materials Origin form ([link to certificate form](#)) from the fabricator must show all steps of manufacturing, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410 Buy America Requirements and be signed by a fabricator representative. The engineer reserves the right to request additional information and documentation to verify that all Buy America requirements have been satisfied. These documents shall be submitted upon request by the engineer and retained for a period of 3 years after the last reimbursement of the material.

106.9.1.3.3 Any minor miscellaneous steel or iron items that are not included in the materials specifications shall be certified by the prime contractor as being procured domestically. Examples of these items would be bolts for sign posts, anchorage inserts, etc. The certification shall read "I certify that all steel and iron materials permanently incorporated in this project during all manufacturing processes, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410 Buy America Requirements procured and processed domestically in accordance with

Job No.: JNE0028
Route: 15, H
County: Shelby

CFR Title 23 Section 635.410 Buy America Requirements. Any foreign steel used was submitted and accepted under minor usage". The certification shall be signed by an authorized representative of the prime contractor.

106.9.1.4 When permitted in the contract, alternate bids may be submitted for foreign steel and iron products. The award of the contract when alternate bids are permitted will be based on the lowest total bid of the contract based on furnishing domestic steel or iron products or 125 percent of the lowest total bid based on furnishing foreign steel or iron products. If foreign steel or iron products are awarded in the contract, domestic steel or iron products may be used; however, payment will be at the contract unit price for foreign steel or iron products.

106.9.2 Buy America Requirements for Construction Materials other than iron or steel products. Construction materials mean articles, materials, or supplies that consist of only one of the items listed. Minor additions of articles, materials, supplies, or binding agents to a construction material do not change the categorization of the construction material. Upon request by the engineer, the contractor shall submit a domestic certification for all construction materials listed that are incorporated into the project.

- (a) Non-ferrous metals
- (b) Plastic and Polymer-based products (including polyvinylchloride, composite building materials, and polymers used in fiber optic cables)
- (c) Glass (including optic glass)
- (d) Fiber optic cable (including drop cable)
- (e) Optical fiber
- (f) Lumber
- (g) Engineered wood
- (h) Drywall

106.9.3 Buy America Requirements for Manufactured Products.

Manufactured products mean articles, materials or supplies that have been processed into a specific form and shape, or combined with other articles, materials or supplies to create a product with different properties than the individual articles, materials or supplies. If an item is classified as an iron or steel product, an excluded material, or other product category as specified by law or in 2 CFR part 184, then it is not a manufactured product. However, an article, material or supply classified as a manufactured product may include components that are iron or steel products, excluded materials, or other product categories as specified by law or in 2 CFR part 184. Mixtures of excluded materials delivered to a work site without final form for incorporation into a project are not a manufactured product.

106.9.3.1 Produced in the United States, in the case of manufactured products, means:

- (A) For projects obligated on or after October 1, 2025, the product was manufactured in the United States; and
- (B) For projects obligated on or after October 1, 2026, the product was manufactured in the United States and the cost of the components of the manufactured product that are mined, produced, or manufactured in the United States is greater than 55 percent of the total cost of all components of the manufactured product.

Job No.: JNE0028
Route: 15, H
County: Shelby

106.9.3.2 (i) With respect to precast concrete products that are classified as manufactured products, components of precast concrete products that consist wholly or predominantly of iron or steel or a combination of both shall meet the requirements of paragraph (b) of this section. The cost of such components shall be included in the applicable calculation for purposes of determining whether the precast concrete product is produced in the United States.

(ii) With respect to intelligent transportation systems and other electronic hardware systems that are installed in the highway right of way or other real property and classified as manufactured products, the cabinets or other enclosures of such systems that consist wholly or predominantly of iron or steel or a combination of both shall meet the requirements of paragraph (b) of this section. The cost of cabinets or other enclosures shall be included in the applicable calculation for purposes of determining whether systems referred to in the preceding sentence are produced in the United States.

106.9.4 Waiver for De Minimis Costs for Manufactured and Construction Materials other than iron or steel products.

"The total value of the non-compliant products is no more than the lesser of \$1,000,000 or 5% of total applicable costs for the project." The contractor shall submit to the engineer any non-domestic materials and their total material cost to the engineer. The contractor and the engineer will both track these totals to assure that the minimal usage allowance is not exceeded.

- **Third-Party Test Waiver for Concrete Aggregate**

1.0 Description. Third party tests may be allowed for determining the durability factor for concrete pavement and concrete masonry aggregate.

2.0 Material. All aggregate for concrete shall be in accordance with Sec 1005.

2.1 MoDOT personnel shall be present at the time of sampling at the quarry. The aggregate sample shall be placed in an approved tamper-evident container (provided by the quarry) for shipment to the third-party testing facility.

2.2 AASHTO T 161 Method B Resistance of Concrete to Rapid Freezing and Thawing, shall be used to determine the aggregate durability factor. All concrete beams for testing shall be 3-inch wide by 4-inch deep by 16-inch long or 3.5-inch wide by 4.5-inch deep by 16-inch long. All beams for testing shall receive a 35-day wet cure fully immersed in saturated lime water prior to initiating the testing process.

2.3 Concrete test beams shall be made using a MoDOT approved concrete pavement mix design.

3.0 Testing Facility Requirements. All third-party test facilities shall meet the requirements outlined in this provision.

3.1 The testing facility shall be AASHTO accredited.

3.1.1 For tests ran after January 1, 2025, accreditation documentation shall be on file with the Construction and Materials Division prior to any tests being performed.

Job No.: JNE0028
Route: 15, H
County: Shelby

3.1.2 Construction and Materials Division may consider tests completed prior to January 1, 2025, to be acceptable if all sections of this provision are met, with the exception of 3.1.1. Accreditation documentation shall be provided with the test results for tests completed prior to January 1, 2025. No tests completed prior to September 1, 2024, will be accepted.

3.2 The testing facility shall provide their testing process, list of equipment, equipment calibration documentation, and testing certifications or qualifications of technicians performing the AASHTO T 161 Procedure B tests. The testing facility shall provide details on their freezing and thawing apparatus including the time and temperature profile of their freeze-thaw chamber. The profile shall include the temperature set points throughout the entirety of the freeze-thaw cycle. The profile shall show the cycle time at which the apparatus drains/fills with water and the cycle time at which the apparatus begins cooling the specimens.

3.3 Results, no more than five years old, from the third-party test facility shall compare within ± 2.0 percent of an independent test from another AASHTO accredited test facility or with MoDOT test records, in order to be approved for use (e.g. test facility results in a durability factor of 79, MoDOT's recent durability test factor is 81; this compared within ± 2 percent). The independent testing facility shall be in accordance with this provision. The comparison test can be from a different sample of the same ledge combination.

3.4 When there is a dispute between the third party durability test results and MoDOT durability test results, the MoDOT durability test result shall govern.

3.5 Test results shall be submitted to MoDOT's Construction and Materials division electronically for final approval. Test results shall include raw data for all measurements of relative dynamic modulus of elasticity and percent length change for each individual concrete specimen. Raw data shall include initial measurements made at zero cycles and every subsequent measurement of concrete specimens. Raw data shall include the cycle count and date each measurement was taken. Test results shall also include properties of the concrete mixture as required by AASHTO T 161. This shall include the gradation of the coarse aggregate sample. If AASHTO T 152 is used to measure fresh air content, then the aggregate correction factor for the mix determined in accordance with AASHTO T 152 shall also be included.

4.0 Method of Measurement. There is no method of measurement for this provision. The testing requirements and number of specimens shall be in accordance with AASHTO T 161 Procedure B.

5.0 Basis of Payment. No direct payment will be made to the contractor or quarry to recover the cost of aggregate samples, sample shipments, testing equipment, labor to prepare samples or test samples, or developing the durability report.

- **Delete paragraph 15.0 of the General Provision Disadvantaged Business Enterprise (DBE) Program Requirements and substitute the following:**

15.0 Bidder's List Quote Summary. MoDOT is a recipient of federal funds and is required by 49 CFR 26.11 to provide data about its DBE program. All bidders who seek to work on federally assisted contracts must submit data about all DBE and non-DBEs in accordance with Sec 102.7.9. MoDOT will not compare the submitted Bidder's List Quote Summary to any other documents or submittals, pre or post award. All

Job No.: JNE0028
Route: 15, H
County: Shelby

information will be used by MoDOT in accordance with 49 CFR 26.11 for reporting to USDOT and to aid in overall DBE goal setting.

- **Add Sec 102.7.9 to include the following:**

102.7.9 Bidder's List Quote Summary. Each bidder shall submit with each bid a summary of all subcontractors, material suppliers, and service providers (e.g. hauling) considered on federally funded projects pursuant to 49 CFR 26.11. The bidder will provide the firm's name, the corresponding North American Industry Classification System (NAICS) code(s) the firm(s) were considered for, and whether or not they were used in the bid. The information submitted should be the most complete information available at the time of bid. The information shall be disclosed on the Bidder's List Quote Summary form provided in the bidding documents and submitted in accordance with Sec 102.10. Failure to disclose this information may result in a bid being declared irregular.

G. ADA Compliance and Final Acceptance of Constructed Facilities JSP-10-01C

1.0 Description. The contractor shall comply with all laws pertaining to the Americans with Disabilities Act (ADA) during construction of pedestrian facilities on public rights of way for this project. An ADA Checklist is provided herein to be utilized by the contractor for verifying compliance with the ADA law. The contractor is expected to familiarize himself with the plans involving pedestrian facilities and the ADA Post Construction Checklist prior to performing the work.

2.0 ADA Checklist. The contractor can locate the ADA Checklist form on the Missouri Department of Transportation website:

<https://www.modot.org/forms-contractor-use>

2.1 The ADA Checklist is not to be considered all-inclusive, nor does it supersede any other contract requirements. The ADA checklist is a required guide for the contractor to use during the construction of the pedestrian facilities and a basis for the commission's acceptance of work. Prior to work being performed, the contractor shall bring to the engineer's attention any planned work that is in conflict with the design or with the requirement shown in the checklist. This notification shall be made in writing. Situations may arise where the checklist may not fully address all requirements needed to construct a facility to the full requirements of current ADA law. In those situations, the contractor shall propose a solution to the engineer that is compliant with current ADA law using the following hierarchy of resources: 2010 ADA Standards for Accessible Design, Draft Public Rights of Way Accessibility Guidelines (PROWAG) dated November 23, 2005, MoDOT's Engineering Policy Guidelines (EPG), or a solution approved by the U.S. Access Board.

2.2 It is encouraged that the contractor monitor the completed sections of the newly constructed pedestrian facilities in attempts to minimize negative impacts that his equipment, subcontractors or general public may have on the work. Completed facilities must comply with the requirements of ADA and the ADA Checklist or have documented reasons for the non-compliant items to remain.

Job No.: JNE0028
Route: 15, H
County: Shelby

3.0 Coordination of Construction.

3.1 Prior to construction and/or closure on an existing pedestrian path of travel, the contractor shall submit a schedule of work to be constructed, which includes location of work performed, the duration of time the contractor expects to impact the facility and an accessible signed pedestrian detour compliant with MUTCD Section 6D that will be used during each stage of construction. This plan shall be submitted to the engineer for review and approval at or prior to the pre-construction conference. Accessible signed detours shall be in place prior to any work being performed that has the effect of closing an existing pedestrian travel way.

3.2 When consultant survey is included in the contract, the contractor shall use their survey crews to verify that the intended design can be constructed to the full requirements as established in the 2010 ADA Standards. When 2010 ADA Standards do not give sufficient information to construct the contract work, the contractor shall refer to the PROWAG.

3.3 When consultant survey is not included in the contract, the contractor shall coordinate with the engineer, prior to construction, to determine if additional survey will be required to confirm the designs constructability.

4.0 Final Acceptance of Work. The contractor shall provide the completed ADA Checklist to the engineer at the semi-final inspection. ADA improvements require final inspection and compliance with the ADA requirements and the ADA Checklist. Each item listed in the checklist must receive either a "YES" or an "N/A" score. Any item receiving a "NO" will be deemed non-compliant and shall be corrected at the contractor's expense unless deemed otherwise by the engineer. Documentation must be provided about the location of any non-compliant items that are allowed to remain at the end of the construction project. Specific details of the non-compliant items, the ADA requirement that the work was not able to comply with, and the specific reasons that justify the exception are to be included with the completed ADA Checklist provided to the engineer.

4.1 Slope and grade measurements shall be made using a properly calibrated, 2 foot long, electronic digital level approved by the engineer.

5.0 Basis of Payment. The contractor will receive full pay of the contract unit cost for all sidewalk, ramp, curb ramp, median, island, approach work, cross walk striping, APS buttons, pedestrian heads, detectible warning systems and temporary traffic control measures that are completed during the current estimate period as approved by the engineer. Based upon completion of the ADA Checklist, the contractor shall complete any necessary adjustments to items deemed non-compliant as directed by the engineer.

5.1 No direct payment will be made to the contractor to recover the cost of equipment, labor, materials, or time required to fulfill the above provisions, unless specified elsewhere in the contract documents.

H. Lump Sum Temporary Traffic Control JSP-22-01B

1.0 Delete Sec 616.11 and insert the following:

Job No.: JNE0028
Route: 15, H
County: Shelby

616.11 Method of Measurement. Measurement for relocation of post-mounted signs will be made to the nearest square foot of sign area only for the signs designated for payment on the plans. All other sign relocations shall be incidental. Measurement for construction signs will be made to the nearest square foot of sign area. Measurement will be made per each for each of the temporary traffic control items provided in the contract.

616.11.1 Lump Sum Temporary Traffic Control. No measurement will be made for temporary traffic control items grouped and designated to be paid per lump sum. The list of lump sum items provided in the plans or contract is considered an approximation and may be subject to change based on field conditions. This is not a complete list and may exclude quantities for duplicate work zone packages used in simultaneous operations. The contractor shall provide all traffic control devices required to execute the provided traffic control plans for each applicable operation, stage, or phase. No measurement will be made for any additional signs or devices needed except for changes in the traffic control plan directed by the engineer.

2.0 Delete Sec 616.12 and insert the following:

616.12 Basis of Payment. All temporary traffic control devices authorized for installation by the engineer will be paid for at the contract unit price for each of the pay items included in the contract. Whether the devices are paid individually, or per lump sum, no direct payment will be made for the following:

- (a) Incidental items necessary to complete the work, unless specifically provided as a pay item in the contract.
- (b) Installing, operating, maintaining, cleaning, repairing, removing, or replacing traffic control devices.
- (c) Covering and uncovering existing signs and other traffic control devices.
- (d) Relocating temporary traffic control devices, including permanent traffic control devices temporarily relocated, unless specifically included as a pay item in the contract.
- (e) Worker apparel.
- (f) Flaggers, AFADs, PFDs, pilot vehicles, and appurtenances at flagging stations.
- (g) Furnishing, installing, operating, maintaining, and removing construction-related vehicle and equipment lighting.
- (h) Construction and removal of temporary equipment crossovers, including restoring pre-existing crossovers.
- (i) Provide and maintaining work zone lighting and work area lighting.

616.12.1 Lump Sum Temporary Traffic Control. Traffic control items grouped together in the contract or plans for lump sum payment shall be paid incrementally per Sec 616.12.1.1. Alternately, upon request from the contractor, the engineer will consider a modified payment schedule that more accurately reflects completion of traffic control work. No payment will be made for any additional signs or devices needed

Job No.: JNE0028
Route: 15, H
County: Shelby

except for changes in the traffic control plan directed by the engineer. Additional items directed by the engineer will be paid for in accordance with Sec 109.4. No adjustment to the price will be made for overruns or underruns of other work or for added work that is completed within existing work zones.

616.12.1.1 Partial payments. For purposes of determining partial payments, the original contract amount will be the total dollar value of all original contract line items less the price for Lump Sum Temporary Traffic Control (LSTTC). If the contract includes multiple projects, this determination will be made for each project. Partial payments will be made as follows:

(a) The first payment will be made when five percent of the original contract amount is earned. The payment will be 50 percent of the price for LSTTC, or five percent of the original contract amount, whichever is less.

(b) The second payment will be made when 50 percent of the original contract amount is earned. The payment will be 25 percent of the price for LSTTC, or 2.5 percent of the original contract amount, whichever is less.

(c) The third payment will be made when 75 percent of the original contract amount is earned. The payment will be 20 percent of the price for LSTTC, or two percent of the original contract amount, whichever is less.

(d) Payment for the remaining balance due for LSTTC will be made when the contract has been accepted for maintenance or earlier as approved by the engineer.

616.12.1.2 Temporary traffic control will be paid for at the contract lump sum price for Item:

Item No.	Unit	Description
616-99.01	Lump Sum	Misc. Lump Sum Temporary Traffic Control

I. ADA Material Testing Frequency Modifications JSP-23-01A

1.0 Description. This provision revises the Inspection and Testing Plan (ITP) for the construction of ADA compliant features to better match the nature of the work. The minimum Quality Control (QC) testing frequencies shall be as stated in these provisions.

2.0 Compaction Test on Base Rock Under Sidewalk, Curb Ramps and Paved Approaches. (Revises ITP Sec 304.3.4) The required test frequency shall be one per 600 tons.

3.0 Gradation Test on Base Rock Under Sidewalk, Curb Ramps and Paved Approaches. (Revises ITP Sec 304.4.1) The required frequency shall be one per 500 tons.

4.0 Concrete Plant Checklists. (Revises ITP Sec 501) Submittal of the 501 Concrete Plant Checklist shall be once per week when the contractor is only pouring curb, sidewalk, paved approaches, and curb ramps.

Job No.: JNE0028
Route: 15, H
County: Shelby

5.0 Concrete Median, Median Strip, Sidewalk, Curb Ramps, Steps and Paved Approaches. The required frequency shall remain as stated in ITP Sec 608 and further detailed in Sec 608.3.7.

6.0 Concrete Curb. (Revises ITP Sec 609 only for Concrete Curb) For concrete curb, the required frequency shall be equivalent to ITP Sec 608 (concrete median, median strip, sidewalk, curb ramps, steps, and paved approaches), and Sec 608.3.7.

J. Contractor Quality Control NJSP-15-42

1.0 The contractor shall perform Quality Control (QC) testing in accordance with the specifications and as specified herein. The contractor shall submit a Quality Control Plan (QC Plan) to the engineer for approval that includes all items listed in Section 2.0, prior to beginning work.

2.0 Quality Control Plan.

- A. The name and contact information of the person in responsible charge of the QC testing.
- B. A list of the QC technicians who will perform testing on the project, including the fields in which they are certified to perform testing.
- C. A proposed independent third party testing firm for dispute resolution, including all contact information.
- D. A list of Hold Points, when specified by the engineer.
- E. The MoDOT Standard Inspection and Testing Plan (ITP). This shall be the version that is posted at the time of bid on the MoDOT website (www.modot.org/quality).

3.0 Quality Control Testing and Reporting. Testing shall be performed per the test method and frequency specified in the ITP. All personnel who perform sampling or testing shall be certified in the MoDOT Technician Certification Program for each test that they perform.

3.1 Reporting of Test Results. All QC test reports shall be submitted as soon as practical, but no later than the day following the test. Test data shall be immediately provided to the engineer upon request at any time, including prior to the submission of the test report. No payment will be made for the work performed until acceptable QC test results have been received by the engineer and confirmed by QA test results.

3.1.1 Test results shall be reported on electronic forms provided by MoDOT. Forms and Contractor Reporting Excel2Oracle Reports (CRE2O) can be found on the MoDOT website. All required forms, reports and material certifications shall be uploaded to a Microsoft SharePoint® site provided by MoDOT and organized in the file structure established by MoDOT.

3.2 Non-Conformance Reporting. A Non-Conformance Report (NCR) shall be submitted by the contractor when the contractor proposes to incorporate material into the work that does not meet the testing requirements or for any work that does not comply with the contract terms or specifications.

3.2.1 Non-Conformance Reporting shall be submitted electronically on the Non-Conformance Report form provided on the MoDOT Website. The NCR shall be uploaded to the MoDOT SharePoint® site and an email notification sent to the engineer.

Job No.: JNE0028
Route: 15, H
County: Shelby

3.2.2 The contractor shall propose a resolution to the non-conforming material or work. Acceptance of a resolution by the engineer is required before closure of the non-conformance report.

4.0 Work Planning and Scheduling.

4.1 Two-week Schedule. Each week, the contractor shall submit to the engineer a schedule that outlines the planned project activities for the following two-week period. The two-week schedule shall detail all work and traffic control events planned for that period and any Hold Points specified by the engineer.

4.2 Weekly Meeting. When work is active, the contractor shall hold a weekly project meeting with the engineer to review the planned activities for the following week and to resolve any outstanding issues. Attendees shall include the engineer, the contractor superintendent or project manager and any foreman leading major activities. This meeting may be waived when, in the opinion of the engineer, a meeting is not necessary. Attendees may join the meeting in person, by phone or video conference.

4.3 Pre-Activity Meeting. A pre-activity meeting is required in advance of the start of each new activity, except when waived by the engineer. The purpose of this meeting is to review construction details of the new activity. At a minimum, the discussion topics shall include: safety precautions, QC testing, traffic impacts, and any required Hold Points. Attendees shall include the engineer, the contractor superintendent and the foreman who will be leading the new activity. Pre-activity meetings may be held in conjunction with the weekly project meeting.

4.4 Hold Points. Hold Points are events that require approval by the engineer prior to continuation of work. Hold Points occur at definable stages of work when, in the opinion of the engineer, a review of the preceding work is necessary before continuation to the next stage.

4.4.1 A list of typical Hold Point events is available on the MoDOT website. Use of the Hold Point process will only be required for the project-specific list of Hold Points, if any, that the engineer submits to the contractor in advance of the work. The engineer may make changes to the Hold Point list at any time.

4.4.2 Prior to all Hold Point inspections, the contractor shall verify the work has been completed in accordance with the contract and specifications. If the engineer identifies any corrective actions needed during a Hold Point inspection, the corrections shall be completed prior to continuing work. The engineer may require a new Hold Point to be scheduled if the corrections require a follow-up inspection. Rescheduling of Hold Points require a minimum 24-hour advance notification from the contractor unless otherwise allowed by the engineer.

5.0 Quality Assurance Testing and Inspection. MoDOT will perform quality assurance testing and inspection of the work, except as specified herein. The contractor shall utilize the inspection checklists provided in the ITP as a guide to minimize findings by MoDOT inspection staff. Submittal of completed checklists is not required, except as specified in 5.1.

5.1 Inspection and testing required in the production of concrete for the project shall be the responsibility of the contractor. Submittal of the 501 Concrete Plant Checklist is required.

6.0 Basis of Payment. No direct payment will be made for compliance with this provision.

Job No.: JNE0028
Route: 15, H
County: Shelby

K. Access to Commercial and Private Properties

1.0 Description. This improvement is located within a commercial and residential area. While working on entrances or adjacent properties, the contractor shall make every reasonable effort to minimize any interference to the properties and to pursue the work diligently. Under no circumstances shall the contractor completely block ingress/egress to and from businesses during the normal business hours of each business unless as approved in advance by the property owner and the engineer.

1.1 The contractor shall notify the engineer seven (7) calendar days prior to any area of sidewalk or entrance construction. After notification from the contractor, the engineer will contact each property owner at least one week prior to any sidewalk or entrance construction within their property limits to advise them of the work that will take place and the timeframe of the work.

2.0 Construction Requirements. If there exists more than one entrance to the property, the contractor shall keep a minimum of one entrance to that property completely open at all times unless approved in advance by the property owner and the engineer. If there is only one entrance, the contractor shall only construct one half of the entrance at a time. The minimum compressive strength of the concrete shall be 2500 psi for light traffic (residential) and 3000 psi for commercial traffic before allowing access.

3.0 Liquidated Damages Specified. If the entire entrance is not complete and open to traffic within seven (7) calendar days, the Commission, the traveling public, and state and local police and governmental authorities will be damaged in various ways, including but not limited to, increased construction administration cost, potential liability, traffic and traffic flow regulation cost, traffic congestion and motorist delay, with its resulting cost to the traveling public. These damages are not reasonably capable of being computed or quantified. Therefore, the contractor will be charged with liquidated damages specified in the amount of \$250.00 per day for each full day that an entrance is not complete and open to traffic in excess of the limitation as specified elsewhere in the special provision.

4.0 Basis of Payment. No direct payment will be made to the contractor to recover the cost of equipment, labor, materials or time required to fulfill the above provisions, unless specified elsewhere in the contract documents.

L. Damage to Existing Pavement, Side Roads and Entrances

1.0 Description. This work shall consist of repairing any damage to existing pavement, curb, ramps and/or shoulders caused by contractor operations. This shall include damage caused either directly or indirectly by contractor operations, including but not limited to, damage caused by the traffic during contractor operations.

2.0 Construction Requirements. Any cracking, gouging, or other damage to the existing pavement, curb, ramps and/or shoulders, side roads, or entrances from general construction shall be repaired within twenty four (24) hours of the time of damage at the contractor's expense. Repair of the damaged pavement, shoulders, side roads, or entrances shall be as determined by the engineer.

3.0 Method of Measurement. No measurement of damaged pavement, curb, ramps or shoulder areas as described above shall be made.

Job No.: JNE0028
Route: 15, H
County: Shelby

4.0 Basis of Payment. No payment will be made for repairs to existing pavement, curb, ramps and/or shoulders damaged by contractor operations.

M. Contractor Furnished Surveying and Staking

In addition to the requirements of Section 627 of the Missouri Standard Specifications for Highway Construction, the following shall apply:

1.0 Description. The contractor will be responsible for all layout required on the project. Any and all staking required to ensure that improvements installed on this project meet the ADA requirements is the sole responsibility of the contractor. This responsibility will include, but not limited to the following: Construction signs, curb ramp, landing, and sidewalk construction, truncated dome installation, quantity verification, curb construction, pavement marking, pedestrian signal modifications, median strip/island construction and modifications, etc.

1.1 The above list is not all inclusive. The contractor shall have the primary responsibility for these operations. The contractor shall provide the Resident Engineer with a staking plan layout for approval prior to the installation of signs. The RE will also provide assistance during this layout provided a request is submitted to the RE or Construction Project Manager 48 hours in advance. This will ensure that all permanently mounted traffic control devices remain consistent with District policy and avoid re-staking. If the contractor installs any signs without engineer approval, all costs associated with re-staking and/or relocation will be at the contractor's expense.

1.2 The intent of this provision is to increase the quality of our work zones and minimize negative impacts to the contractor's schedule that can result from delays in staking.

1.3 Any adjustments to the plan quantities or line numbers established in the contract shall be approved by the Engineer.

2.0 Basis of Payment. No direct payment will be made to cover the costs associated with these additional requirements. All costs will be considered completely covered by the unit bid price submitted for Contractor Furnished Surveying and Staking.

N. Curb Ramps and Sidewalk

1.0 Description. Construction of concrete curbs, aprons, curb ramps, transition areas, sidewalk and landings shall be in accordance with applicable portions of Sections 608 & 609 of the Standard Specification and Standard Plans for Highway Construction 608.10, as shown on the plans, and meet ADA requirements.

2.0 Construction Requirements. This work shall include, but is not limited to, sidewalk construction including landings, joint construction, aggregate base, compaction, apron modifications, transition area, curb ramp construction, Type S Curb or Type A Curb installation (as required), tie bars or dowel bars (as required), clean-up, etc. for each location shown on the plans.

The following requirements shall be applicable to construction of this project:

Job No.: JNE0028
Route: 15, H
County: Shelby

- Existing curb, curb and gutter, sidewalk, shoulders, etc. that are adjacent to a designated curb ramp and/or sidewalk improvement area that is damaged during construction shall be replaced/repared to match existing materials and condition.
- Variable height curb along the roadside may be constructed monolithic or separate depending on construction operations. Integral curb shall be doweled to the existing gutter or pavement.
- Integral or Type S-curb shall be used along the existing right-of-way when constructing curb ramps as shown on the plans. The cost of the curb is included in pay limits of the curb ramp.
- The transition area shall be 8" thick and tied to the existing roadway pavement and existing paved approach or sidewalk it is matching.
- Curing compound for all concrete construction shall be a clear or translucent color. The white pigmented option or other colored compound will not be allowed.
- Adjacent grass areas, landscaping, irrigation lines, pavement, etc. disturbed by curb ramp or sidewalk construction shall be repaired or replaced to match or exceed existing conditions. Seed/mulch quantities are included for adjacent areas. More or less seed/mulch may be required depending on actual field conditions.

3.0 Method of Measurement. Curb ramps and concrete sidewalk will be measured to the nearest 1/10 square yard. Measurement of incidental items required to complete all aspects of construction for the above noted items at each new curb ramp and sidewalk location will not be made individually unless specified elsewhere in the contract.

4.0 Basis of Payment. All costs incurred by the contractor by reason of compliance to satisfy the above requirements shall be considered incidental to and completely covered by the contract unit price for each of the pay items within the contract.

O. Linear Grading for ADA Facilities

1.0 Description. This work shall consist of altering the existing roadside features to the required grade and cross sections shown in the plans (if applicable), or to comply with typical sections, running slopes, drop-off and side-slope standards, consistent with the guidelines set forth in the Americans with Disabilities Act (ADA). This work shall be in accordance with Sections 202 and 207 and accompanying provisions except as modified herein.

2.0 Construction Requirements. The roadside shall be brought to the required grade and cross section as established in Section 1.0 of this provision, to a uniform appearance, free of sharp breaks or humps. Minor deviations will be allowed, to take advantage of favorable topography, as approved by the engineer.

2.1 The contractor shall remove all existing roadside improvements necessary to facilitate the new sidewalk and curb ramp construction, along with any other roadside removal items at, or adjacent to the pedestrian pathway, as noted in the plans or as approved by the engineer. This shall include the removal and/or saw cutting at existing raised islands or median strips to construct the pedestrian pathway. The contractor shall pay special care to existing utility facilities to be used in place or relocated by others.

2.2 The contractor shall be responsible for all excavation and embankment work necessary to facilitate construction of new ADA compliant facilities; normally consisting of subgrade and subsequent finished

Job No.: JNE0028
Route: 15, H
County: Shelby

grading for sidewalks, curbs, curb ramps; and may include miscellaneous grading work for items such as ditches, entrances, paved approaches, driveways and pipes, at or adjacent to proposed new sidewalk facilities.

2.3 By this provision, it may be necessary to excavate, stockpile, and haul some material within the project limits. Due to staging and/or Right-of-Way constraints, it may be necessary to waste unusable material off of Right-of-Way, and/or haul a replacement volume of material back to achieve the desired grades.

2.4 All removals of Portland or Asphaltic Concrete performed under this provision will require saw-cutting a neat/clean edge along the removal lines at no direct pay, unless otherwise provided for in the contract.

3.0 Method of Measurement. Measurement of Linear Grading for ADA Facilities will be made along the length of the new sidewalk and/or curb ramp installed, along each side of the roadway where sidewalk work is to be performed. Measurement will be made to the nearest 1-foot for each sidewalk work area, totaled, and paid to the nearest 1-foot for final pay. Final field measurement will not be required except where appreciable errors are found, or authorized changes have been made.

4.0 Basis of Payment. The accepted quantities of Linear Grading for ADA Facilities will be paid for at the contract unit price for item 207-99.03, Linear Grading for ADA Facilities, Linear Foot, and will be considered as full compensation for all labor, equipment, material, waste fees, disposal agreements, material acquisition, or other construction costs involved to complete the described work.

P. Positive Drainage

1.0 Description. The contractor shall be made aware that this project alters the drainage collection through Shelby County. Care shall be taken during construction to provide proper drainage.

2.0 Construction Requirements. The contractor shall maintain positive drainage for all properties and shall not create locations of ponding or other drainage concerns to property owners. The contractor shall alert the engineer of any potential concerns during construction that may affect the ability to maintain positive drainage.

3.0 Basis of Payment. No direct payment will be made for compliance with this provision. All equipment and labor necessary for the work described shall be considered incidental to and completely covered by other items in the contract.

Q. Removal and Replacement of Traffic Signs

1.0 Description. Existing traffic signs that have to be removed prior to proposed traffic signs being installed and that are determined essential to the safe and orderly flow of traffic by the Engineer shall be temporarily re-erected immediately by the Contractor at temporary locations in a manner approved by the Engineer. The existing signs shall remain temporarily erected until the final permanent signing has been installed. The Contractor shall maintain the existing signs in a straight and neat condition for the duration of the temporary mounting.

Job No.: JNE0028
Route: 15, H
County: Shelby

2.0 Basis of Payment. No direct payment shall be made for compliance with this provision.

R. Reinforced Concrete Sidewalk

1.0 Description. This work shall consist of producing and placing macro-synthetic fiber reinforced (MSFR) concrete as shown on the plans or as directed by the engineer. The MSFR pavement shall be in accordance with Sec 502, except as modified herein. This work shall be done in accordance with Section 608.

Property	Minimum Criteria
Fiber Length, in., minimum	1.50 in
Aspect Ratio (length divided by equivalent diameter)	45-150
Relative Tensile Strength, ksi., minimum	50 ksi

2.0 Materials. All materials shall be in accordance with Division 1000, Material Details, unless otherwise noted.

2.1 Macro-Synthetic Fiber. The macro-synthetic fibers shall be manufactured from virgin polyolefins (polypropylene and polyethylene) and shall comply to ASTM D7508/D7508M with the following additional criteria:

2.2 Macro-Synthetic Fiber Reinforced Concrete. The MSFR concrete shall be a Type III Synthetic Fiber-Reinforced concrete mixture in accordance with ASTM C 1116.4.1.3.

2.3 Submittals. The fiber manufacturer shall submit ASTM C1609/C1609M test results from a 4000/600 psi (28-Day Compressive Strength / 28-Day Flexural Strength, respectively) mix design for MSFR concrete with a minimum equivalent flexural strength ratio (RD T, 150) of 30 percent at the recommend fiber dosage rate. The RDT, 150 results along with the fiber dosage rate shall be submitted with the mix design in accordance with Sec 501. Fiber dosage rate be per manufacture's recommendations.

2.4 Longitudinal Steel Reinforcement. Sidewalk shall be reinforced with three equally spaced #4 reinforcing bars.

3.0 Construction. Fiber material shall be delivered, stored, handled, and mixed in accordance with manufacturer's guidelines. The fiber shall be added at the concrete plant at the addition rate specified in the mix design. The fiber manufacture shall be on site during the first day's production and shall specify the mixing time required to ensure adequate dispersion of the fibers and achieve a homogenous and workable mixture. All other requirements shall be in accordance with Sec 502.

4.0 Basis of Payment. The accepted quantity of Reinforced Concrete Sidewalk will be paid for at the contract unit price of 608-99.05 Sq.Yd., 4 IN. Reinforced Concrete Sidewalk and 608-99.05 (1) Sq.Yd., 8 IN. Reinforced Concrete Sidewalk.

S. Rectangular Rapid Flashing Beacon Assembly

1.0 Description. Rectangular Rapid Flashing Beacons Assemblies (RRFBs) shall be placed at the locations indicated in the plans. Rectangular Rapid Flashing Beacons shall consist of a signal post having pedestrian crossing signs and two rapid flashing beacons facing one direction of traffic. The RRFB assemblies shall be solar powered with wireless communications to allow for both RRFBs to activate with a single pushbutton actuation. The solar panel array and battery system shall be sized for up to 5 days of autonomy based on site location. APS pushbuttons shall meet current PROWAG, ADA, and MUTCD requirements.

2.0 Construction Requirements.

- a. General Conditions:
 - i. RRFBs shall meet requirements set forth by this JSP and in the MUTCD 11th Edition, Chapter 4L (https://mutcd.fhwa.dot.gov/pdfs/11th_Edition/part4.pdf)
 - ii. An RRFB shall consist of two rapidly and alternately flashed rectangular yellow indications having LED-array based pulsing light sources and shall be operated in accordance with the detailed requirements specified below.
 - iii. Each post shall have front facing signs and RRFBs for a total of 4 pedestrian signs, four plaques, and 8 RRFBs total for the crossing.
 - iv. Power for the RRFBs shall be via 120V AC from a separate adjacent disconnect cabinet.
- b. Beacon Dimensions and Placement in Sign Assembly:
 - i. Each RRFB shall consist of two rectangular-shaped yellow indications, each with an LED- array based light source. Each RRFB indication shall be a minimum of approximately 5 inches wide by approximately 2 inches high.
 - ii. The two RRFB indications shall be aligned horizontally, with the longer dimension horizontal and with a minimum space between the two indications of approximately seven inches (7 in), measured from inside edge of one indication to inside edge of the other indication.
 - iii. The outside edges of the RRFB indications, including any housings, shall not project beyond the outside edges of the W11-2 sign.
- c. Beacon Flashing Requirements:
 - i. When activated, the two yellow indications in each RRFB shall flash in a rapidly alternating "wig-wag" flashing sequence (left light on, then right light on).
 - ii. Each of the two yellow indications of an RRFB shall have 70 to 80 periods of flashing per minute and shall have alternating but approximately equal periods of rapid pulsing light emissions and dark operation. During each of its 70 to 80 flashing periods per minute, one of the yellow indications shall emit two rapid pulses of light and the other yellow indication shall emit three rapid pulses of light.
 - iii. The flash rate of each individual yellow indication, as applied over the full on-off sequence of a flashing period of the indication, shall not be between 5 and 30 flashes per second, to avoid frequencies that might cause seizures.

Job No.: JNE0028
Route: 15, H
County: Shelby

- iv. The light intensity of the yellow indications shall meet the minimum specifications of Society of Automotive Engineers (SAE) standard J595 (Directional Flashing Optical Warning Devices for Authorized Emergency, Maintenance, and Service Vehicles) dated August 2021.

d. Beacon Operation:

- i. The RRFB shall be normally dark, shall initiate operation only upon pedestrian actuation, and shall cease operation at a predetermined time after the pedestrian actuation. The length of actuation shall be programmable and changeable.
- ii. All RRFBs associated with a given crosswalk shall, when activated, simultaneously commence operation of their alternating rapid flashing indications and shall cease operation simultaneously.
- iii. To actuate the RRFBs, a pedestrian instruction sign with the legend PUSH BUTTON TO TURN ON WARNING LIGHTS | WAIT FOR GAP IN TRAFFIC should be mounted integral with each pedestrian pushbutton. Push buttons shall meet American's with Disabilities Act (ADA) requirements in both location and design with both visible and audible feedback when pushed.
- iv. The duration of a predetermined period of operation of the RRFBs following each actuation should be based on the MUTCD procedures for timing of pedestrian clearance times for pedestrian signals.
- v. A small light directed at and visible to pedestrians in the crosswalk shall be installed integral to the RRFB or push button to give confirmation that the RRFB is in operation.

e. Other:

- i. Except as otherwise provided above, all other provisions of the MUTCD applicable to Warning Beacons shall apply to RRFBs.
- ii. The signs shall meet the requirements of Division 903 of the MoDOT standard specifications for size, retroreflectivity, materials, and mounting. The minimum height of the lowest sign shall be seven feet when mounted in or adjacent to sidewalk to meet ADA requirements.
- iii. The W11-2 and W16-7p signs shall be the highly reflective green.
- iv. The post shall be 4.5" diameter galvanized steel pipe post with breakaway base assembly on concrete foundation. The post shall be located so that a minimum of four feet of walkable sidewalk is maintained.

3.0 Method of Measurement. Measurement for installation of RRFBs will be made per each RRFB assembly, including pole, base, foundation, solar panel(s), batteries, pole-mounted cabinet, wiring between RRFB elements within the pole, pushbutton, signs, RRFB modules, and miscellaneous hardware. No measurement will be made for individual items that make up the RRFB system.

4.0 Basis of Payment. All labor, equipment, and materials necessary to install the beacons, signs, solar panels with batteries, push buttons, post, foundation, and other equipment to

Job No.: JNE0028
Route: 15, H
County: Shelby

have a fully operational RRFB system will be included in Item No. 902-99.02 Rectangular Rapid Flashing Beacon Assembly, per each for each RRFB assembly installed.

T. ADA Compliant Moveable Barricade

1.0 Description. This work shall consist of providing moveable barricades to satisfy the requirements of the pedestrian traffic control plans as shown in the bidding documents. The contractor will be responsible for moving the pedestrian barricades to coincide with their planned order of work.

2.0 Construction Requirements. The contractor shall use a movable barricade that meets the requirements as established by the ADA. The pedestrian barricades shall be of self-supporting type having a minimum length of 6 feet per unit. The face of the barricade shall not extend into adjacent sidewalk considered open for pedestrian use. The contractor will be responsible for setting and maintaining the pedestrian barricades until all of the proposed improvements have been constructed.

3.0 Method of Measurement. Measurement for ADA Compliant Moveable Barricade will be made per JSP H

4.0 Basis of Payment. Payment for all work necessary to fulfill the requirements noted above shall be considered completely covered in the contract unit price for Pay Item No. 616-99.01, Lump Sum Temporary Traffic Control. No direct payment will be made for any necessary relocation of the ADA compliant barricade.

U. Seeding and Mulching Requirements

1.0 Seeding. Seeding shall be in accordance with Sec. 805 except as otherwise stated herein. Cool season grasses shall be utilized in accordance with Standard Plan 805.00.

1.1 Temporary Seeding. Temporary seeding shall be in accordance with Sec. 806.50 except as otherwise stated herein.

2.0 Mulching. Mulching shall be in accordance with Sec. 802 except as otherwise stated herein.

3.0 Method of Measurement. No measurement will be made for seeding, temporary seeding or mulching. Seeding and mulching of all disturbed areas, including any additional areas disturbed beyond what is shown on the plans, shall be considered included in the single lump sum item provided.

4.0 Basis of Payment. All labor, equipment, and materials necessary to complete all seeding, temporary seeding and mulching shall be completely covered under the lump sum price for item 805-99.01, Seeding and Mulching - Cool Season Grasses.

Job No.: JNE0028
Route: 15, H
County: Shelby

V. Shaping Slopes Class III (Modified Material Requirements) NJSP-20-03B

215.1.3 Shaping Slopes, Class III, shall consist of providing rock fill material and shaping slopes to construct additional shoulder width for the installation of guardrail and Type A crashworthy end terminals in accordance with Missouri Standard Plans for Highway Construction. The rock fill material used shall meet the requirements specified in Sec 215.1.3.1. The shoulder surface shall be finished smooth such that it is traversable and without significant voids or depressions.

215.1.3.1 Material Requirements. Rock fill material used for Shaping Slopes, Class III, shall consist of a durable crushed stone, shot rock or broken concrete, with a predominant size of 3 inches and a maximum size of 6 inches. Acceptance by the engineer will be made by visual inspection.

215.4 Basis of Payment. The accepted quantity will be paid at the contract unit bid price for 215-99.10 Misc. Shaping Slopes Class III – Modified Material Requirement, per 100F

W. Expansion Joint Plate

1.0 Description. This work shall consist of installing a ¼" aluminum, skid resistant, plate over bridge expansion joints as shown on the plans.

The Contractor shall refer to the construction plans detailing the locations of the expansion joint plates. The contractor shall pay special attention during construction to ensure proper drainage is achieved where expansion joint plates are installed.

The one quarter (1/4) inch aluminum slip-resistant plate shall be installed flush with the top of the expansion joint or sidewalk and secured to the bridge deck and/or barrier. The aluminum slip-resistant plate shall have a minimum static coefficient of friction of 0.6 and be ADA compliant.

2.0 Method of Measurement. Measurement will be made to the nearest square foot.

3.0 Basis of Payment. All labor, equipment, and materials required to install the steel plate as shown on the plans and by this provision will be considered completely covered by Pay Item 711-99-04, Misc., Floor Expansion Joint Cover.

X. Utilities

1.0 For informational purposes only, the following is a list of names, addresses, and telephone numbers of the known utility companies in the area of the construction work for this improvement:

Job No.: JNE0028
Route: 15, H
County: Shelby

<u>Utility Name</u>	<u>Known Required Adjustment</u>	<u>Type</u>
Brightspeed (formerly Lumen – Local, CenturyLink) Tyler Rikard 3546 N Ten Mile Dr Jefferson City, MO 65109 Phone: (980) 376-1498 Email: tyler.rikard@brightspeed.com	None	Communications
Chariton Valley Brian Mosier 1231 E. Briggs Drive Macon, MO 63552 Phone: (660) 349-0589 Email: Bmosier@charitonvalley.com	None	Communications
Charter Communications Terrell Bradshaw 101 North West Plaza St. Ann, MO 63074 Phone: (314) 610-7798 Email: terrell.bradshaw@charter.com	None	Communications
City of Shelbina Brian Fifer P.O. Box 646 Shelbina, MO 63468 Phone: (573) 588-4104 Email: superintendent@shelbinamo.gov	None	Electric Gas Sewer Water
Macon County PWSD 1 Brian Bender 28890 US Hwy 63 Macon, MO 63552 Phone: (660) 385-6457 Email: mcpwsd01@gmail.com	None 2.1	Water
Mecon Electric Cooperative Bryce Butner 31571 Business Route 36 East Macon, MO 63552 Phone: (660) 651-1593 Email: bbutner@maconelectric.com	None Section 2.2	Electric

Job No.: JNE0028
 Route: 15, H
 County: Shelby

Mark Twain Rural Telephone Matt Glover 48054 MO-6 Hurdland, MO 63547 Phone: (660) 423-5211 Email: mglover@marktwain.coop	None	Communications
MoDOT Northeast District Dylan Behl 1711 US 61 Hannibal, MO 63401 Phone: (573) 589-0217 Email: dylan.behl@modot.mo.gov	None Section 2.3	Power Signals Streetlights Communications

1.1 The existence and approximate location of utility facilities known to exist, as shown on the plans, are based upon the best information available to the Commission at this time. This information is provided by the Commission "as-is" and the Commission expressly disclaims any representation or warranty as to the completeness, accuracy, or suitability of the information for any use. Reliance upon this information is done at the risk and peril of the user, and the Commission shall not be liable for any damages that may arise from any error in the information. It is, therefore, the responsibility of the contractor to verify the above listing information indicating existence, location and status of any facility. Such verification includes direct contact with the listed utilities.

2.0 Project Specific Provisions:

2.1 Macon County PWSD 1 - has buried water lines located throughout the project limits in Leonard. Macon County PWSD 1 has buried water line from approximately station 213+92, 30' RT to 216+20, 30' RT. Two water lines cross Route H at approximately station 214+30. Relocation of these facilities is not anticipated. Contractors shall contact Brian Bender, with Macon County PWSD 1, prior to any grading or removal operations to ensure contractor operations will not affect their facilities.

2.2 Macon Electric Cooperative (MEC) – has one-phase overhead distribution lines located throughout the project limits in Leonard. MEC has buried electrical service line runs from the power pole located at approximately station 215+76 to the house on the west side of the proposed sidewalk. This buried line is 18 inches in depth, but no conflict is anticipated. Contractors shall contact Bryce Butner, with Macon Electric Cooperative, prior to any grading or removal operations to ensure contractor operations will not affect their facilities.

2.3 MoDOT Northeast District – has electric, communication, signals, and lighting facilities throughout the project limits in Shelby. MoDOT has buried electric line located from approximately station 1109+73, 33' RT to 1110++04, 31' RT. This buried line is approximately 33 inches in depth. Proposed guardrail work is planned to be within the limits of these facilities, but no conflicts are anticipated. MoDOT has buried electric line located from approximately station 1117+42, 26' RT to 1117+44, 32' RT. This electrical line is approximately 30 inches in depth. Proposed sidewalk is planned to be within the limits of these facilities, but no conflicts are anticipated. Contractors shall contact Dylan Behl, MoDOT Traffic Electrician, prior to any grading or removal operations to ensure contractor operations will not affect their facilities.