

DESIGN DESIGNATION
ROUTE 266 W/O RTE AB
A.A.D.T. - 2027 = 2,434
A.A.D.T. - 2047 = 2,896
D.H.V. = 10.79%
T = 10.62%
V = 55 M.P.H.
D (E/W) = 49.0%/51.0%

FUNCTIONAL CLASSIFICATION-MAJOR COLLECTOR

ROUTE 266 E/O RTE B
A.A.D.T. - 2027 = 5,830
A.A.D.T. - 2047 = 6,985
D.H.V. = 10.82%
T = 4.81%
V = 55 M.P.H.
D (E/W) = 49.1%/50.9%

FUNCTIONAL CLASSIFICATION-MAJOR COLLECTOR

CONTROLLED ACCESS HIGHWAY

THIS SHALL BE A CONTROLLED ACCESS HIGHWAY, BETWEEN STA. 524+25.08 AND STA. 559+48.53 EXCEPT AT LOCATIONS AND AS OTHERWISE SPECIFICALLY SHOWN ON THESE PLANS, NO ABUTTER'S RIGHTS IN OR OF DIRECT ACCESS TO, FROM, OR ACROSS THE HIGHWAY OR ITS RIGHT-OF-WAY SHALL ATTACH OR BELONG TO ANY PROPERTY ABUTTING ON SAID SECTION OF HIGHWAY, OR TO ANY PERSON MERELY BECAUSE OF OWNERSHIP OF SUCH ABUTTING PROPERTY. THERE SHALL BE THE USUAL RIGHT OF ACCESS OVER ANY LOCATION SHOWN ON THESE PLANS EITHER AS (1) AN ENTRANCE OR (2) A PRIVATE UNDERPASS. WHEREVER AN ADJACENT OUTER ROADWAY OR SERVICE ROAD IS SHOWN, THERE SHALL BE THE USUAL RIGHT OF DIRECT ACCESS BETWEEN THE ABUTTING PROPERTY AND SUCH OUTER ROADWAY OR SERVICE ROAD (EXCEPT WHERE ACCESS IS SPECIFICALLY PROHIBITED BY THE SPECIAL SYMBOL DENOTING NO RIGHT OF ACCESS) AND ALONG IT TO AND FROM THE NEAREST LANE OF THE THROUGHWAY OF A PUBLIC HIGHWAY. OUTER ROADWAYS AND SERVICE ROADS, AS THE CASE MAY BE, ARE SO DESIGNATED ON THE PLANS.

- BEGINNING AND ENDING OF CONTROLLED ACCESS
+ + CONTROLLED ACCESS
—||— NO RIGHT OF ACCESS OR CROSSING OF LINES BEARING THIS SYMBOL WILL BE PERMITTED UNDER ANY CIRCUMSTANCES.

CONVENTIONAL SYMBOLS
(USED IN PLANS)

	EXISTING	NEW
BUILDINGS AND STRUCTURES		
GUARD RAIL		
GUARD CABLE		
CONCRETE RIGHT-OF-WAY MARKER		
STEEL RIGHT-OF-WAY MARKER		
LOCATION SURVEY MARKER		
UTILITIES		
FIBER OPTICS	-FO-	-FO-
OVERHEAD CABLE TV	-OTV-	-OTV-
UNDERGROUND CABLE TV	-UTV-	-UTV-
OVERHEAD TELEPHONE	-OT-	-OT-
UNDERGROUND TELEPHONE	-UT-	-UT-
OVERHEAD POWER	-OE-	-OE-
UNDERGROUND POWER	-UE-	-UE-
SANITARY SEWER	-S-	-S-
STORM SEWER	-SS-	-SS-
GAS	-G-	-G-
WATER	-W-	-W-
MANHOLE		
FIRE HYDRANT		
WATER VALVE		
WATER METER		
DROP INLET		
DITCH BLOCK		
GROUND MOUNTED SIGN		
LIGHT POLE		
H-FRAME POWER POLE		
TELEPHONE PEDESTAL		
FENCE		
CHAIN LINK		
WOVEN WIRE		
GATE POST		
BENCHMARK		




NOTE: DASHED OR OPEN SYMBOLS INDICATE EXISTING FEATURES

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

PLANS FOR PROPOSED

STATE HIGHWAY

GREENE COUNTY

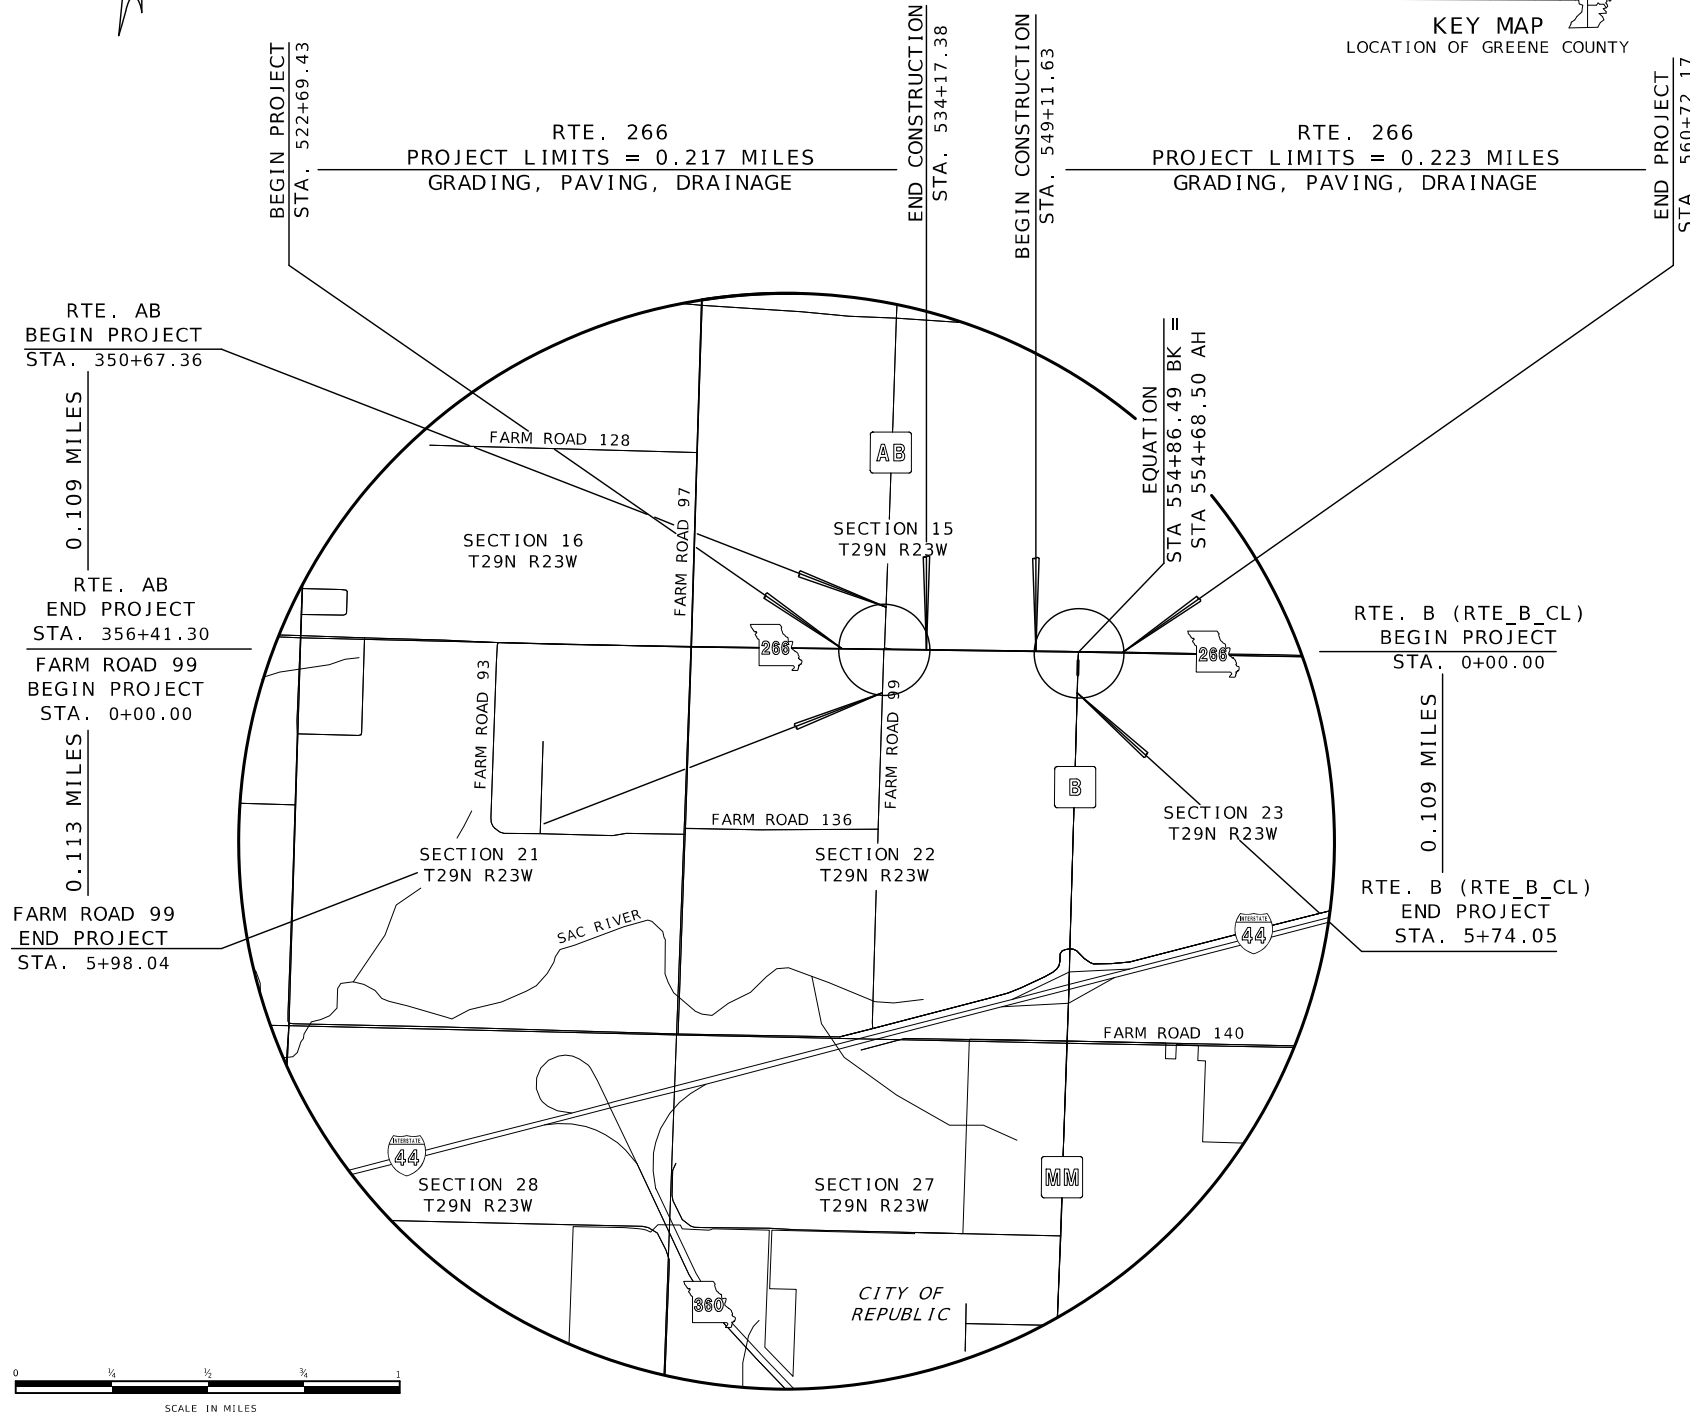

THE EXISTENCE AND APPROXIMATE LOCATION OF UTILITY FACILITIES KNOWN TO EXIST, AS SHOWN ON THE PLANS, ARE BASED ON THE BEST INFORMATION AVAILABLE TO THE COMMISSION AT THIS TIME. THIS INFORMATION IS PROVIDED BY THE COMMISSION "AS-IS" AND THE COMMISSION EXPRESSLY DISCLAIMS ANY REPRESENTATION OR WARRANTY AS TO THE COMPLETENESS, ACCURACY, OR SUITABILITY OF THE INFORMATION FOR ANY USE. RELIANCE UPON THIS INFORMATION IS DONE AT THE RISK AND PERIL OF THE USER, AND THE COMMISSION SHALL NOT BE LIABLE FOR ANY DAMAGES THAT MAY ARISE FROM ANY ERROR IN THE INFORMATION. IT IS, THEREFORE, THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY THE EXISTENCE, LOCATION AND STATUS OF ANY FACILITY. SUCH VERIFICATION INCLUDES DIRECT CONTACT WITH THE LISTED UTILITIES.

INDEX OF SHEETS

DESCRIPTION	SHEET NUMBER
TITLE SHEET	1
TYPICAL SECTIONS (TS) (2 SHEETS)--	2
QUANTITIES (QU) (9 SHEETS)-----	3
PLAN-PROFILE (PP)-----	4-17
COORDINATE POINTS (CP)-----	18
SPECIAL SHEETS (SS)-----	19-28
TRAFFIC CONTROL (TC)-----	29-36
EROSION CONTROL (EC)-----	37-50
LIGHTING (LT)-----	51-52
SIGNING (SN)-----	53-83
PAVEMENT MARKING (PM)-----	84-92
CULVERT SECTIONS (CS)-----	93-96
CROSS SECTIONS (XS)-----	1-59

LENGTH OF PROJECT

MO 266	
BEGINNING OF PROJECT	STA. 522+69.43
END OF CONSTRUCTION	STA. 534+17.38
APPARENT LENGTH	1147.95 FEET
	0.217 MILES
BEGINNING OF CONSTRUCTION	STA. 549+11.63
END OF PROJECT	STA. 560+72.17
APPARENT LENGTH	1160.54 FEET
	0.220 MILES
EQUATIONS & EXCEPTIONS	
STA. 554+86.49 BK =	+17.99 FEET
STA. 554+68.50 AH	
RTE. AB	
BEGINNING OF PROJECT	STA. 350+67.36
END OF CONSTRUCTION	STA. 356+41.30
APPARENT LENGTH	573.94 FEET
	0.109 MILES
EQUATIONS & EXCEPTIONS	
NONE	
FARM ROAD 99	
BEGINNING OF PROJECT	STA. 0+00.00
END OF CONSTRUCTION	STA. 5+98.04
APPARENT LENGTH	598.04 FEET
	0.113 MILES
EQUATIONS & EXCEPTIONS	
NONE	
RTE. B	
BEGINNING OF PROJECT	STA. 0+00.00
END OF CONSTRUCTION	STA. 5+74.05
APPARENT LENGTH	574.05 FEET
	0.109 MILES
EQUATIONS & EXCEPTIONS	
NONE	
TOTAL CORRECTIONS	
+17.99	FEET
NET LENGTH OF PROJECT	
4072.51	FEET
STATE LENGTH	
0.771	MILES
FOR INFORMATION ONLY	
ESTIMATED DISTURBED ACRES	3.24

STATE OF MISSOURI
CAMERON SCOTT
NUMBER
PE-2021019715
PROFESSIONAL ENGINEER

076-2021019715
CAMERON SCOTT, P.E.
MO-PE-2021019715

DATE PREPARED
7/24/2026

ROUTE 266
DISTRICT SW
STATE MO
SHEET NO. 1
COUNTY GREENE
JOB NO. JSU0080
CONTRACT ID.
PROJECT NO.
BRIDGE NO.

DESCRIPTION
DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

REMOVAL OF IMPROVEMENTS (CONT.)								
SHEET	STATION	STATION	ROUTE	LOCATION	DESCRIPTION	TOTAL	UNITS	REMARKS
47	519+08.61		266	RT	SIGN	1	EACH	JCT/AB
47	521+60.60		266	LT	SIGN	1	EACH	SPEED LIMIT 55
49	534+46.27		266	LT	SIGN	1	EACH	JCT/AB
50	348+02.24		AB	RT	SIGN	1	EACH	JCT/266
50	349+75.52		AB	RT	SIGN	1	EACH	STOP AHEAD
50	350+67.63		AB	RT	SIGN	1	EACH	SPEED LIMIT 55
52	544+97.40		266	RT	SIGN	1	EACH	JCT/B
52	548+59.26		266	RT	SIGN	1	EACH	TO JCT I-44 EAST/TO JCT I-44 WEST
52	550+21.30		266	LT	SIGN	1	EACH	HISTORIC BYWAY U.S. 66
54	560+67.77 R2		266	RT	SIGN	1	EACH	SPEED LIMIT 55
54	562+90.05 R2		266	LT	SIGN	1	EACH	JCT/B
55	11+68.01		B	LT	SIGN	1	EACH	STOP AHEAD
1 LUMP SUM								

MOBILIZATION
1 LUMP SUM

CLEARING AND GRUBBING
1 ACRE

ADDITIONAL MOBILIZATION FOR SEEDING
4 EACH

EARTHWORK							
		STATION		UNCLASSIFIED EXCAVATION	EMBANKMENT IN PLACE	COMPACTING EMBANKMENT	REMARKS
SHEETS	LOCATION	FROM	TO	CY	CY	CY	
4-6	266	522+69.43	534+17.38	2278.9	2071.7	1517.4	266/AB ROUNDABOUT, ALONG 266
7, 5	AB	350+67.36	355+01.30	1033.3	41.7		266/AB ROUNDABOUT, ALONG AB
5, 8	FR 99	1+40.00	5+98.04	1237.3	668.1		266/AB ROUNDABOUT, FR 99
9-11	266	549+11.63	560+72.17	2367.9	2152.6	2993.9	266/B ROUNDABOUT, ALONG 266
10, 12	RTE_B_CL	1+40.00	5+74.05	593.1	362.1		266/B ROUNDABOUT, ALONG B
TOTALS				7510.5	5296.2	4511.3	
USE				7511	5296	4511	

LINEAR GRADING CLASS 1					
SHEET	STATION	ROUTE	LOCATION	STA.	REMARKS
6	532+10.16	266	LT	0.30	ENTRANCE 1, PARCEL 4
6	532+10.22	266	RT	0.32	ENTRANCE 2, PARCEL 3
7	351+15.96	AB	LT	0.17	ENTRANCE 3, PARCEL 4
8	2+55.40	FR 99	RT	0.52	DRAINAGE DITCH AT NEW RCB
8	4+64.39	FR 99	RT	0.28	ENTRANCE 4, PARCEL 2
8	4+64.39	FR 99	LT	0.30	ENTRANCE 5, PARCEL 3
9	550+66.69	266	RT	0.27	ENTRANCE 6, PARCEL 8
11	559+71.40	266	LT	0.33	ENTRANCE 7, PARCEL 5
12	3+39.66	RTE_B_CL	RT	0.29	ENTRANCE 8, BURTON
TOTAL				2.8	

ISLANDS AND MEDIANS						
LT/RT LOCATION	BEGIN STATION	END STATION	8 IN. TRUCK APRON (PIGMENTED & TEXTURED)	MODIFIED 8 IN. CONCRETE MEDIAN STRIP	6 IN. TYPE 5 AGGREGATE BASE	REMARKS
			SY	SY	SY	
ROUTE 266 & ROUTE AB						
LT/RT	525+04.27	527+51.52		233.3	233.3	MEDIAN 1 RTE. 266
LT/RT	527+76.15	529+10.65	1613.7		1613.7	CENTER OF ROUNDABOUT
LT/RT	529+35.28	531+63.32		215.4	215.4	MEDIAN 2 RTE. 266
LT/RT	353+02.79	355+49.42		232.3	232.3	MEDIAN 3 RTE. AB
LT/RT	0+91.42	3+75.68		300.9	300.9	MEDIAN 4 FR99
ROUTE 266 & ROUTE AB						
LT/RT	551+61.75	554+09.01		233.34	233.3	MEDIAN 1 RTE. 266
LT/RT	554+33.64	555+50.15 R2	1614.1		1614.1	CENTER OF ROUNDABOUT
LT/RT	555+74.78 R2	558+22.02 R2		233.34	233.3	MEDIAN 2 RTE. 266
LT/RT	0+91.50	3+16.99		212.56	212.6	MEDIAN 3 RTE. B
TOTAL			3227.8	1661.2	4888.9	
USE			3227.8	1661.2	4888.9	

SUMMARY OF QUANTITIES
SHEET 2 OF 9

STATE OF MISSOURI

CAMERON

SOOY

NUMBER

PE-2021019715

PROFESSIONAL ENGINEER

074-Professional Seal-#202

CAMERON SOOY - CIVIL

MO-PE-2021019715

DATE PREPARED

7/24/2026

ROUTE

266

DISTRICT

SW

STATE

MO

SHEET NO.

3

COUNTY

GREENE

JOB NO.

JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION

DATE

MISSOURI HIGHWAYS AND TRANSPORTATION

COMMISSION

MoDOT

105 WEST CAPITOL

JEFFERSON CITY, MO 65102

1-888-ASK-MODOT (1-888-275-6636)

DRAINAGE PIPES AND FLARED END SECTIONS																
START START	END STA.	LOCATION	GROUP C PIPE			GROUP A PIPE			GROUP C FES			GROUP A FES			CLASS 3	ROCK
			15 IN.	18 IN.	24 IN.	18 IN.	30 IN.	36 IN.	15 IN.	18 IN.	24 IN.	18 IN.	30 IN.	36 IN.	EXCAVATION	LINING
			LF	LF	LF	LF	LF	LF	EA	EA	EA	EA	EA	EA	CY	CY
529+62.97	529+62.97	RTE 266 LT/RT				69.2						2.0			37.9	1.8
531+76.53	532+42.32	RTE 266 RT			65.8						2.0				25.7	3.1
531+76.53	532+42.32	RTE 266 RT			65.8						2.0				-	-
532+60.98	532+60.98	RTE 266 LT/RT					40.6						2.0		38.2	4.2
4+35.35	4+90.09	FR 99 LT	55						2.0						34.8	1.8
4+38.44	4+89.72	FR 99 RT	51.3						2.0						19.0	1.8
550+37.39	550+98.29	RTE 266 RT		61.2						2.0					37.7	1.8
550+37.39	550+98.29	RTE 266 RT		61.2						2.0					-	-
00+94.00	00+94.00	RTE B LT/RT						106.3						2.0	69.9	9.0
559+34.14	560+03.61	RTE 266 LT	69.5						2.0						13.8	1.8
3+29.70	3+51.18	RTE B RT	21.5						2.0						7.9	1.8
TOTAL			197.3	122.4	131.6	69.2	40.6	106.3	8	4	4	2	2	2	284.9	27.1
USE			198	123	132	70	41	107	8	4	4	2	2	2	285	27

ROCK LINING (TOTAL)		
DESCRIPTION	CY	REMARKS
REINFORCED CONCRETE BOX CULVERT	28	
DRAINAGE PIPES & FLARED END SECTIONS	27	
TOTAL	55	
REFER TO SEPARATE QUANTITY TABLES FOR STATIONING AND OTHER DETAILS		

CONTRACTOR FURNISHED SURVEYING AND STAKING
1 LUMP SUM

EROSION CONTROL								
STATION	STATION	ROUTE	LOCATION	SILT FENCE	ROCK DITCH CHECK	SEDIMENT REMOVAL	SEPARATION GEOTEXTILE	REMARKS
				LF	LF	CY	SY	
522+69.42	527+82.31	266	LT	651	40	10.5	20	NW QUAD
350+67.14	355+55.91	AB	RT	365	30	6.7	15	NW QUAD
522+69.42	527+74.50	266	RT	555	50	10.6	25	SW QUAD
0+97.40	5+98.34	FR 99	RT	342	50	8.4	25	SW QUAD
528+89.14	534+18.05	266	LT	657	60	12.6	30	NE QUAD
350+71.34	355+10.93	AB	LT	217	30	5.2	15	NE QUAD
529+01.56	534+17.52	266	RT	585	70	12.9	35	SE QUAD
1+00.26	5+96.39	FR 99	LT	373	40	7.7	20	SE QUAD
549+11.59	560+14.35	266	LT	1087	100	20.9	50	NORTH SIDE
549+11.60	554+30.12	266	RT	572	60	11.7	30	SW QUAD
1+01.77	5+73.85	B	RT	364	40	7.6	20	SW QUAD
555+47.37	559+04.22	266	RT	463	40	8.6	20	SE QUAD
0+94.91	5+75.30	B	LT	390	30	6.9	15	SE QUAD
			TOTALS	6621.0	640.0	130.3	320.0	
			USE	6621	640	130	320	



DATE PREPARED
8/12/2026

ROUTE
266

DISTRICT
SW

STATE
MO

SHEET NO.
3

COUNTY
GREENE

JOB NO.
JSU0080

CONTRACT ID.

PROJECT NO.	
BRIDGE NO.	
DESCRIPTION	
DATE	

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

SEEDING AND MULCHING						
				SEEDING - COOL SEASON GRASSES	MULCHING	
STATION	STATION	ROUTE	LOCATION	ACRES	ACRES	REMARKS
522+69.42	527+82.31	266	LT	0.16	0.16	NW QUAD
350+67.34	355+55.91	AB	RT	0.12	0.12	NW QUAD
522+69.42	527+74.50	266	RT	0.24	0.24	SW QUAD
0+97.40	5+98.02	FR 99	RT	0.14	0.14	SW QUAD
528+89.14	534+17.39	266	LT	0.25	0.25	NE QUAD
352+07.07	355+10.93	AB	LT	0.10	0.10	NE QUAD
529+01.56	534+17.38	266	RT	0.30	0.30	SE QUAD
1+00.26	5+98.07	FR 99	LT	0.19	0.19	SE QUAD
549+11.63	560+72.17 R2	266	LT	0.46	0.46	NORTH SIDE
549+11.62	554+30.12	266	RT	0.32	0.32	SW QUAD
1+01.77	5+73.72	B	RT	0.16	0.16	SW QUAD
555+47.37	559+04.20 R2	266	RT	0.23	0.23	SE QUAD
0+94.91	5+74.11	B	LT	0.12	0.12	SE QUAD
			TOTALS	3	3	

CONCRETE PAVEMENT							
					9" PCCP	6" TYPE 5 AGGREGATE BASE	
SHEET	STATION	STATION	ROUTE	LOCATION	SY	SY	REMARKS
4	522+69.43	525+75.00	266	LT	464.5	464.5	WB MAINLINE
4	522+69.43	525+75.00	266	RT	624.4	624.4	EB MAINLINE
5	525+75.00	527+53.40	266	LT	419.6	419.6	WB MAINLINE
5	525+75.00	527+53.40	266	RT	482.0	482.0	EB MAINLINE
5	527+53.40	529+33.40	266	LT	760.8	760.8	NORTH SIDE OF CIRCULATORY ROADWAY
5	527+53.40	529+33.40	266	RT	761.2	761.2	SOUTH SIDE OF CIRCULATORY ROADWAY
5	529+33.40	531+15.00	266	LT	489.3	489.3	WB MAINLINE
5	529+33.40	531+15.00	266	RT	444.4	444.4	EB MAINLINE
5	354+50.12	355+51.30	AB	RT	308.1	308.1	SB MAINLINE
5	354+50.12	355+51.30	AB	LT	268.8	268.8	NB MAINLINE
5	0+89.79	1+91.16	FR 99	RT	266.7	266.7	SB MAINLINE
5	0+89.79	1+91.16	FR 99	LT	311.3	311.3	NB MAINLINE
6	531+15.00	534+17.38	266	LT	672.7	672.7	WB MAINLINE
6	531+15.00	534+17.38	266	RT	511.4	511.4	EB MAINLINE
7	350+67.36	354+50.12	AB	RT	817.2	817.2	SB MAINLINE
7	350+67.36	354+50.12	AB	LT	666.2	666.2	NB MAINLINE
8	1+91.16	5+98.04	FR 99	RT	617.6	617.6	SB MAINLINE
8	1+91.16	5+98.04	FR 99	LT	881.5	881.5	NB MAINLINE
				SUBTOTAL (266/AB):	9767.7	9767.7	
9	549+11.63	552+40.00	266	LT	555.6	555.6	WB MAINLINE
9	549+11.63	552+40.00	266	RT	695.6	695.6	EB MAINLINE
10	552+40.00	554+10.89	266	LT	409.1	409.1	WB MAINLINE
10	552+40.00	554+10.89	266	RT	465.8	465.8	EB MAINLINE
10	554+10.89	555+72.90 R2	266	LT	747.2	747.2	NORTH SIDE OF CIRCULATORY ROADWAY
10	554+10.89	555+72.90 R2	266	RT	761.8	761.8	SOUTH SIDE OF CIRCULATORY ROADWAY
10	555+72.90 R2	557+62.01 R2	266	LT	505.3	505.3	WB MAINLINE
10	555+72.90 R2	557+62.01 R2	266	RT	445.8	445.8	EB MAINLINE
10	0+89.94	1+91.40	B	RT	260.7	260.7	SB MAINLINE
10	0+89.94	1+91.40	B	LT	312.3	312.3	NB MAINLINE
11	557+62.01 R2	560+72.17 R2	266	LT	658.5	658.5	WB MAINLINE
11	557+62.01 R2	560+72.17 R2	266	RT	491.8	491.8	EB MAINLINE
12	1+91.40	5+74.05	B	RT	494.1	494.1	SB MAINLINE
12	1+91.40	5+74.05	B	LT	997.6	997.6	NB MAINLINE
				SUBTOTAL (266/B):	7801.2	7801.2	
				TOTALS:	17568.9	17568.9	



DATE PREPARED 8/11/2026	
ROUTE 266	STATE MO
DISTRICT SW	SHEET NO. 3
COUNTY GREENE	
JOB NO. JSU0080	
CONTRACT ID.	
PROJECT NO.	
BRIDGE NO.	

DESCRIPTION						
DATE						

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-273-6636)


ENTRANCES											
				WIDTH	GRADE		2" BP-1 PG64-22	3.75" PMBB PG64-22	4" TYPE 5 AGGREGATE BASE	TACK COAT	REMARKS
SHEET	STATION	ROUTE	LOCATION	LF	%	RAD I I	TONS	TONS	SY	GAL	
6	532+10.16	266	ENT. 1, LT	20	+1.0,+5.79	15	8.3	15.6	75.6	6	TYPE 1 DRIVEWAY
6	532+10.22	266	ENT. 2, RT	30	-1.0,-3.5,-8.41	35	18.3	34.3	165.7	13	TYPE 1 DRIVEWAY
7	351+15.96	AB	ENT. 3, LT	24	-0.5,+0.35	N/A	7.4	13.9	67.3	5	TYPE 1 DRIVEWAY
8	4+64.39	FR 99	ENT. 4, RT	32	-1.0,-4.0,-8.96	35	16.9	31.6	152.9	12	TYPE 1 DRIVEWAY
8	4+64.39	FR 99	ENT. 5, LT	32	+1.0,+6.0,+10.39	35	17.8	33.4	161.5	13	TYPE 1 DRIVEWAY
9	550+66.69	266	ENT. 6, RT	32	+3.0,+7.0,+9.25	35	16.4	30.8	149.0	12	TYPE 1 DRIVEWAY
11	559+71.40	266	ENT. 7, LT	34	+1.0,-3.0,-8.0,-12.5	45	23.1	43.3	209.6	17	TYPE 1 DRIVEWAY
12	3+39.66	B	ENT. 8, RT	20	-1.0,-2.0,-1.5	15.0	8.3	15.6	75.5	6	TYPE 1 DRIVEWAY
TOTALS							116.5	218.5	1057.1	84.0	
USE							116.5	218.5	1057	84	

AGGREGATE BASE (TOTAL)			
	TYPE 5 AGGREGATE	TYPE 5 AGGREGATE	
DESCRIPTION	4 IN. (SY)	6 IN. (SY)	REMARKS
CONCRETE PAVEMENT AT 266/AB		9767.7	
CONCRETE PAVEMENT AT 266/B		7801.2	
LOW PROFILE SPLITTER ISLANDS		1661.1	
TRUCK APRON		3227.8	
ASPHALT PAVEMENT FOR ENTRANCES	1057.1		
TOTAL	1057.1	22457.8	
USE	1057	22458	
REFER TO SEPARATE QUANTITY TABLES FOR STATIONING AND OTHER DETAILS			

240 VOLT BASE MOUNTED CONTROL STATION						
SHEET	ROUTE	STATION	OFFSET	EACH	BREAKER (AMPS)	
					MAIN	CIRCUIT 1A
51	MO 266	527+13.47	64.64 RT	1	100	15
52	MO 266	555+86.16 R2	82.63 RT	1	100	15
TOTAL				2		

TYPE 2 POWER SUPPLY ASSEMBLY, LIGHTING ONLY					
SHEET	ROUTE	STATION	OFFSET	EACH	VOLT
51	MO 266	527+27.13	71.36 RT	1	240/120
52	MO 266	555+99.06 R2	72.50 RT	1	240/120
TOTAL				2	

PULL BOX, CONCRETE						
SHEET	PULL BOX NUMBER	ROUTE	STATION	OFFSET	DRAIN TYPE NO DIRECT PAY	
					EACH	EACH
51	1	MO 266	526+99.48	48.71 RT	11-B	1
51	2	MO 266	526+99.32	51.07 LT	11-B	1
51	3	RT AB	354+91.90	40.33 RT	11-B	1
51	4	RT AB	354+89.27	46.74 LT	11-B	1
51	5	FR 99	1+49.86	27.11 RT	11-B	1
51	6	FR 99	1+49.68	35.74 LT	11-B	1
52	1	RT B	0+91.48	104.99 LT	11-B	1
52	2	MO 266	556+46.09 R2	31.74 RT	11-B	1
52	3	MO 266	556+46.46 R2	36.36 LT	11-B	1
52	4	MO 266	553+39.33	38.64 LT	11-B	1
52	5	MO 266	553+43.22	35.18 RT	11-B	1
TOTAL						11



DATE PREPARED
8/19/2026

ROUTE
266

DISTRICT
SW

STATE
MO

SHEET NO.
3

COUNTY
GREENE

JOB NO.
JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION	DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

SIGN	SIZE	AREA	QTY	TOTAL	QTY	TOTAL	SIGN	DESCRIPTION	SIGN	SIZE	AREA	QTY	TOTAL	QTY	TOTAL	SIGN	DESCRIPTION	ITEM	TOTAL	EFFECTIVE: 07-01-2025		
IN.	SQ. FT.	EACH	SQ. FT.	EACH	SQ. FT.	NO.	IN.		SQ. FT.	EACH	SQ. FT.	EACH	SQ. FT.	NO.	NUMBER	QTY		DESCRIPTION				
WARNING SIGNS									GUIDE SIGNS									6122008		IMPACT ATTENUATOR 40 MPH (SAND BARRELS)		
WO1-1L	48X48	16.00						TURN (SYMBOL LEFT)	E05-1	36X48	12.00						GORE EXIT	6122009		IMPACT ATTENUATOR 45 MPH (SAND BARRELS)		
WO1-1R	48X48	16.00						TURN (SYMBOL RIGHT)	E05-2	48X36	12.00						EXIT OPEN	6122010		IMPACT ATTENUATOR 50 MPH (SAND BARRELS)		
WO1-2L	48X48	16.00						CURVE (SYMBOL LEFT)	E05-2a	48X36	12.00						EXIT CLOSED	6122012		IMPACT ATTENUATOR 55 MPH (SAND BARRELS)		
WO1-2R	48X48	16.00						CURVE (SYMBOL RIGHT)	GO20-1	60X24	10.00						ROAD WORK NEXT XX MILES	6122014		IMPACT ATTENUATOR 60 MPH (SAND BARRELS)		
WO1-3L	48X48	16.00						REVERSE TURN (SYMBOL LEFT)	GO20-2	48X24	8.00	4	32.00			26	END ROAD WORK	6122017		IMPACT ATTENUATOR 65 MPH (SAND BARRELS)		
WO1-3R	48X48	16.00						REVERSE TURN (SYMBOL RIGHT)	GO20-4	36X18	4.50						PILOT CAR FOLLOW ME	6122019		IMPACT ATTENUATOR 70 MPH (SAND BARRELS)		
WO1-4L	48X48	16.00						REVERSE CURVE (SYMBOL LEFT)	GO20-4a	42X30	8.75						PILOT CAR IN USE WAIT & FOLLOW	6122020		REPLACEMENT SAND BARREL		
WO1-4R	48X48	16.00						REVERSE CURVE (SYMBOL RIGHT)	GO20-4aP	18X12	1.50						PILOT CAR IN USE WAIT & FOLLOW	6122030		IMPACT ATTENUATOR (RELOCATION)		
WO1-4bL	48X48	16.00						DOUBLE ARROW REVERSE CURVE (SYMBOL LEFT)	GO20-5aP	36X24	6.00	4	24.00			54	WORK ZONE (PLAQUE)	6122040		WORK ZONE CRASH CUSHION (NARROW)		
WO1-4bR	48X48	16.00						DOUBLE ARROW REVERSE CURVE (SYMBOL RIGHT)	MO4-8a	24X18	3.00	2	6.00			52	END DETOUR	6122041		WORK ZONE CRASH CUSHION (RELOCATION)		
WO1-4cL	48X48	16.00						TRIPLE ARROW REVERSE CURVE (SYMBOL LEFT)	MO4-9L	48X36	12.00						DETOUR (LEFT)	6123001	1	TRUCK MOUNTED ATTENUATOR (TMA)		
WO1-4cR	48X48	16.00						TRIPLE ARROW REVERSE CURVE (SYMBOL RIGHT)	MO4-9R	48X36	12.00						DETOUR (RIGHT)	6161012		BUOYS (BOATS KEEP OUT)		
WO1-6	60X30	12.50						HORIZONTAL ARROW (SYMBOL)	MO4-9P	48X12	4.00						STREET NAME (PLAQUE)	6161013		BUOYS (NO WAKE)		
WO1-6a	72X36	18.00						HORIZ. ARROW (SYMBOL ON PERMANENT BARRICADE)	MO4-10L	48X18	6.00						DETOUR ARROW (LEFT)	6161014		SPECIAL SIGN ASSEMBLY (BOATS KEEP OUT)		
WO1-7	60X30	12.50						DOUBLE HEAD HORIZONTAL ARROW (SYMBOL)	MO4-10R	48X18	6.00						DETOUR ARROW (RIGHT)	6161020		CHANNELIZER (DRUM-LIKE)		
WO1-7a	72X36	18.00						DOUBLE HEAD HORIZ. ARROW (SYMBOL ON PERM. BARR.)	REGULATORY SIGNS									6161022		CHANNELIZER (CONE)		
WO1-8	18X24	3.00						CHEVRON (SYMBOL)	R1-1	48X48	13.25						STOP	6161025	80	CHANNELIZER (TRIM-LINE)		
WO1-8a	30X36	7.50						CHEVRON (SYMBOL FOR DIVIDED HIGHWAYS)	R1-2	48TRI.	6.93						YIELD	6161026		CHANNELIZER (VERTICAL PANEL)		
WO3-1	48X48	16.00						STOP AHEAD (SYMBOL)	R1-2a	36X36	9.00						TO ONCOMING TRAFFIC (PLAQUE)	6161030	24	TYPE 3 MOVEABLE BARRICADE		
WO3-2	48X48	16.00						YIELD AHEAD (SYMBOL)	R1-3P	30X12	2.50						ALL WAY (PLAQUE)	6161033		DIRECTION INDICATOR BARRICADE		
WO3-3	48X48	16.00						SIGNAL AHEAD (SYMBOL)	R2-1	36X48	12.00	8	96.00			4, 25	SPEED LIMIT 45/55	6161040		FLASHING ARROW PANEL		
WO3-4	48X48	16.00						BE PREPARED TO STOP	R3-1	48X48	16.00						NO RIGHT TURN (SYMBOL)	6161047		TYPE 3 OBJECT MARKER		
WO3-5	48X48	16.00						SPEED LIMIT AHEAD	R3-2	48X48	16.00						NO LEFT TURN (SYMBOL)	6161055		SEQUENTIAL FLASHING WARNING LIGHT		
WO4-1L	48X48	16.00						MERGE (SYMBOL FROM LEFT)	R3-3	36X36	9.00						NO TURNS	6161070		TUBULAR MARKER		
WO4-1R	48X48	16.00						MERGE (SYMBOL FROM RIGHT)	R3-4	48X48	16.00						NO U-TURN (SYMBOL)	6161095		RADAR SPEED ADVISORY SYSTEM		
WO4-1aL	48X48	16.00						MERGE (LEFT)	R3-7L	30X30	6.25						LEFT LANE MUST TURN LEFT	6161096		CHANGEABLE MESSAGE SIGN, COMMISSION FURNISHED/RETAINED		
WO4-1aR	48X48	16.00						MERGE (RIGHT)	R3-7R	30X30	6.25						RIGHT LANE MUST TURN RIGHT					
WO5-1	48X48	16.00	2	32.00			43	ROAD/BRIDGE/RAMP NARROWS	R4-1	36X48	12.00						DO NOT PASS	6161098A		CHANGEABLE MESSAGE SIGN WITHOUT COMM. INTERFACE, CONTRACTOR FURNISHED/RETAINED		
WO5-3	48X48	16.00						ONE LANE BRIDGE	R4-2	36X48	12.00						PASS WITH CARE					
WO5-5	48X48	16.00						NARROW LANES	R4-7a	36X48	12.00						KEEP RIGHT (HORIZONTAL ARROW)	6161099	6	CHANGEABLE MESSAGE SIGN WITH COMM. INTERFACE, CONTRACTOR FURNISHED/RETAINED		
WO6-1	48X48	16.00						DIVIDED HIGHWAY (SYMBOL)	R4-8a	36X48	12.00						KEEP LEFT (HORIZONTAL ARROW)					
WO6-2	48X48	16.00						DIVIDED HIGHWAY END (SYMBOL)	R5-1	30X30	6.25						DO NOT ENTER	6162000A		WORK ZONE TRAFFIC SIGNAL SYSTEM		
WO6-3	48X48	16.00						TWO WAY TRAFFIC (SYMBOL)	R5-1a	36X24	6.00						WRONG WAY	6162002		TEMPORARY LONG-TERM RUMBLE STRIPS		
WO7-3a	30X24	5.00	2	10.00			43	NEXT XX MILES (PLAQUE)	R6-1L	54X18	6.75						ONE WAY ARROW (LEFT)	6173600D		TEMPORARY TRAFFIC BARRIER, CONTRACTOR FURNISHED/RETAINED		
WO8-1	48X48	16.00						BUMP	R6-1R	54X18	6.75						ONE WAY ARROW (RIGHT)					
WO8-2	48X48	16.00						DIP	R6-2L	24X30	5.00						ONE WAY (LEFT)	6173700B		TEMP. TRAFFIC BARRIER ANCHORED, CONTRACTOR FURNISHED/RETAINED		
WO8-3	48X48	16.00						PAVEMENT ENDS	R6-2R	24X30	5.00						ONE WAY (RIGHT)					
WO8-4	48X48	16.00						SOFT SHOULDER	R9-9	24X12	2.00						SIDEWALK CLOSED	6173706		TEMP. TRAFFIC BARRIER STIFFNESS TRANSITION CONTRACTOR FURNISHED/RETAINED		
WO8-5	48X48	16.00						SLIPPERY WHEN WET (SYMBOL)	R9-11L	24X18	3.00						SIDEWALK CLOSED AHEAD, (ARROW LEFT) CROSS HERE					
WO8-6	48X48	16.00						TRUCK CROSSING									SIDEWALK CLOSED AHEAD, (ARROW RIGHT) CROSS HERE					
WO8-6c	48X48	16.00						TRUCK ENTRANCE	R9-11R	24X18	3.00						STOP HERE ON RED (45^ ARROW)	6174000A		TEMP. TRAFFIC BARRIER HEIGHT TRANSITION, CONTRACTOR FURNISHED/RETAINED		
WO8-7	36X36	9.00						LOOSE GRAVEL	R10-6	24X36	6.00							6175010A		RELOCATING TEMPORARY TRAFFIC BARRIER		
WO8-7a	36X36	9.00						FRESH OIL / LOOSE GRAVEL	R11-2	48X30	10.00	4	40.00			29	ROAD CLOSED	6175011B		RELOCATING TEMP. TRAFFIC BARRIER ANCHORED		
WO8-9	48X48	16.00						LOW SHOULDER	R11-3a	60X30	12.50	3	37.50				ROAD CLOSED 2 MILES AHEAD	6175013		RELOCATING TEMP. TRAFFIC BARRIER STIFFNESS		
WO8-11	48X48	16.00						UNEVEN LANES										LOCAL TRAFFIC ONLY	6175020A			
WO8-12	48X48	16.00						NO CENTER LINE	R11-4	60X30	12.50	3	37.50				ROAD CLOSED TO THRU TRAFFIC	6208064A		TEMPORARY RAISED PAVEMENT MARKER		
WO8-15	48X48	16.00						GROOVED PAVEMENT										ROAD CLOSED TO THRU TRAFFIC	9029400			
WO8-15P	30X24	5.00						MOTORCYCLE (PLAQUE)	CONST-3A	60X48	20.00						FINE SIGN	9029401		TEMPORARY TRAFFIC SIGNALS AND LIGHTING		
WO8-17L	48X48	16.00						SHOULDER DROP-OFF (SYMBOL LEFT)	CONST-3X	56X12	4.67						SPEEDING/PASSING (PLATE)					
WO8-17R	48X48	16.00						SHOULDER DROP-OFF (SYMBOL RIGHT)	MISCELLANEOUS SIGNS													
WO8-17P	30X24	5.00						SHOULDER DROP-OFF (PLAQUE)	CONST-5	48X36	12.00						POINT OF PRESENCE					
W10-1	42RND.	9.62						RAILROAD CROSSING	CONST-5	96X48	32.00	4	128.00			3	POINT OF PRESENCE					
WO12-1	24X24	4.00						DOUBLE DOWN ARROW (SYMBOL)	CONST-8	48X36	12.00	4	48.00			59	WORK ZONE NO PHONE ZONE					
WO12-2	48X48	16.00						LOW CLEARANCE (SYMBOL)	MO4-11	36X78	19.50	26	507.00			50A-P	DETOUR PLAQUE					
WO12-2x	24X18	3.00						LOW CLEARANCE (PLAQUE)														
WO12-2a	84X24	14.00						OVERHEAD LOW CLEARANCE (FEET AND INCHES)														
WO12-4	120X60	50.00						LOW CLEARANCE XX FT XX IN XX MILES AHEAD														
WO12-5	120X60	50.00						WIDTH RESTRICTION XX FT XX IN XX MILES AHEAD														
WO13-1	30X30	6.25						ADVISORY SPEED (PLAQUE)														
WO16-2	30X24	5.00						XXX FEET (PLAQUE)														
WO16-3	30X24	5.00						X MILE (PLAQUE)														
WO20-1	48X48	16.00	8	128.00			2	ROAD/BRIDGE/RAMP WORK AHEAD														
WO20-2	48X48	16.00	2	32.00			18	DETOUR AHEAD														
WO20-3	48X48	16.00	8	128.00			20,20A	ROAD CLOSED AHEAD	616-10.05				TOTAL									
WO20-4	48X48	16.00	2	32.00			7	ONE LANE ROAD AHEAD	CONSTRUCTION SIGNS				1382									
WO20-5	48X48	16.00						RIGHT/CENTER/LEFT LANE CLOSED AHEAD	616-10.10						TOTAL							
WO20-5a	48X48	16.00						2 RIGHT/CENTER/LEFT LANES CLOSED AHEAD	RELOCATED SIGNS													
WO20-6a	48X48	16.00						RIGHT/CENTER/LEFT LANE CLOSED														
WO20-7a	48X48	16.00	2	32.00			8	FLAGGER (SYMBOL)														
WO21-2	36X36	9.00						FRESH OIL														
WO21-5	48X48	16.00	2	32.00			21	SHOULDER WORK / SHOULDER WORK AHEAD														
WO22-1	48X48	16.00						BLASTING ZONE AHEAD														
WO22-2	42X36	10.50						TURN OFF 2-WAY RADIO AND PHONE														
WO22-3	42X36	10.50						END BLASTING ZONE														
GO22-1	21X15	2.19						WET PAINT (ARROW PIVOTS)														

STATE OF MISSOURI
CAMERON SODY
NUMBER
PE-2021019715
08-14-2021 10:43:03
CAMERON SODY-CIVIL
MO-PE-2021019715
DATE PREPARED
8/12/2026

ROUTE
266
STATE
MO

DISTRICT
SW
SHEET NO.
3

COUNTY
GREENE

JOB NO.
JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION

DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

SUMMARY OF QUANTITIES
SHEET 9 OF 9

ANY WORK INDICATED ON THE PLANS THAT EXTENDS BEYOND THE PROJECT LIMITS IS CONSIDERED INCIDENTAL TO AND A PART OF THE CONSTRUCTION OF THIS PROJECT.

ALL BEARINGS BASED ON STATE PLANE BEARINGS, CENTRAL ZONE.

RIGHT OF WAY LIMITS FOR THIS PROJECT EXTENDS FROM:

STATION 522+69.43	TO STATION 534+30.00	A DISTANCE OF 0.22 MILES ON MO 266
STATION 549+11.63	TO STATION 560+72.17	A DISTANCE OF 0.22 MILES ON MO 266
STATION 350+67.36	TO STATION 356+41.30	A DISTANCE OF 0.11 MILES ON RTE AB
STATION 0+00.00	TO STATION 5+98.04	A DISTANCE OF 0.11 MILES ON FARM RD 99
STATION 0+00.00	TO STATION 6+80.87	A DISTANCE OF 0.13 MILES ON RTE B

ENTRANCES CONSTRUCTED THROUGH NEW CONTROLLED ACCESS RIGHT OF WAY BETWEEN
STATION 522+69.43 TO STATION 534+30.00 A DISTANCE OF 0.22 MILES ON MO 266
STATION 549+11.63 TO STATION 560+72.17 A DISTANCE OF 0.22 MILES ON MO 266
STATION 350+67.36 TO STATION 356+41.30 A DISTANCE OF 0.11 MILES ON RTE AB
STATION 0.00.00 TO STATION 5+98.04 A DISTANCE OF 0.11 MILES ON FARM RD 99
STATION 0+00.00 TO STATION 6+80.87 A DISTANCE OF 0.13 MILES ON RTE B
MAY BE WIDENED BY PERMIT TO A MAXIMUM WIDTH OF 60 FEET.

NEW RIGHT OF WAY STATION AND OFFSET INFORMATION TAKEN FROM THE EXISTING
C/L OF MO 266, RTE AB, FARM RD 99 AND RTE B.


THE APPROXIMATE LOCATION OF PROPERTY LINES AS SHOWN ON THE PLANS ARE BASED ON THE BEST INFORMATION AVAILABLE TO THE COMMISSION AT THIS TIME. THIS INFORMATION IS PROVIDED BY THE COMMISSION "AS-IS" AND THE COMMISSION EXPRESSLY DISCLAIMS ANY REPRESENTATION OR WARRANTY AS TO THE COMPLETENESS, ACCURACY, OR SUITABILITY OF THE INFORMATION FOR ANY USE.

SE 1/4 SW 1/4
15-29-23

①

LONG FARM PROPERTIES, LLC

SEE SHEET 7

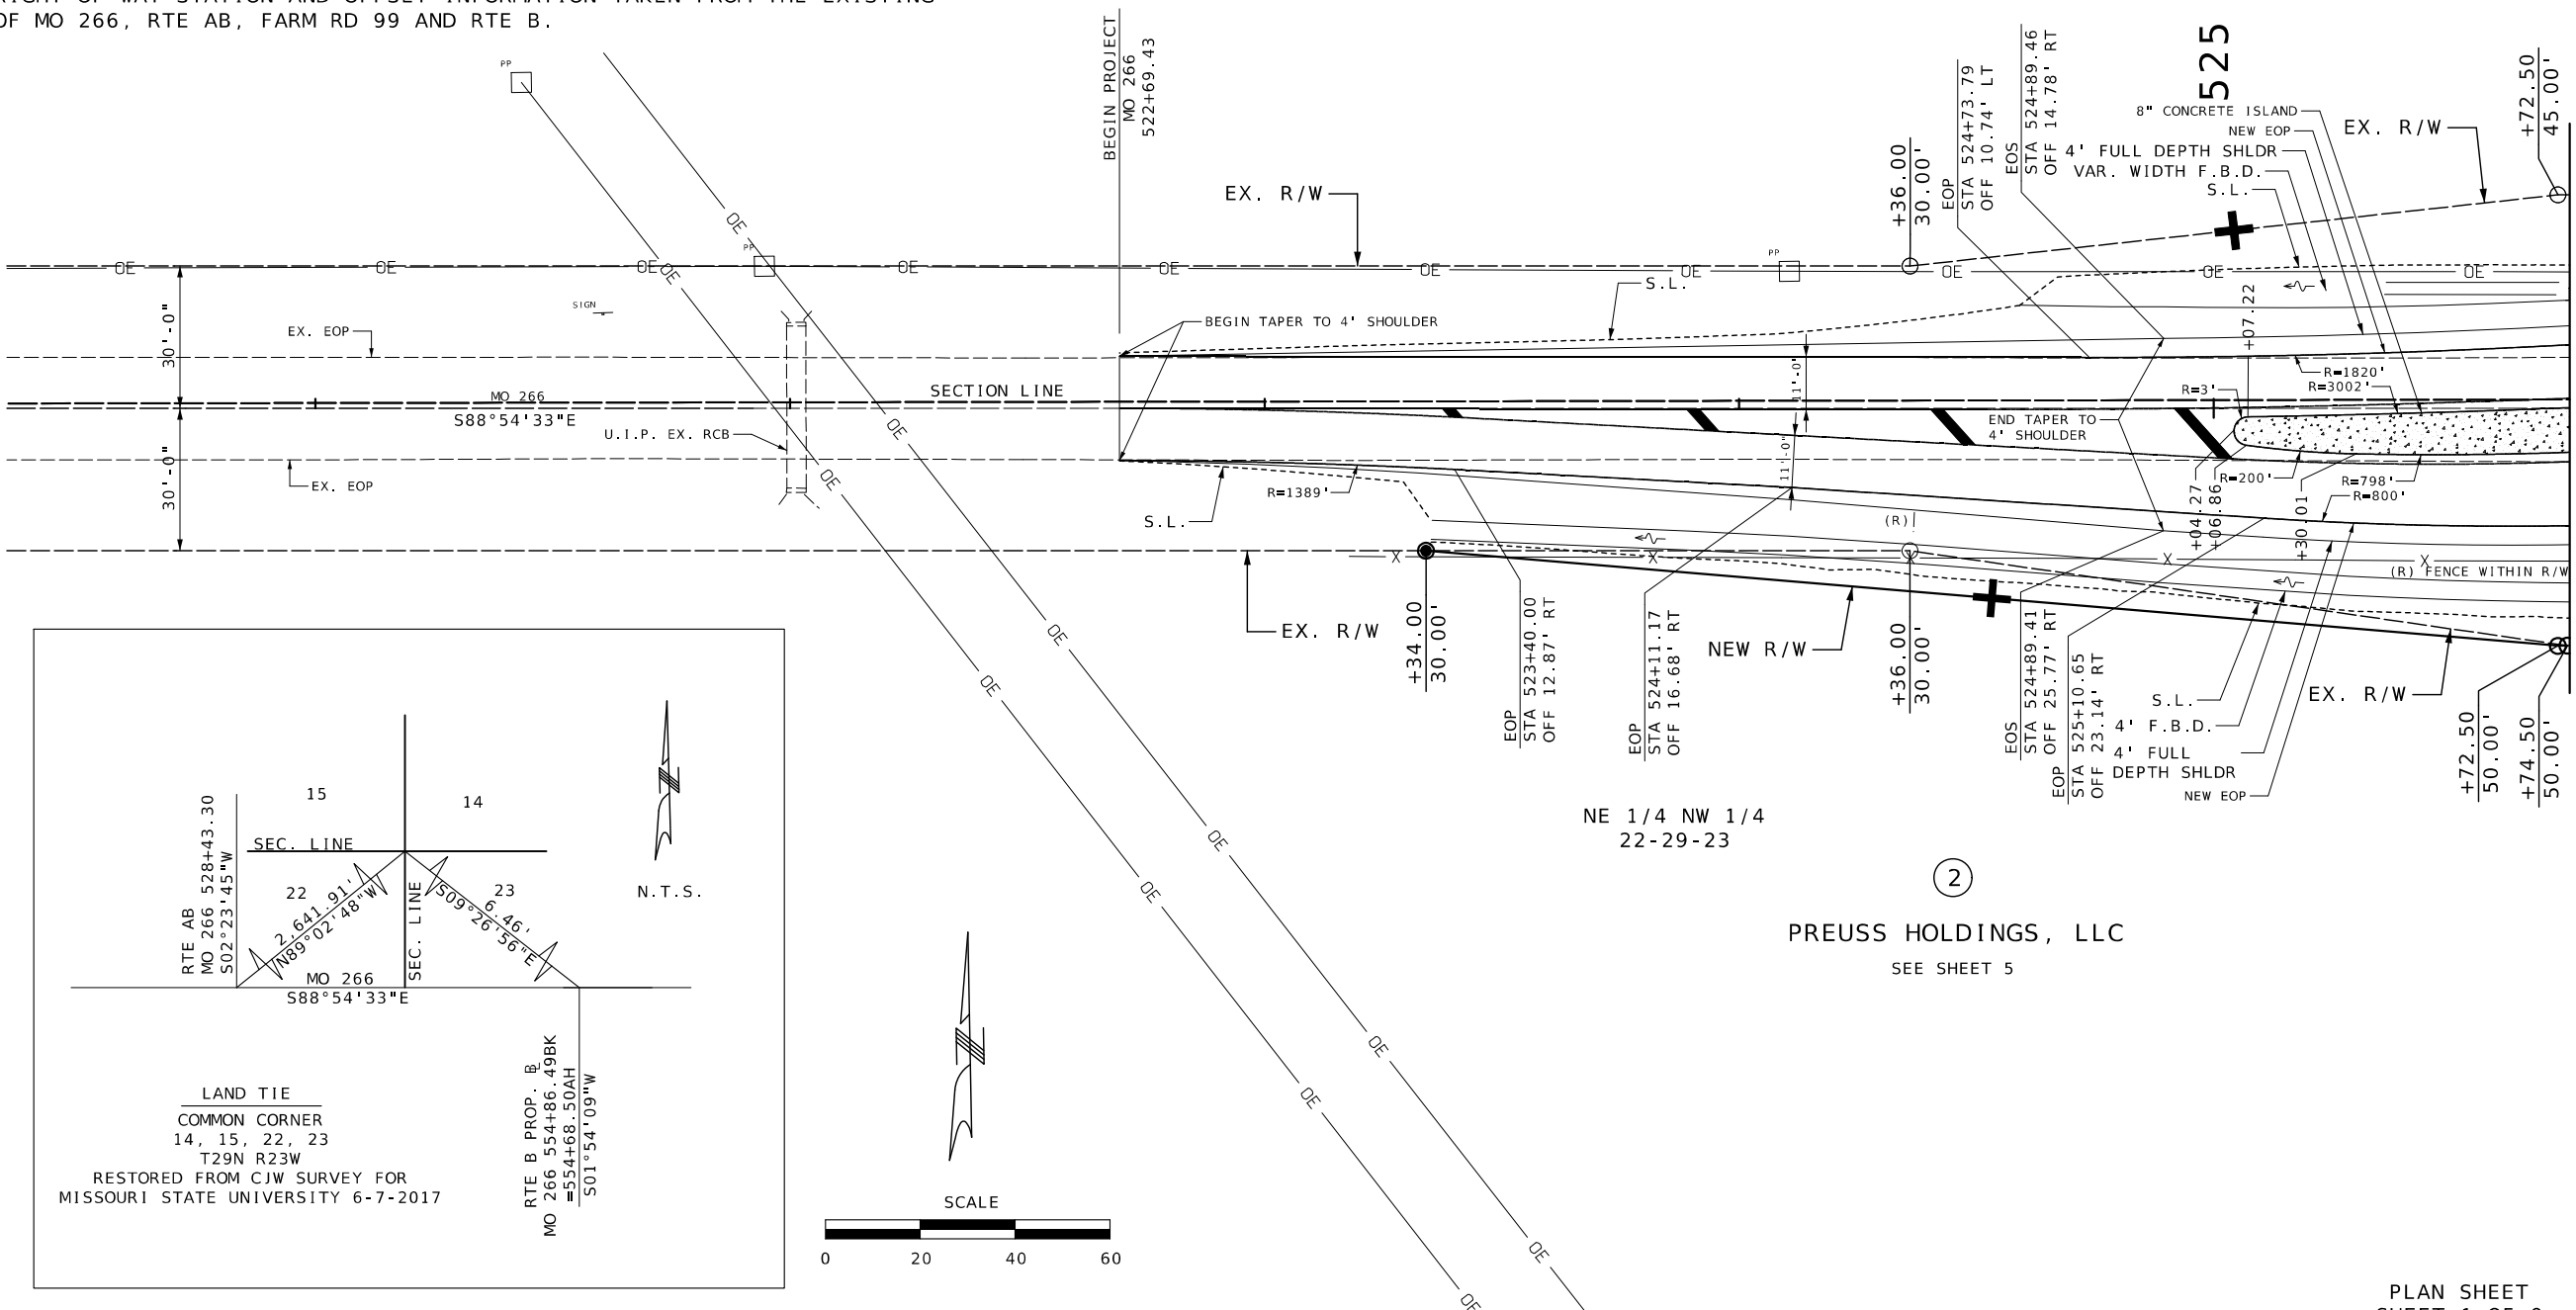

PLAN SHEET
SHEET 1 OF 9
MO 266 & RTE AB/FARM RD 99



07-25-2020 12:13:03
CAMERON SOOY - CIVIL
MO DE 0001010745

DATE PREPARED
7/24/2026

ROUTE 266	STATE MO
--------------	-------------

DISTRICT	SHEET NO.
SW	4

COUNTY
GREENE

JOB NO.
JSU0080

CONTRACT ID.

PROJECT NO. _____


BRIDGE NO.

[illegible]

MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)





PLAN SHEET
SHEET 2 OF 9
MO 266 & RTE AB/FARM RD 99





3
VROOM SOLAR MO INC.
SEE SHEET 5

NW 1/4 NE 1/4
22-29-23

NE 1/4 NW 1/4
22-29-23

2
PREUSS HOLDINGS, LLC
SEE SHEET 5

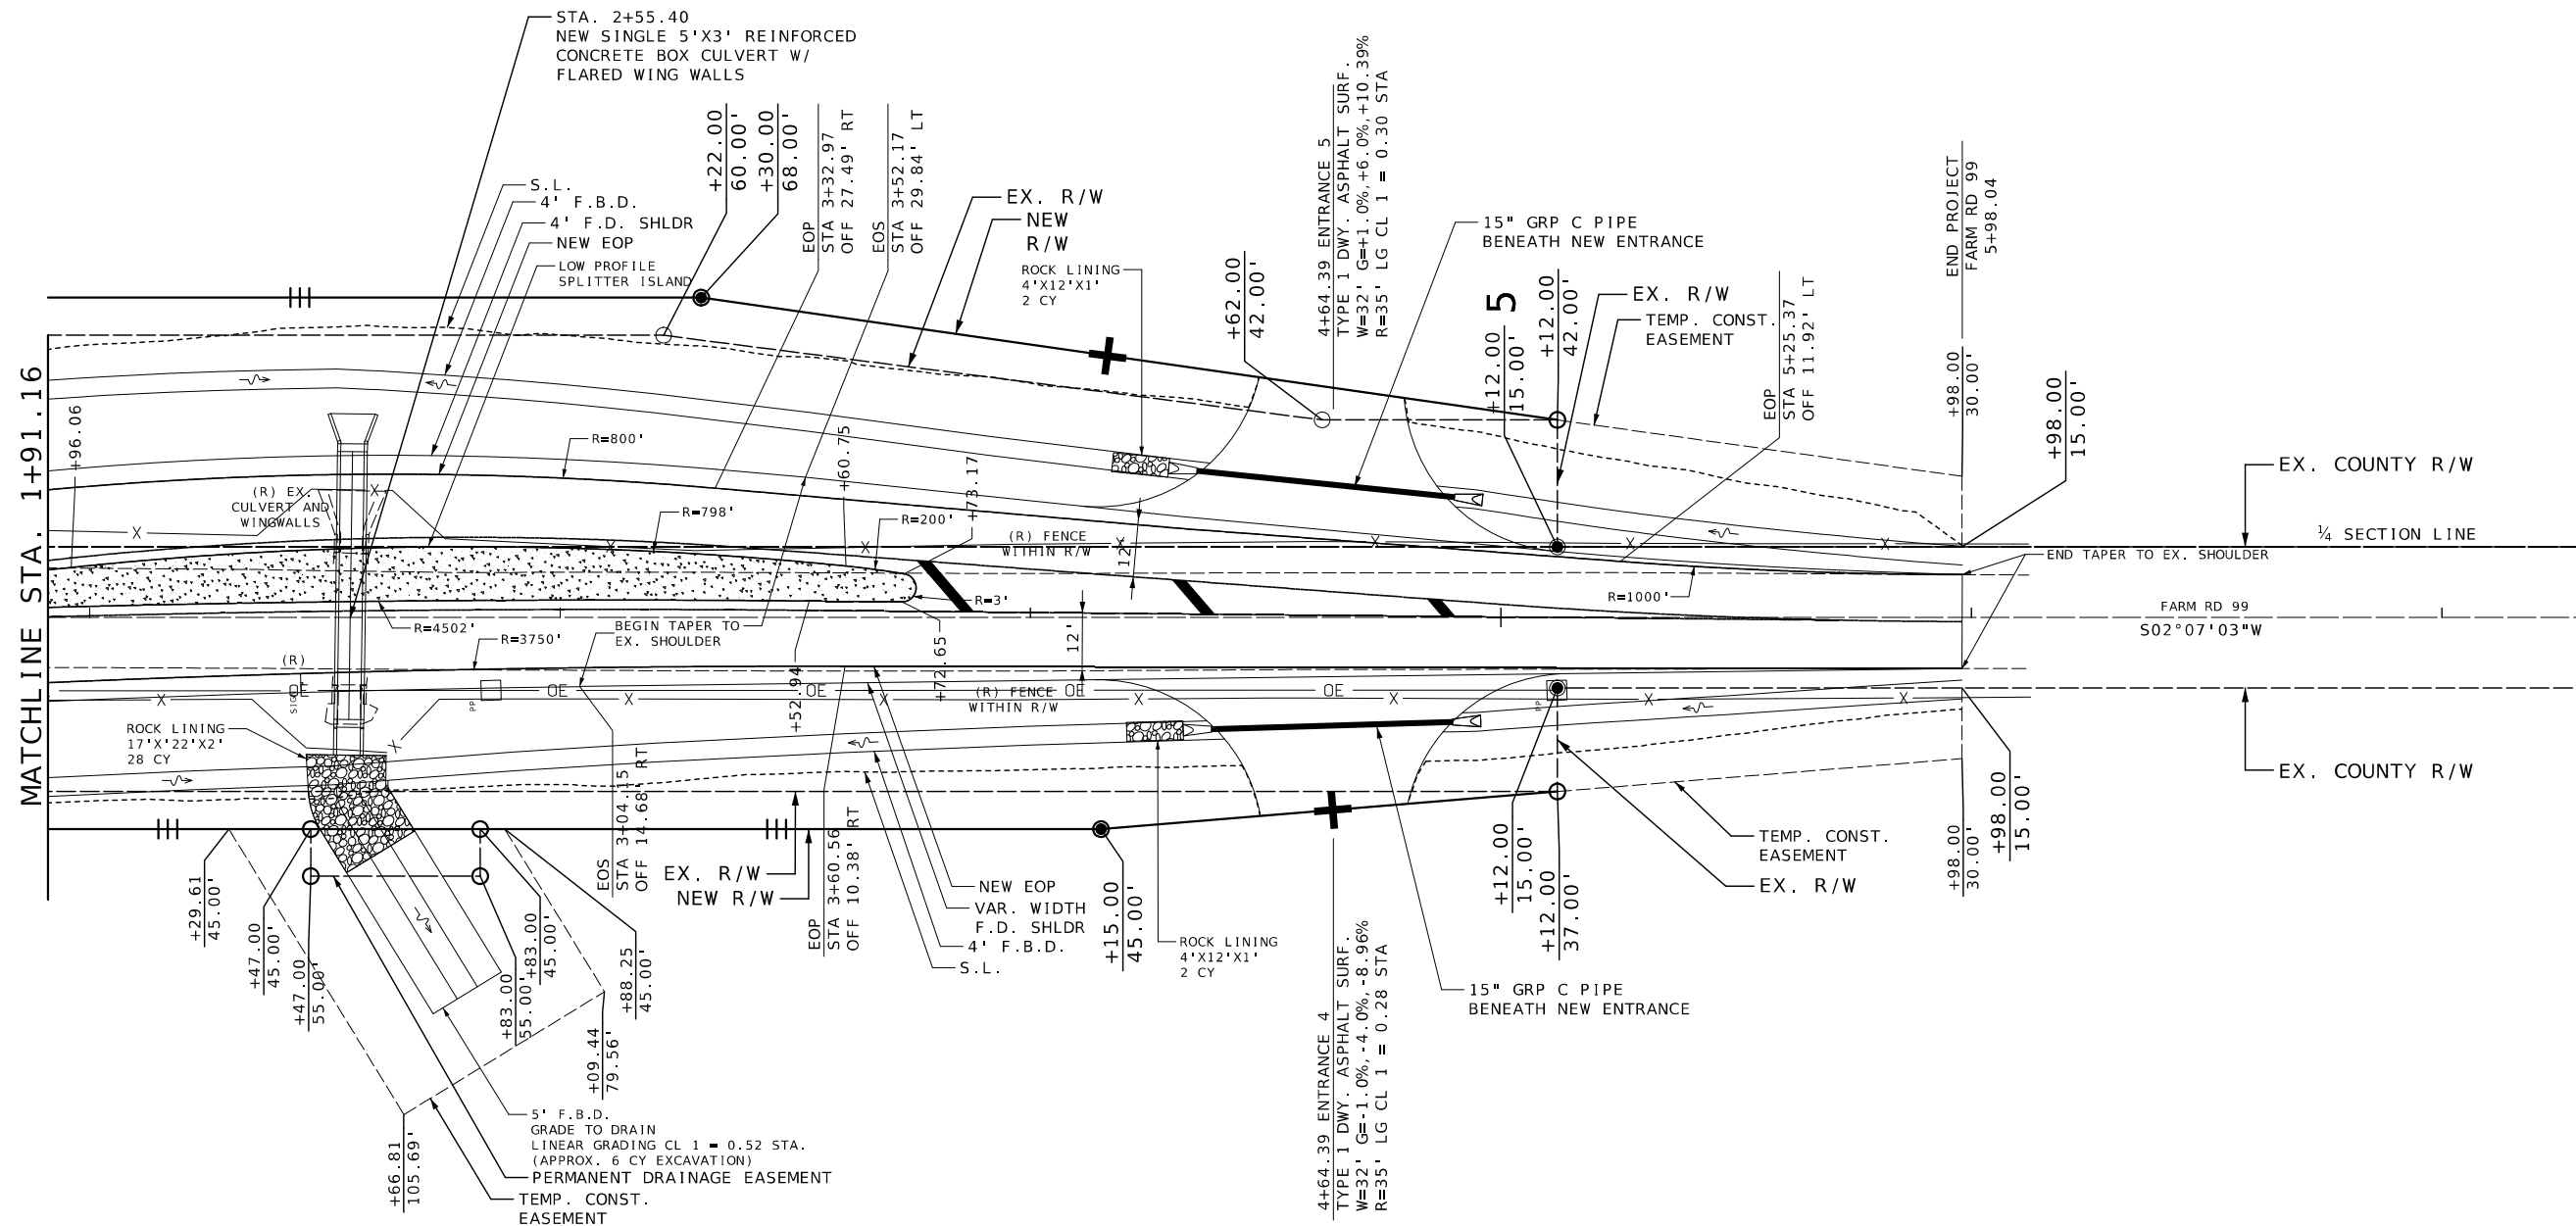

PLAN SHEET
SHEET 5 OF 9
MO 266 & RTE AB/FARM RD 99




DATE PREPARED
7/24/2026
ROUTE 266 STATE MO
DISTRICT SW SHEET NO. 8
COUNTY GREENE
JOB NO. JSU0080
CONTRACT ID.

PROJECT NO.
BRIDGE NO.

DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
MoDOT
105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)



DATE PREPARED
8/11/2026

ROUTE 266 STATE MO

DISTRICT SW SHEET NO. 9


COUNTY GREENE

JOB NO. JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

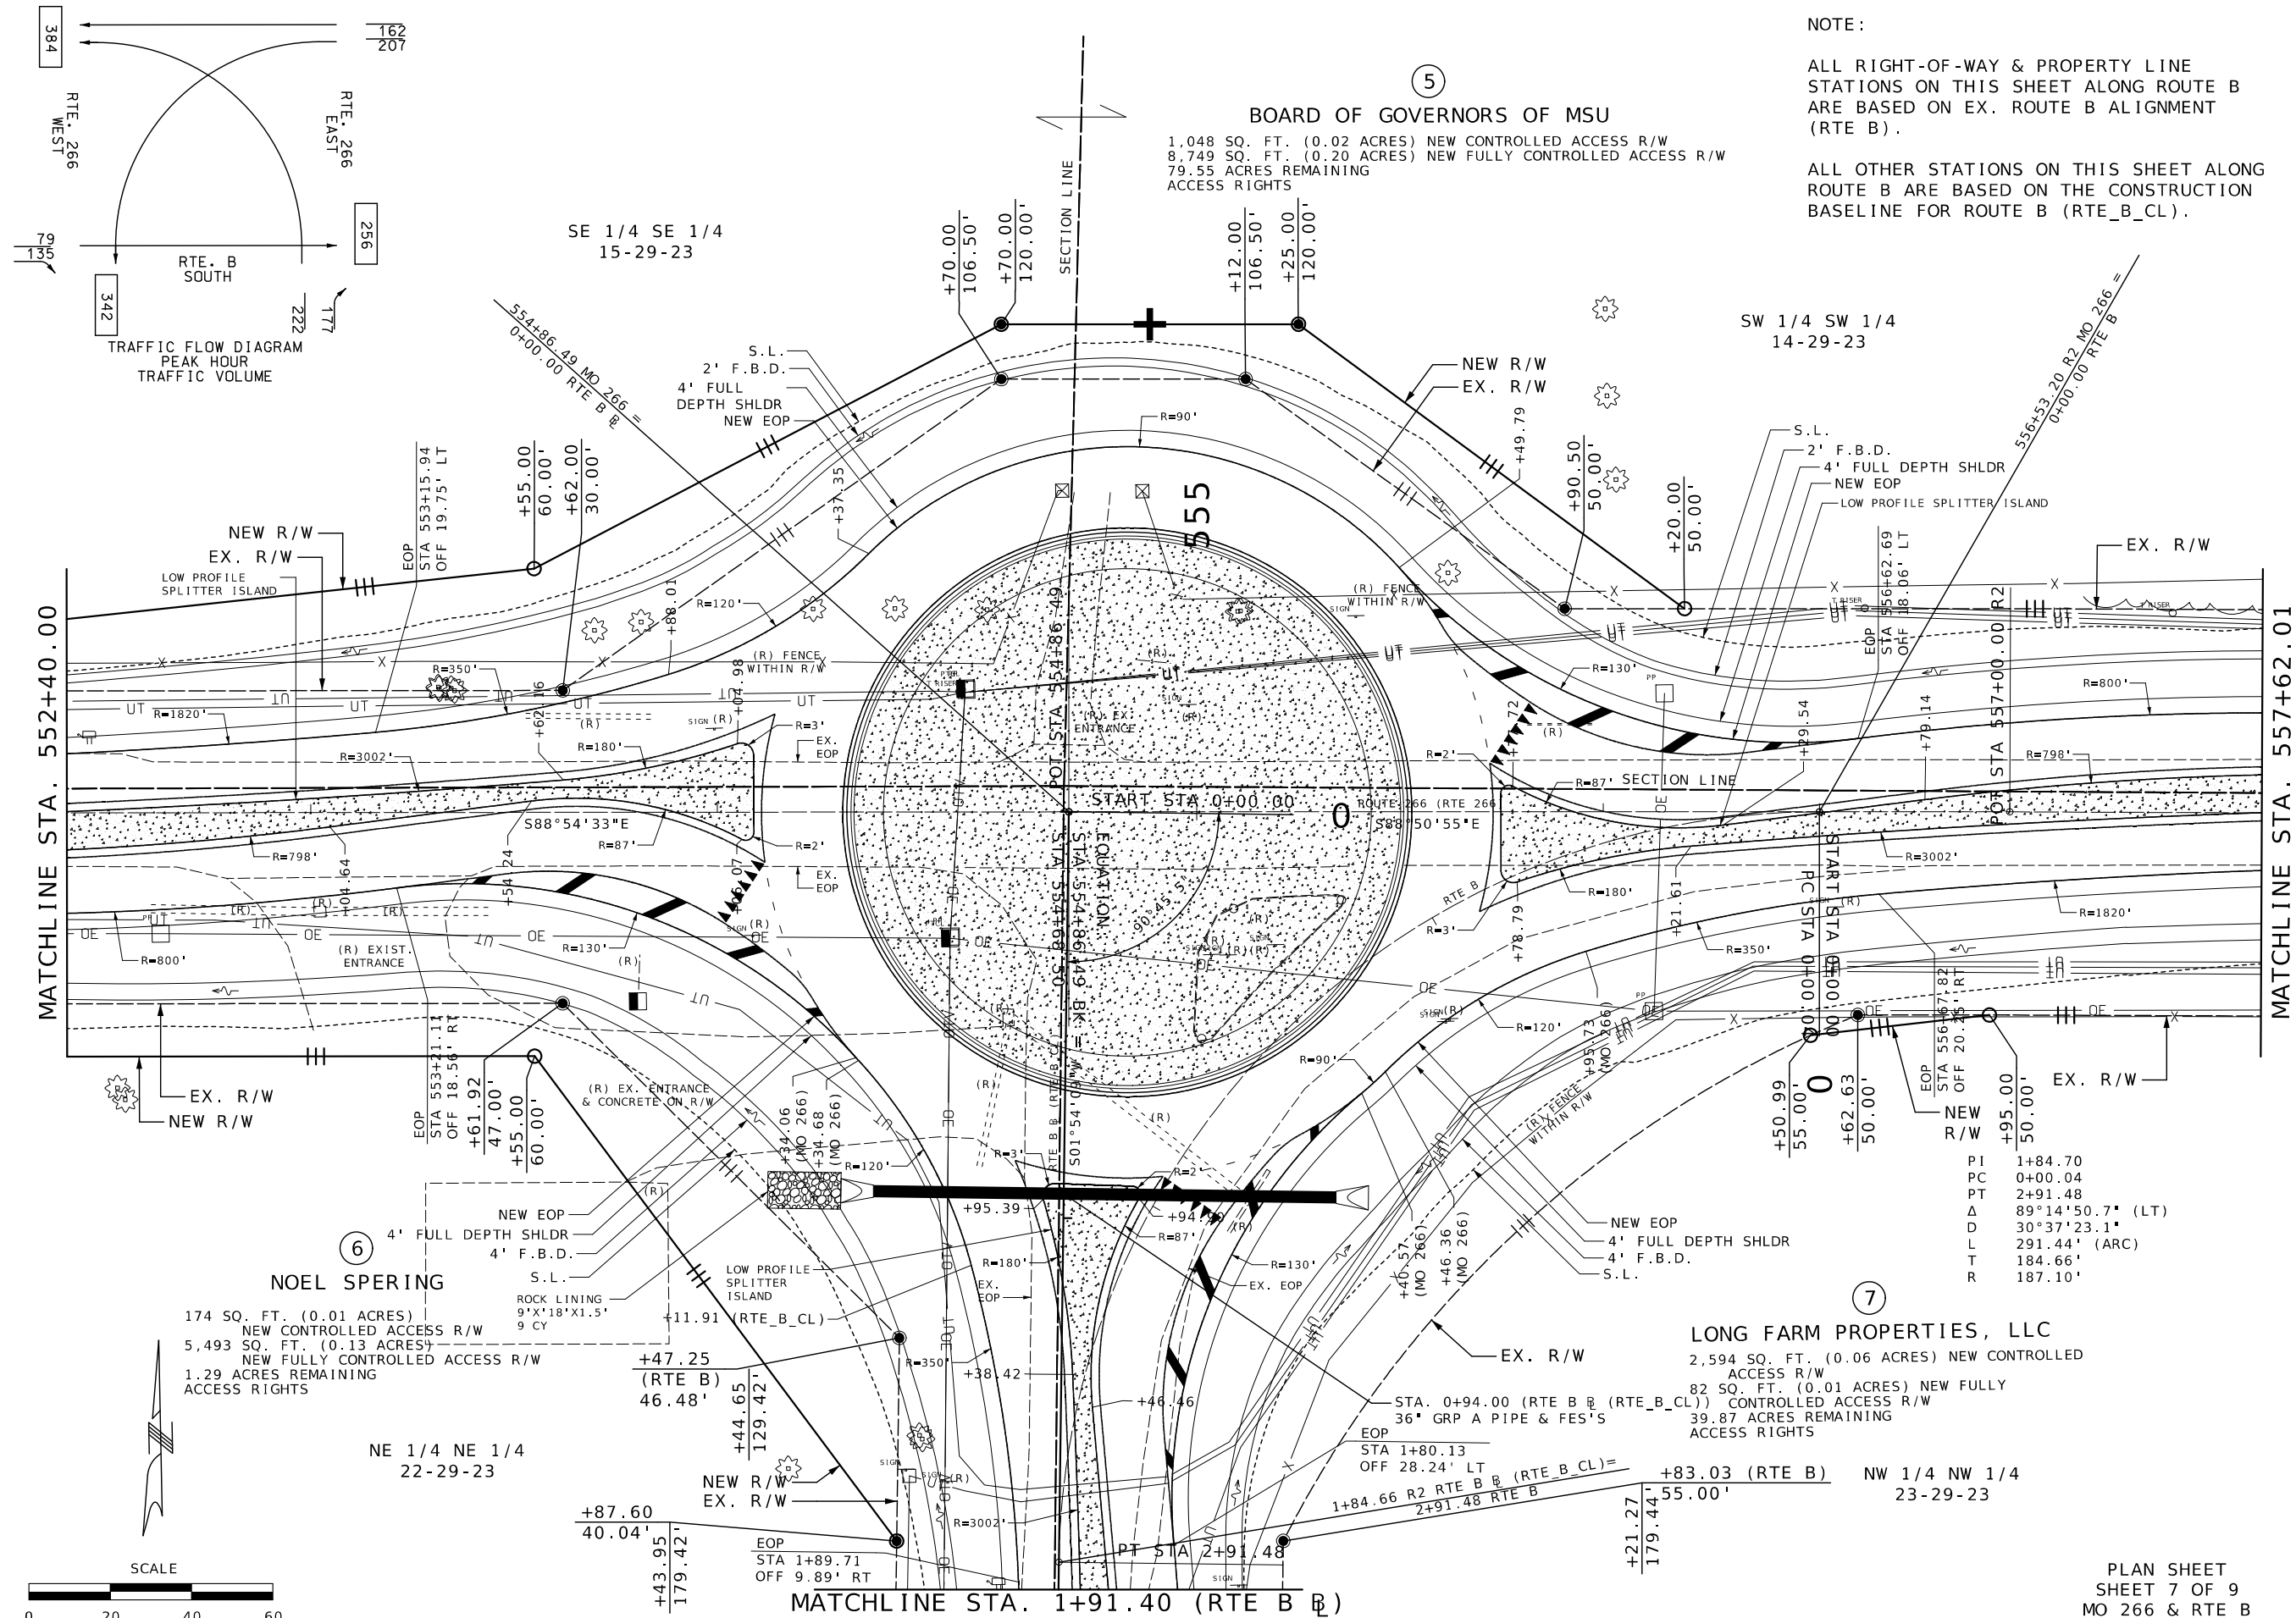

NOTE:


ALL RIGHT-OF-WAY & PROPERTY LINE STATIONS ON THIS SHEET ALONG ROUTE B ARE BASED ON EX. ROUTE B ALIGNMENT (RTE B).

ALL OTHER STATIONS ON THIS SHEET ALONG ROUTE B ARE BASED ON THE CONSTRUCTION BASELINE FOR ROUTE B (RTE_B_CL).

[illegible]

PLAN SHEET
SHEET 7 OF 9
MO 266 & RTE B

NOTE:
ALL RIGHT-OF-WAY & PROPERTY LINE STATIONS ON THIS SHEET BASED ON EX. ROUTE B ALIGNMENT (RTE B).
ALL OTHER STATIONS ON THIS SHEET BASED ON THE CONSTRUCTION BASELINE FOR ROUTE B (RTE_B_CL).

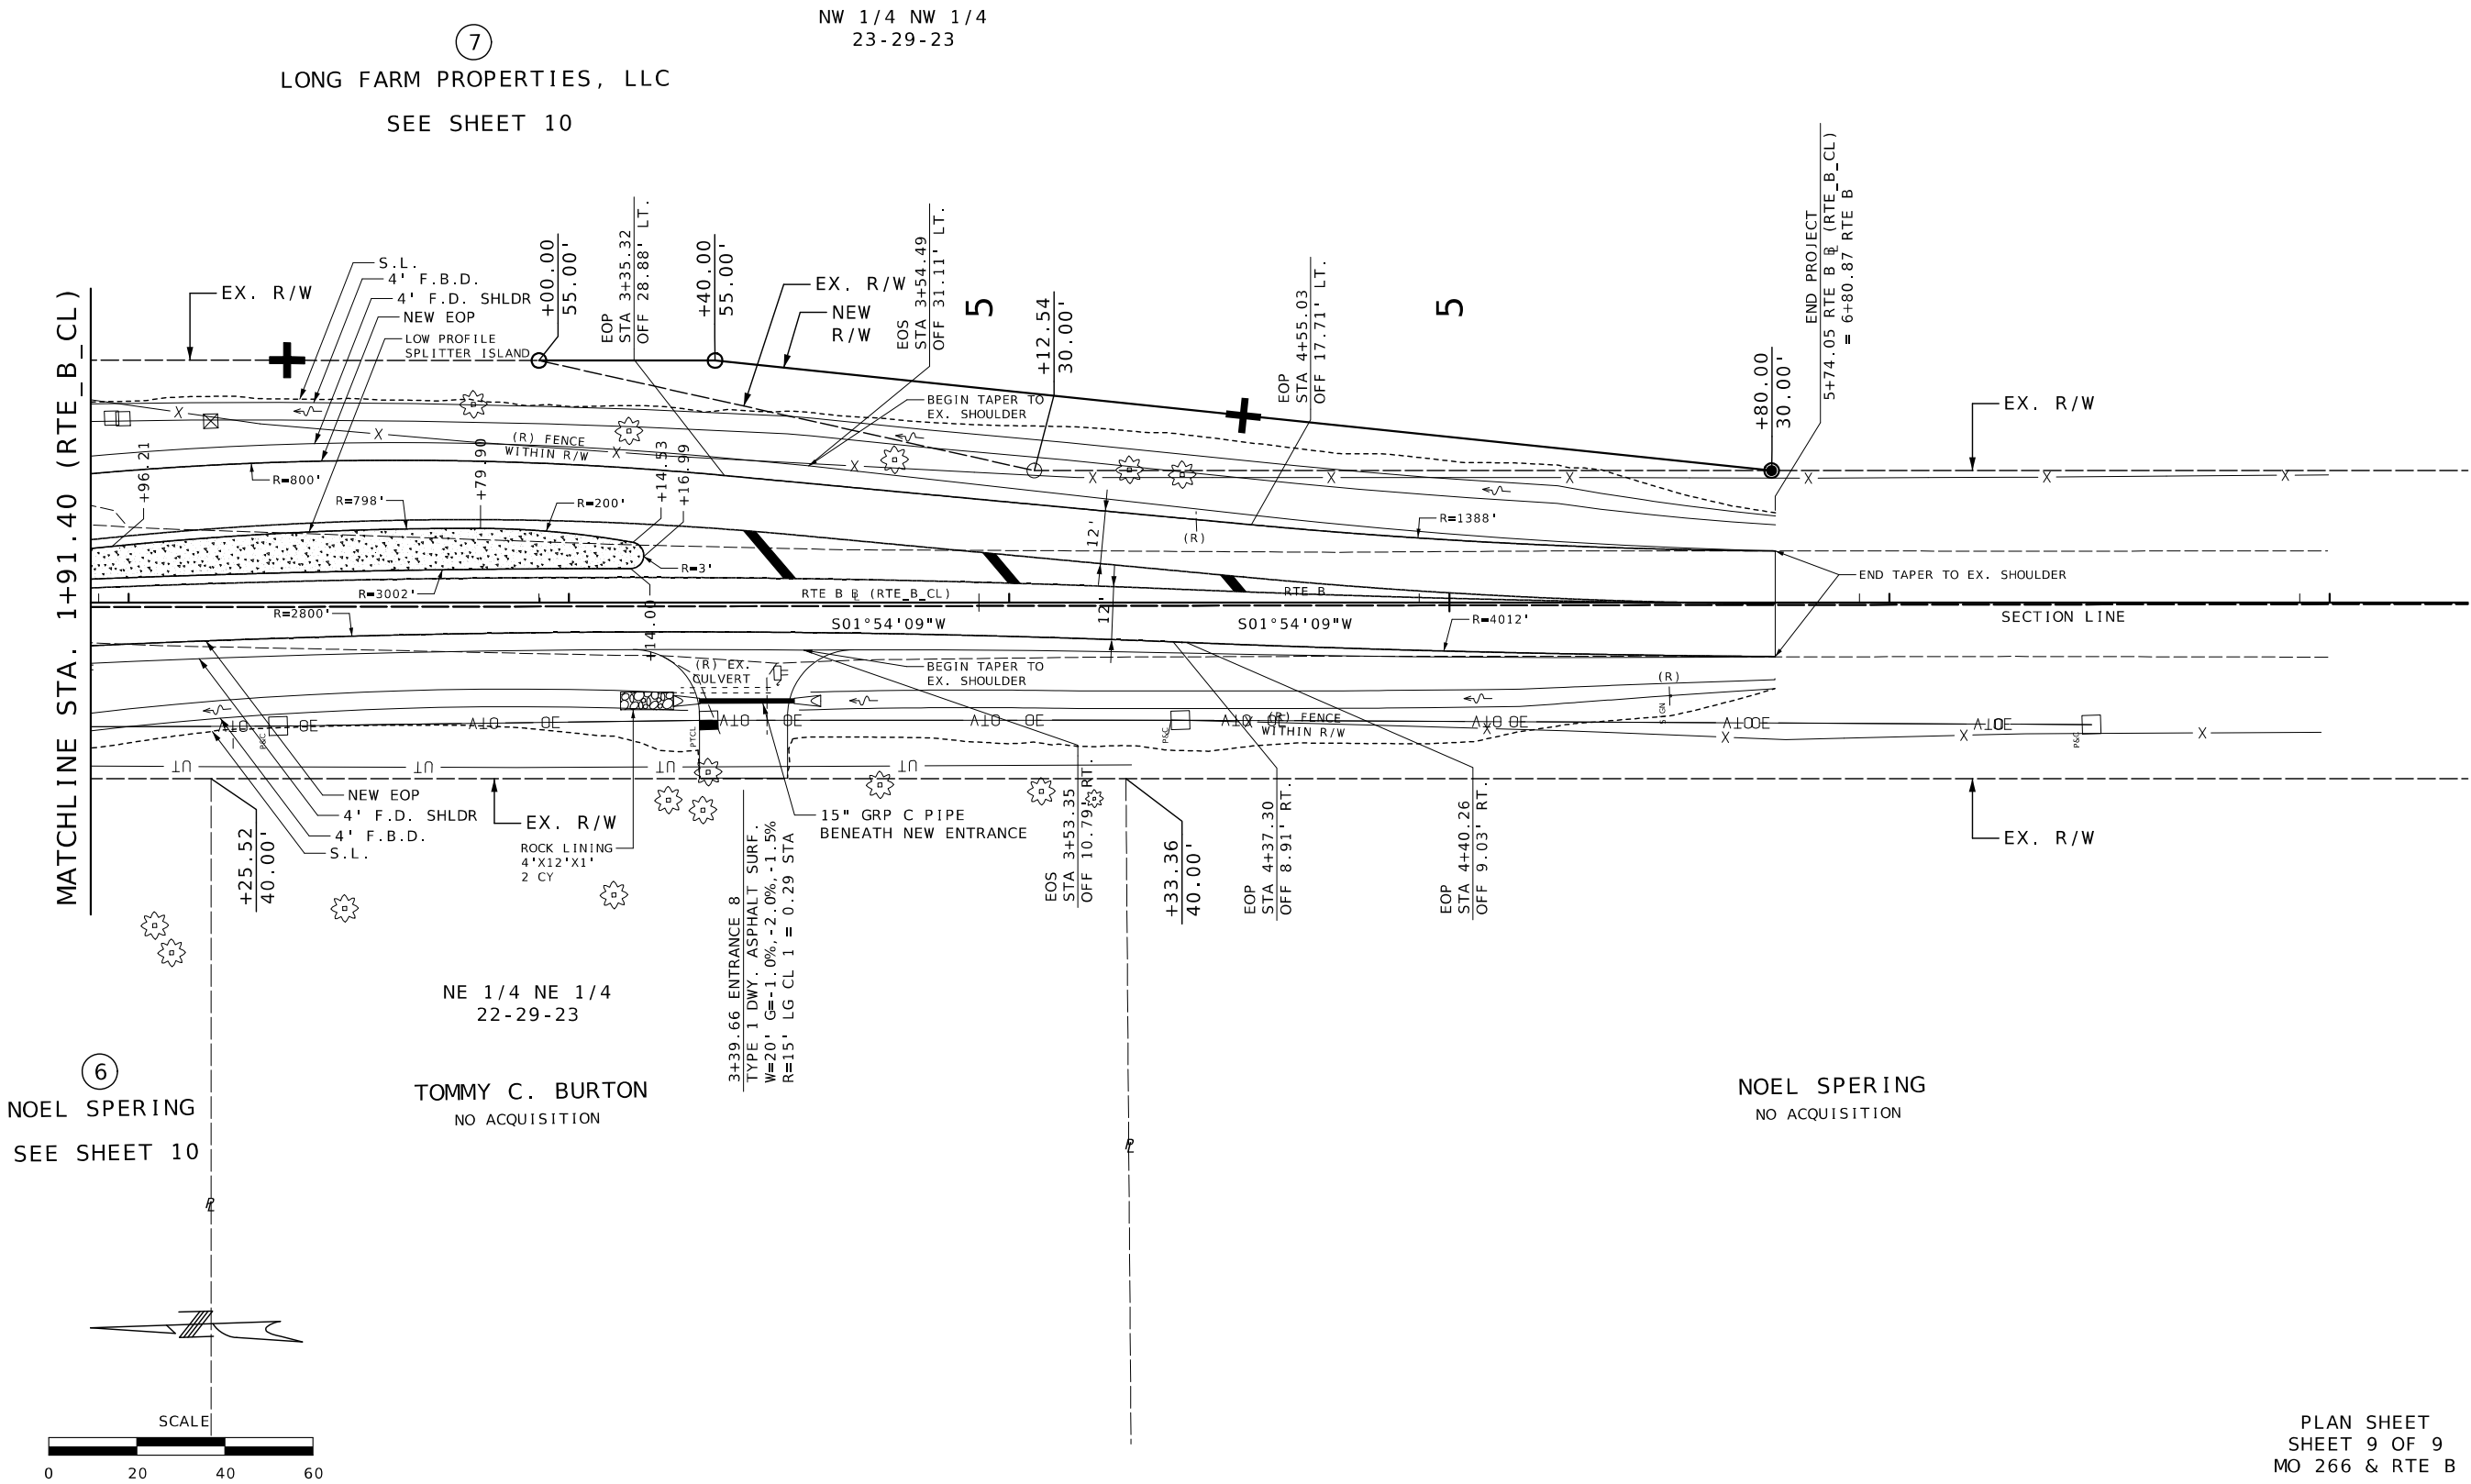

STATE OF MISSOURI

CAMERON

SOOY

NUMBER

PE-2021019715

PROFESSIONAL ENGINEER

076-2021019715

CAMERON SOOY - CIVIL

MO-PE-2021019715

DATE PREPARED

7/24/2026

ROUTE

266

DISTRICT

SW

STATE

MO

SHEET NO.

12

COUNTY

GREENE

JOB NO.

JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION

DATE



MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

MoDOT


105 WEST CAPITOL

JEFFERSON CITY, MO 65102

1-888-ASK-MODOT (1-888-275-6636)

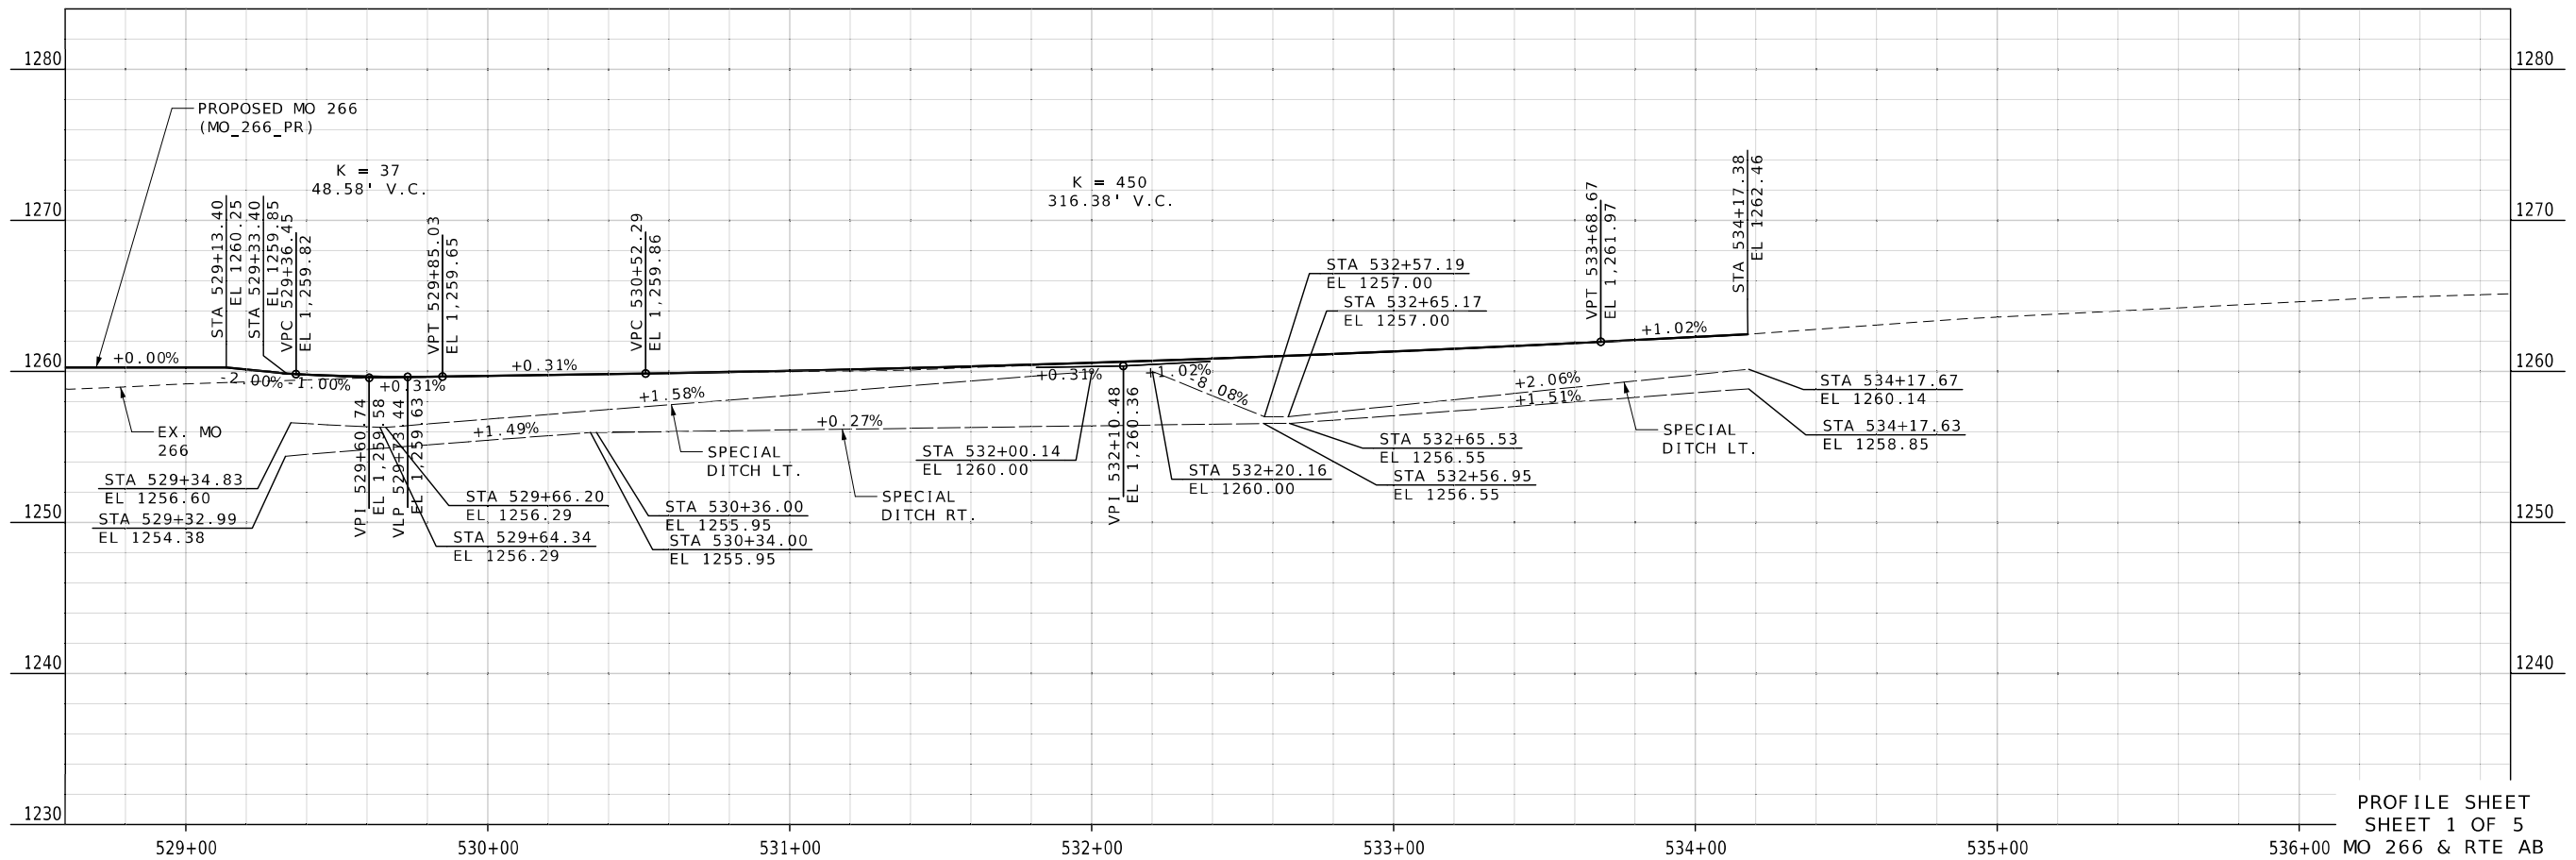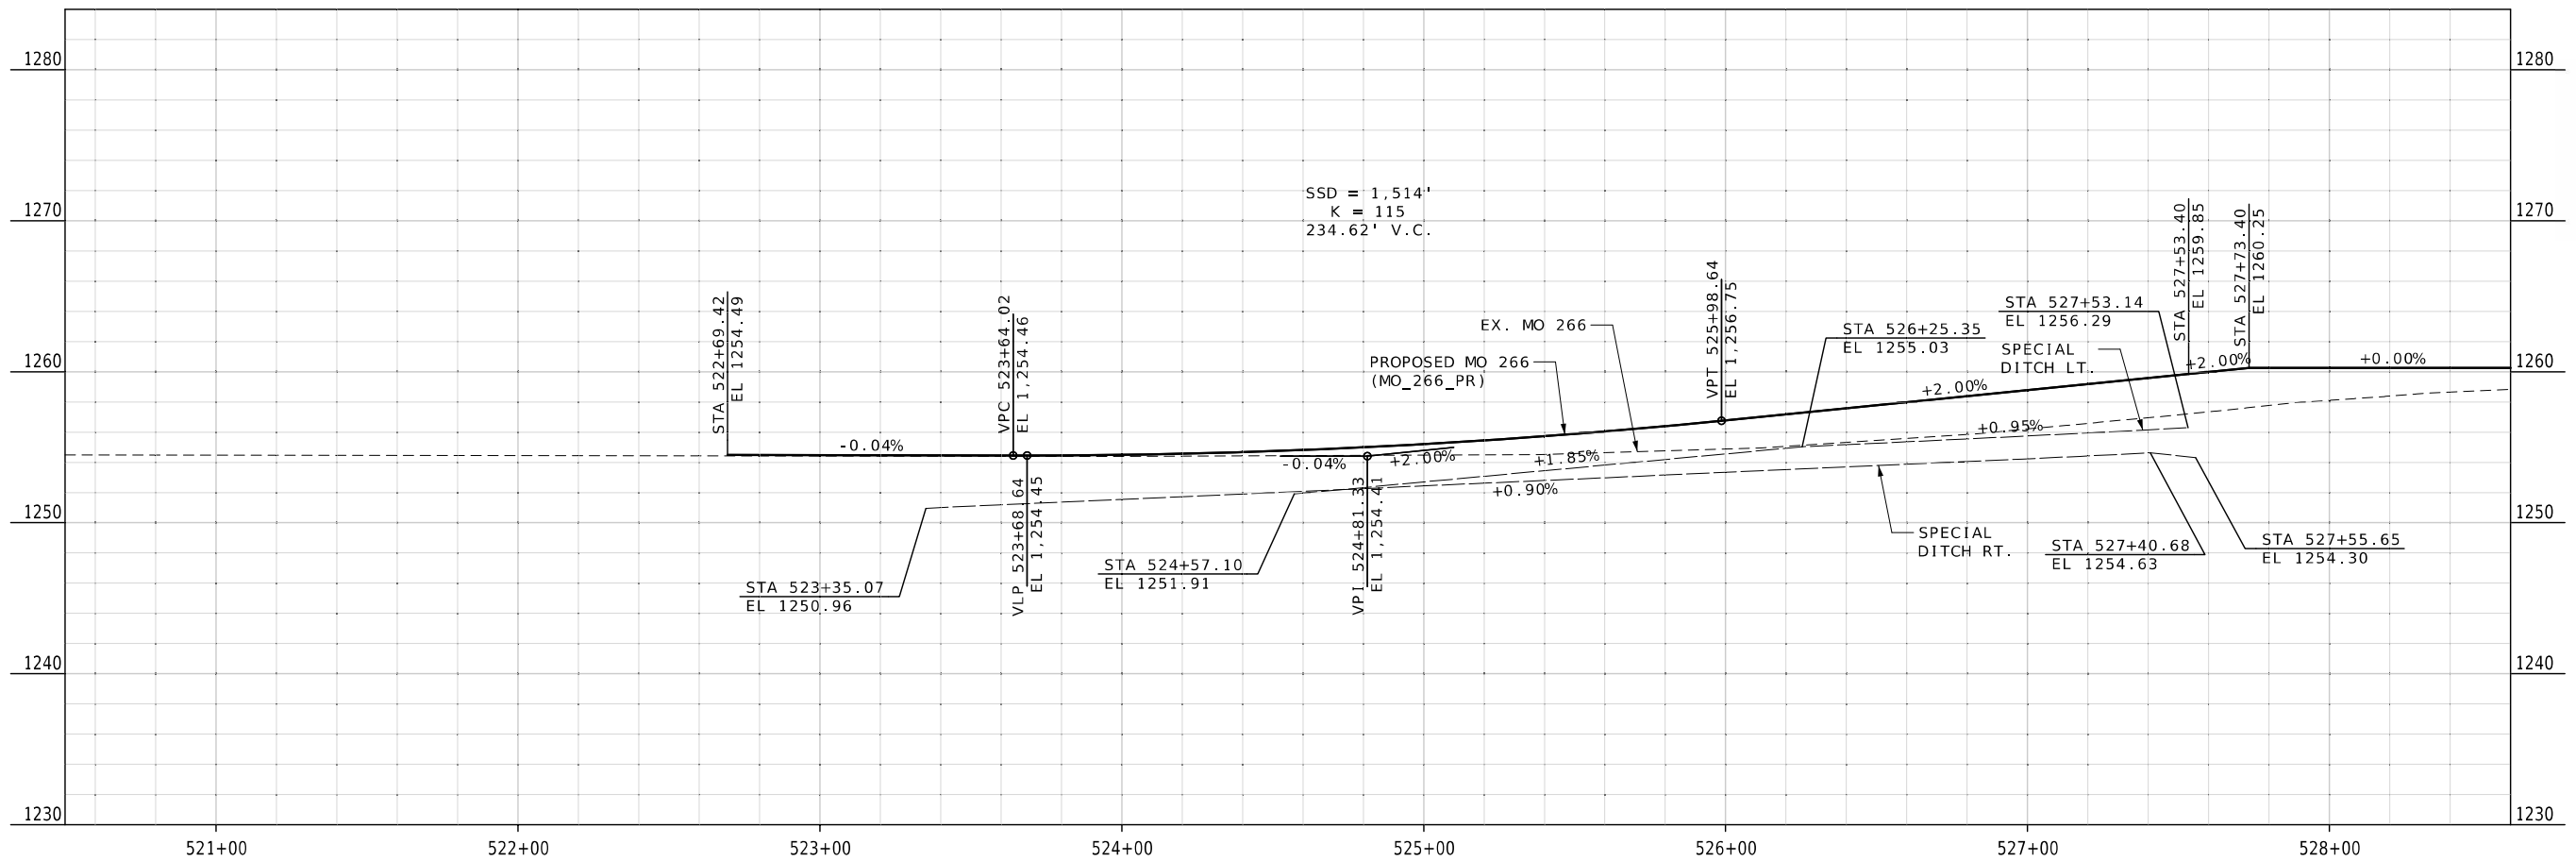

PROFILE SHEET
SHEET 1 OF 5
MO 266 & RTE AB



DATE PREPARED
7/24/2026

ROUTE 266	STATE MO
DISTRICT SW	SHEET NO. 13

COUNTY
GREENE

JOB NO.
JSU0080

CONTRACT ID.



PROJECT NO.

BRIDGE NO.

DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

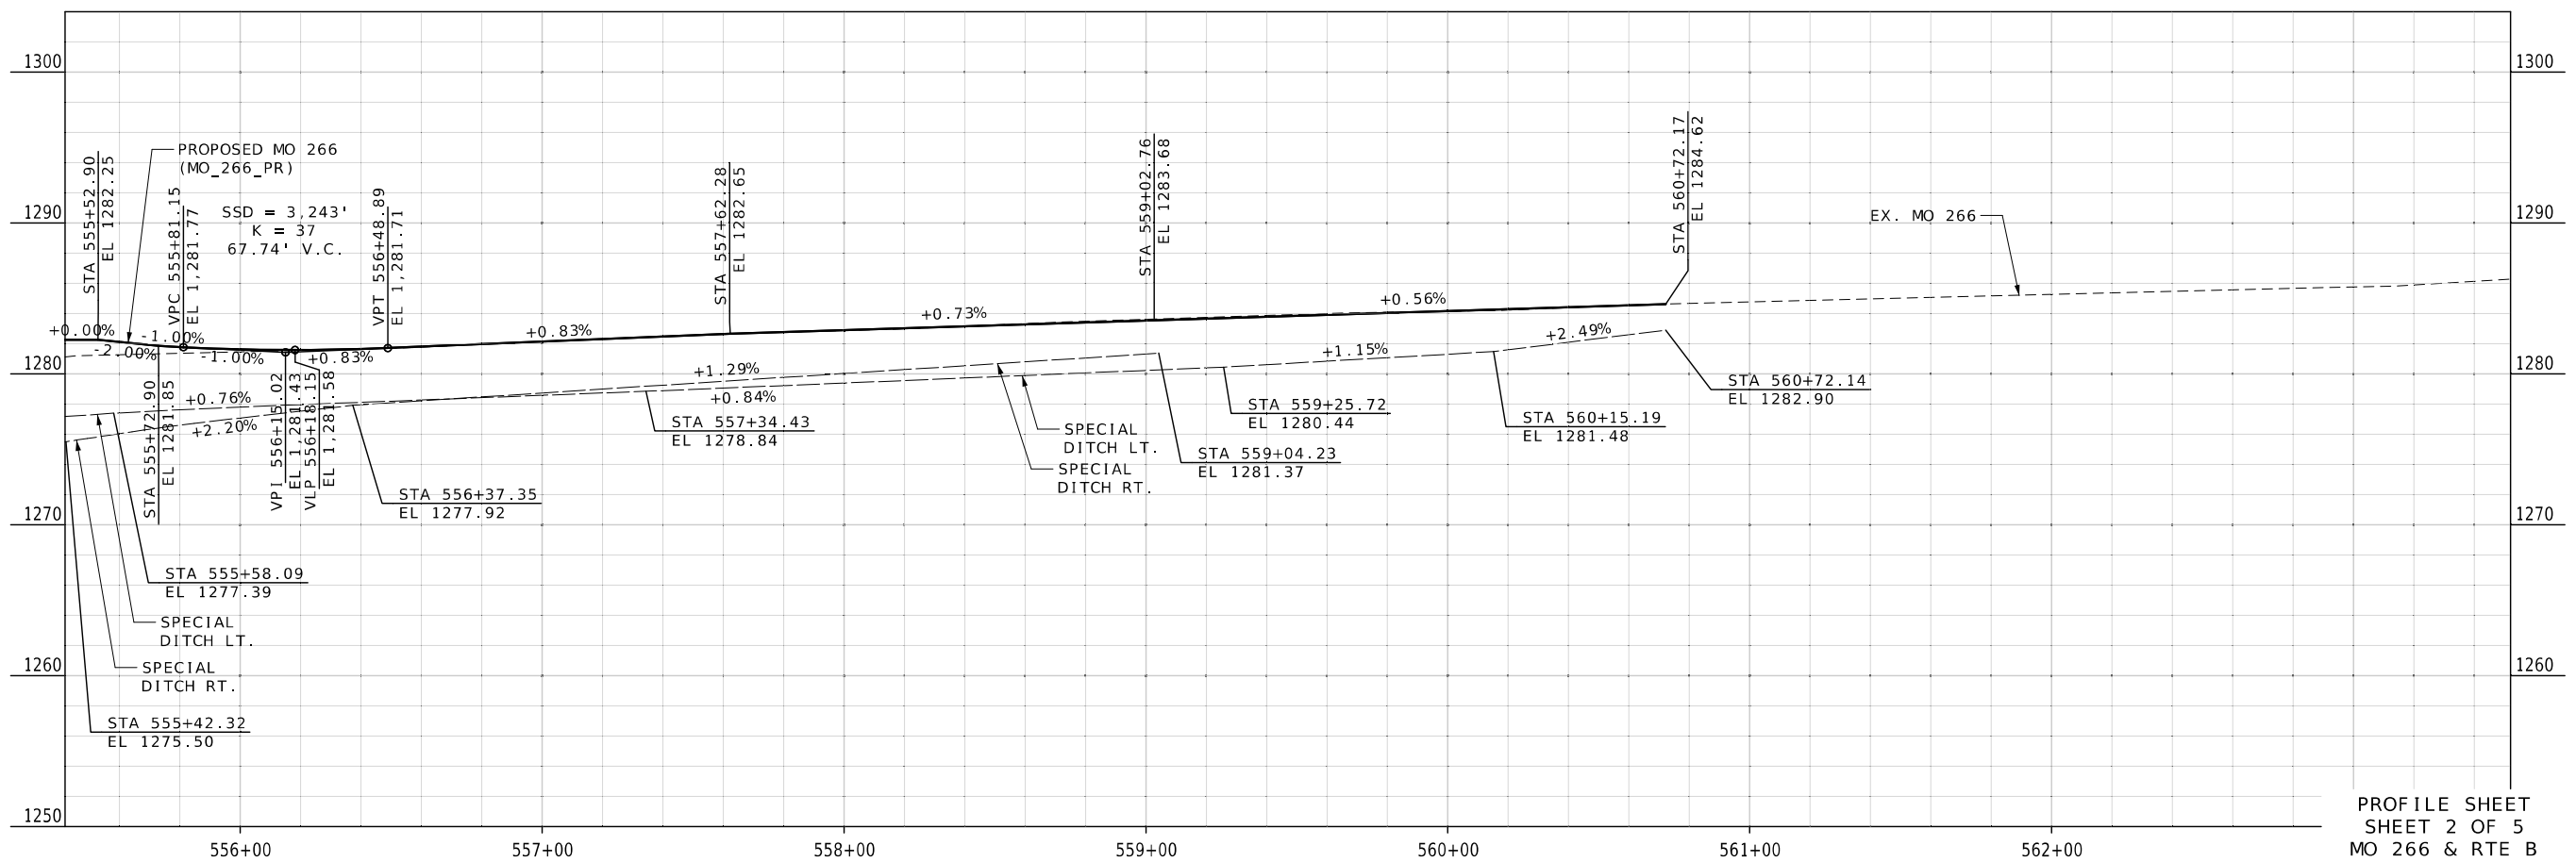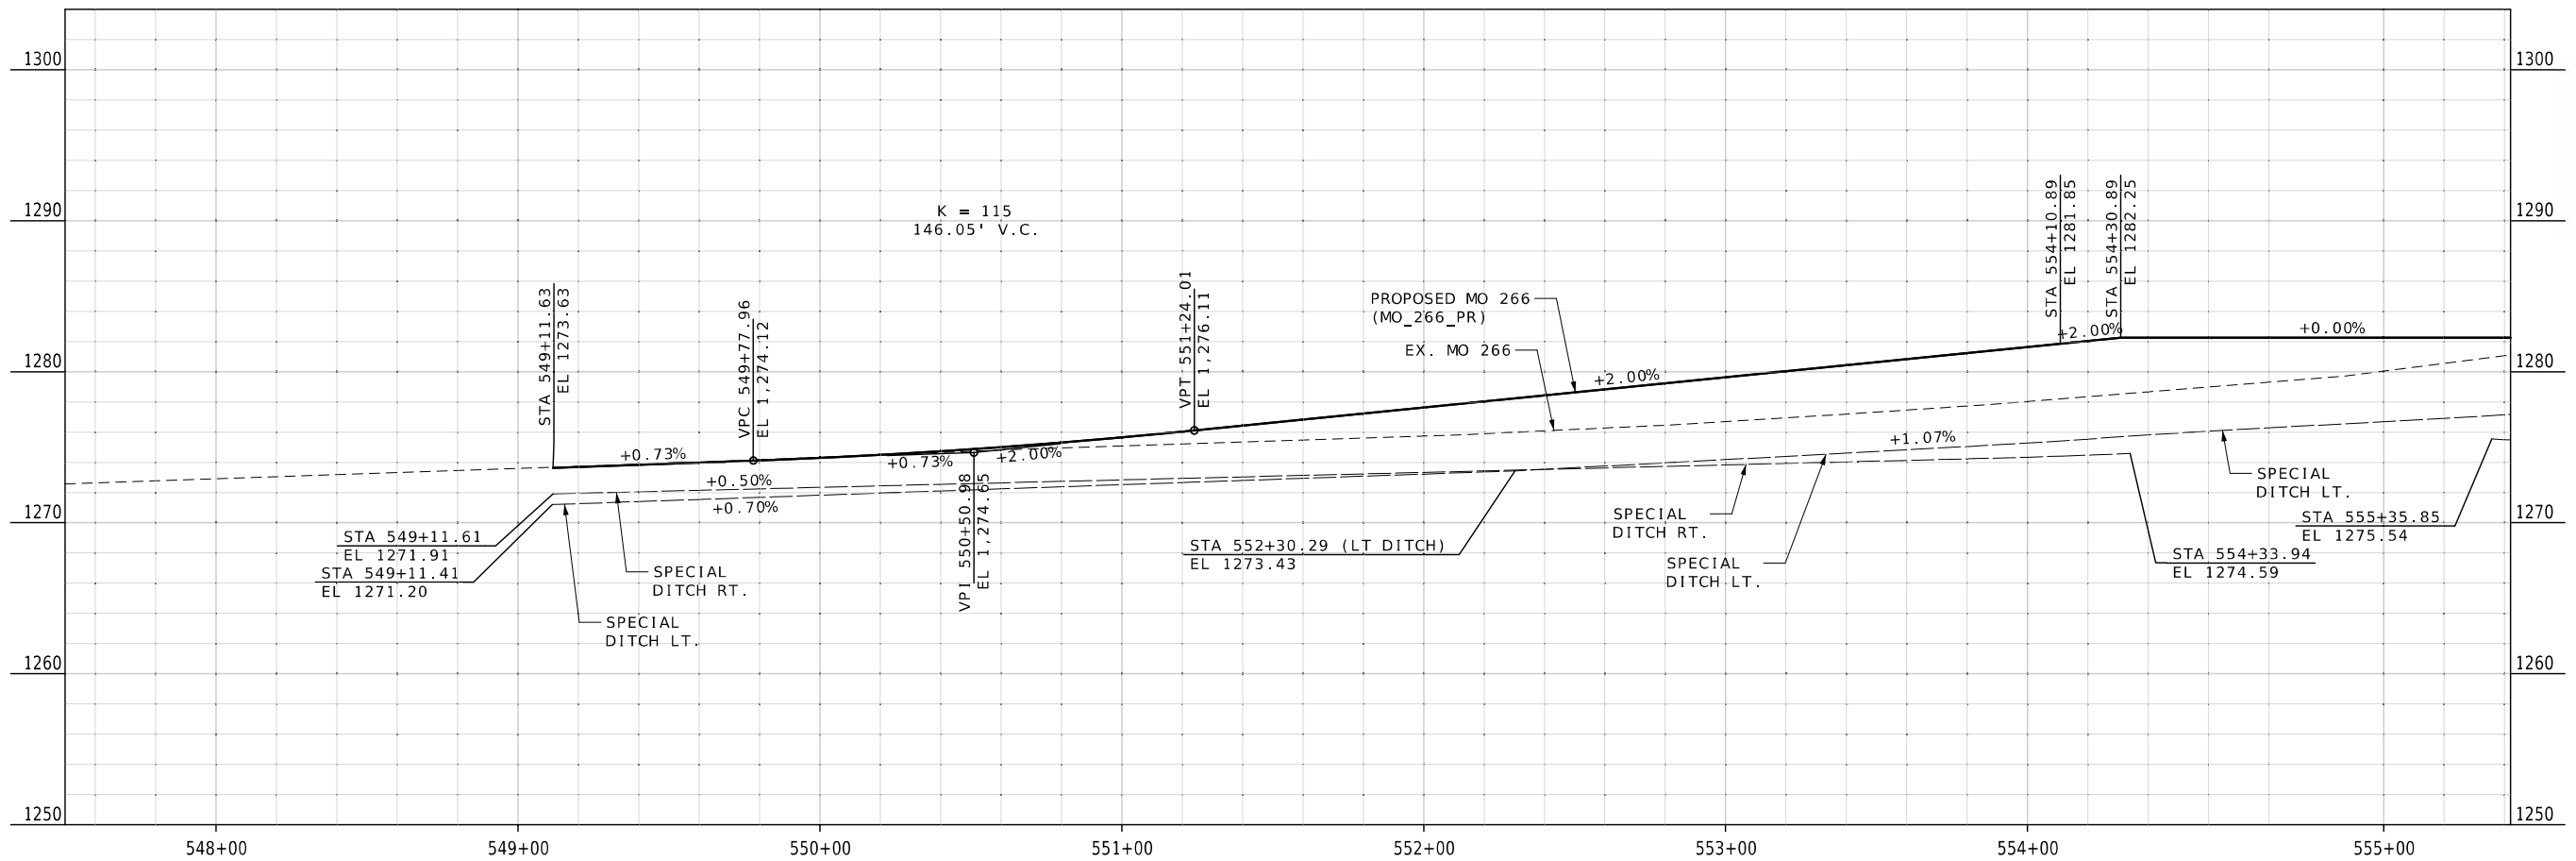

PROFILE SHEET
SHEET 2 OF 5
MO 266 & RTE B





DATE PREPARED 7/24/2026	
ROUTE 266	STATE MO
DISTRICT SW	SHEET NO. 14
COUNTY GREENE	
JOB NO. JSU0080	
CONTRACT ID.	
PROJECT NO.	
BRIDGE NO.	


DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

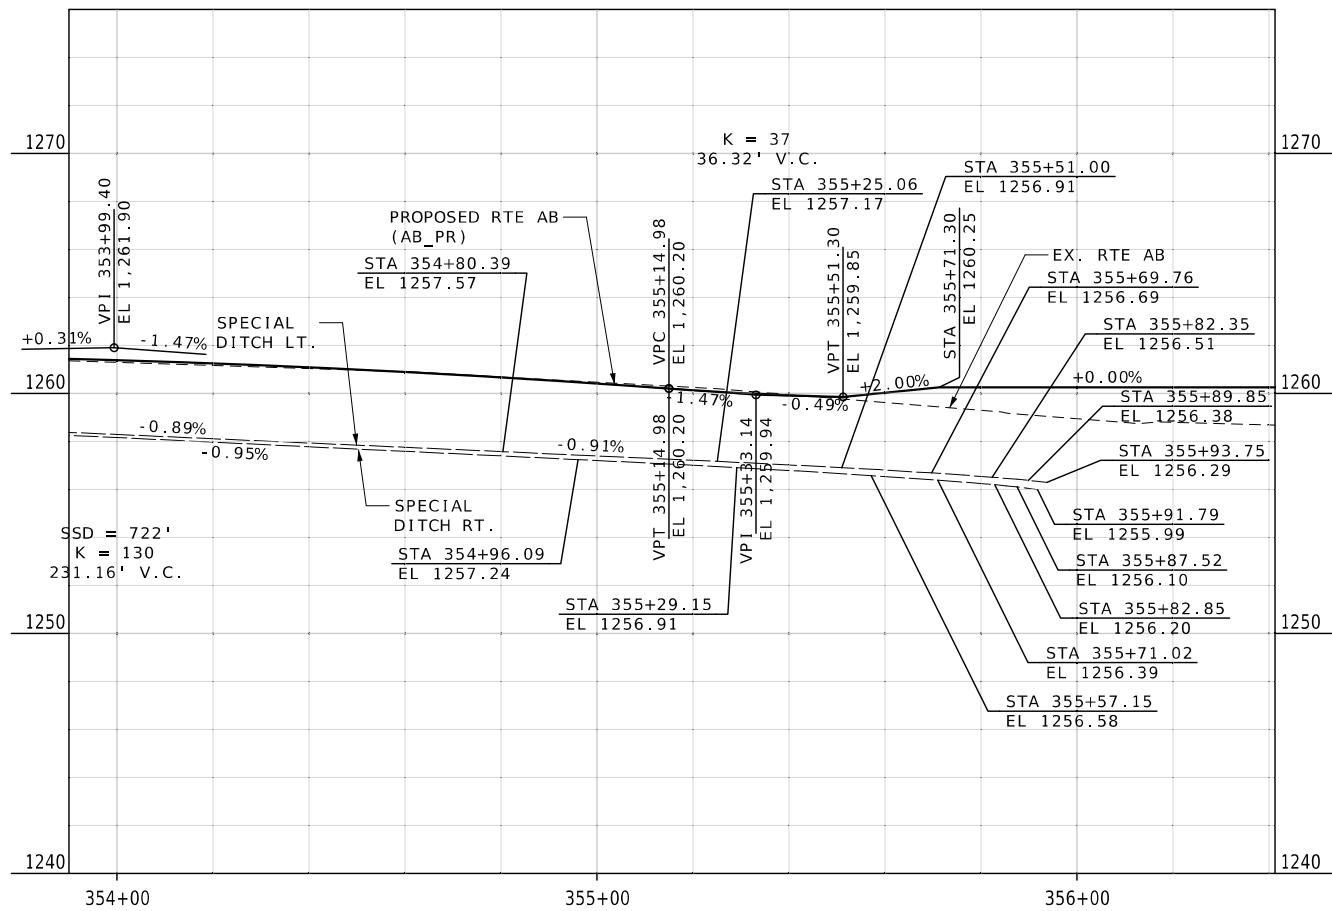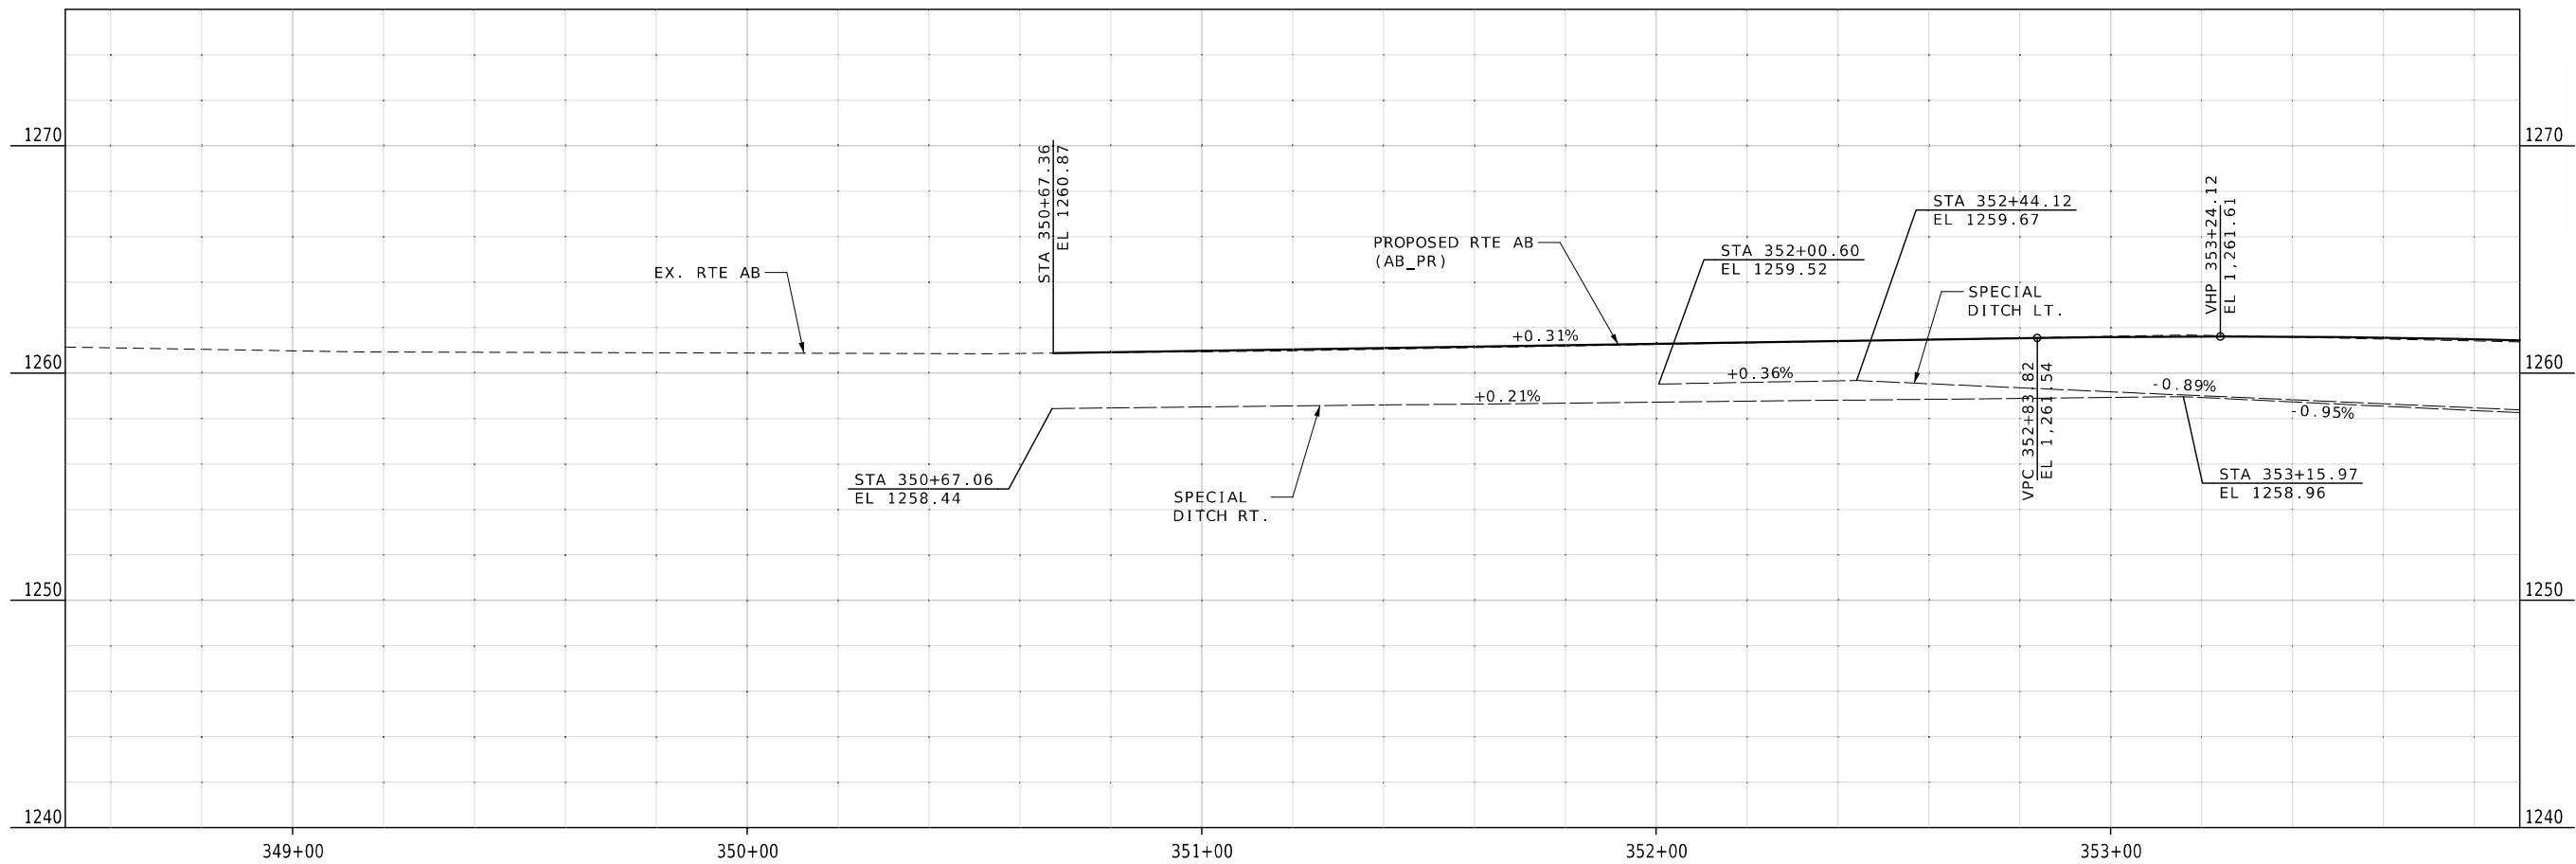

PROFILE SHEET
SHEET 3 OF 5
RTE AB



DATE PREPARED
7/24/2026

ROUTE 266	STATE MO
DISTRICT SW	SHEET NO. 15

COUNTY
GREENE
JOB NO.
JSU0080
CONTRACT ID.



PROJECT NO.

BRIDGE NO.

DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

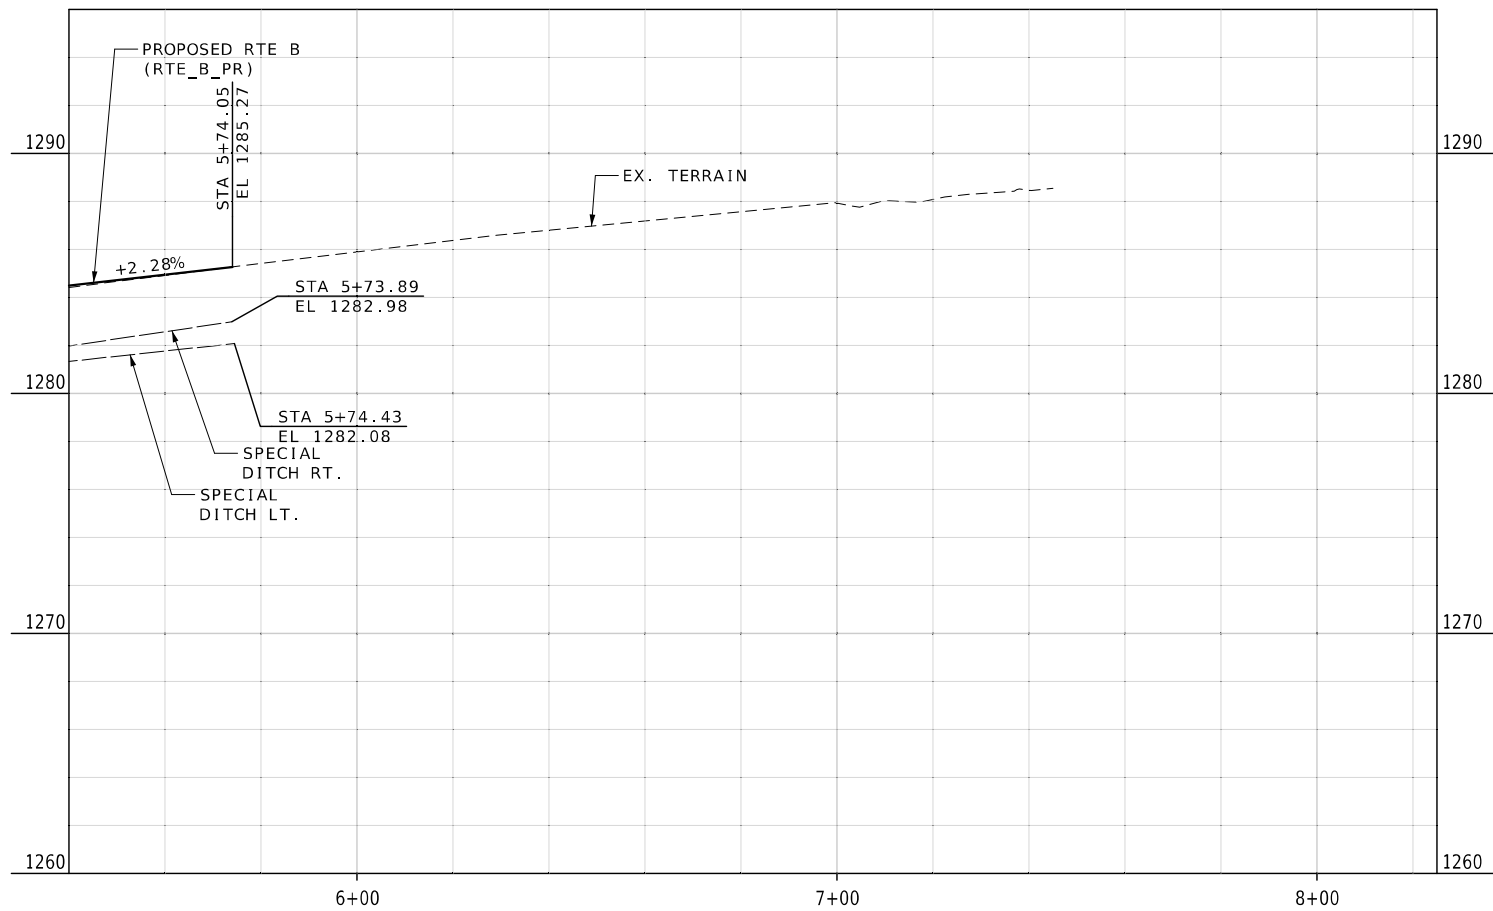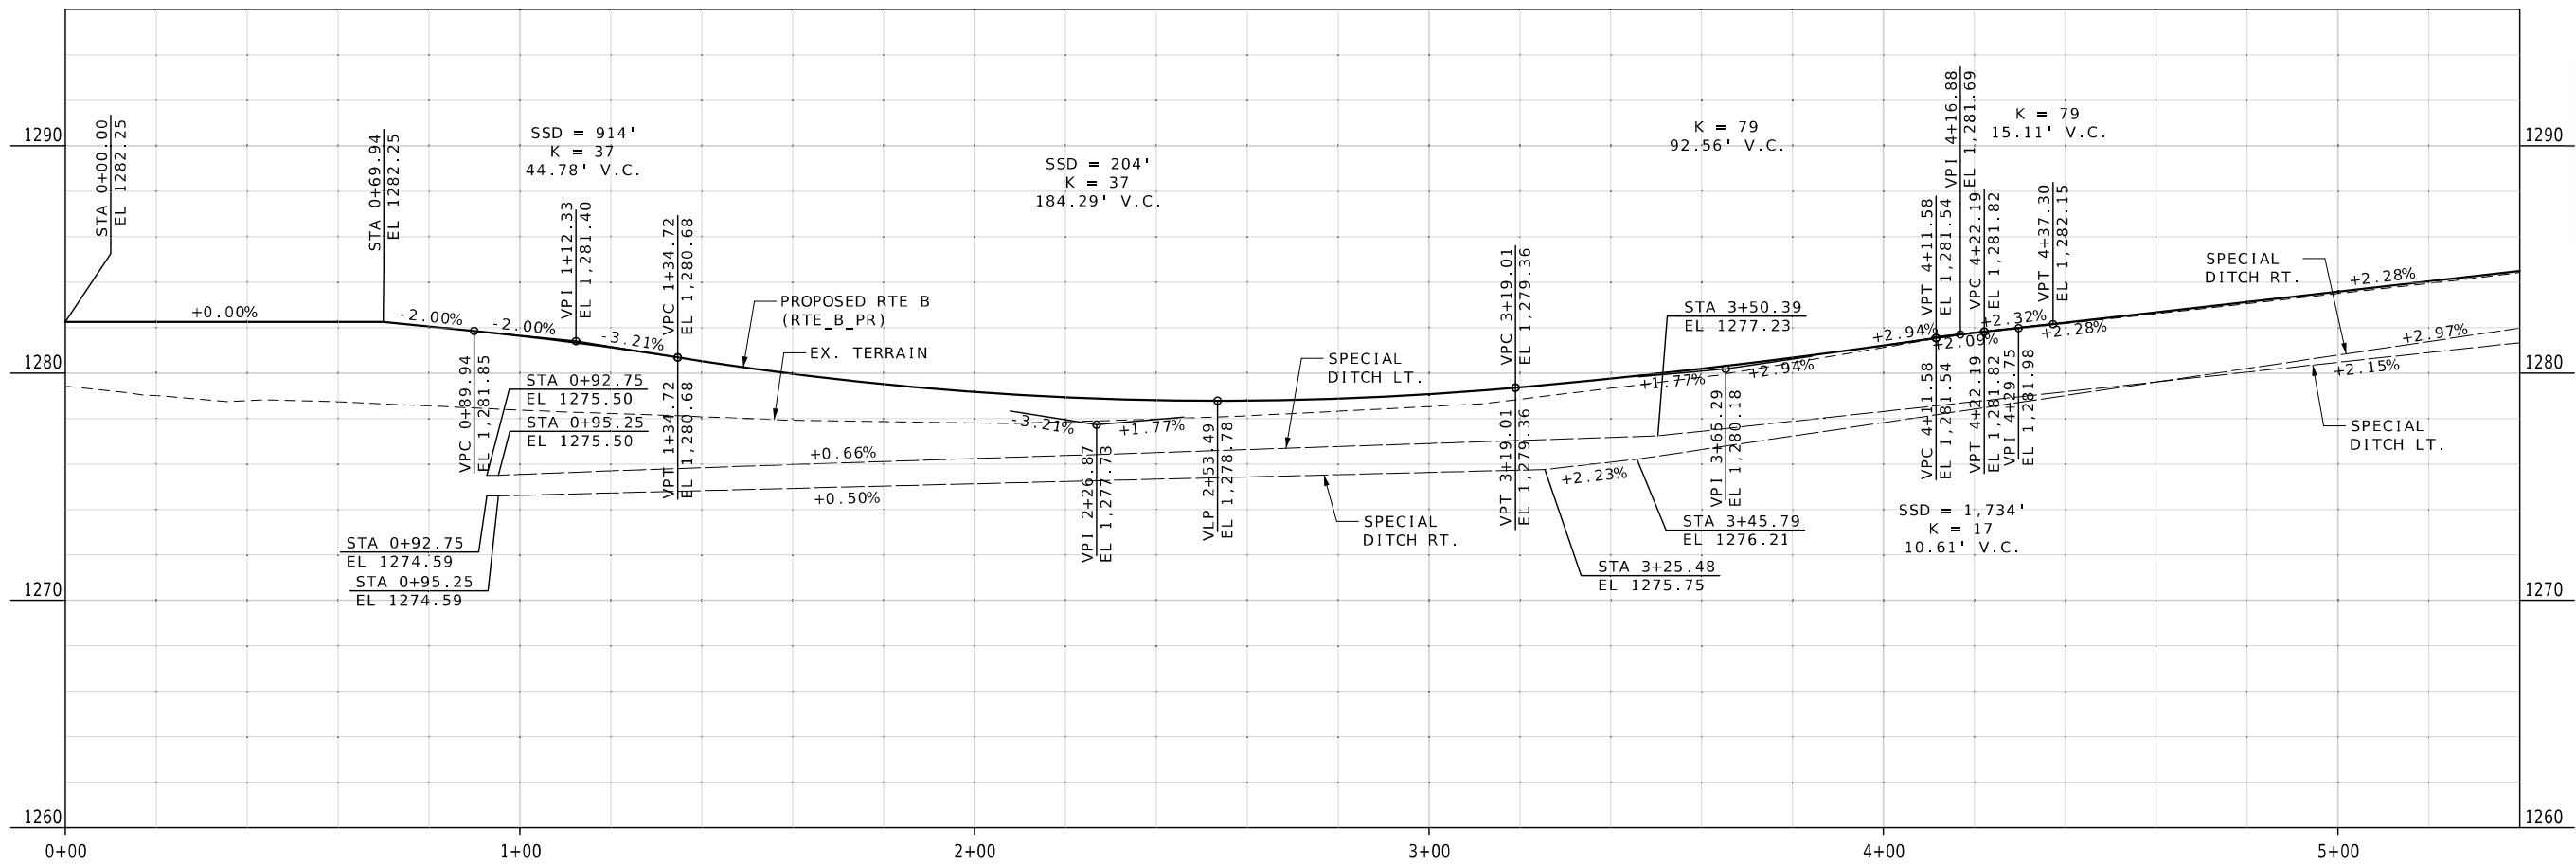

PROFILE SHEET
SHEET 5 OF 5
RTE B



DATE PREPARED 7/24/2026	
ROUTE 266	STATE MO
DISTRICT SW	SHEET NO. 17
COUNTY GREENE	
JOB NO. JSU0080	
CONTRACT ID.	
PROJECT NO.	
BRIDGE NO.	

DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-273-6636)

ALL PROJECT COORDINATES HAVE BEEN PROJECTED FROM THE MISSOURI STATE PLANE COORDINATE (SPC) SYSTEM OF 1983 USING AN AVERAGE PROJECT PROJECTION (GRID TO GROUND) FACTOR. TO GET BACK TO STATE PLANE COORDINATES MULTIPLY THE PROJECT COORDINATES BY THE AVERAGE GRID FACTOR AS SHOWN IN THE "REFERENCE CONTROL INFORMATION" PORTION OF THIS TABLE.

PROJECT COORDINATE INFORMATION

COORDINATE SYSTEM

MODIFIED STATE PLANE

HORIZONTAL DATUM

NAD 83

VERTICAL DATUM

NAVD 88

GEOID MODEL

GEOID12A

ELEVATIONS DETERMINED BY

GPS

PROJECT PROJECTION FACTOR

1.00004000

REFERENCE CONTROL INFORMATION

COORDINATE SYSTEM

MODIFIED STATE PLANE

CONTROL STATION

MODOT GNSS

DESIGNATION

MODOT SPRINGFIELD CORS ARP

CORS_ID

MOSF

PID

DL5388

LATITUDE

37°14'30.333454"

LONGITUDE

93°13'47.54333"

NORTHING (M)

156530.873

EASTING (M)

435242.882

ZONE

2402 (MO-CENTRAL)

PROJECT AVERAGE GRID FACTOR

0.9999600

EXAMPLE OF PROJECT COORDINATE TO S.P.C.

PROJECT NORTHING X AVERAGE GRID FACTOR
= STATE PLANE NORTHING

PROJECT EASTING X AVERAGE GRID FACTOR
= STATE PLANE EASTING

EXAMPLE: CONTROL POINT #1

N 503707.88 X 0.9999600 = N 503687.73

E 1370525.06 X 0.9999600 = E 1370470.24

LINEAR UNIT CONVERSION

1 METER = 3.280833333 US SURVEY FEET (USFT)

COORDINATE POINT LISTING

SHEET NO	STATION	LOCATION	OFFSET (USFT)	MODIFIED STATE PLANE (GROUND)			DESCRIPTION
				NORTHING (US SURVEY FT)	EASTING (US SURVEY FT)	ELEVATION (US SURVEY FT)	
PROJECT CONTROL POINTS							
	542+24.11	MO 266	-44.42	503,707.8790	1,370,525.0604	1,269.1630	CP1 - 5/8" REBAR PINK CAP
	559+27.97	MO 266	39.44	503,589.8533	1,372,244.7684	1,283.3602	CP2 - 5/8" REBAR PINK CAP
MO 266 EXIST ALIGNMENT							
	520+00.00	☒ MO 266 EXIST	0.00	503,705.8132	1,368,300.5110		BEGIN ☒ EXIST MO 266
	528+31.94	☒ MO 266 EXIST	0.00	503,689.9743	1,369,132.3045		FARM RD 99 ALIGNMENT INTERSECT
	528+43.40	☒ MO 266 EXIST	0.00	503,689.7565	1,369,143.7581		RTE AB ALIGNMENT INTERSECT
	554+86.49	☒ MO 266 EXIST	0.00	503,639.4360	1,371,786.3691		EQUATION BACK
	554+68.50	☒ MO 266 EXIST	0.00	503,639.4360	1,371,786.3691		EQUATION AHEAD
	556+53.20	☒ MO 266 EXIST	0.00	503,635.7290	1,371,971.0297		RTE B ALIGNMENT INTERSECT
	557+00.00	☒ MO 266 EXIST	0.00	503,634.7844	1,372,017.8202		HPI
	565+00.00	☒ MO 266 EXIST	0.00	503,615.4522	1,372,817.5865		END ☒ EXIST MO 266
RTE AB EXIST ALIGNMENT							
	303+41.50	☒ RTE AB EXIST	0.00	508,985.0269	1,369,362.7876		BEGIN ☒ EXIST RTE AB
	307+68.60	☒ RTE AB EXIST	0.00	508,558.2549	1,369,346.0509		HPI
	319+72.00	☒ RTE AB EXIST	0.00	507,355.8491	1,369,297.1446		HPI
	356+41.30	☒ RTE AB EXIST	0.00	503,689.7565	1,369,143.7581		END ☒ EXIST RTE AB
FARM RD 99 EXIST ALIGNMENT							
	00+00.00	☒ FARM RD 99 EXIST	0.00	503,689.9743	1,369,132.3045		BEGIN ☒ EXIST FARM RD 99
	26+47.75	☒ FARM RD 99 EXIST	0.00	501,044.0304	1,369,034.4721		END ☒ EXIST FARM RD 99
RTE B EXIST ALIGNMENT							
	0+00.00	☒ RTE B EXIST	0.00	503,635.7290	1,371,971.0297		BEGIN ☒ EXIST RTE B
	0+00.00	☒ RTE B EXIST	0.00	503,635.7298	1,371,970.9882		PC
	1+84.66	☒ RTE B EXIST	0.00	503,639.4361	1,371,786.3669		HPI
	2+91.44	☒ RTE B EXIST	0.00	503,454.8794	1,371,780.2360		PT
	8+51.78	☒ RTE B EXIST	0.00	502,894.8497	1,371,761.6322		END ☒ EXIST RTE B
RTE B CONSTRUCTION BASELINE (RTE_B_CL)							
	0+00.00	☒ RTE B	0.00	503,639.4361	1,371,786.3669		BEGIN ☒ EXIST RTE B
	7+45.00	☒ RTE B	0.00	502,894.8497	1,371,761.6322		END ☒ EXIST RTE B

EXIST. JCT. AB SIGN

778.2'

281.5'

31.6'

MO 266 EOP

CONTROL POINT #1 5/8" REBAR
N 503,707.8790
E 1,370,525.0604
1381' EAST OF EXIST. MO 266 AND RTE B INTERSECTION
NORTH SIDE OF EXIST. MO 266
STA 542+24.11, 44.42 LT, MO 266

EXIST. JCT. B SIGN

271.2'

26.8'

140.5'

MO 266 EOP

CONTROL POINT #2 5/8" REBAR
N 503,589.8533
E 1,372,244.7684
277' EAST OF EXIST. MO 266 AND RTE B INTERSECTION
SOUTH SIDE OF EXIST. MO 266
STA 559+27.97, 39.44 RT, MO 266

EXIST. MO 266 EAST SIGN

EXIST. SPEED LIMIT SIGN

STATE OF MISSOURI
CAMERON SOOY
NUMBER
PE-2021019715
PROFESSIONAL ENGINEER
076-220001-205
CAMERON SOOY - CIVIL
MO-PE-2021019715
DATE PREPARED
7/24/2026
ROUTE 266 STATE MO
DISTRICT SW SHEET NO. 18
COUNTY GREENE
JOB NO. JSU0080
CONTRACT ID.
PROJECT NO.
BRIDGE NO.


DESCRIPTION
DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

COORDINATE POINT SHEET
SHEET 1 OF 1

AB266NW								
CURVE 1			CURVE 2			CURVE 3		
PI	200+67.96		PI	201+28.53		PI	201+61.47	
PC	200+00.00		PC	201+25.24		PC	201+31.82	
PT	201+25.24		PT	201+31.82		PT	201+89.96	
Δ	55°11'48.1" (RT)		Δ	4°11'23.8" (LT)		Δ	27°45'35.5" (RT)	
D	44°4'25.2"		D	63°39'43.1"		D	47°44'47.3"	
L	125.24' (ARC)		L	6.58' (ARC)		L	58.14' (ARC)	
T	67.96'		T	3.29'		T	29.65'	
R	130.00'		R	90.00'		R	120.00'	
CURVE 4			SCS					
PI	202+24.43		PI	STA 201+41.89				
PC	201+89.96		SCS	TOTAL Δ 98°23'51.9"				
PT	202+58.69		PC	200+00.00				
Δ	11°15'4.5" (RT)		PT	201+25.24				
D	16°22'12.8"		Δ	55°11'48.1" (RT)				
L	68.73' (ARC)		D	44°4'25.2"				
T	34.48'		L	125.24' (ARC)				
R	350.00'		T	67.96'				
			R	130.00'				

AB266NE								
CURVE 1			CURVE 2			CURVE 3		
PI	100+67.96		PI	101+26.42		PI	101+58.40	
PC	100+00.00		PC	101+25.24		PC	101+27.59	
PT	101+25.24		PT	101+27.59		PT	101+87.91	
Δ	55°11'48.1" (RT)		Δ	1°30'2.1" (LT)		Δ	28°47'49.9" (RT)	
D	44°4'25.2"		D	63°39'43.1"		D	47°44'47.3"	
L	125.24' (ARC)		L	2.36' (ARC)		L	60.31' (ARC)	
T	67.96'		T	1.18'		T	30.81'	
R	130.00'		R	90.00'		R	120.00'	
CURVE 4			SCS					
PI	102+22.14		PI	STA 101+44.27				
PC	101+87.91		SCS	TOTAL Δ 96°40'3.5"				
PT	102+56.16		PC	100+00.00				
Δ	11°10'23.4" (RT)		PT	101+25.24				
D	16°22'12.8"		Δ	55°11'48.1" (RT)				
L	68.25' (ARC)		D	44°4'25.2"				
T	34.24'		L	125.24' (ARC)				
R	350.00'		T	67.96'				
			R	130.00'				

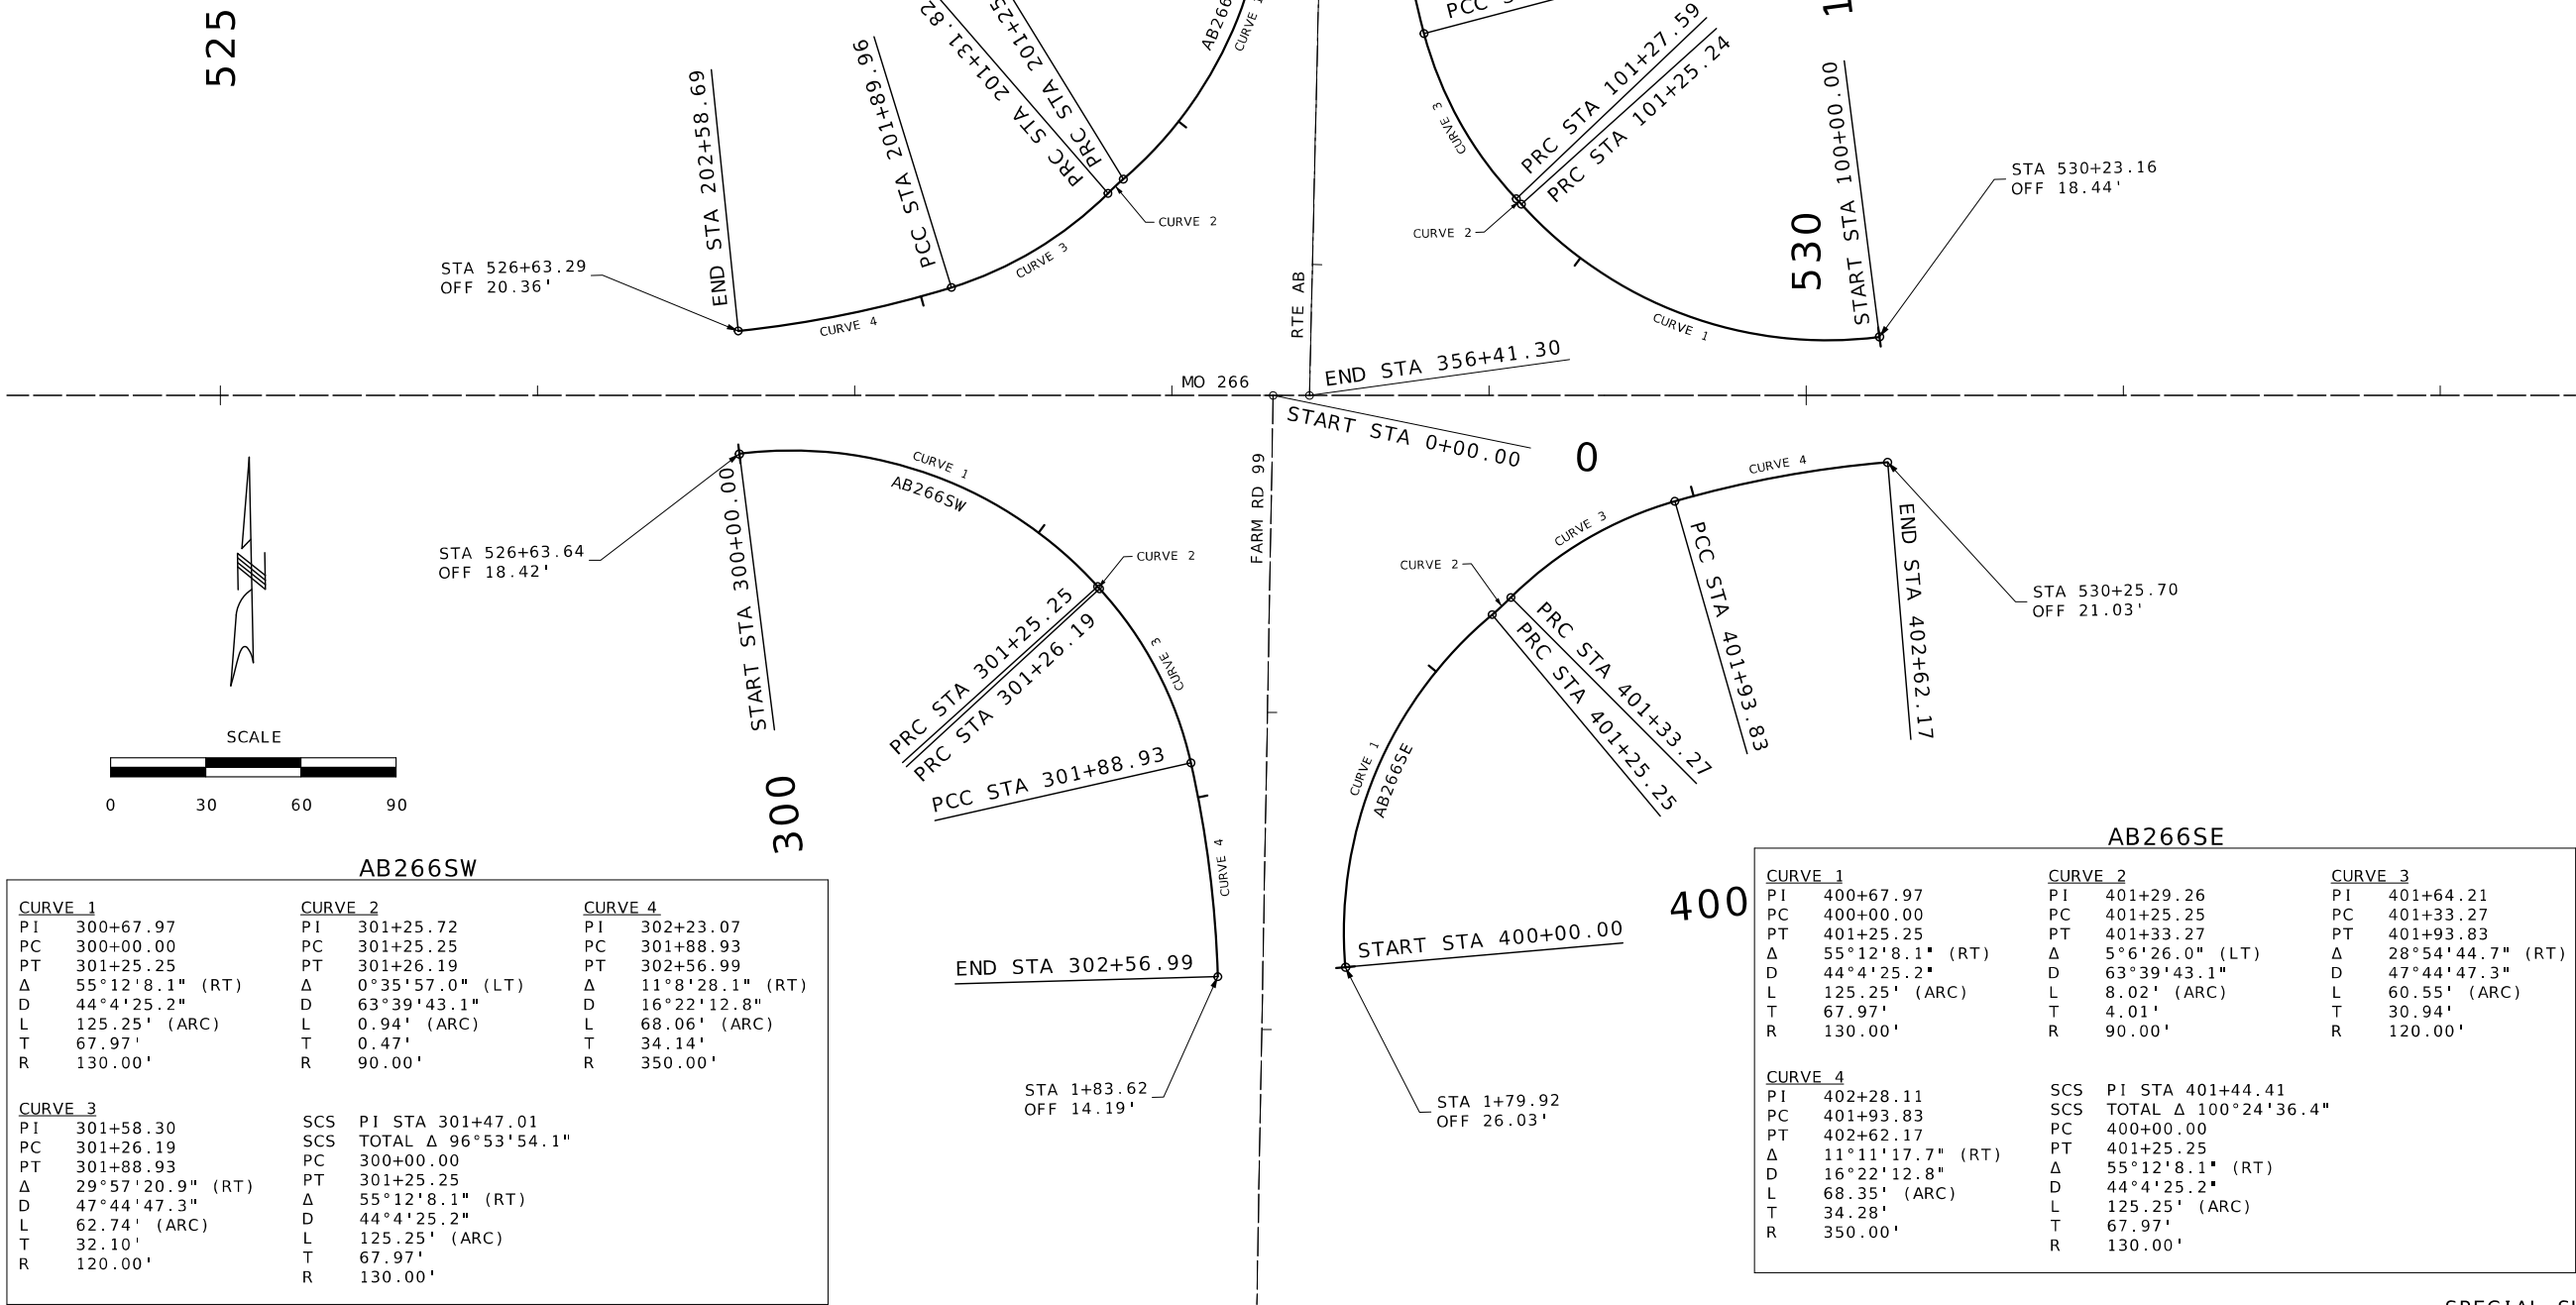

STATE OF MISSOURI
CAMERON
SOOY
NUMBER
PE-2021019715
PROFESSIONAL ENGINEER

08%
CAMERON SOOY-CIVIL
MO-PE-2021019715

DATE PREPARED
8/11/2026

ROUTE
266

DISTRICT
SW

STATE
MO

SHEET NO.
19

COUNTY
GREENE

JOB NO.
JSU0080

CONTRACT ID.

PROJECT NO.



BRIDGE NO.

DESCRIPTION

DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

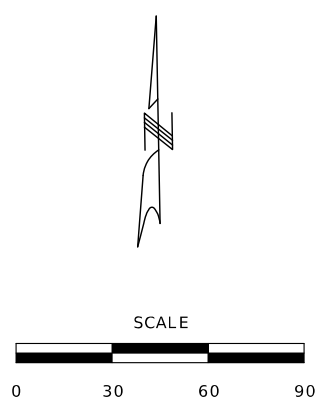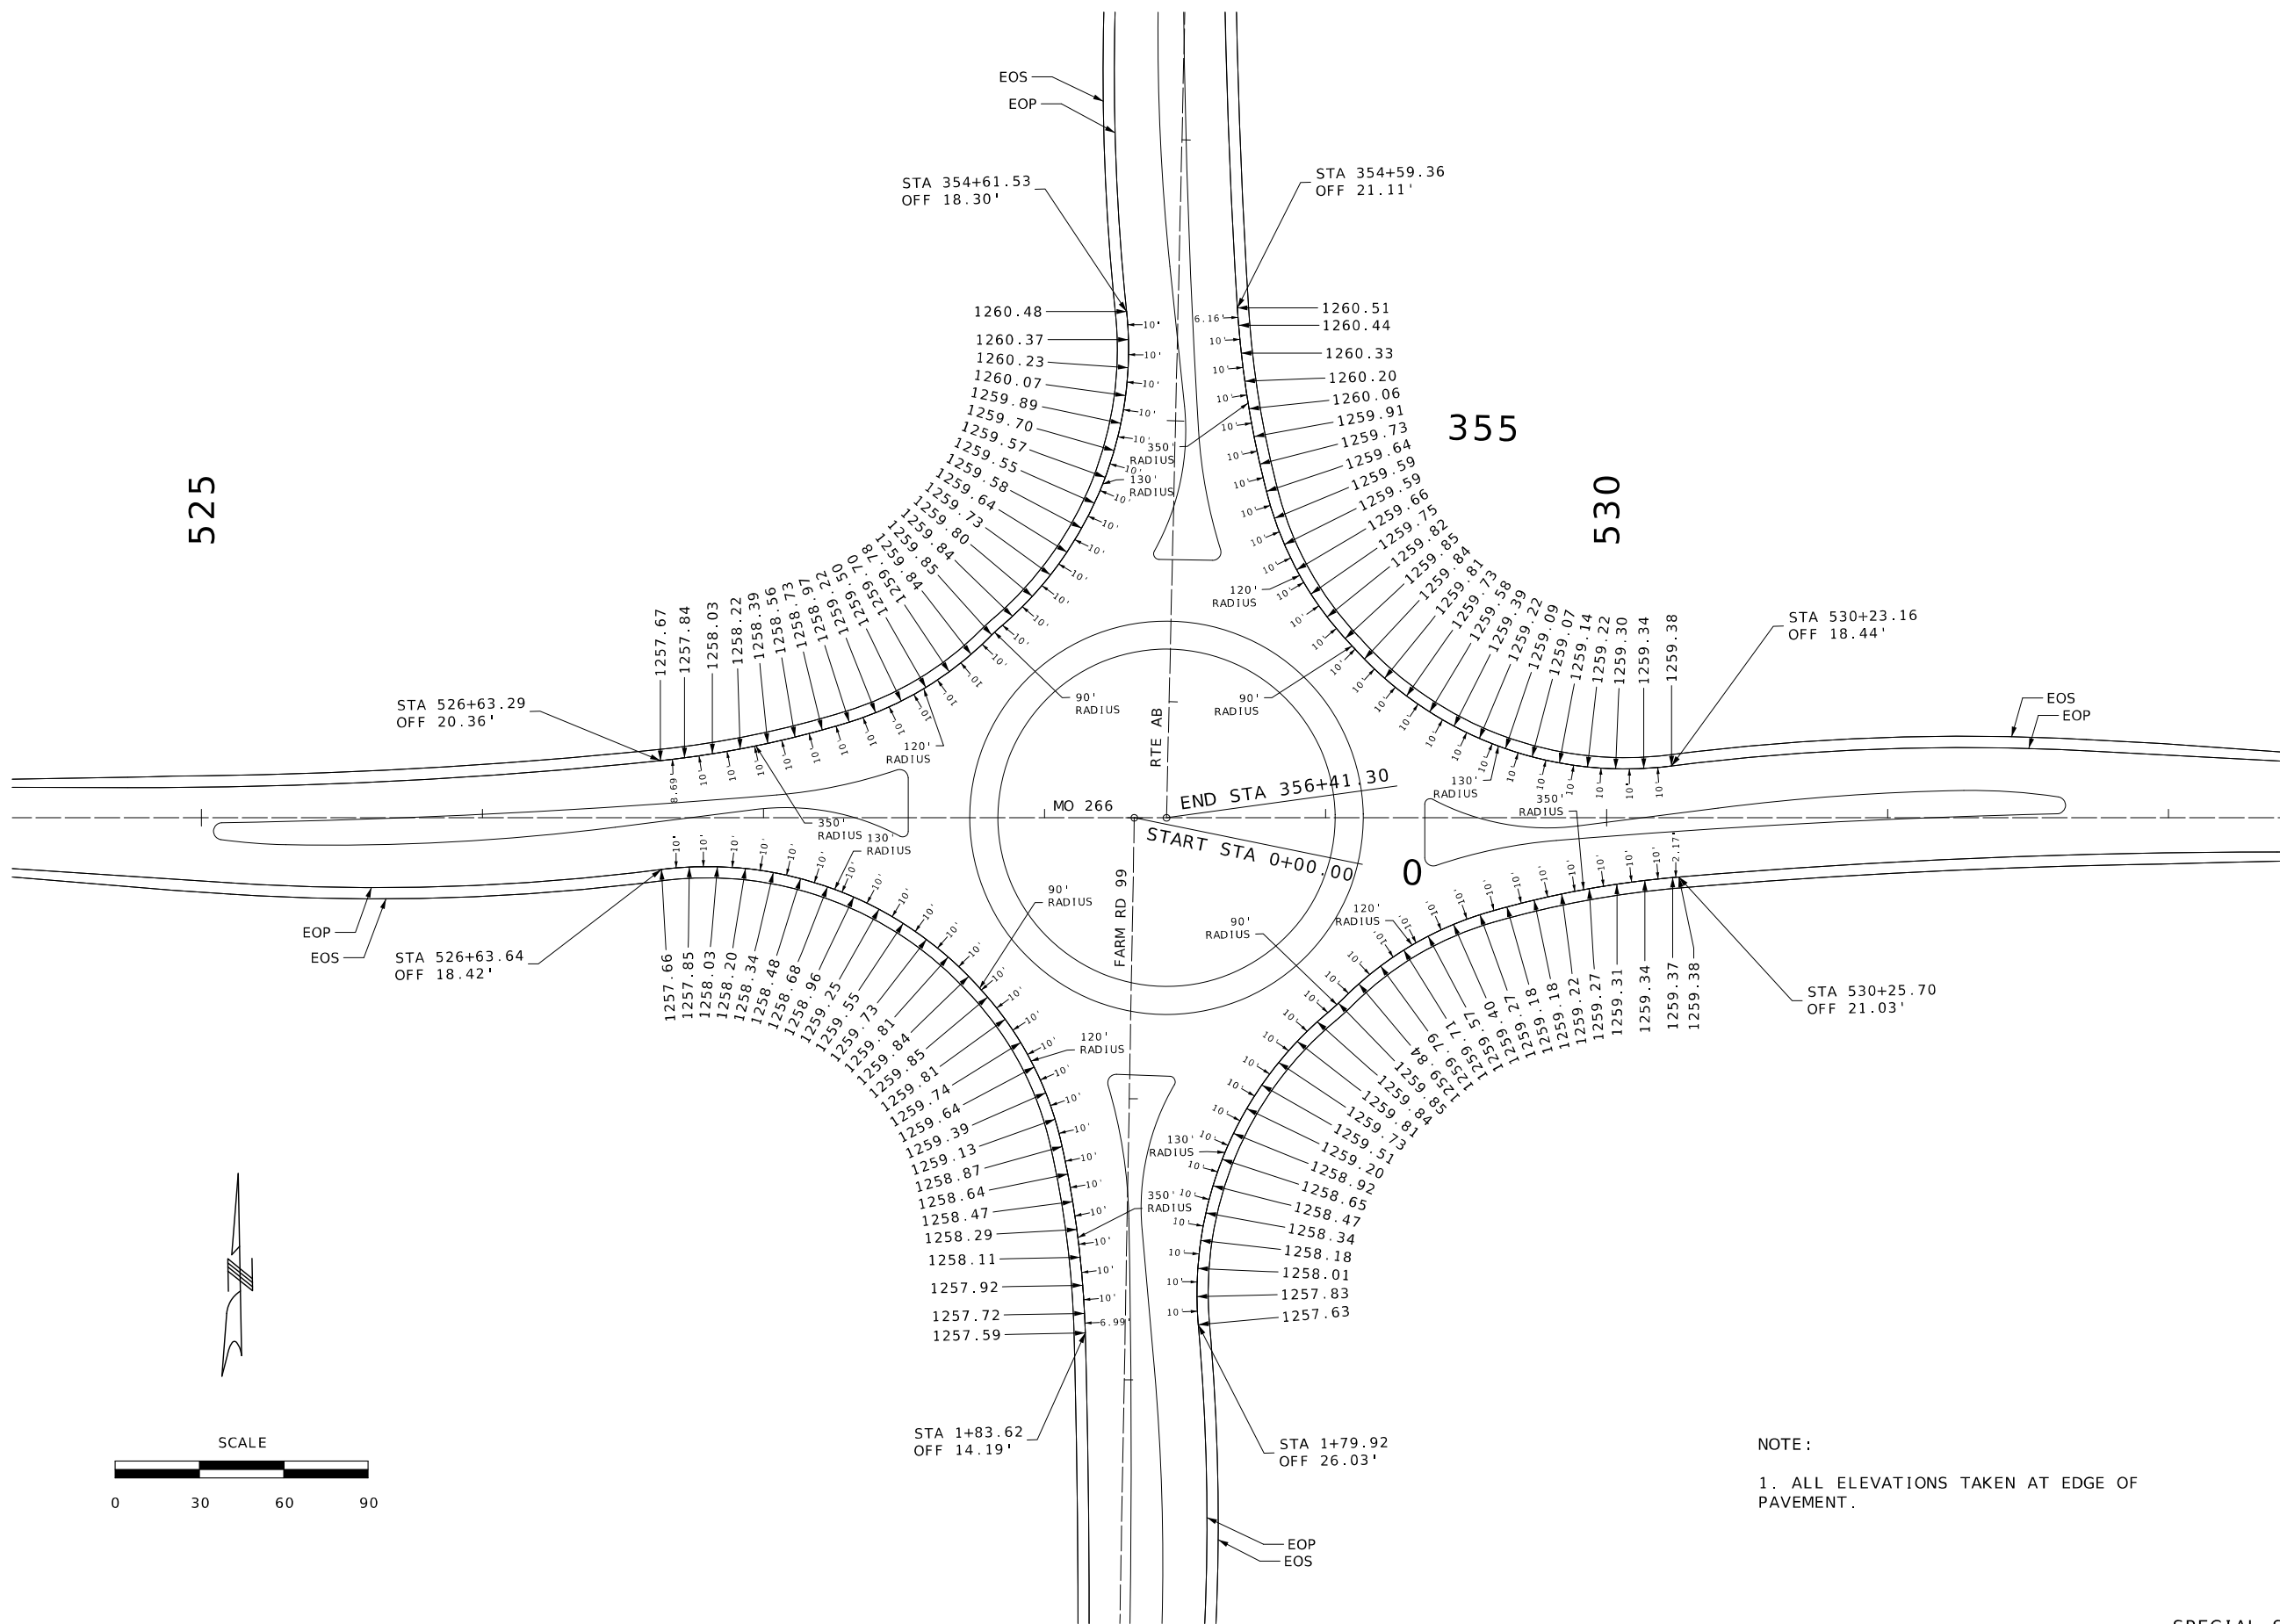

NOTE:
1. ALL ELEVATIONS TAKEN AT EDGE OF PAVEMENT.

STATE OF MISSOURI
CAMERON
SOOY
NUMBER
PE-2021019715
PROFESSIONAL ENGINEER

DATE PREPARED
8/11/2026

ROUTE
266

DISTRICT
SW

STATE
MO

SHEET NO.
20

COUNTY
GREENE

JOB NO.
JSU0080

CONTRACT ID.



PROJECT NO.

BRIDGE NO.

DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

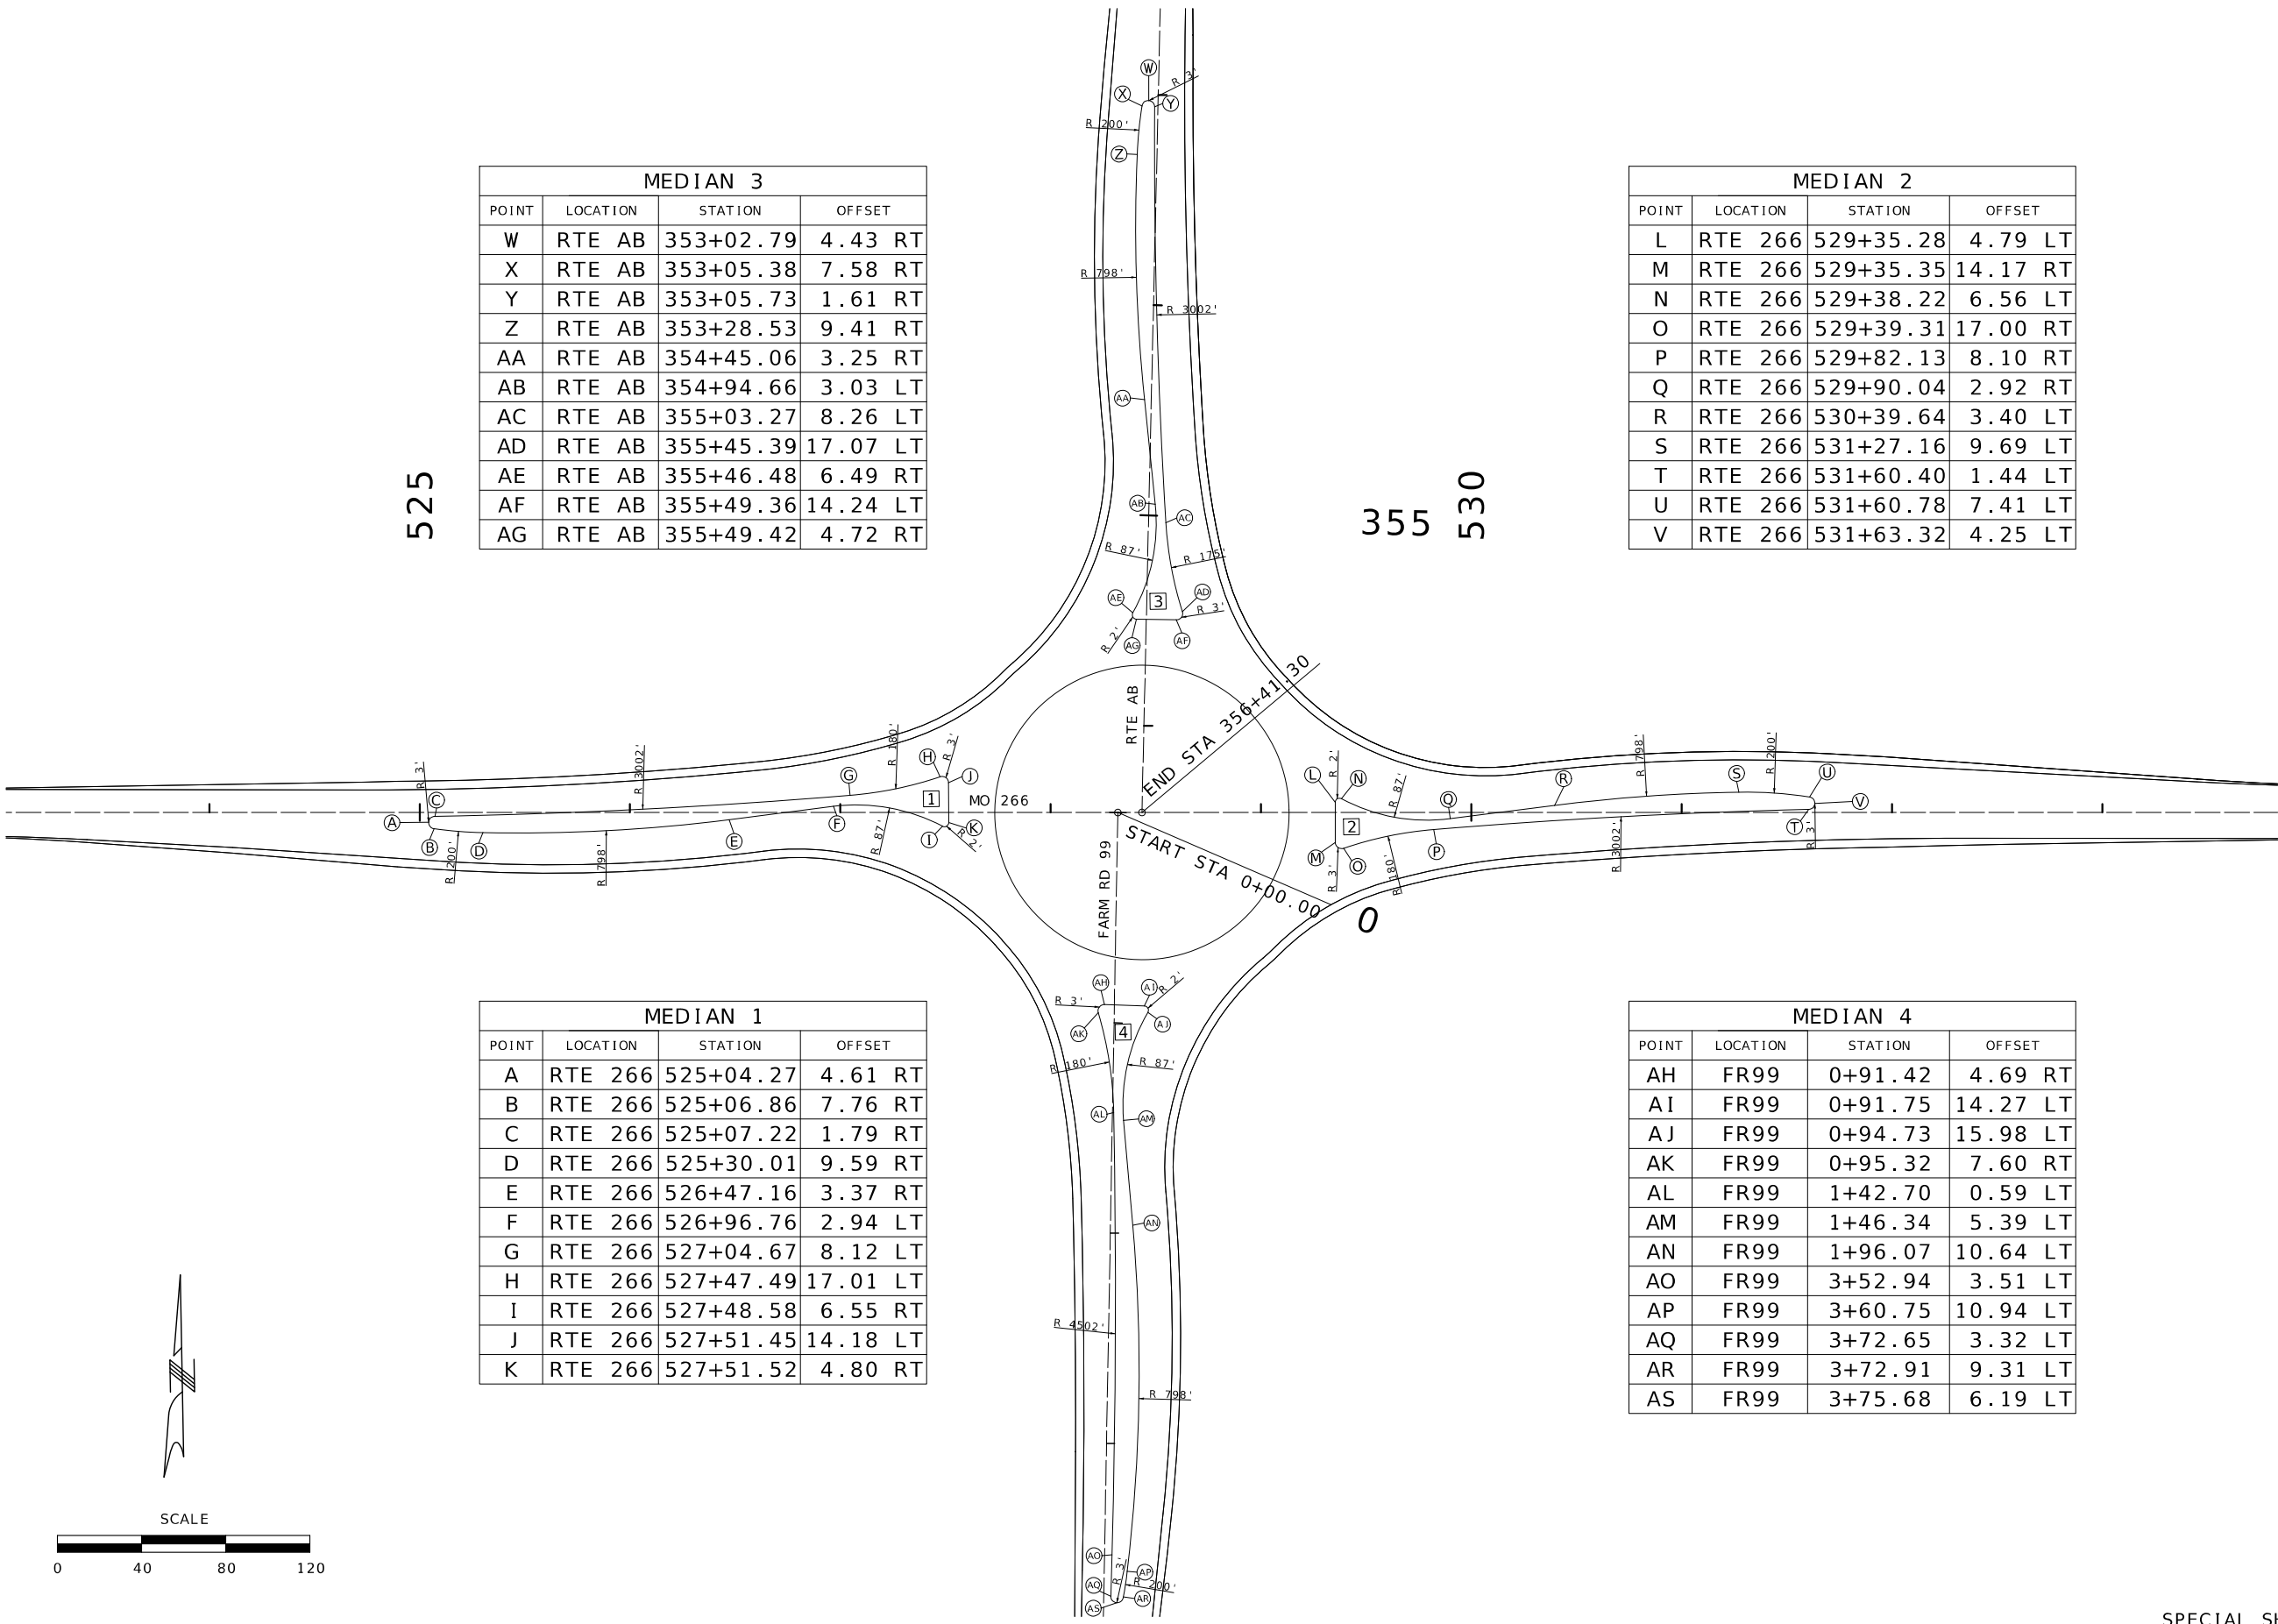

MEDIAN 3				
POINT	LOCATION	STATION	OFFSET	
W	RTE AB	353+02.79	4.43	RT
X	RTE AB	353+05.38	7.58	RT
Y	RTE AB	353+05.73	1.61	RT
Z	RTE AB	353+28.53	9.41	RT
AA	RTE AB	354+45.06	3.25	RT
AB	RTE AB	354+94.66	3.03	LT
AC	RTE AB	355+03.27	8.26	LT
AD	RTE AB	355+45.39	17.07	LT
AE	RTE AB	355+46.48	6.49	RT
AF	RTE AB	355+49.36	14.24	LT
AG	RTE AB	355+49.42	4.72	RT

MEDIAN 2				
POINT	LOCATION	STATION	OFFSET	
L	RTE 266	529+35.28	4.79	LT
M	RTE 266	529+35.35	14.17	RT
N	RTE 266	529+38.22	6.56	LT
O	RTE 266	529+39.31	17.00	RT
P	RTE 266	529+82.13	8.10	RT
Q	RTE 266	529+90.04	2.92	RT
R	RTE 266	530+39.64	3.40	LT
S	RTE 266	531+27.16	9.69	LT
T	RTE 266	531+60.40	1.44	LT
U	RTE 266	531+60.78	7.41	LT
V	RTE 266	531+63.32	4.25	LT

MEDIAN 1				
POINT	LOCATION	STATION	OFFSET	
A	RTE 266	525+04.27	4.61	RT
B	RTE 266	525+06.86	7.76	RT
C	RTE 266	525+07.22	1.79	RT
D	RTE 266	525+30.01	9.59	RT
E	RTE 266	526+47.16	3.37	RT
F	RTE 266	526+96.76	2.94	LT
G	RTE 266	527+04.67	8.12	LT
H	RTE 266	527+47.49	17.01	LT
I	RTE 266	527+48.58	6.55	RT
J	RTE 266	527+51.45	14.18	LT
K	RTE 266	527+51.52	4.80	RT

MEDIAN 4				
POINT	LOCATION	STATION	OFFSET	
AH	FR99	0+91.42	4.69	RT
AI	FR99	0+91.75	14.27	LT
AJ	FR99	0+94.73	15.98	LT
AK	FR99	0+95.32	7.60	RT
AL	FR99	1+42.70	0.59	LT
AM	FR99	1+46.34	5.39	LT
AN	FR99	1+96.07	10.64	LT
AO	FR99	3+52.94	3.51	LT
AP	FR99	3+60.75	10.94	LT
AQ	FR99	3+72.65	3.32	LT
AR	FR99	3+72.91	9.31	LT
AS	FR99	3+75.68	6.19	LT

STATE OF MISSOURI

CAMERON

SCOTT

NUMBER

PE-2021019715

PROFESSIONAL ENGINEER

00%

MISSOURI

00%

CAMERON SCOTT - CIVIL

MO-PE-2021019715

DATE PREPARED

8/11/2026

ROUTE

266

DISTRICT

SW

STATE

MO

SHEET NO.

21

COUNTY

GREENE

JOB NO.

JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION

DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

MoDOT

105 WEST CAPITOL


JEFFERSON CITY, MO 65102

1-888-ASK-MODOT (1-888-275-6636)

SPECIAL SHEET

SHEET 3 OF 10

* INDICATES 10' TYPICAL WIDTH
** INDICATES 15' TYPICAL WIDTH

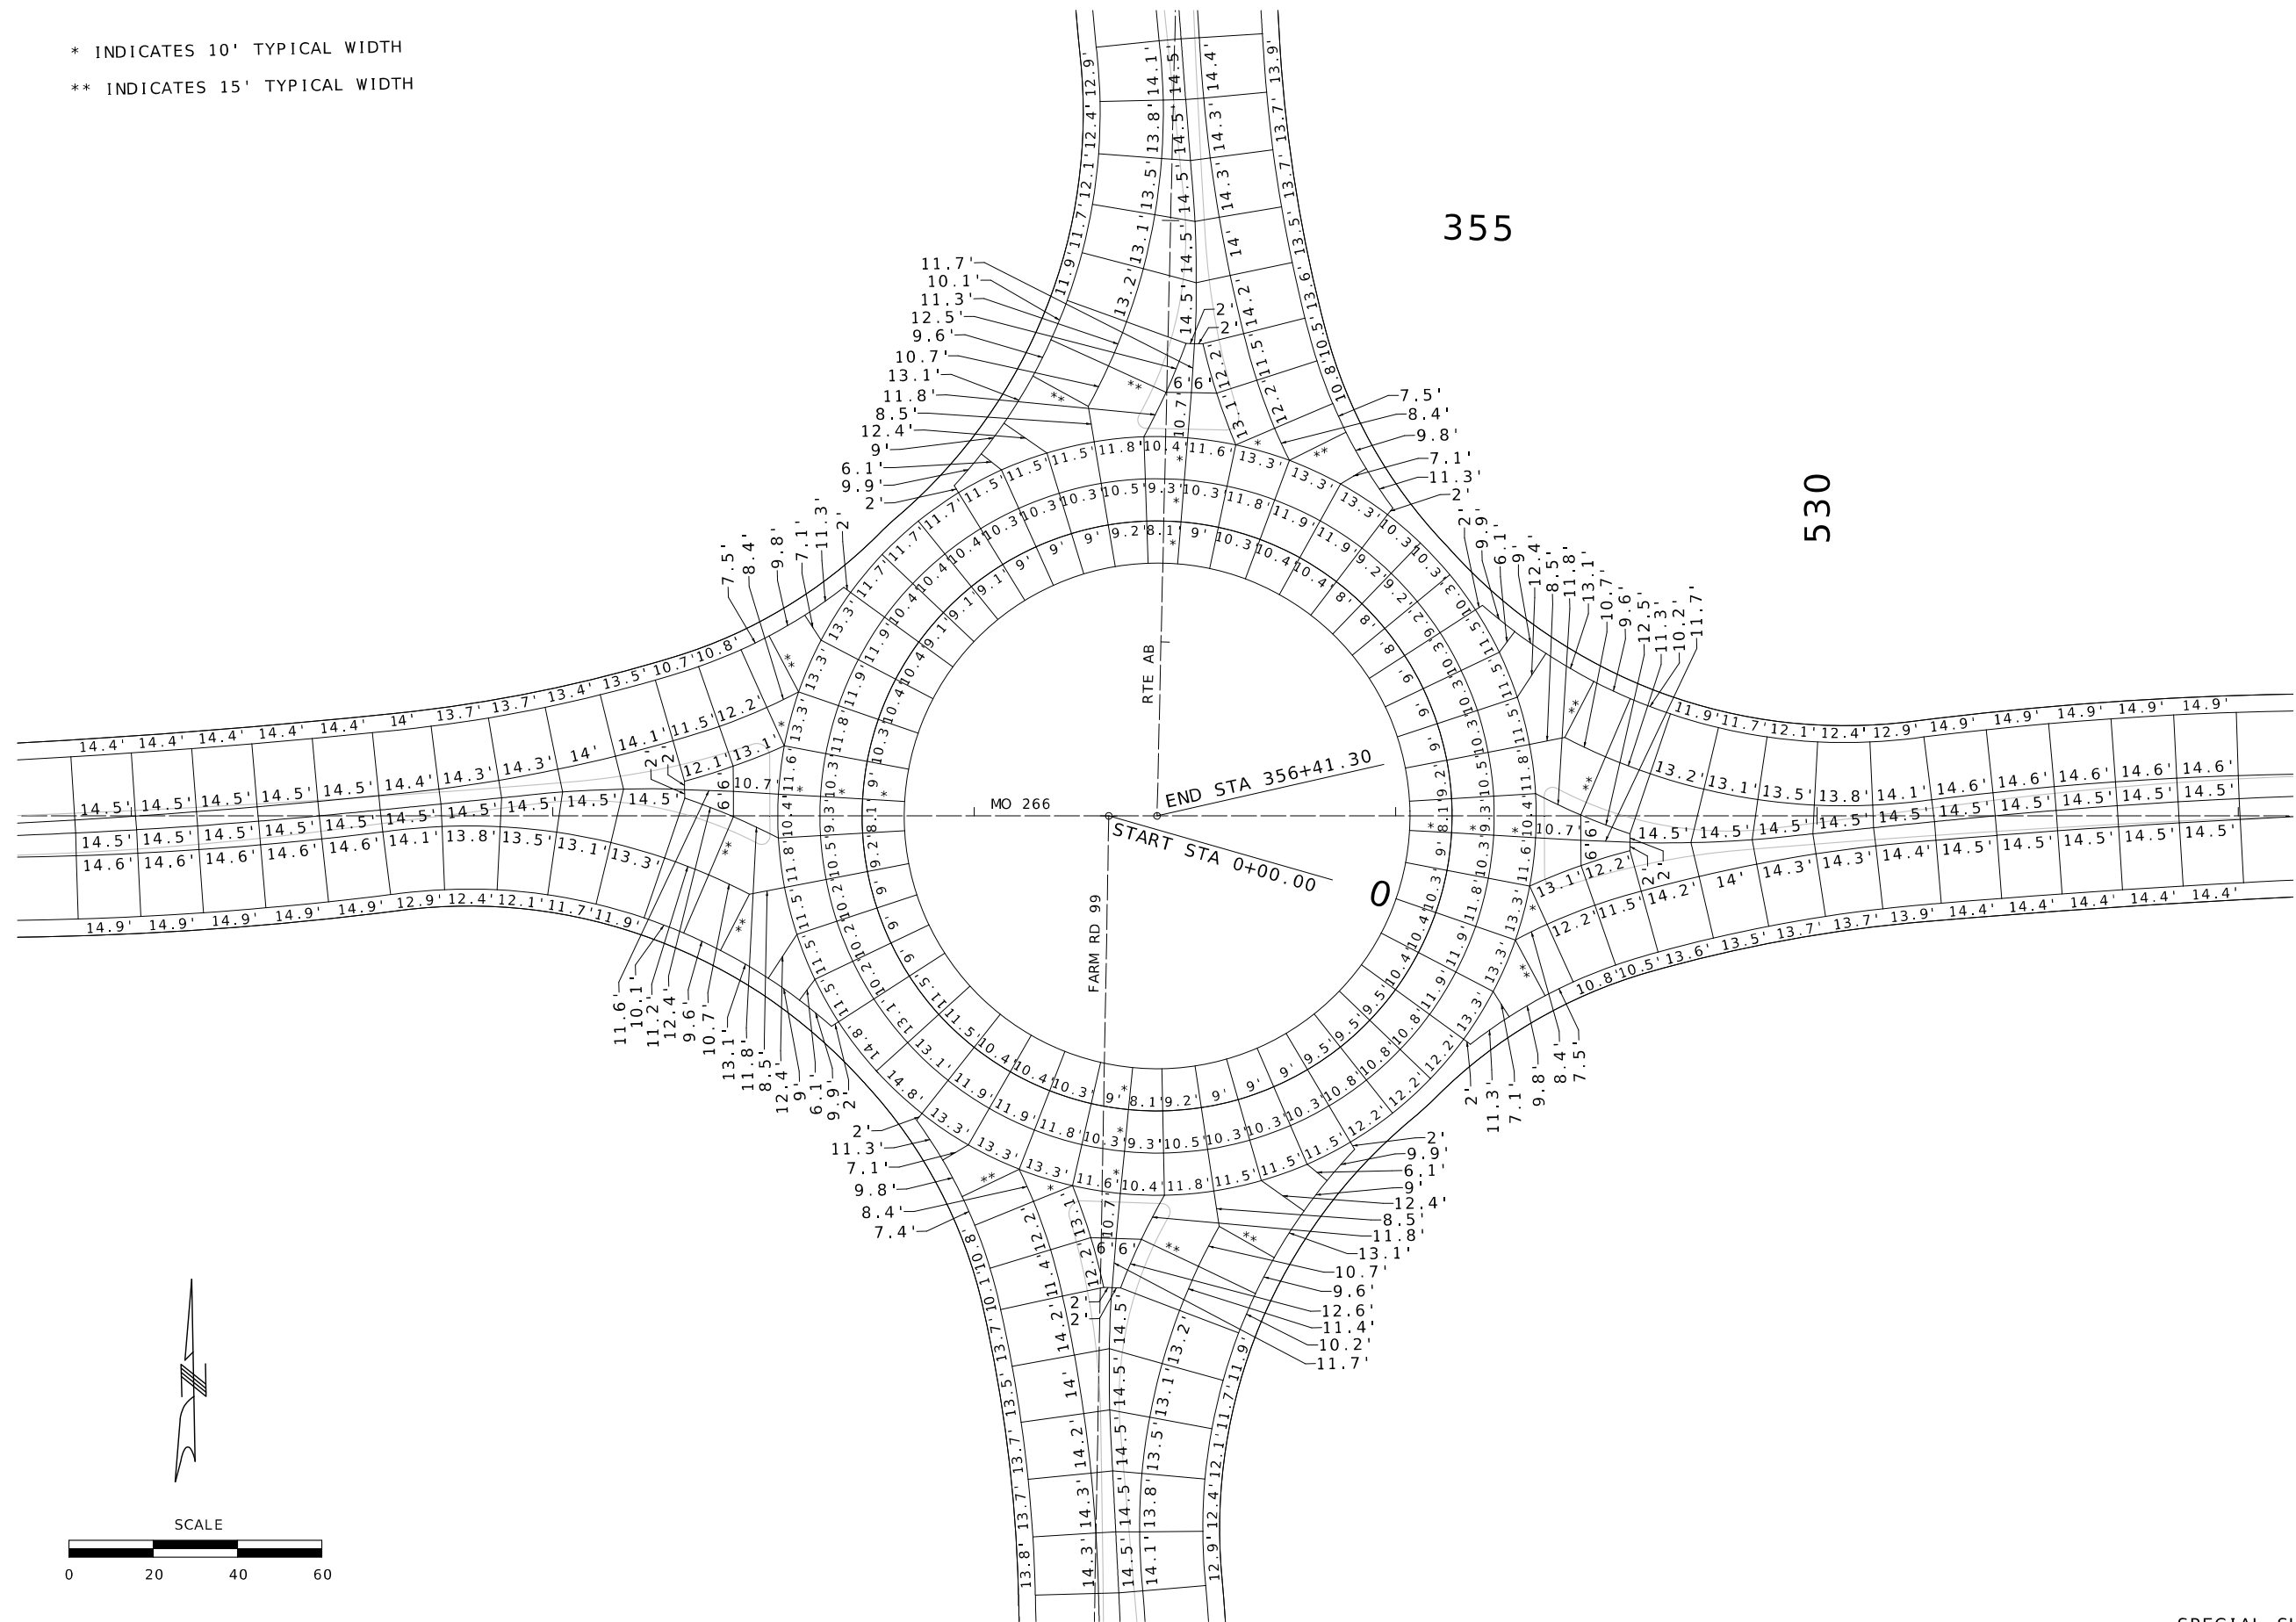

SPECIAL SHEET
SHEET 4 OF 10



DATE PREPARED
7/24/2026

ROUTE 266	STATE MO
DISTRICT SW	SHEET NO. 22

COUNTY
GREENE

JOB NO.
JSU0080

CONTRACT ID.

PROJECT NO. _____

BRIDGE NO. _____

[illegible]


**MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION**

 **MoDOT**

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)




CURVE_1		CURVE_2		CURVE_3		CURVE_4		SCS	P1 STA 509+68.64
P1	500+67.97	P1	502+20.06	P1	503+00.95	P1	503+66.37	SCS	TOTAL Δ 187°59'18.0"
PC	500+00.00	PC	501+25.25	PC	502+71.30	PC	503+29.44	PC	500+00.00
PT	501+25.25	PT	502+71.30	PT	503+29.44	PT	504+03.03	PT	501+25.25
Δ	55°12'8.1" (RT)	Δ	92°58'45.5" (LT)	Δ	27°45'35.5" (RT)	Δ	12°2'48.9" (RT)	Δ	55°12'8.1" (RT)
D	44°4'25.2"	D	63°39'43.1"	D	47°44'47.3"	D	16°22'12.8"	D	44°4'25.2"
L	125.25' (ARC)	L	146.05' (ARC)	L	58.14' (ARC)	L	73.59' (ARC)	L	125.25' (ARC)
T	67.97'	T	94.81'	T	29.65'	T	36.93'	T	67.97'
R	130.00'	R	90.00'	R	120.00'	R	350.00'	R	130.00'

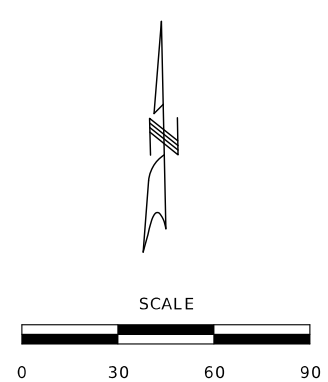

<u>CURVE 1</u>		<u>CURVE 2</u>		<u>CURVE 3</u>	
PI	700+67.97	PI	701+29.17	PI	701+62.74
PC	700+00.00	PC	701+25.25	PC	701+33.08
PT	701+25.25	PT	701+33.08	PT	701+91.22
Δ	55°12'8.1" (RT)	Δ	4°59'15.1" (LT)	Δ	27°45'35.5" (RT)
D	44°4'25.2"	D	63°39'43.1"	D	47°44'47.3"
L	125.25' (ARC)	L	7.83' (ARC)	L	58.14' (ARC)
T	67.97'	T	3.92'	T	29.65'
R	130.00'	R	90.00'	R	120.00'

<u>CURVE 4</u>		<u>SCS</u>	
PI	702+28.16	PI STA	701+44.40
PC	701+91.22	SCS TOTAL Δ	99°59'47.6"
PT	702+64.81	PC	700+00.00
Δ	12°2'48.9" (RT)	PT	701+25.25
D	16°22'12.8"	Δ	55°12'8.1" (RT)
L	73.59' (ARC)	D	44°4'25.2"
T	36.93'	L	125.25' (ARC)
R	350.00'	T	67.97'
		R	130.00'


[illegible]



NOTE:

1. ALL ELEVATIONS TAKEN AT EDGE OF PAVEMENT.

SPECIAL SHEET
SHEET 6 OF 10



08-21-2020 10:20:03
CAMERON SOOY - CIVIL
MO-PE-2021019715

DATE PREPARED

8/11/2026	
0.00000000	0.00000000

ROUTE	STATE
266	MO

DISTRICT	SHEET NO.
----------	-----------

SW	24
----	----

COUNTY
GREENE

GREENE
JOB NO.

JSU0080

CONTRACT ID.

PROJECT NO.

PROJECT NO. _____

BRIDGE NO.

[illegible]MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)



074-Professional No. 2021
CAMERON SOOY - CIVIL
MO-PE-2021019715

DATE PREPARED
7/24/2026

ROUTE	STATE
266	MO
DISTRICT	SHEET NO.
SW	25

COUNTY
GREENE
JOB NO.
JSU0080
CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION




105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)


MEDIAN 1			
POINT	LOCATION	STATION	OFFSET
A	RTE 266	551+61.76	4.76 RT
B	RTE 266	551+64.35	7.91 RT
C	RTE 266	551+64.70	1.94 RT
D	RTE 266	551+87.50	9.74 RT
E	RTE 266	553+04.64	3.52 RT
F	RTE 266	553+54.24	2.79 LT
G	RTE 266	553+62.16	7.97 LT
H	RTE 266	554+04.98	16.86 LT
I	RTE 266	554+06.07	6.70 RT
J	RTE 266	554+08.94	14.03 LT
K	RTE 266	554+09.01	4.95 RT

MEDIAN 2			
POINT	LOCATION	STATION	OFFSET
L	RTE 266	555+74.78	4.56 LT
M	RTE 266	555+74.83	14.43 RT
N	RTE 266	555+77.72	6.30 LT
O	RTE 266	555+78.79	17.26 RT
P	RTE 266	556+21.61	8.42 RT
Q	RTE 266	556+29.54	3.25 RT
R	RTE 266	556+79.14	3.00 LT
S	RTE 266	557+96.26	9.47 LT
T	RTE 266	558+19.08	1.74 LT
U	RTE 266	558+19.42	7.71 LT
V	RTE 266	558+22.01	4.56 LT


MEDIAN 3			
POINT	LOCATION	STATION	OFFSET
W	RTE B	1+98.15	6.77 RT
X	RTE B	1+99.93	3.87 RT
Y	RTE B	2+05.88	23.80 RT
Z	RTE B	2+10.11	24.77 RT
AA	RTE B	2+45.50	2.95 RT
AB	RTE B	2+52.23	3.71 LT
AC	RTE B	3+03.03	12.78 LT
AD	RTE B	3+86.72	16.86 LT
AE	RTE B	4+20.80	7.73 LT
AF	RTE B	4+21.36	13.70 LT
AG	RTE B	4+23.81	10.48 LT

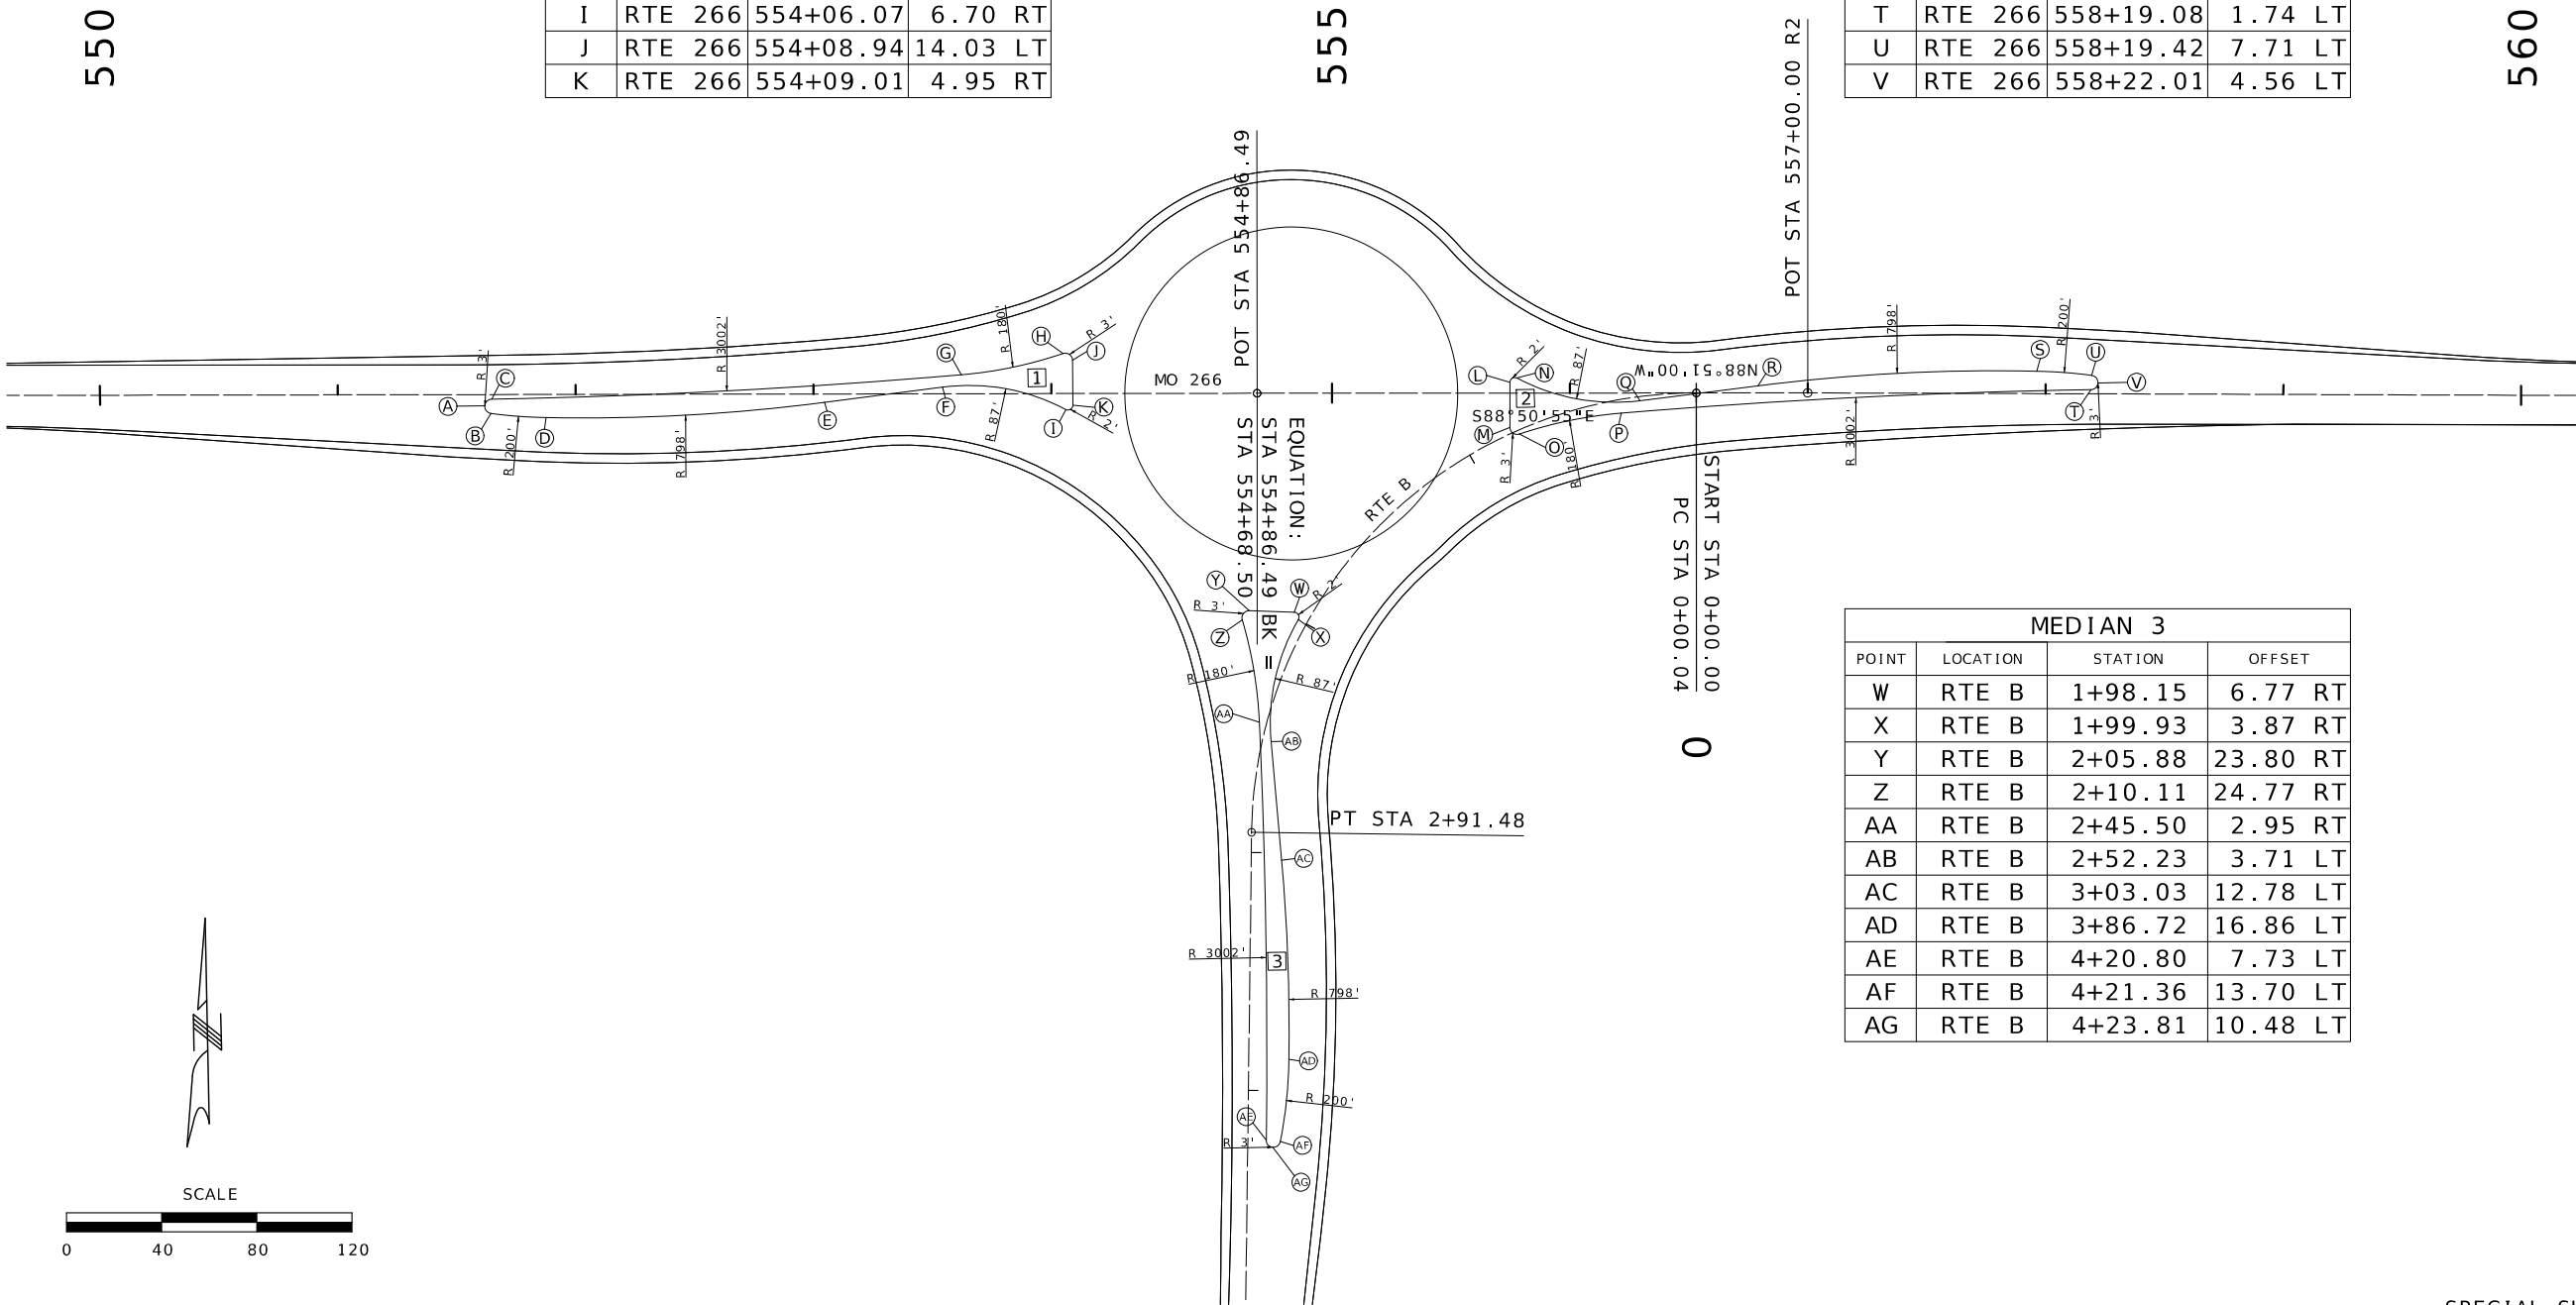


ENTRANCE 1 PROFILE - TYPE 1 DRIVEWAY
532+10.16, RTE 266 25.5' LT
W=20'

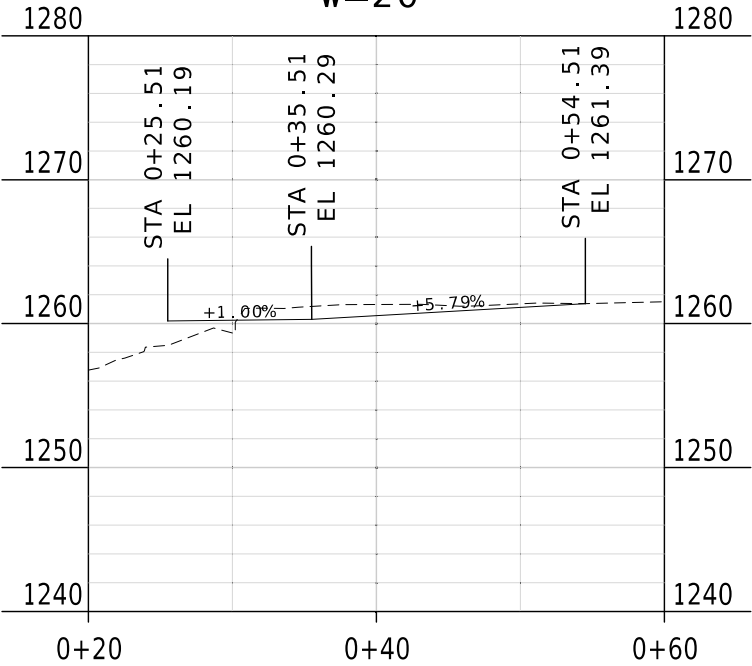


ENTRANCE 2 PROFILE - TYPE 1 DRIVEWAY
532+10.32, RTE 266 16.1' RT
W=30'

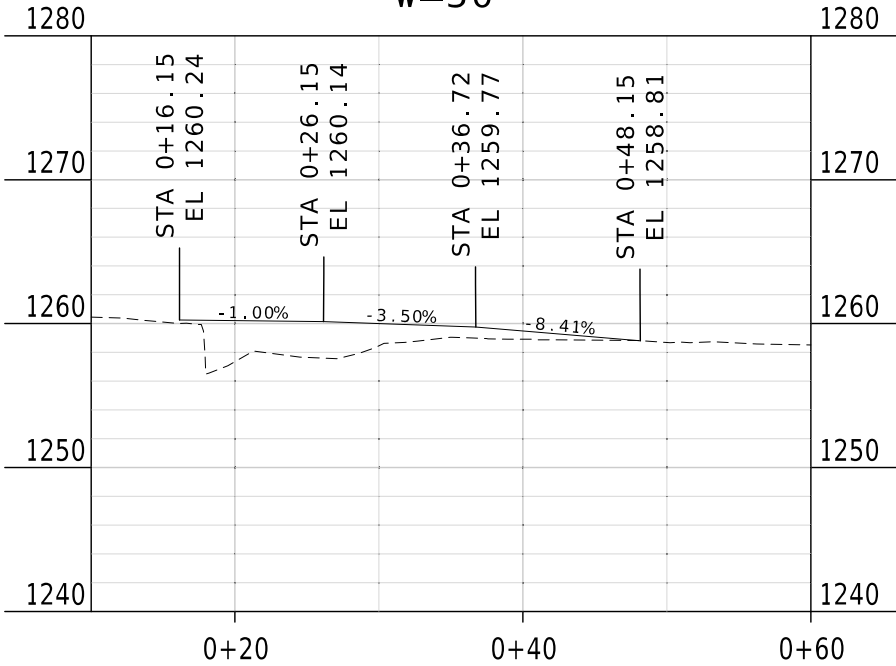

ENTRANCE 3 PROFILE - TYPE 1 DRIVEWAY
351+15.92, RTE AB 12.3' LT
W=24'

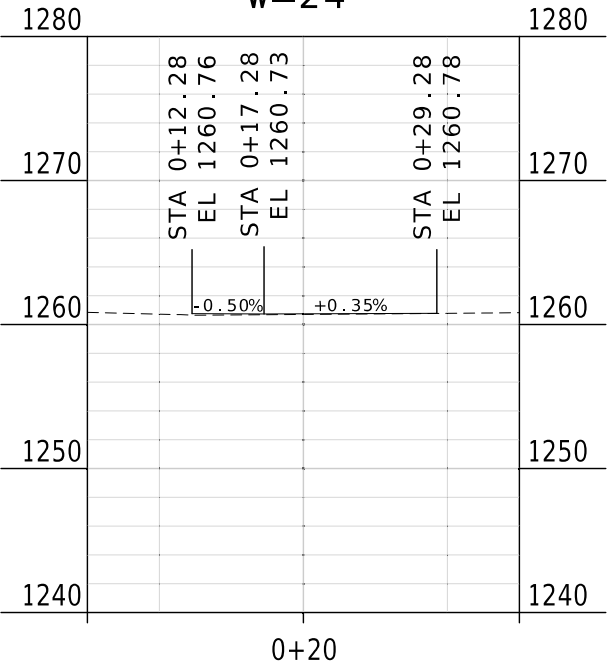

ENTRANCE 4 PROFILE - TYPE 1 DRIVEWAY
4+64.39, FR 99 12.6' RT
W=32'

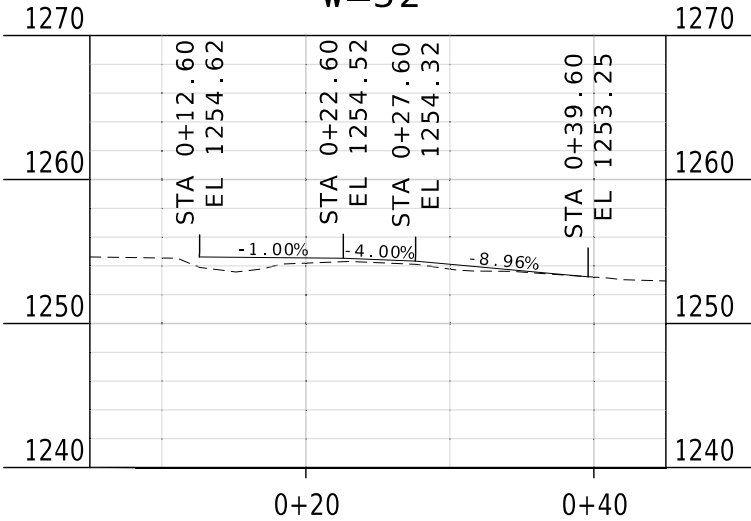

DATE PREPARED 8/20/2026	
ROUTE 266	STATE MO
DISTRICT SW	SHEET NO. 27
COUNTY GREENE	
JOB NO. JSU0080	
CONTRACT ID.	


PROJECT NO.
BRIDGE NO.

DATE	DESCRIPTION


MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)


ENTRANCE 5 PROFILE - TYPE 1 DRIVEWAY
4+64.39, FR 99 18.5' LT
W=32'

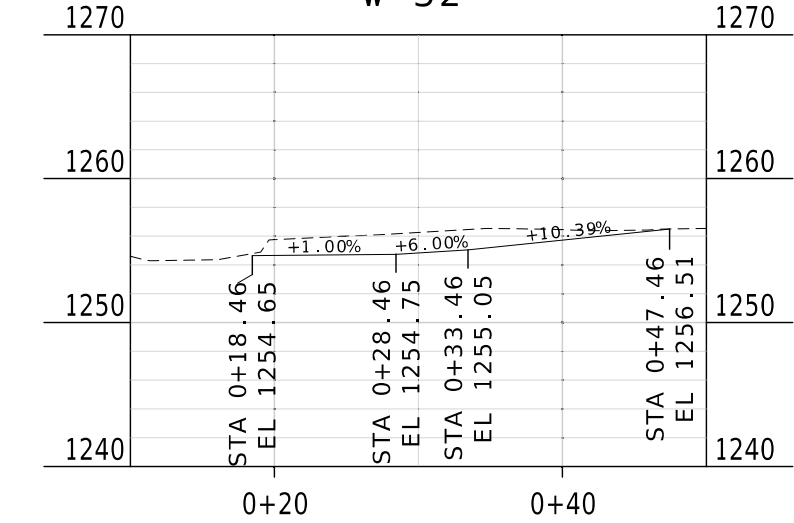


ENTRANCE 6 PROFILE - TYPE 1 DRIVEWAY
550+66.27, RTE 266 20.4' RT
W=32'

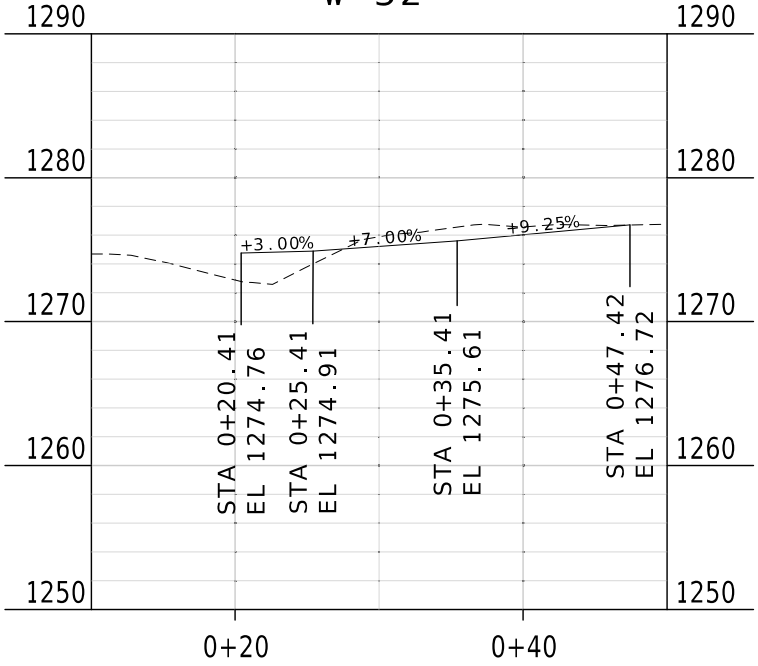

ENTRANCE 7 PROFILE - TYPE 1 DRIVEWAY
559+71.76, RTE 266 16.7' LT
W=34'

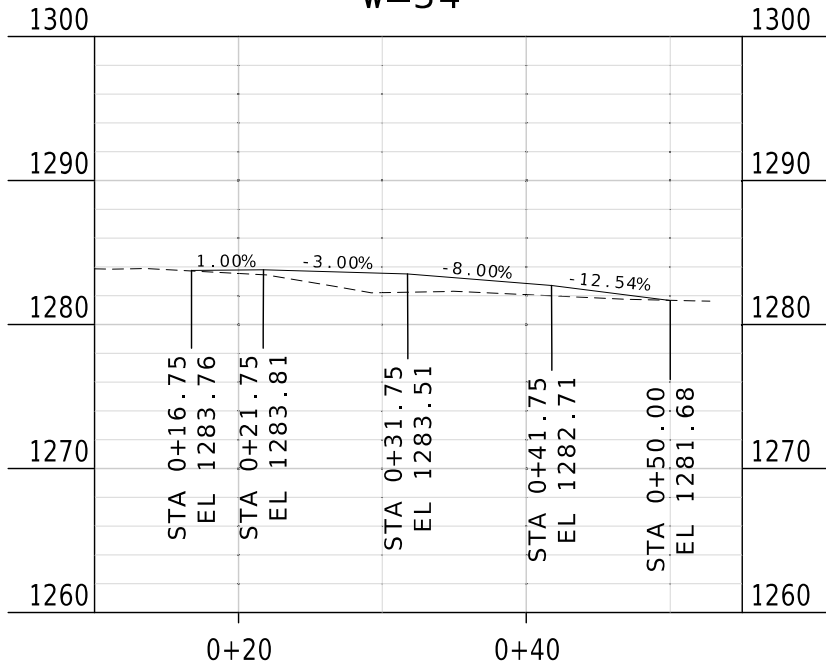

ENTRANCE 8 PROFILE - TYPE 1 DRIVEWAY
3+39.66 RTE_B_CL 10.7' RT
W=20'

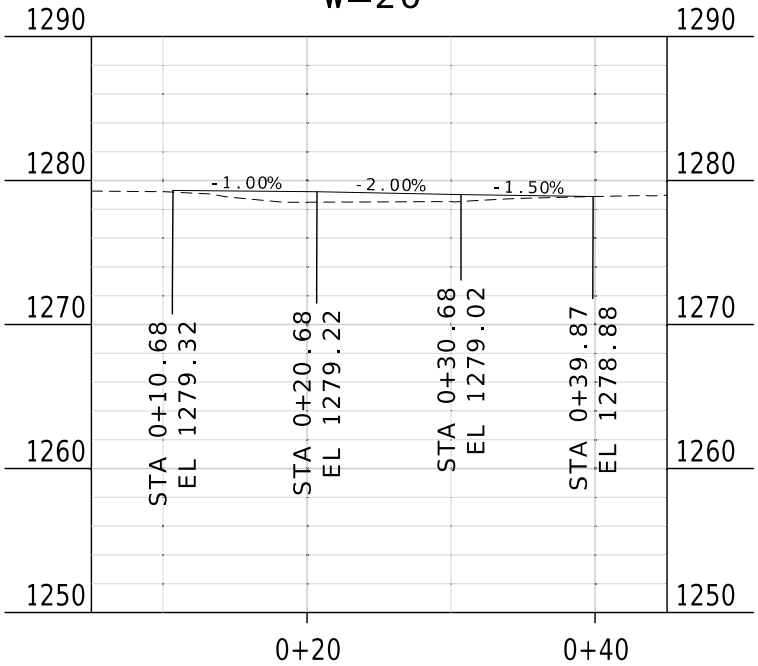


DATE PREPARED 8/11/2026	
ROUTE 266	STATE MO
DISTRICT SW	SHEET NO. 28
COUNTY GREENE	
JOB NO. JSU0080	
CONTRACT ID.	
PROJECT NO.	
BRIDGE NO.	

DESCRIPTION	DATE

GENERAL NOTES:

1. ANY EXISTING SIGNS THAT CONFLICT WITH THE TRAFFIC CONTROL SIGNING SHALL BE COMPLETELY COVERED OR REMOVED.
2. TEMPORARY SIGNING SHOWN IS FOR WORK ON ONE SIDE OF THE ROAD. FOR WORK ON THE OTHER SIDE, REVERSE ORDER OF THE SIGNS AND CHANNELIZERS.
3. SIGNING SHOWN SHALL REMAIN IN PLACE UNTIL CONSTRUCTION IS COMPLETE.
4. ALTERNATE TRAFFIC CONTROL MAY BE USED AS NEEDED AT THE APPROVAL OF THE ENGINEER.
5. REFER TO STANDARD DRAWING 616.10, 619.10, AND 620.10 FOR ADDITIONAL DETAILS AND 903.03 FOR SIGN AND SIGN MOUNTING REQUIREMENTS.
6. SPEED LIMIT SIGNS INDICATING THE NORMAL SPEED LIMIT SHALL BE INSTALLED AT THE END OF THE WORK ZONE, PROVIDED NO FURTHER WORK ZONES WILL BE ENCOUNTERED WITHIN THE NEXT 1/2 MILE.
7. TEMPORARY SPEED LIMIT SIGNS SHALL BE COVERED OR REMOVED WHEN THE CONDITIONS REQUIRING REDUCED SPEEDS DO NOT EXIST.
8. NO DIRECT PAYMENT WILL BE MADE FOR THE RELOCATION OF CHANNELIZERS, CONSTRUCTION SIGNS, OR FLASHING ARROW PANEL.
9. ALL SIGNS SHALL BE PORTABLE MOUNT AND ARE TO BE MOVED AS WORK PROGRESSES, UNLESS OTHERWISE NOTED. ALL TRAFFIC CONTROL ITEMS SHALL BE REMOVED FROM THE ROADWAY DURING NON-WORKING HOURS.
10. THE CONTRACTOR SHALL BE RESPONSIBLE FOR IMPLEMENTING AND MAINTAINING PROPER TRAFFIC CONTROL SETUPS THROUGHOUT CONSTRUCTION AS DESCRIBED IN THESE PLANS OR AS APPROVED BY THE ENGINEER.
11. WHERE MINIMUM LANE WIDTHS CANNOT BE ACHIEVED ON THE SIDE STREETS, THE CONTRACTOR SHALL CLOSE HALF OF THE APPROACH AND POSITION A FLAGGER AT EACH END OF THE WORK AREA. LOCATION TO BE DETERMINED BY THE ENGINEER. ADVANCE FLAGGER SIGNING SHALL BE INSTALLED AS OUTLINED IN THE MUTCD.
12. THE CONTRACTOR SHALL MAINTAIN PUBLIC ACCESS TO ALL BUSINESSES AND STREETS. NO STREET OR ENTRANCE SHALL BE COMPLETELY BLOCKED.
13. SPACING & DISTANCES OF TRAFFIC CONTROL DEVICES ARE APPROXIMATE. THE EXACT LOCATIONS SHALL BE DETERMINED IN THE FIELD & APPROVED BY THE ENGINEER.
14. TRAFFIC CONTROL SHALL CONFORM TO THE LATEST EDITION OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD).
15. ADJUST ADVANCE WARNING SIGN SPACING TO AVOID SIGN PLACEMENT WITHIN THE LIMITS OF THE RAILROAD RIGHT OF WAY.

REVISED: 2/19/2026




DATE PREPARED 7/24/2026	
ROUTE 266	STATE MO
DISTRICT SW	SHEET NO. 29
COUNTY GREENE	
JOB NO. JSU0080	
CONTRACT ID.	

PROJECT NO.
BRIDGE NO.

DESCRIPTION	DATE


MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

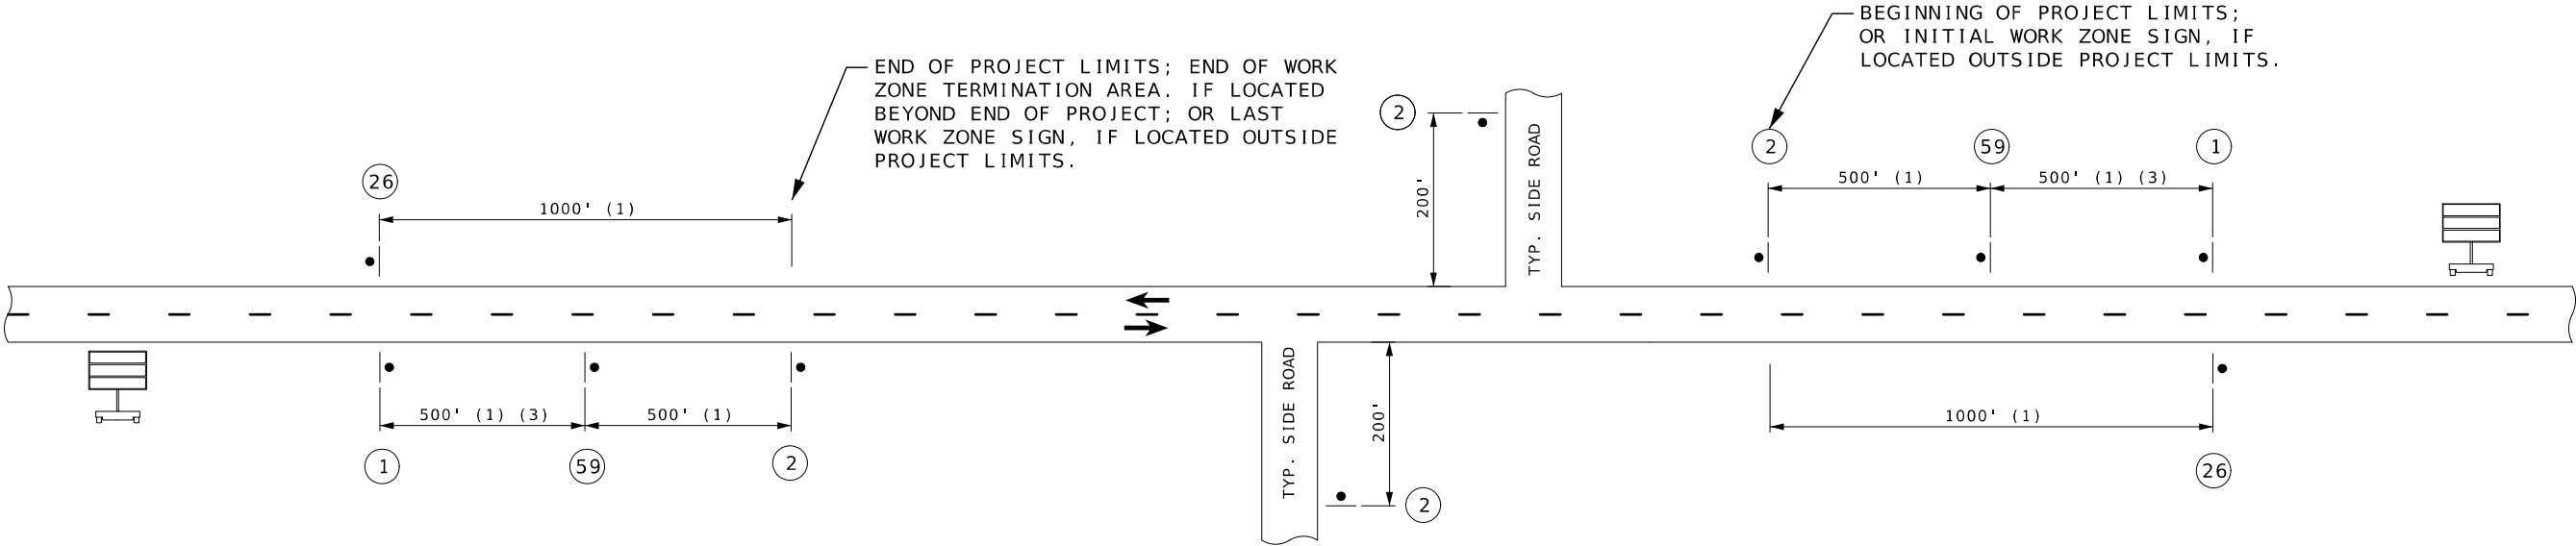

TYPICAL BEGINNING AND END OF PROJECT
(UNDIVIDED HIGHWAY)

- (1) DISTANCE MAY BE ADJUSTED ACCORDING TO FIELD CONDITIONS. WHERE TRAFFIC BACKUPS ARE EXPECTED BEYOND THE ADVANCE WARNING AREA, ADDITIONAL SIGNING MAY BE NEEDED.
- (2) THE "WORK ZONE NO PHONE ZONE" SIGN IS PLACED A MINIMUM OF 500 FEET BEFORE THE ROAD WORK AHEAD SIGN.
- (3) CMS PLACEMENT SHALL BE APPROVED BY THE ENGINEER.
- (4) GO20-1 IS NOT USED WHEN WORK AREA IS LESS THAN 2 MILES. GO20-2 IS OPTIONAL WHEN GO20-1 IS NOT USED



(3)



CONST-8

(59) (2)



GO20-1

(1) (4)



GO20-2

(26) (4)



WO20-1

(2)

NOT TO SCALE

TRAFFIC CONTROL
SHEET 1 OF 8



DATE PREPARED
7/24/2026

ROUTE
266

STATE
MO

DISTRICT
SW

SHEET NO.
30

COUNTY
GREENE

JOB NO.
JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION

DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102

1-888-ASK-MODOT (1-888-275-6636)

MODOT

NOT TO SCALE

TRAFFIC CONTROL
SHEET 2 OF 8



WO20-1
(2)

BRIDGE
OR
RAMP



WO20-4
(7)



WO20-7a
(8)

GO20-5aP
WORK
ZONE

SPEED
LIMIT
45

R2-1

(54)


(4)

SPEED
LIMIT
55

R2-1

(25)

(NORMAL SPEED)

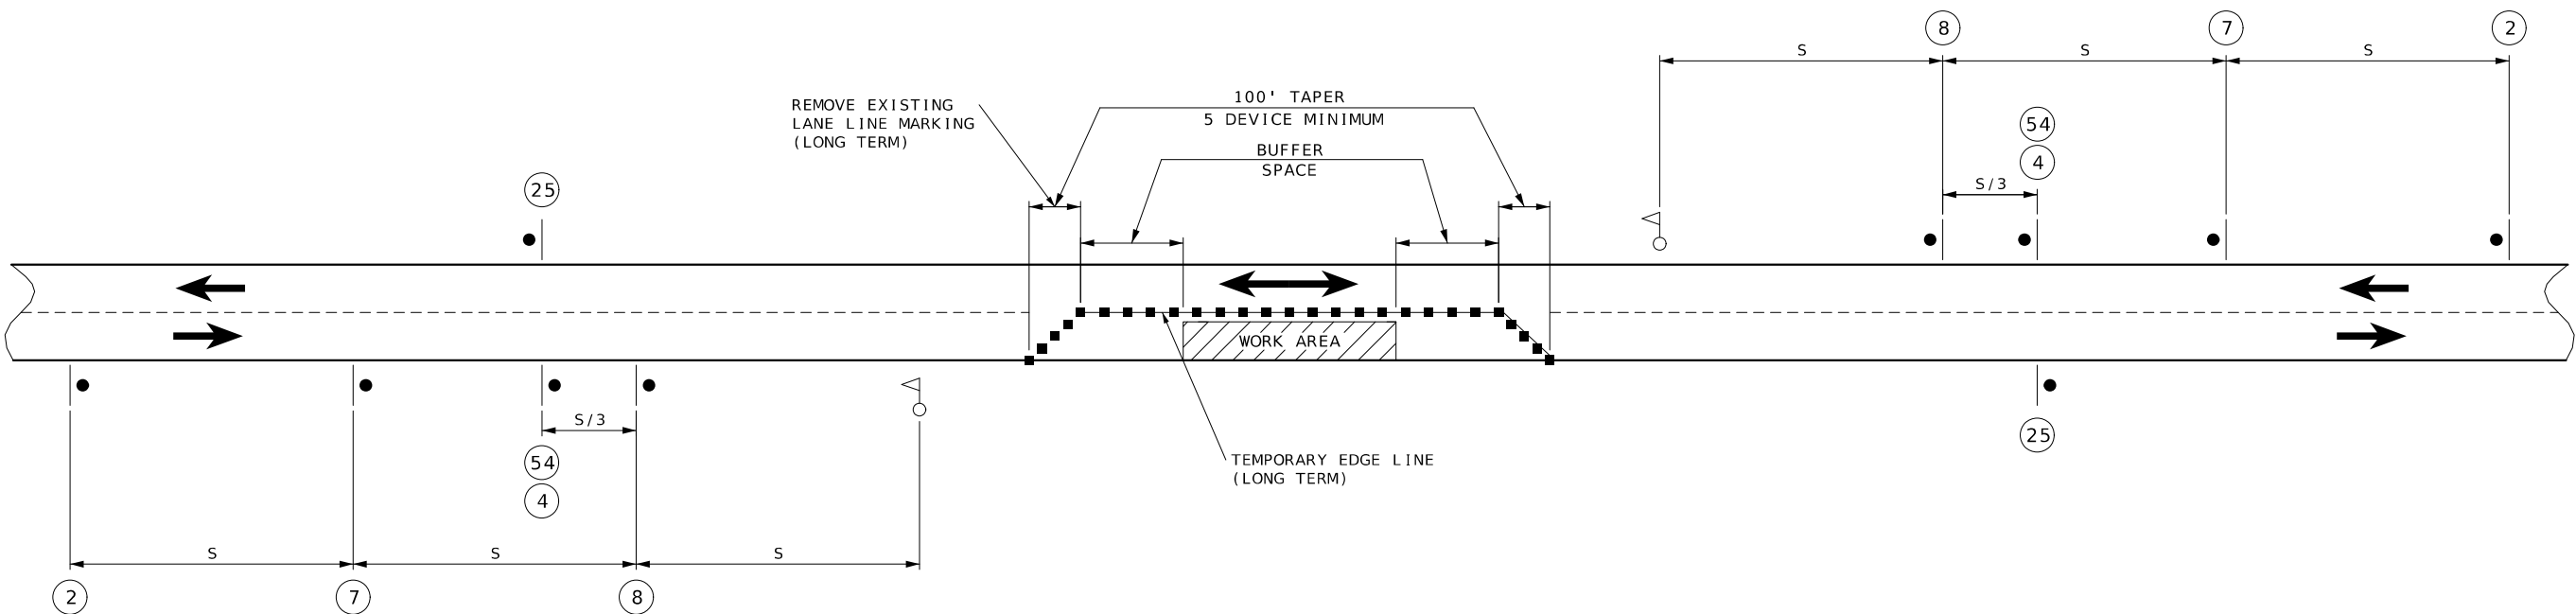

NOTES:
THIS PLAN IS FOR DAYLIGHT FLAGGING OPERATIONS ONLY. WHEN NIGHT WORK IS REQUIRED, OR OTHERWISE ALLOWED BY THE ENGINEER, WORK ZONE LIGHTING SHALL BE PROVIDED IN ACCORDANCE WITH SEC 616.5.2.

CHANNELIZING DEVICES LOCATED DOWNSTREAM OF THE ONE-LANE, TWO-WAY TAPER ARE OPTIONAL. THESE DEVICES SHOULD BE ELIMINATED WHEN THEIR USE WILL REDUCE THE USABLE LANE WIDTH, INCLUDING ANY ACCEPTABLE SHOULDERS, TO LESS THAN 10' OR WILL SIGNIFICANTLY AFFECT THE CONSTRUCTION OPERATION.

FLAG ASSEMBLIES FOR SIGN W020-7a ARE SUBSIDIARY TO THE SIGN.

TEMPORARY PAVEMENT MARKING REQUIRED WITH LONG TERM CLOSURE. NO DIRECT PAY.

• SIGN (SINGLE SIDED)

△ FLAGGER

■ CHANNELIZER

SPEED	SIGN SPACING (FT) (1)	CHANNELIZER SPACING (FT)	OPTIONAL
PERMANENT POSTED (MPH)	UNDIVIDED HIGHWAYS (S)	BUFFER/ WORK AREAS	BUFFER LENGTH (FT)
0-35	200	40	250
40-45	350	80	360
50-55	500	80	495
60-70	1000	120	730

SPACING NOTES:

(1) SPACING BETWEEN SIGNS, BETWEEN LAST SIGN AND FLAGGER, BEGINNING OF TAPER OR SIGNED CONDITION.

SPACINGS MAY BE ADJUSTED AS NECESSARY TO MEET FIELD CONDITIONS, AS APPROVED BY ENGINEER.

LANE CLOSURE USING FLAGGERS (UNDIVIDED HIGHWAY)

NOT TO SCALE

TRAFFIC CONTROL
SHEET 2 OF 8

SPEED	SIGN SPACING (FT)	MINIMUM TAPER LENGTH (L) FOR LANE WIDTHS (W)			OPTIONAL BUFFER LENGTH (FT) (B)	CHANNELIZER SPACING (FT)	
						TAPERS	BUFFER/ WORK AREAS
0-35	200	205	225	245	250	35	40
40-45	350	450	495	540	360	40	80
50-55	500	550	605	660	495	50	80
60-70	1000	700	770	840	730	60	120

NOTES:

(1) NEXT XX MILES SIGN NOT REQUIRED FOR NARROW LANE SECTIONS LESS THAN ONE MILE.



WO20-1
2



WO21-5
21




WO5-1



WO7-3a

43 *

* OMIT SIGN 43 FOR NO TRAVELWAY ENCROACHMENT.



R2-1
54
4




R2-1
25
(NORMAL SPEED)

TRAFFIC CONTROL LEGEND

- SIGN (SINGLE SIDED)
- CHANNELIZER

SHOULDER WORK WITH MINOR TRAVELWAY ENCROACHMENT
OR NO ENCROACHMENT
(UNDIVIDED HIGHWAY)

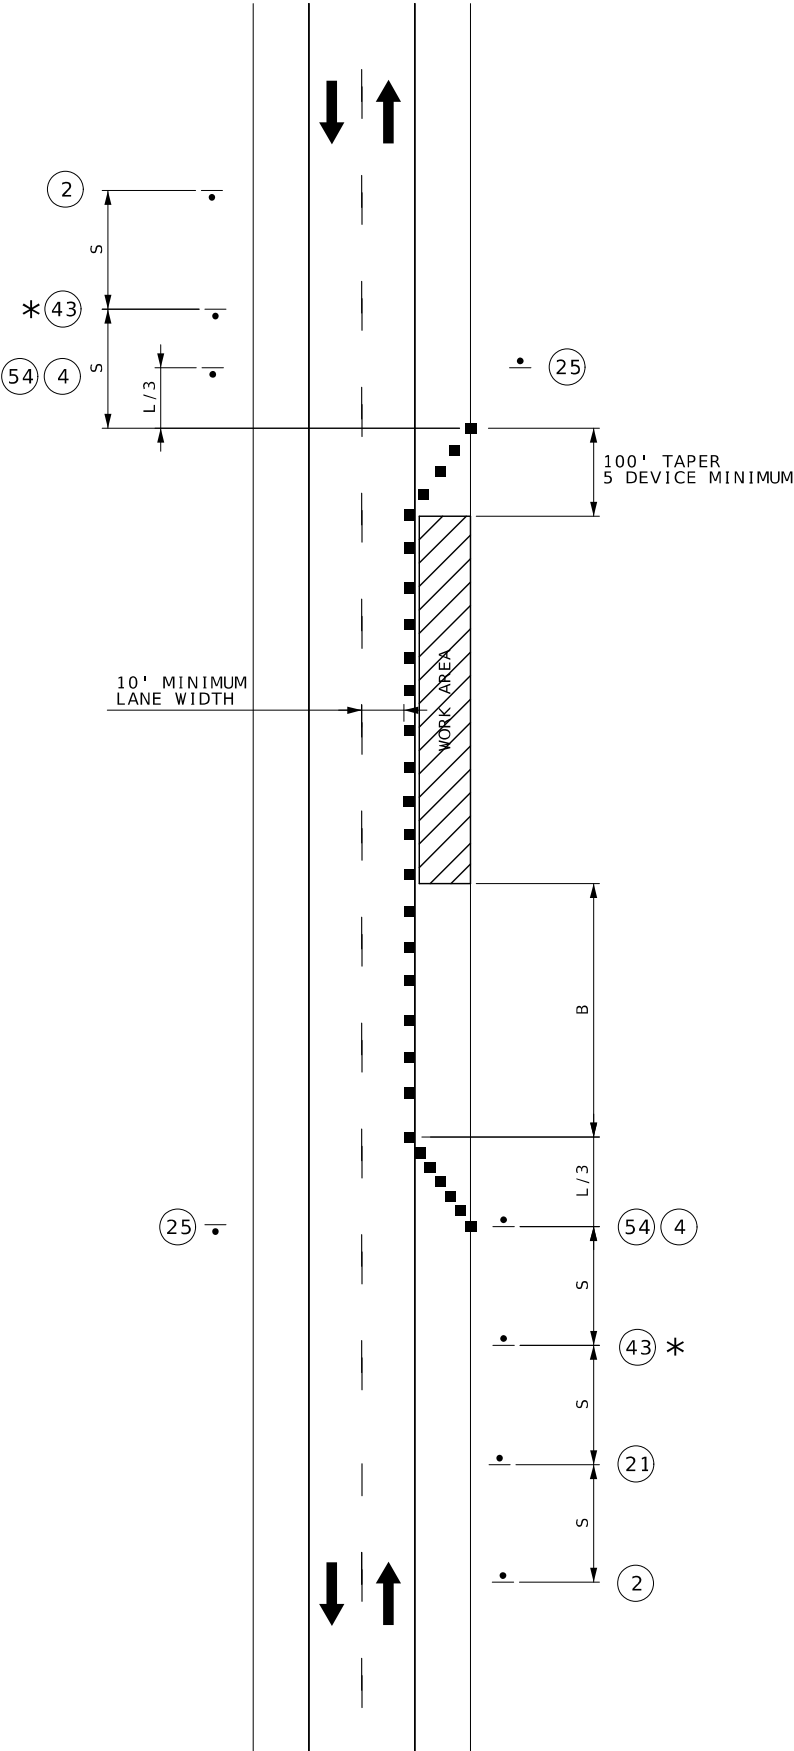

REVISED: 2/19/2026



DATE PREPARED 7/24/2026	
ROUTE 266	STATE MO
DISTRICT SW	SHEET NO. 31
COUNTY GREENE	
JOB NO. JSU0080	
CONTRACT ID.	
PROJECT NO.	
BRIDGE NO.	


DESCRIPTION	DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-273-6636)

NOT TO SCALE

WORK BEYOND THE SHOULDER
(UNDIVIDED HIGHWAY)

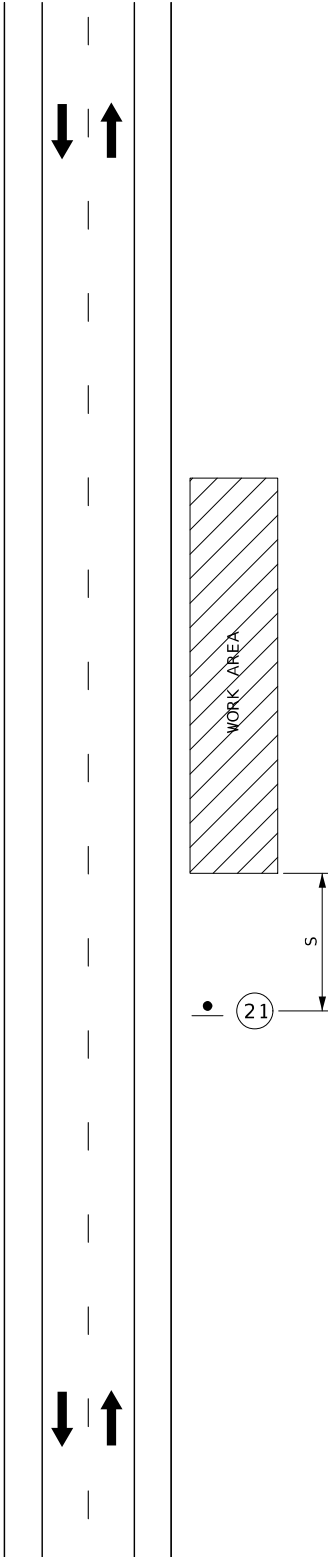


SPEED	SIGN SPACING (FT) (1)
PERMANENT POSTED (MPH)	UNDIVIDED HIGHWAYS (S)
0-35	200
40-45	350
50-55	500
60-70	1000

SPACING NOTES:
(1) SPACING BETWEEN SIGNS MAY BE ADJUSTED AS NECESSARY TO MEET FIELD CONDITIONS, AS APPROVED BY ENGINEER.



W021 - 5
(21)

NOT TO SCALE




DATE PREPARED 7/24/2026	
ROUTE 266	STATE MO
DISTRICT SW	SHEET NO. 32
COUNTY GREENE	
JOB NO. JSU0080	
CONTRACT ID.	
PROJECT NO.	
BRIDGE NO.	

DATE	DESCRIPTION


MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION



















105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

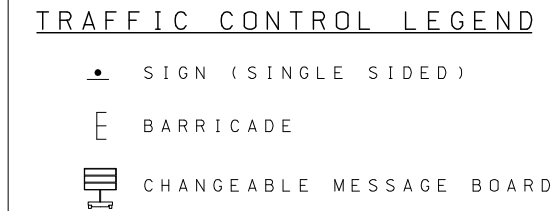

5. NO DIRECT PAY WILL BE MADE FOR
RELOCATION OF TRAFFIC CONTROL SIGNS AND
DEVICES.



TRAFFIC CONTROL SHEET
DETOUR FOR CLOSURE
AT B/266
SHEET 7 OF 8

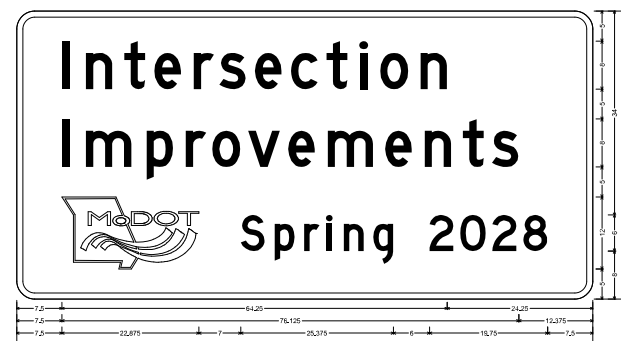

CONST-SP-60 SHF-FLAT SHEET FLUORESCENT:
1.500" Radius, No border, Yellow
*Completed as Promised! Black, D 65% spooling.
Table of letter and object lists


C	A	m	p	s	e	d	a	S
1,500	4,875	7,875	12,375	15,375	16,625	19,375	21,500	24,250
							28,000	31,875
	3,625	39,875	41,875	44,875	49,500	53,750	\$3,500	\$6,250

CONST: SHFLAT: SHEET:
3,000" Radius, 1,000" Border, White on Green
Intersection: Dr: Improvements: Dr: Spring 2028", D:
Title of letter and object lists

	a	b	c	d	e	f	g	h	i	j	k	l	m	n
7,500	11,500	17,675	22,875	29,500	33,750	38,750	45,250	51,625	57,250	60,625	67,250			
7,500	11,500	17,675	28,125	32,625	38,500	45,250	51,875	63,375	68,000	74,375	78,250			
7,500	37,375	43,000	47,875	51,625	54,500	59,500	68,750	74,000	78,250	84,500				

	ALTERNATE DITCH CHECK
	ROCK DITCH CHECK
	SEDIMENT TRAP
	SILT FENCE



REFER TO THE SUMMARY OF QUANTITIES SHEET FOR QUANTITIES AND ADDITIONAL
INFORMATION ON THE LOCATION AND LIMITS OF TEMPORARY EROSION CONTROL DEVICES.

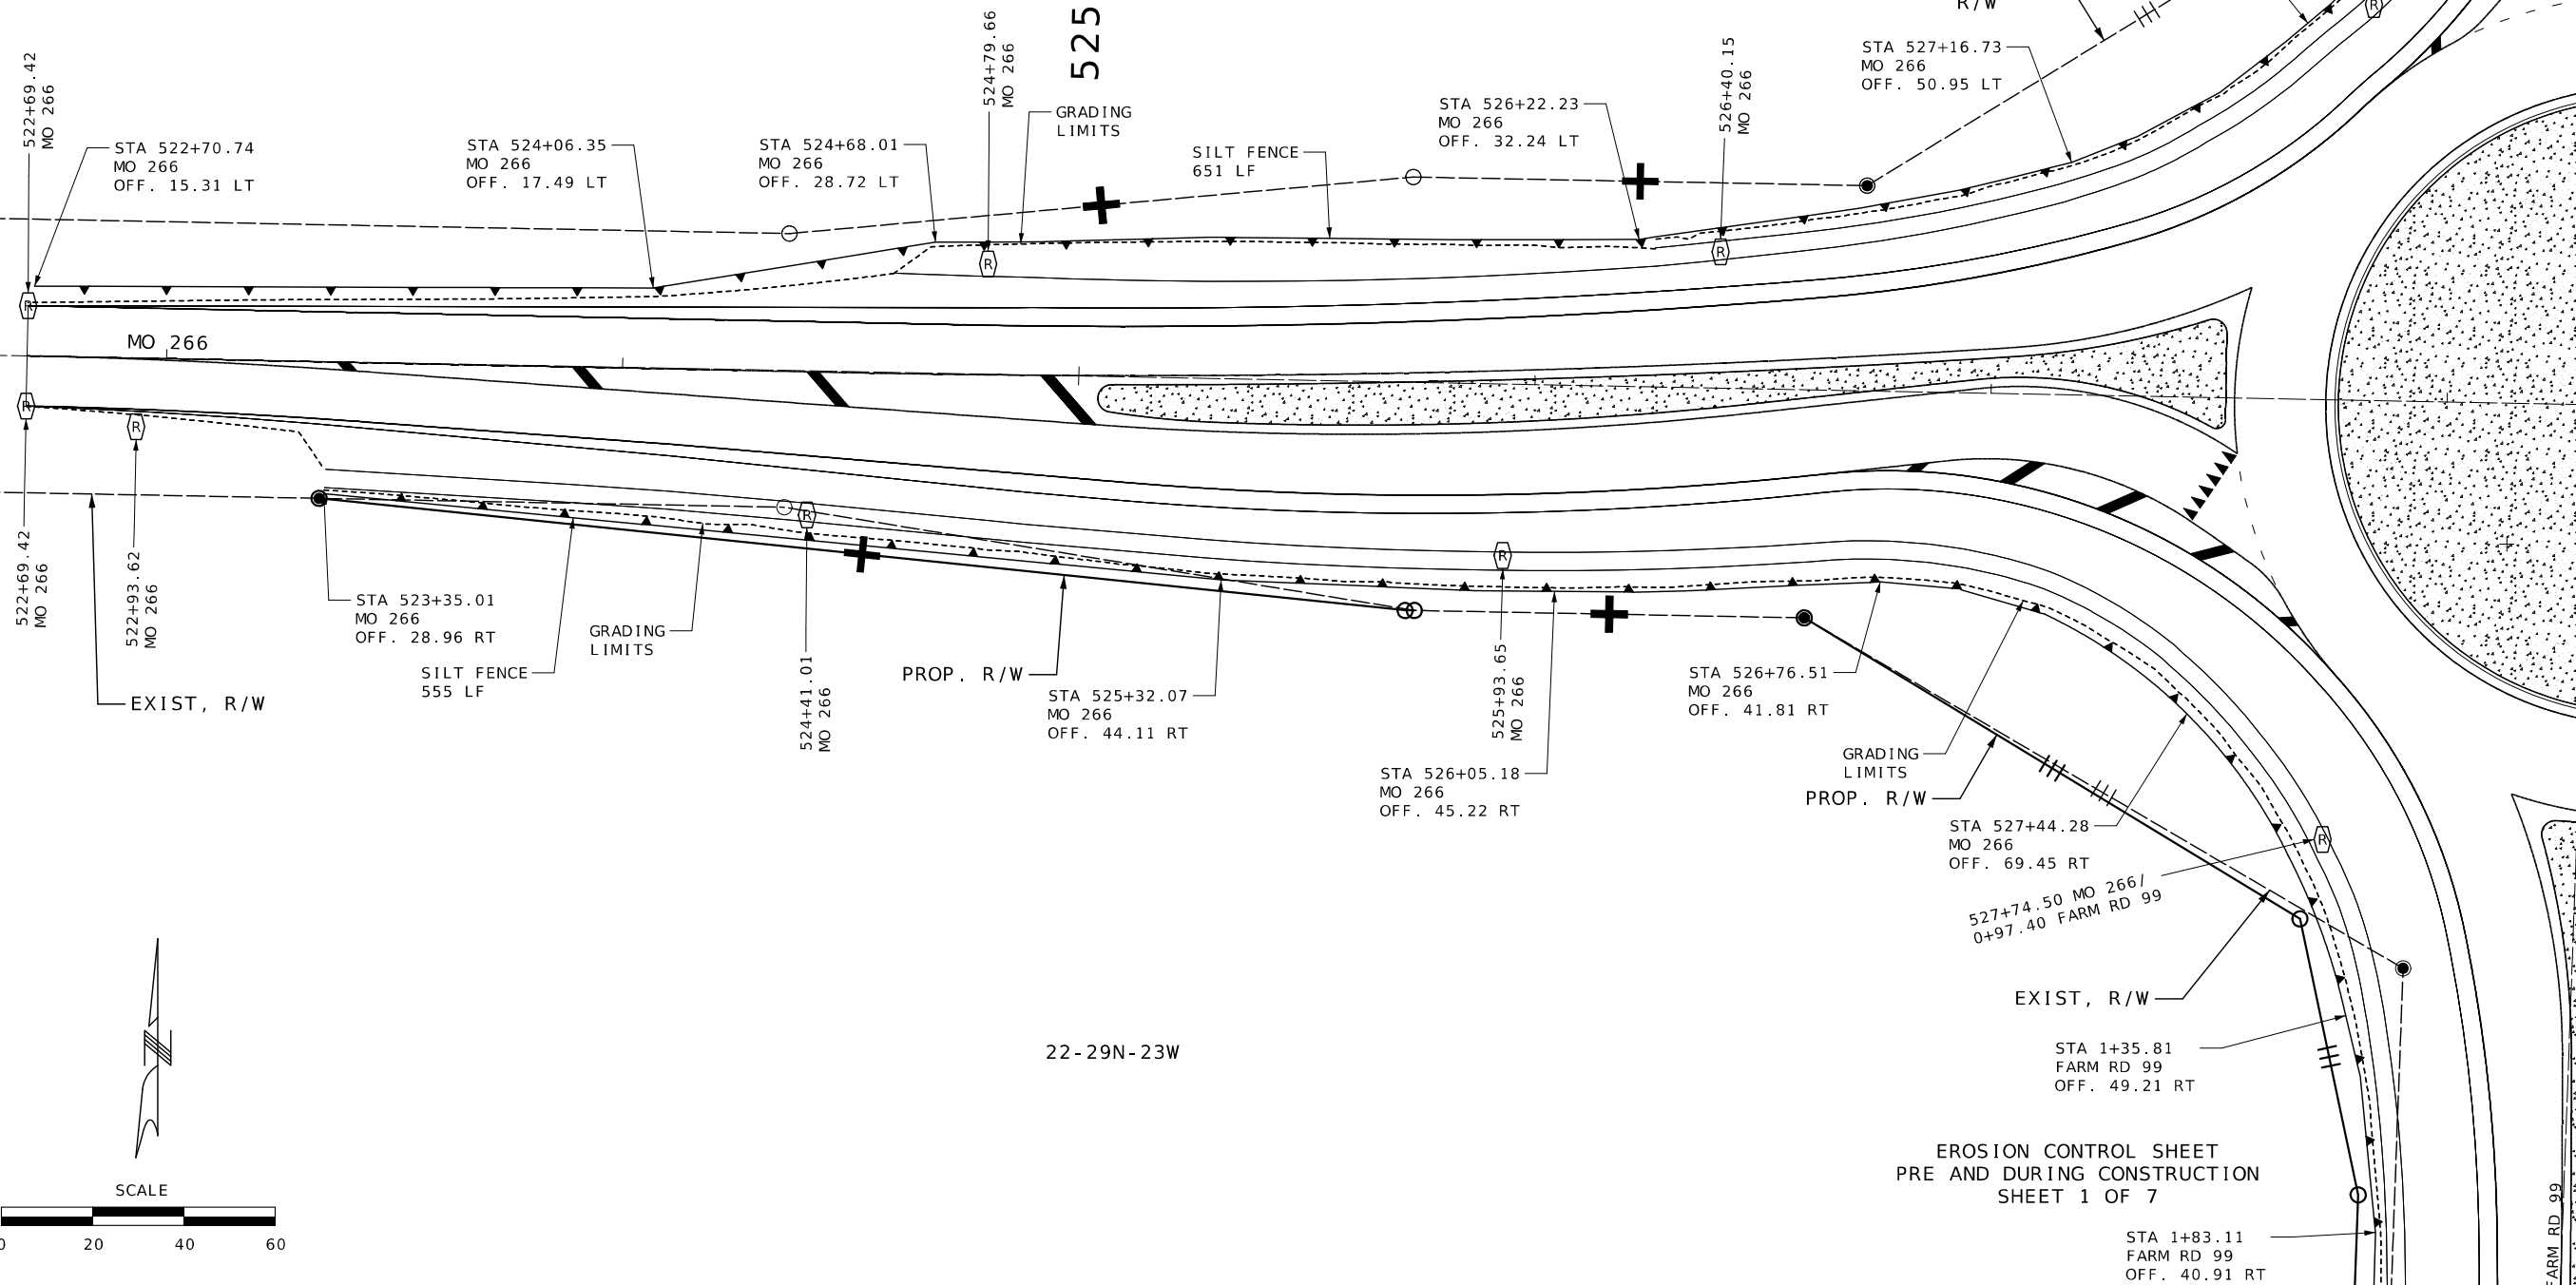


 08-000000-0004 CAMERON SOOY - CIVIL MO-PE-2021019715	
DATE PREPARED 8/11/2026	
ROUTE 266	STATE MO
DISTRICT SW	SHEET NO. 37
COUNTY GREENE	
JOB NO. JSU0080	
CONTRACT ID.	
PROJECT NO.	
BRIDGE NO.	
DESCRIPTION	DATE
	
MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION	
105 WEST CAPITAL JEFFERSON CITY, MO 65102 1-888-ASK-MODOT (1-888-275-6636)	

	ALTERNATE DITCH CHECK
	ROCK DITCH CHECK
	SEDIMENT TRAP
	SILT FENCE

REFER TO THE SUMMARY OF QUANTITIES SHEET FOR QUANTITIES
AND ADDITIONAL INFORMATION ON THE LOCATION AND LIMITS OF
TEMPORARY EROSION CONTROL DEVICES.

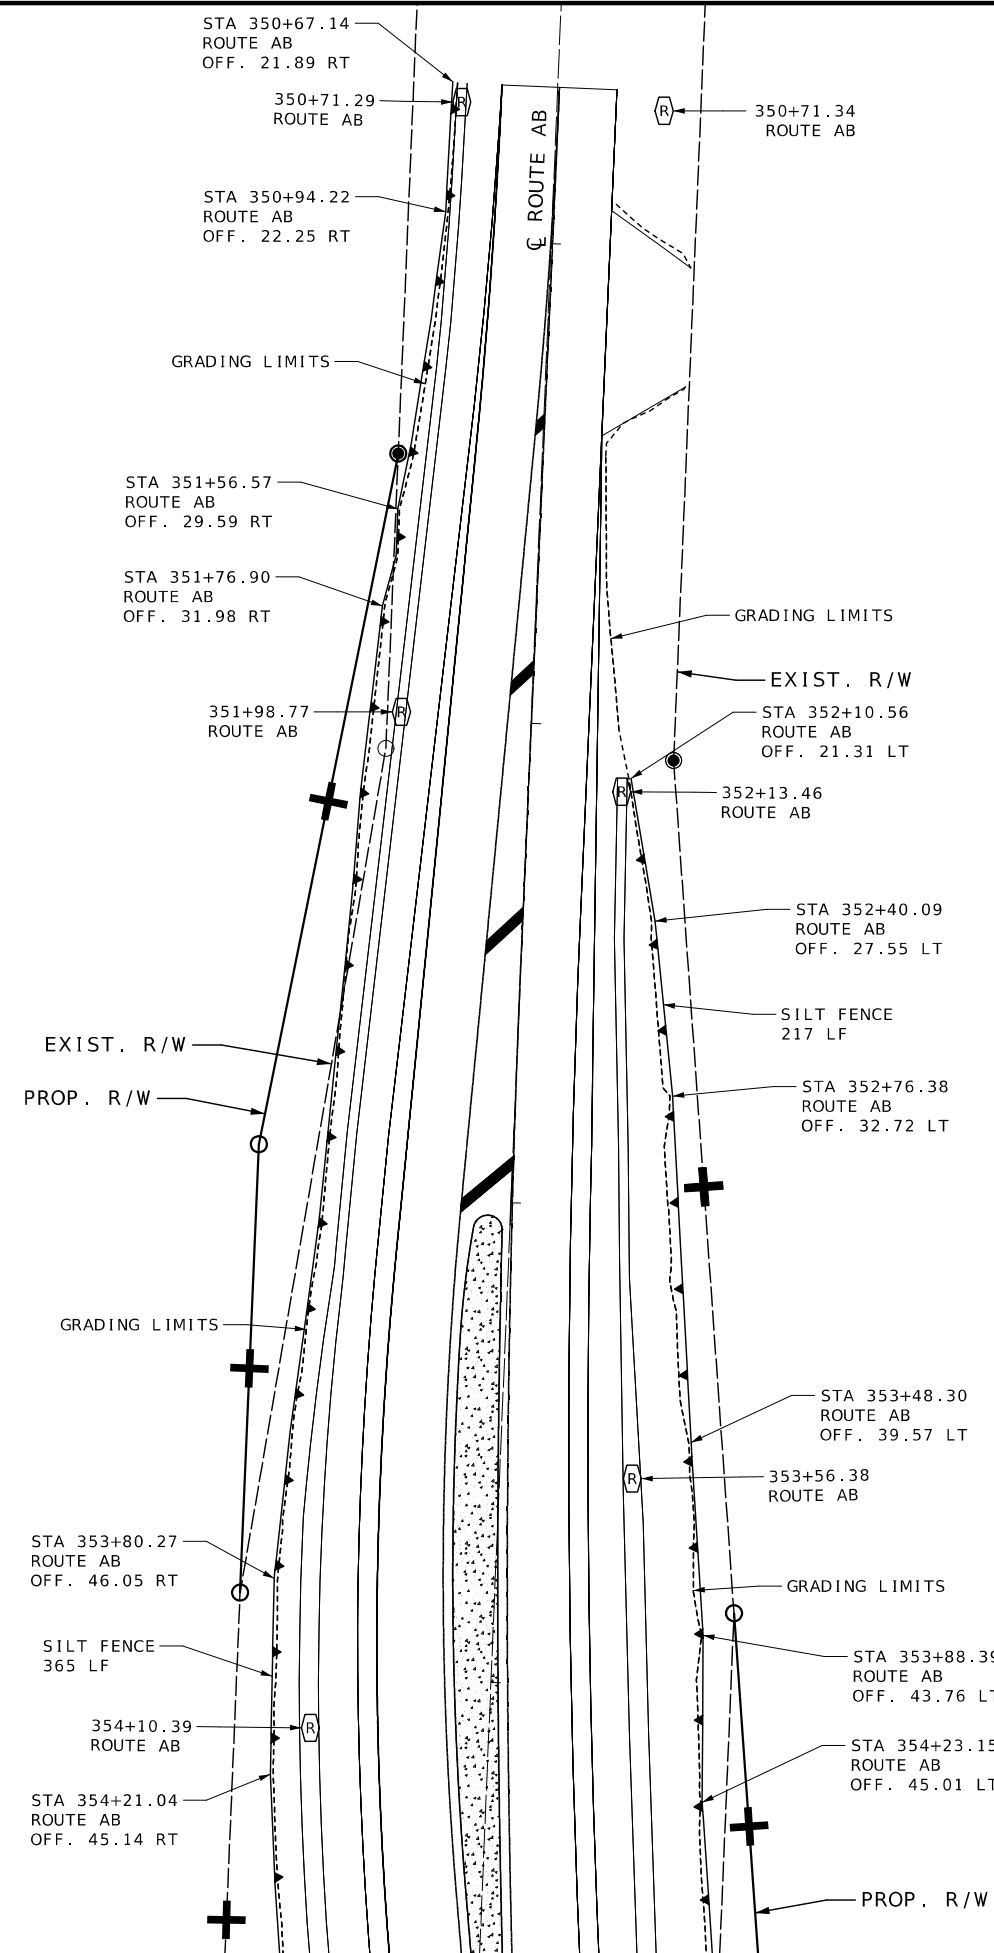

EROSION CONTROL SHEET
DURING CONSTRUCTION
SHEET 3 OF 7



08-21-2020 10:23:04
CAMERON SOOY - CIVIL
MO DE 2001010315

DATE PREPARED

8/11/2026	
ROUTE 266	STATE MO
DISTRICT SW	SHEET NO. 39

COUNTY

GREENE

JOB NO.

JSU0080

CONTRACT ID.

PROJECT NO.


BRIDGE NO.

[illegible]

MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION


105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

	ALTERNATE DITCH CHECK
	ROCK DITCH CHECK
	SEDIMENT TRAP
	SILT FENCE



REFER TO THE SUMMARY OF QUANTITIES SHEET FOR QUANTITIES AND
ADDITIONAL INFORMATION ON THE LOCATION AND LIMITS OF TEMPORARY
EROSION CONTROL DEVICES.

22-29N-23W



EROSION CONTROL SHEET
PRE AND DURING CONSTRUCTION
SHEET 4 OF 7

TEMPORARY EROSION CONTROL LEGEND

- A


ALTERNATE DITCH CHECK
- R

ROCK DITCH CHECK
- S

SEDIMENT TRAP
- SILT FENCE

NOTE: THE LOCATION AND LIMITS OF TEMPORARY EROSION CONTROL DEVICES MAY BE ADJUSTED IN THE FIELD AS DIRECTED BY THE ENGINEER.

REFER TO THE SUMMARY OF QUANTITIES SHEET FOR QUANTITIES AND ADDITIONAL INFORMATION ON THE LOCATION AND LIMITS OF TEMPORARY EROSION CONTROL DEVICES.

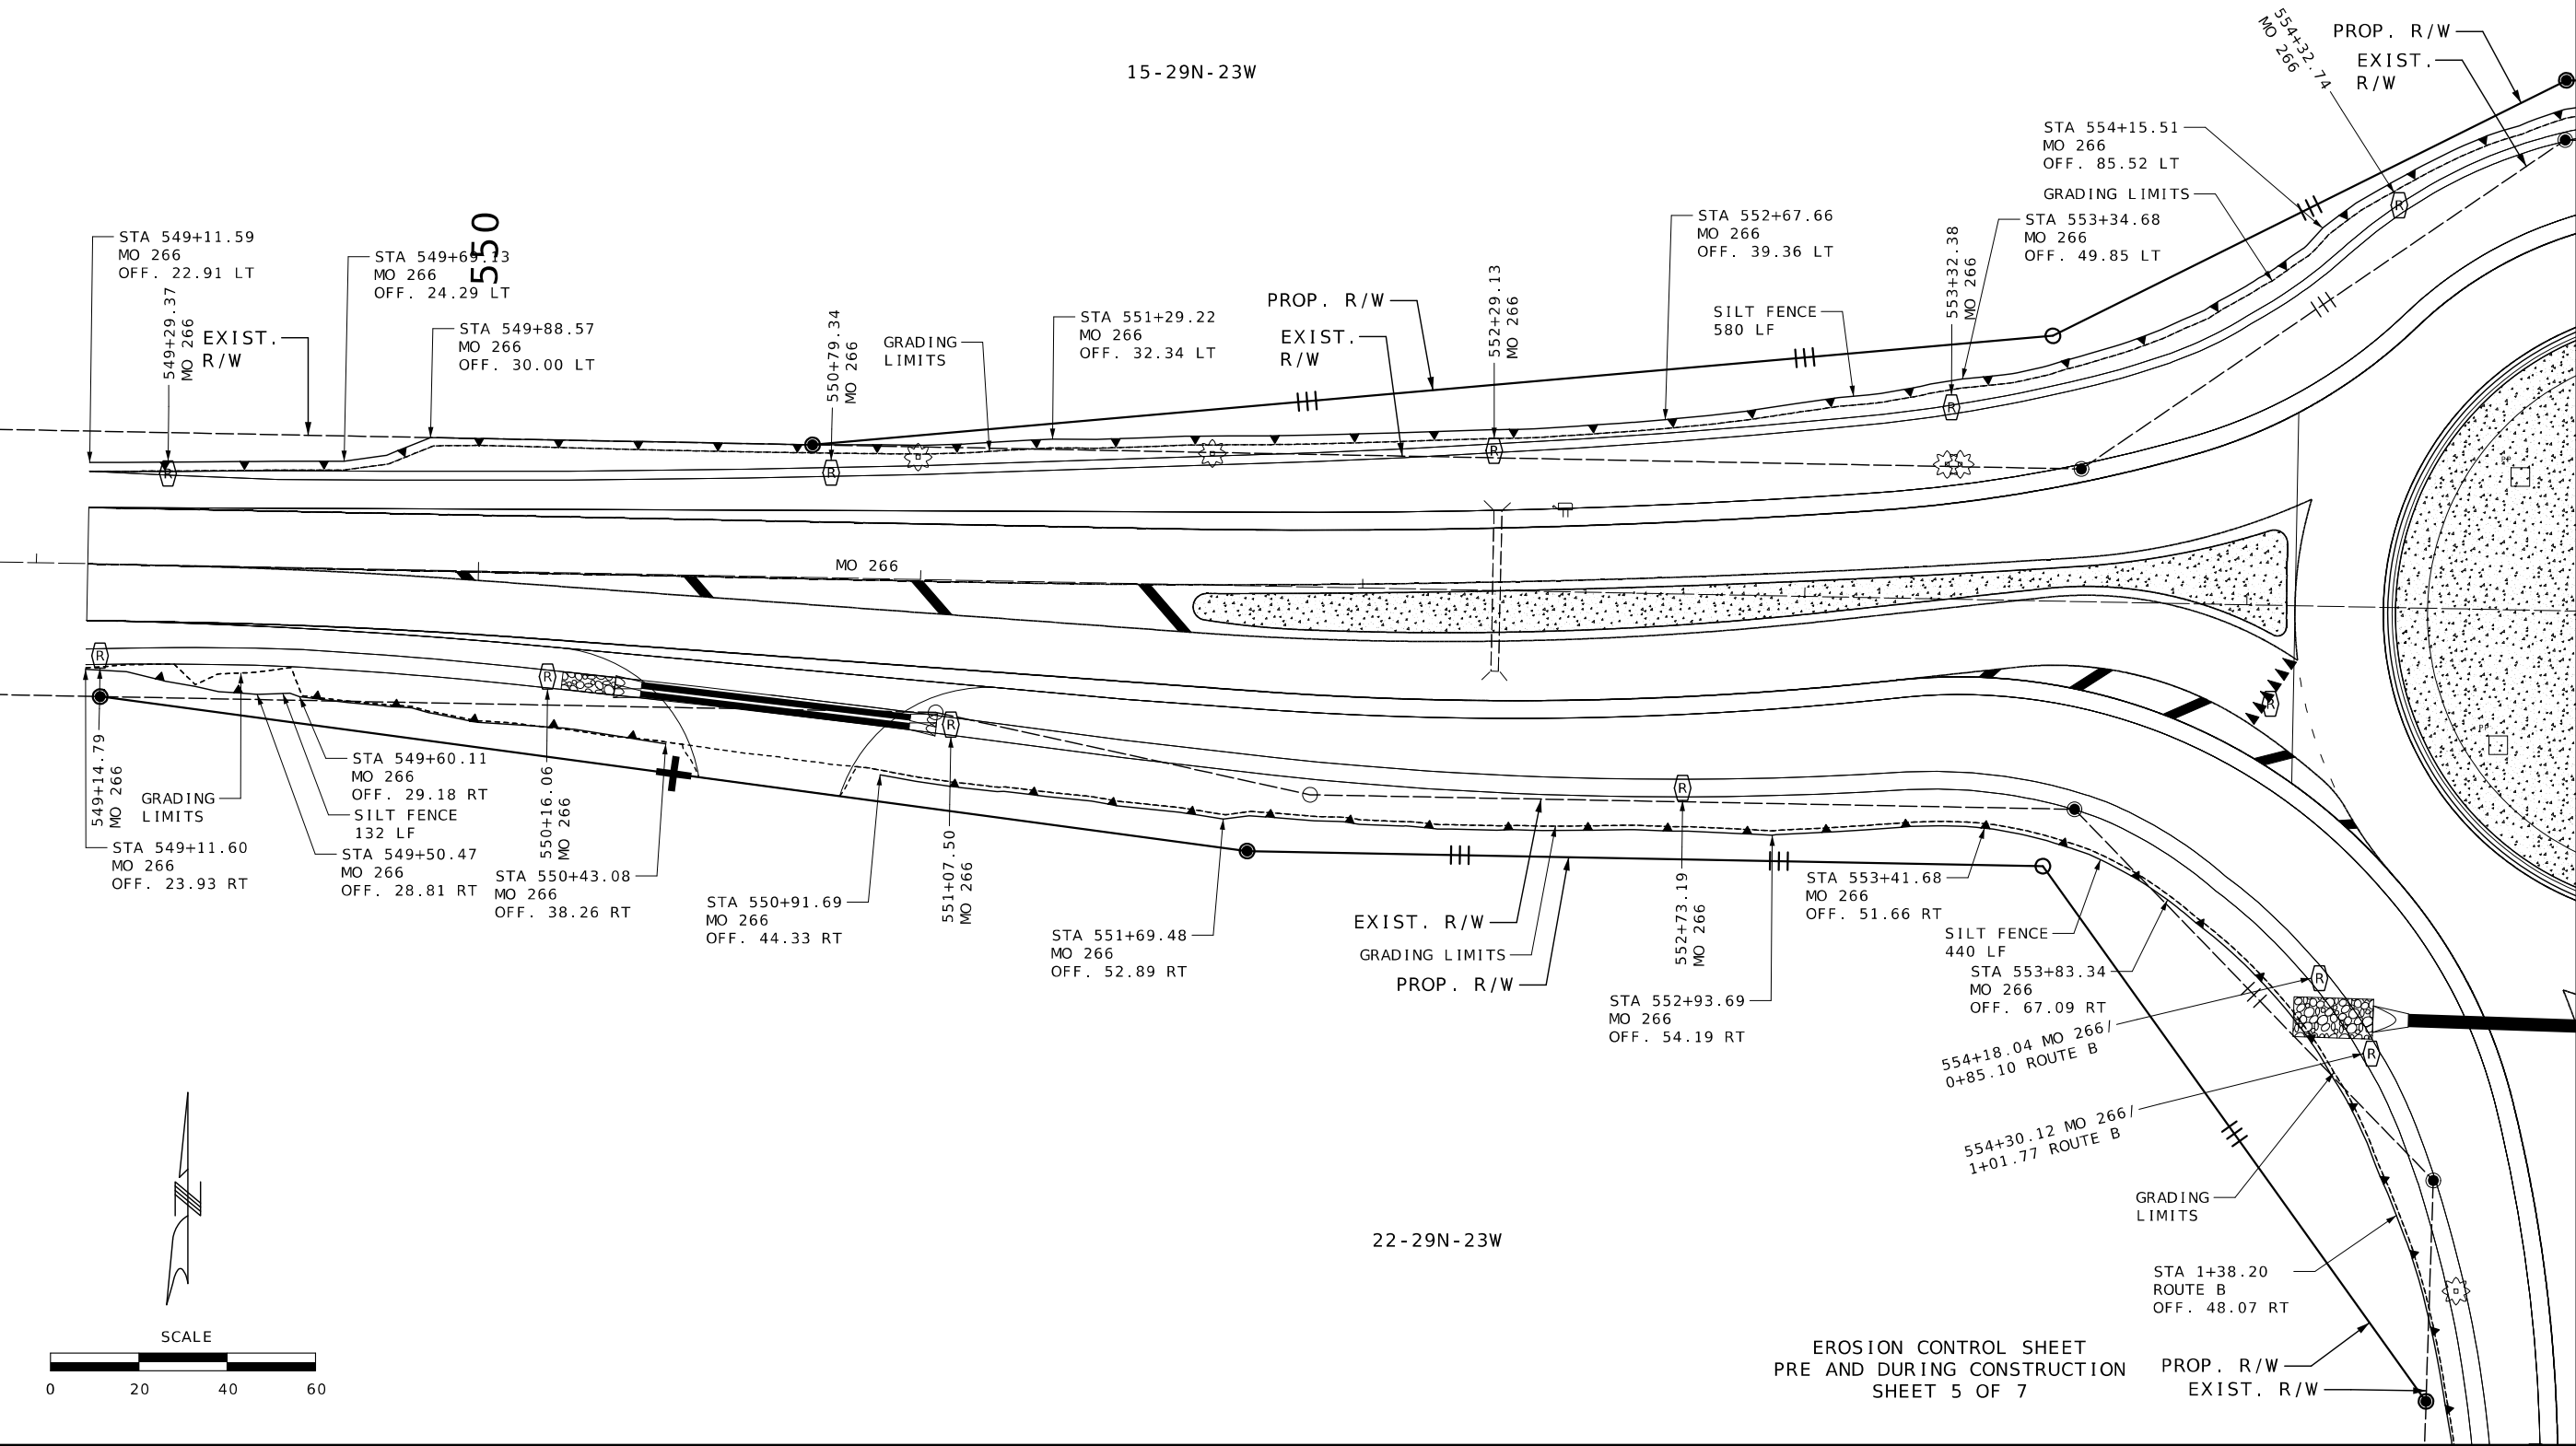

STATE OF MISSOURI
CAMERON SCOTT
NUMBER
PE-2021019715
PROFESSIONAL ENGINEER

DATE PREPARED
8/11/2026

ROUTE
266

STATE
MO

DISTRICT
SW

SHEET NO.
41

COUNTY
GREENE

JOB NO.
JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION

DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION


105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

MODOT

EROSION CONTROL SHEET
PRE AND DURING CONSTRUCTION
SHEET 5 OF 7

REFER TO THE SUMMARY OF QUANTITIES SHEET FOR QUANTITIES AND
ADDITIONAL INFORMATION ON THE LOCATION AND LIMITS OF TEMPORARY
EROSION CONTROL DEVICES.

	ALTERNATE DITCH CHECK
	ROCK DITCH CHECK
	SEDIMENT TRAP
	SILT FENCE





EROSION CONTROL SHEET
PRE AND DURING CONSTRUCTION
SHEET 6 OF 7

MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

	ALTERNATE DITCH CHECK
	ROCK DITCH CHECK
	SEDIMENT TRAP
	SILT FENCE

REFER TO THE SUMMARY OF QUANTITIES SHEET FOR
QUANTITIES AND ADDITIONAL INFORMATION ON THE
LOCATION AND LIMITS OF TEMPORARY EROSION CONTROL
DEVICES.

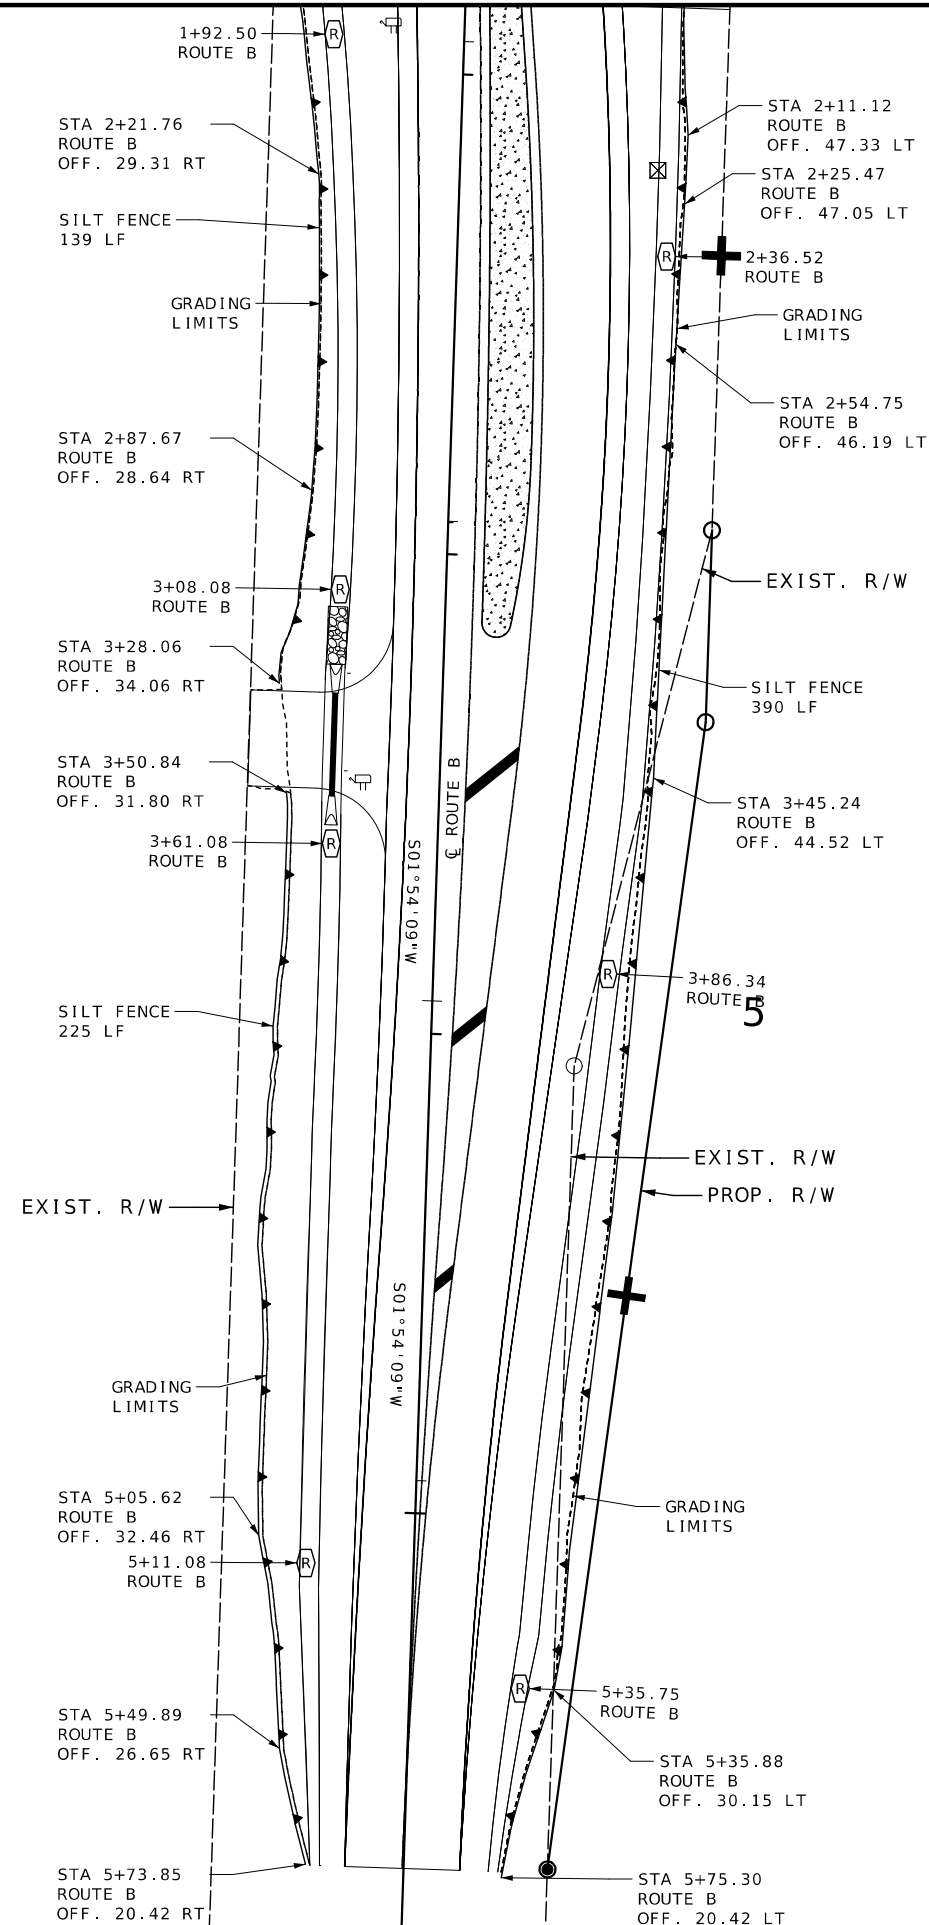

23 - 29N - 23W

EROSION CONTROL SHEET
PRE AND DURING CONSTRUCTION
SHEET 7 OF 7



08-21-2020 10:23:04
CAMERON SOOY - CIVIL
MO DE 0001010345

DATE PREPARED

ROUTE	STATE
266	MO

DISTRICT SW	SHEET NO. 43
----------------	-----------------

COUNTY
GREENE

JOB NO.
JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

[illegible]


MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION



105 WEST CAPITAL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

TEMPORARY EROSION CONTROL LEGEND

-  ALTERNATE DITCH CHECK
-  ROCK DITCH CHECK
-  SEDIMENT TRAP
-  SILT FENCE
-  SEEDING

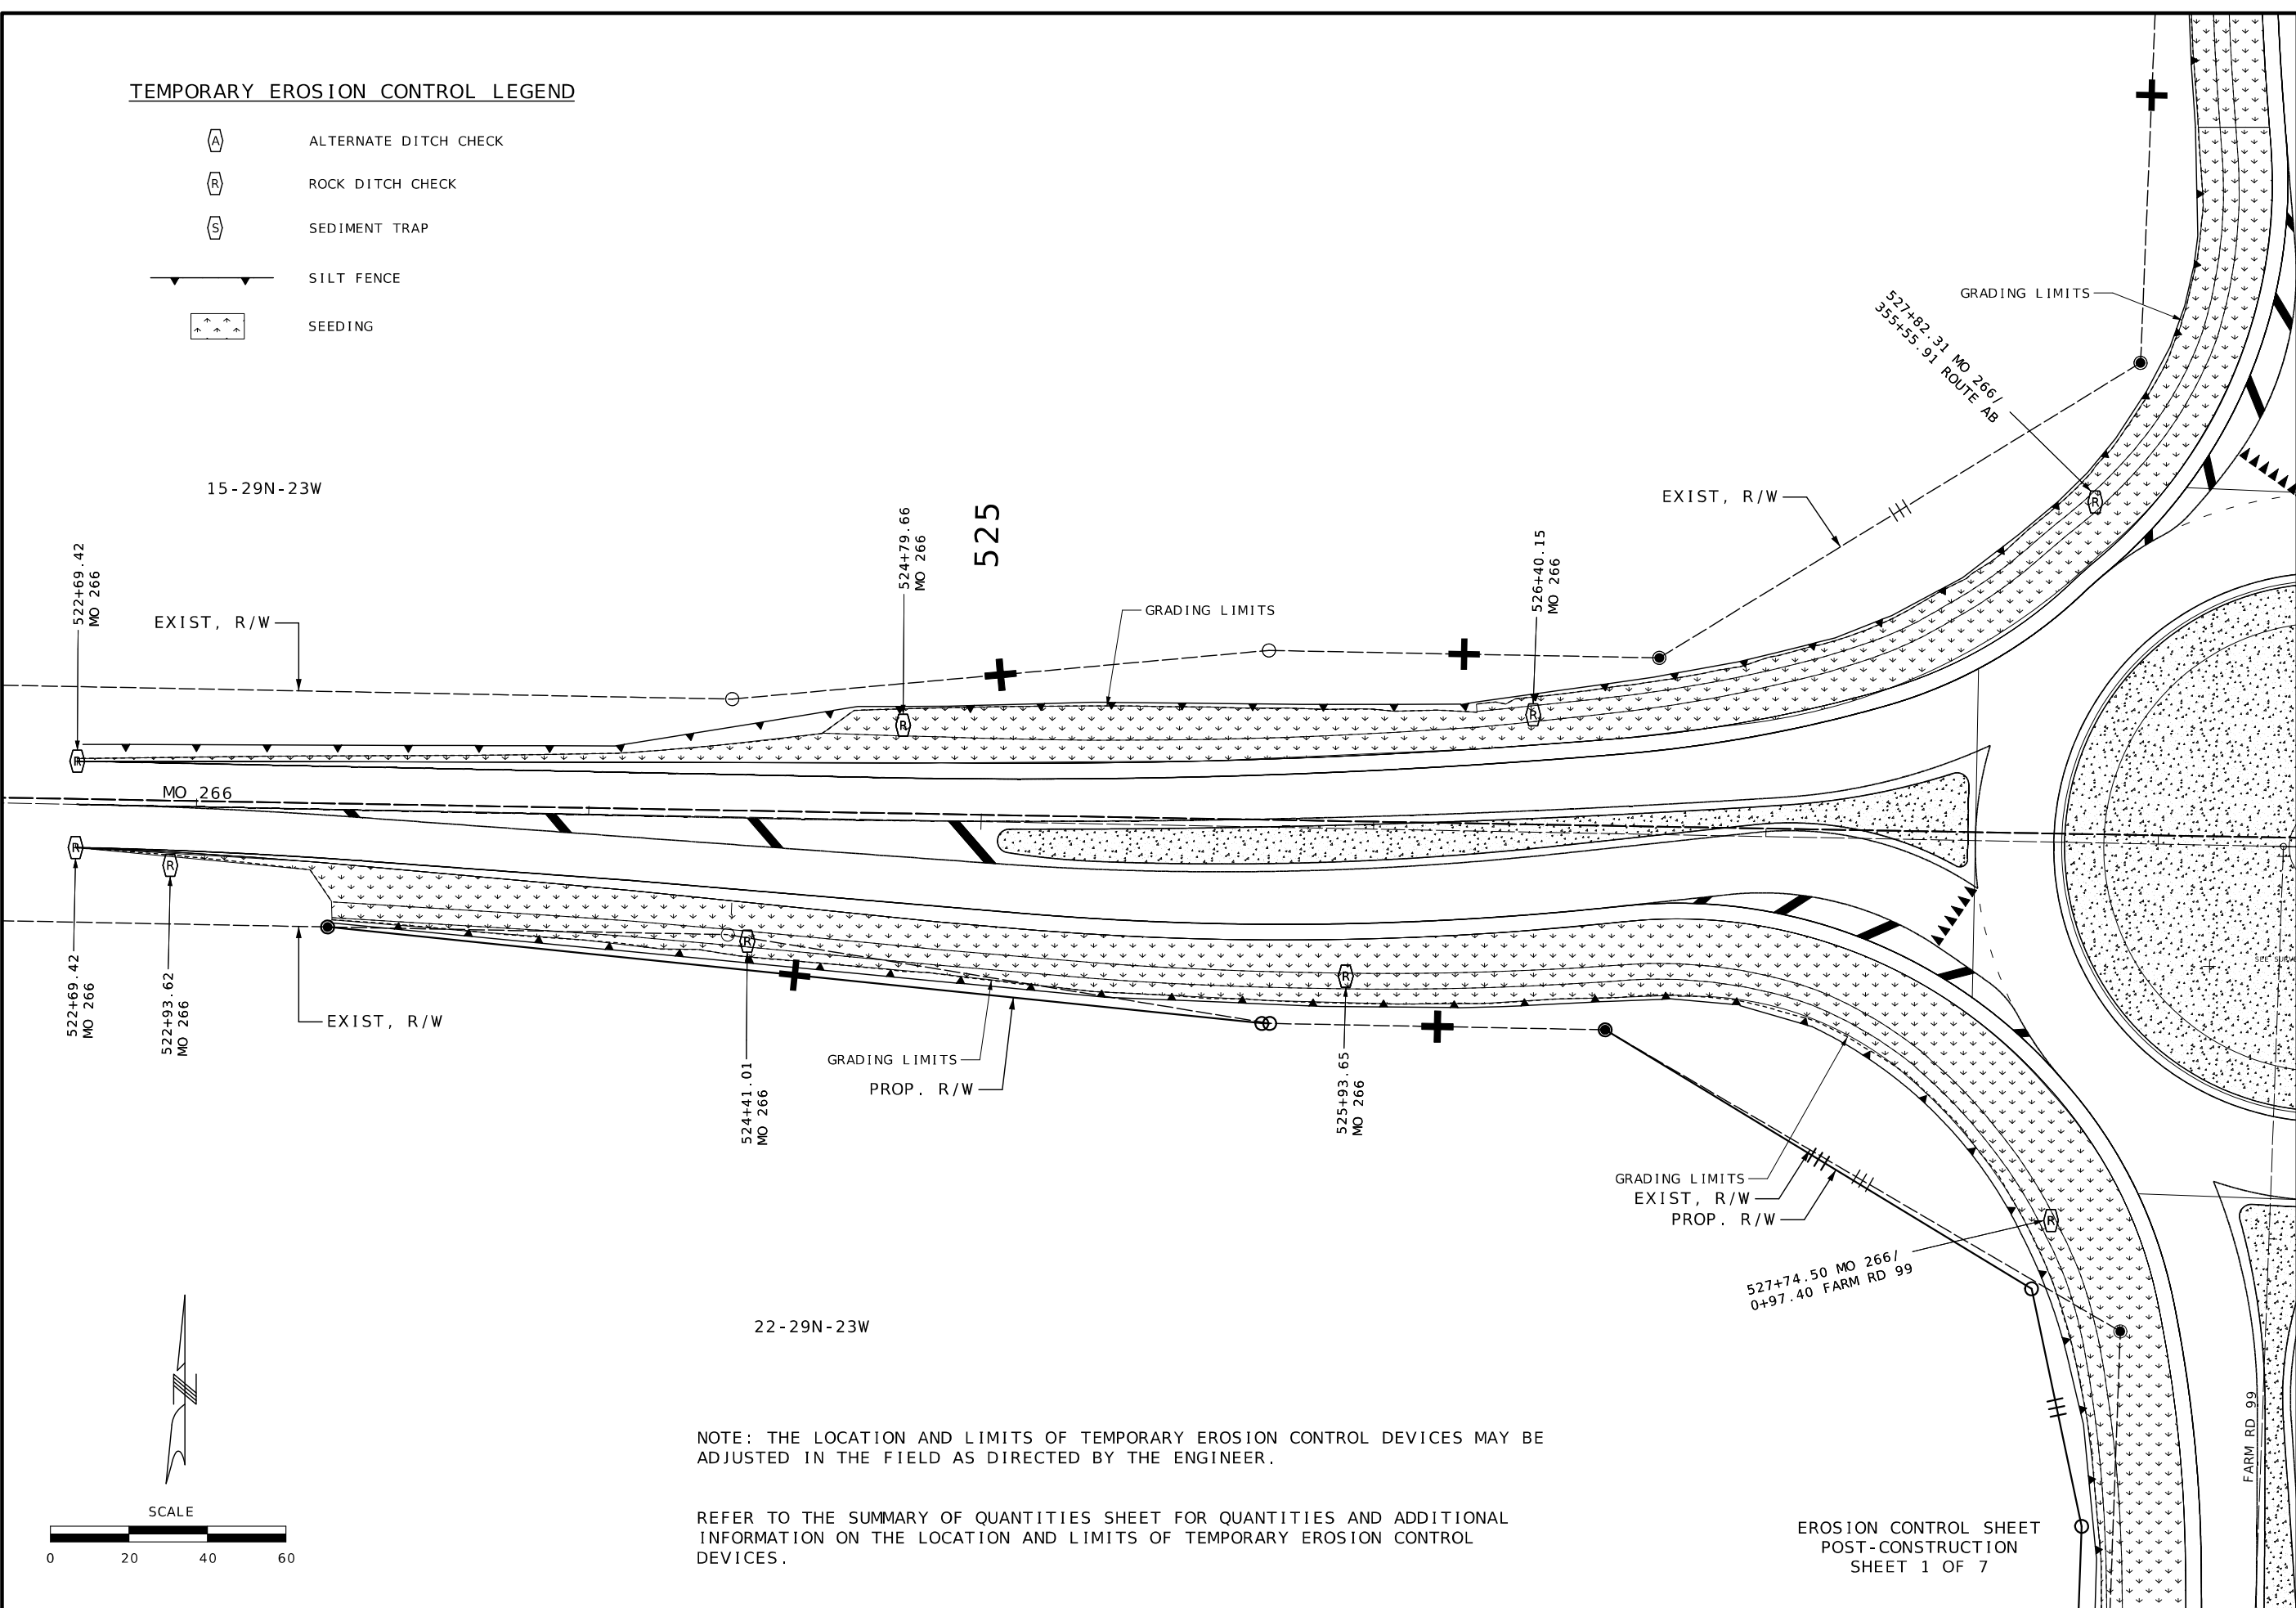

NOTE: THE LOCATION AND LIMITS OF TEMPORARY EROSION CONTROL DEVICES MAY BE ADJUSTED IN THE FIELD AS DIRECTED BY THE ENGINEER.

REFER TO THE SUMMARY OF QUANTITIES SHEET FOR QUANTITIES AND ADDITIONAL INFORMATION ON THE LOCATION AND LIMITS OF TEMPORARY EROSION CONTROL DEVICES.

EROSION CONTROL SHEET
POST-CONSTRUCTION
SHEET 1 OF 7

STATE OF MISSOURI
CAMERON
SOOY
NUMBER
PE-2021019715
PROFESSIONAL ENGINEER

DATE PREPARED
8/11/2026

ROUTE
266

DISTRICT
SW

STATE
MO

SHEET NO.
44

COUNTY
GREENE

JOB NO.
JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DATE	DESCRIPTION


MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION



105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

REFER TO THE SUMMARY OF QUANTITIES SHEET FOR QUANTITIES AND
ADDITIONAL INFORMATION ON THE LOCATION AND LIMITS OF TEMPORARY
EROSION CONTROL DEVICES.

	ALTERNATE DITCH CHECK
	ROCK DITCH CHECK
	SEDIMENT TRAP
	SILT FENCE
	SEEDING



EROSION CONTROL SHEET
POST-CONSTRUCTION
SHEET 2 OF 7



DATE PREPARED	
8/11/2026	
ROUTE	STATE
266	MO
DISTRICT	SHEET NO.
SW	45
COUNTY	
GREENE	
JOB NO.	
JSU0080	
CONTRACT ID.	
PROJECT NO.	
BRIDGE NO.	

[illegible]



MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

MoDOT

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

	ALTERNATE DITCH CHECK
	ROCK DITCH CHECK
	SEDIMENT TRAP
	SILT FENCE
	SEEDING

REFER TO THE SUMMARY OF QUANTITIES SHEET FOR QUANTITIES
AND ADDITIONAL INFORMATION ON THE LOCATION AND LIMITS OF
TEMPORARY EROSION CONTROL DEVICES.

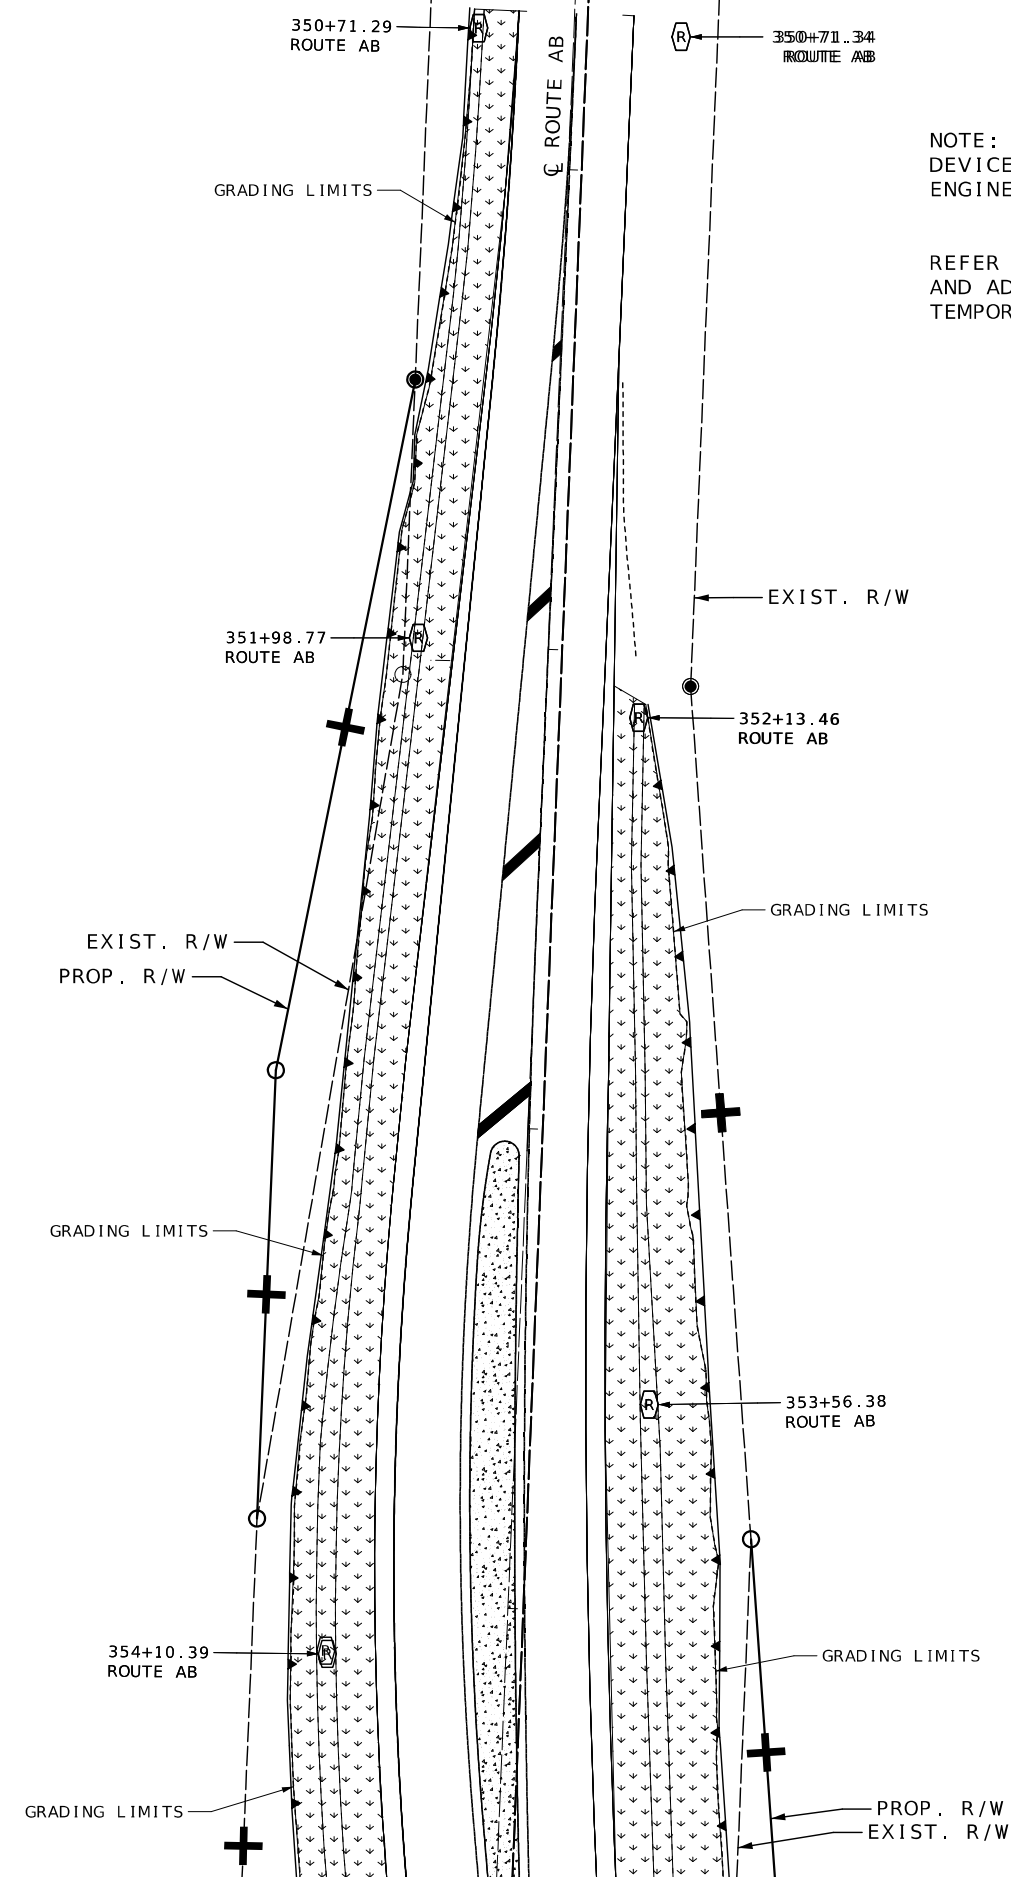

EROSION CONTROL SHEET
POST-CONSTRUCTION
SHEET 3 OF 7



08-21-2020 10:23:05
CAMERON SOOY - CIVIL
MO. DE 0001010345

DATE PREPARED

8 / 11 / 2026

ROUTE	STATE
266	MO

DISTRICT	SHEET NO.
SW	46

COUNTY
GREENE

JOB NO.
JSU0080

CONTRACT ID.

PROJECT NO.


BRIDGE NO.

[illegible]MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)


	ALTERNATE DITCH CHECK
	ROCK DITCH CHECK
	SEDIMENT TRAP
	SILT FENCE
	SEEDING

REFER TO THE SUMMARY OF QUANTITIES SHEET FOR
QUANTITIES AND ADDITIONAL INFORMATION ON THE
LOCATION AND LIMITS OF TEMPORARY EROSION CONTROL
DEVICES.

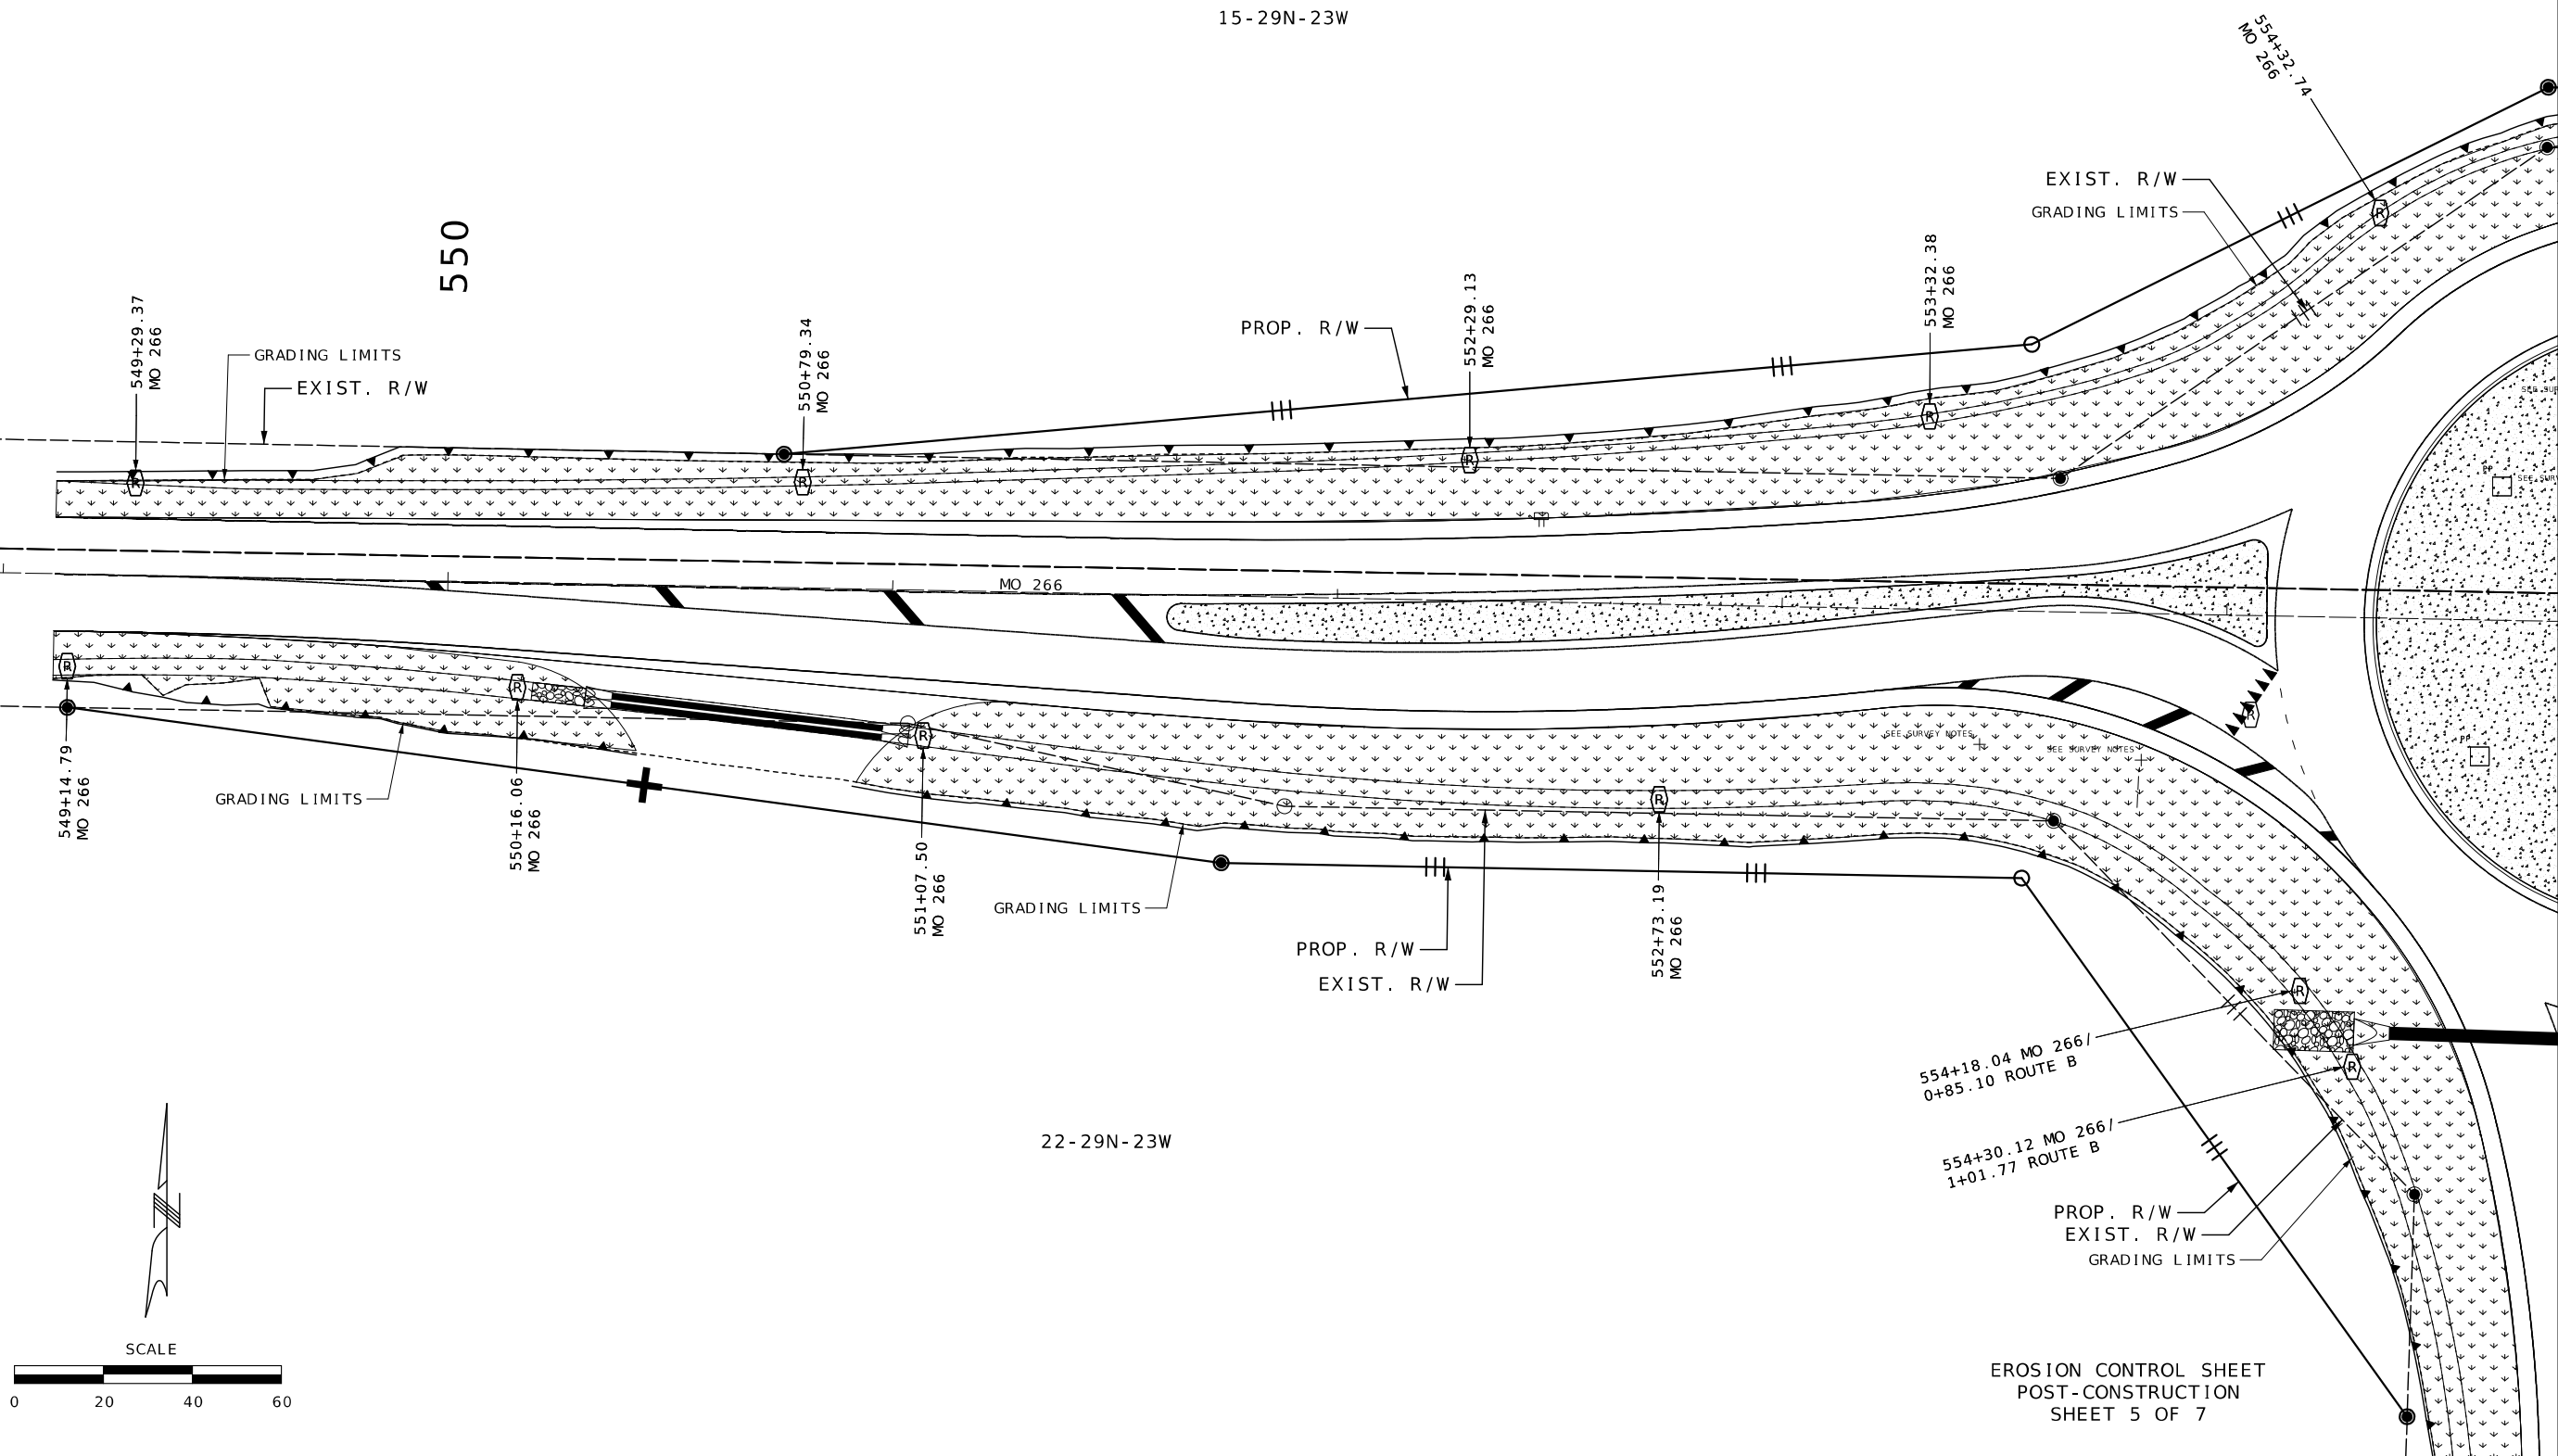
[illegible]

REFER TO THE SUMMARY OF QUANTITIES SHEET FOR QUANTITIES
AND ADDITIONAL INFORMATION ON THE LOCATION AND LIMITS OF
TEMPORARY EROSION CONTROL DEVICES.

	ALTERNATE DITCH CHECK
	ROCK DITCH CHECK
	SEDIMENT TRAP
	SILT FENCE
	SEEDING





EROSION CONTROL SHEET
POST-CONSTRUCTION
SHEET 6 OF 7

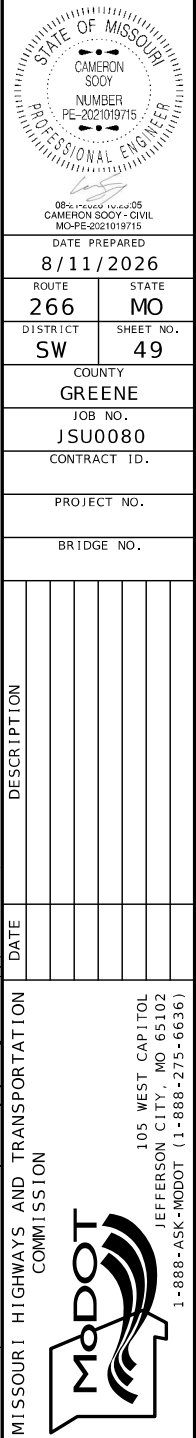


	ALTERNATE DITCH CHECK
	ROCK DITCH CHECK
	SEDIMENT TRAP
	SILT FENCE
	SEEDING

REFER TO THE SUMMARY OF QUANTITIES SHEET FOR
QUANTITIES AND ADDITIONAL INFORMATION ON THE LOCATION
AND LIMITS OF TEMPORARY EROSION CONTROL DEVICES.

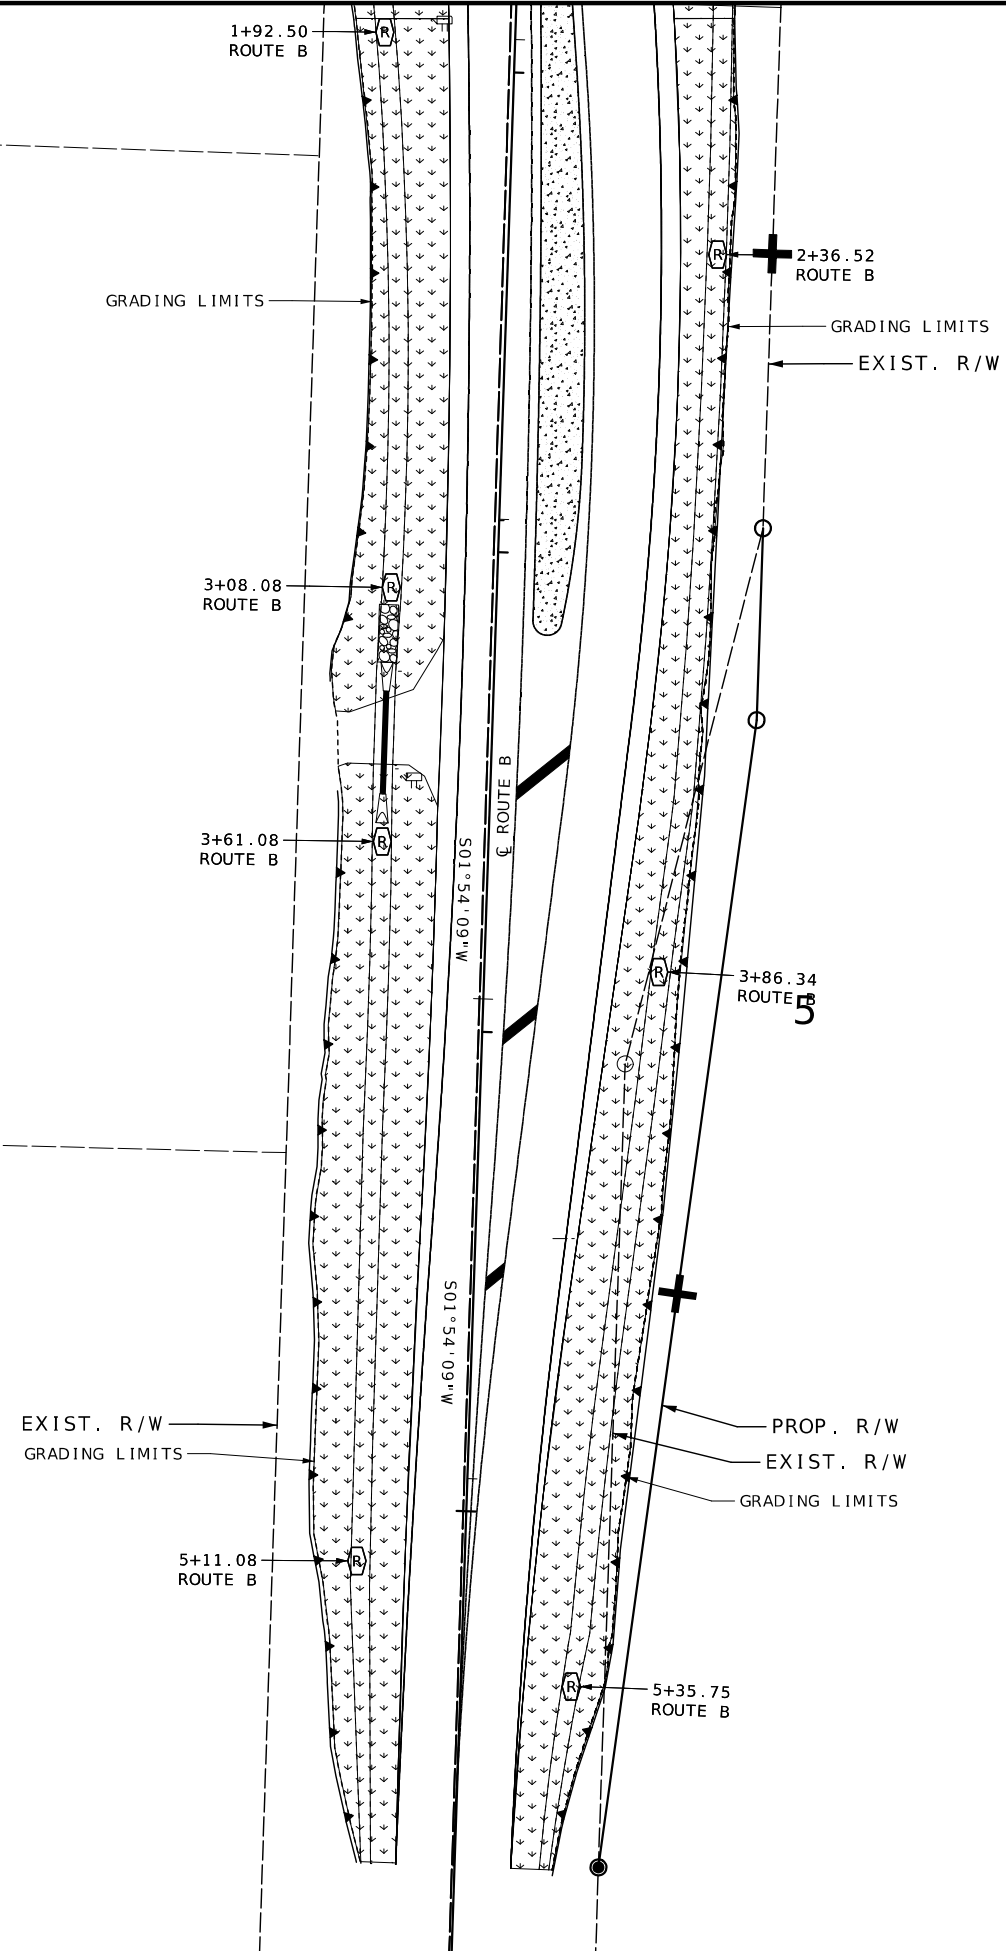[illegible]MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

100 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

LIGHTING LEGEND			
	CONTROLLER, LIGHTING		LED-A LUMINAIRE
	CONTROLLER, LIGHTING (EXISTING)		LED-B LUMINAIRE
	WOOD POST		LED-C LUMINAIRE
	POWER SUPPLY		POWER SOURCE
	JUNCTION BOX		PULL BOX (EXISTING)
	PULL BOX CONCRETE TYPE 1		PULL BOX CONCRETE TYPE 2
	PULL BOX PREFORMED TYPE 1		PULL BOX PREFORMED TYPE 2
	CONDUIT, RIGID (TRENCH)		CONDUIT, RIGID (PUSHED)
	CONDUIT, RIGID (MEDIAN)		CONDUIT, RIGID (BRIDGE)
	CONDUIT, RIGID (EXISTING)		CABLE-CONDUIT (EXISTING)
			CABLE-CONDUIT

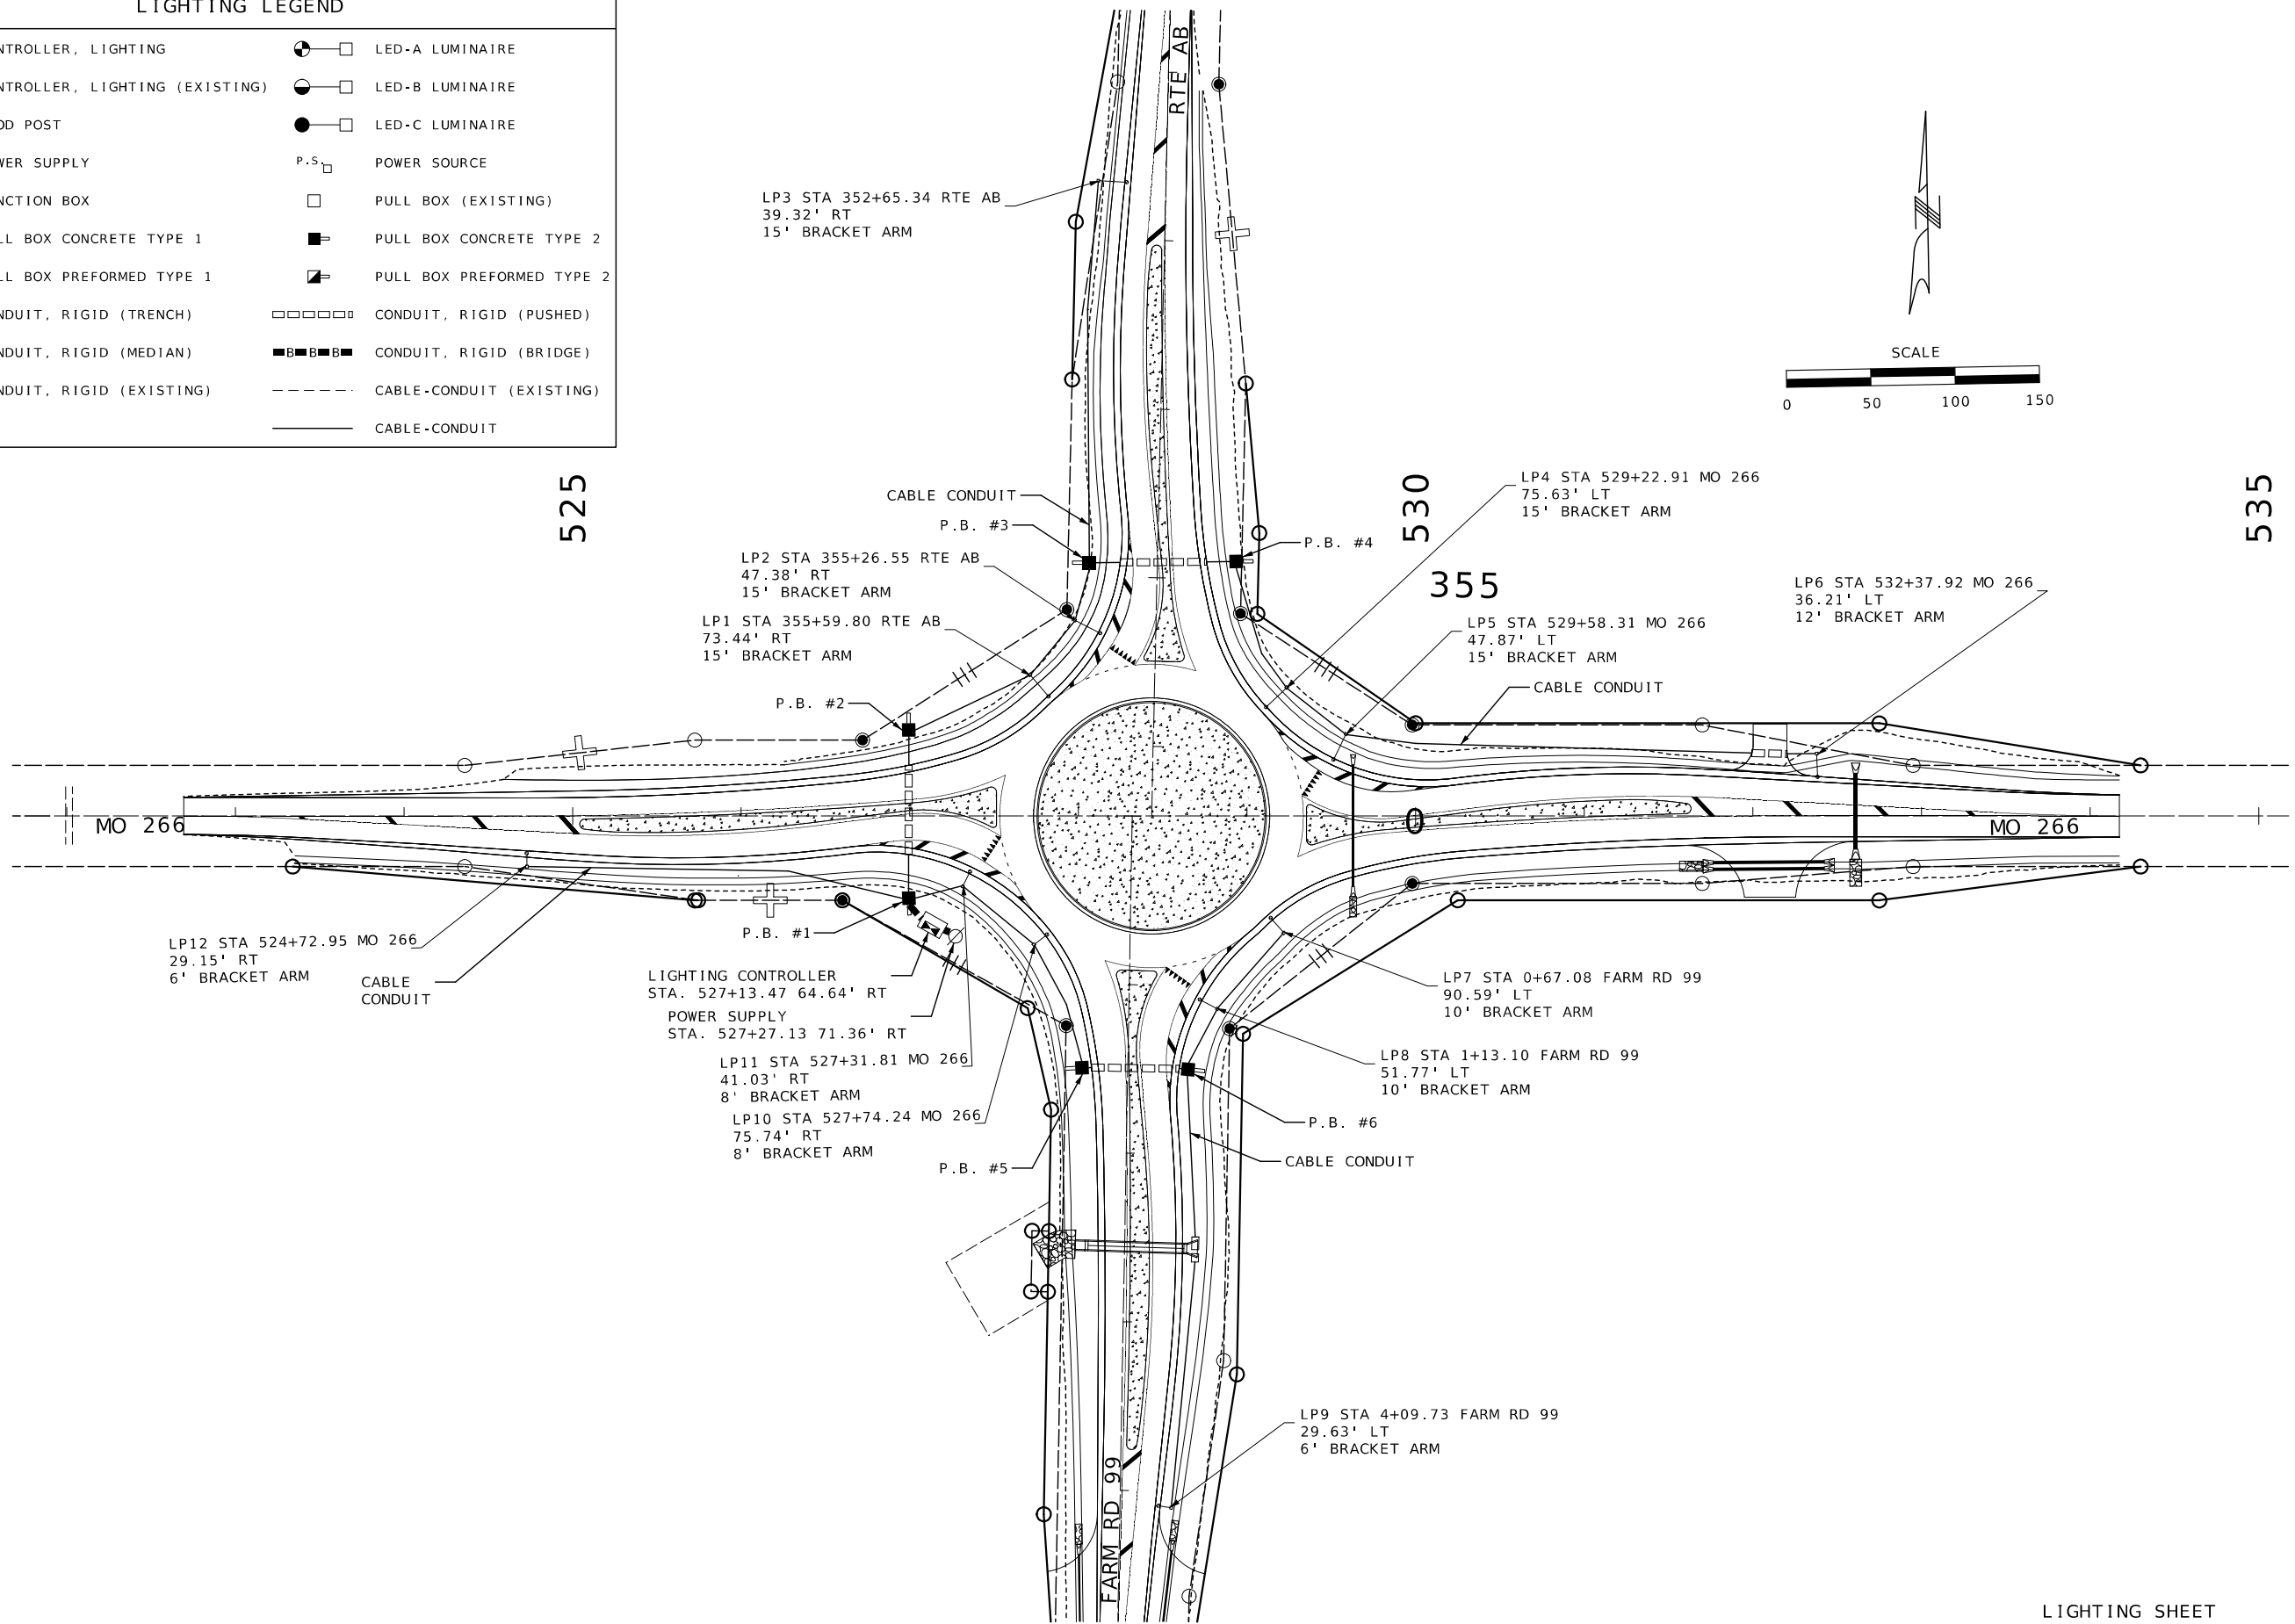

LIGHTING SHEET
SHEET 1 OF 2




DATE PREPARED 8/19/2026	
ROUTE 266	STATE MO
DISTRICT SW	SHEET NO. 51
COUNTY GREENE	
JOB NO. JSU0080	
CONTRACT ID.	
PROJECT NO.	
BRIDGE NO.	

DATE	DESCRIPTION


MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

LIGHTING LEGEND			
	CONTROLLER, LIGHTING		LED-A LUMINAIRE
	CONTROLLER, LIGHTING (EXISTING)		LED-B LUMINAIRE
	WOOD POST		LED-C LUMINAIRE
	POWER SUPPLY		P.S. POWER SOURCE
	JUNCTION BOX		PULL BOX (EXISTING)
	PULL BOX CONCRETE TYPE 1		PULL BOX CONCRETE TYPE 2
	PULL BOX PREFORMED TYPE 1		PULL BOX PREFORMED TYPE 2
	CONDUIT, RIGID (TRENCH)		CONDUIT, RIGID (PUSHED)
	CONDUIT, RIGID (MEDIAN)		CONDUIT, RIGID (BRIDGE)
	CONDUIT, RIGID (EXISTING)		CABLE-CONDUIT (EXISTING)
			CABLE-CONDUIT



LIGHTING SHEET
SHEET 2 OF 2



DATE PREPARED

8/19/2026

ROUTE	STATE
266	MO

266	MO
DISTRICT	SHEET NO.

DISTRICT: SW SHEET NO.: 52

SW	SE
COUNTY	

GREENE

JOB NO.
15110000

JSU00080
CONTRACT ID

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

[illegible]


MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)



MISSOURI HIGHWAYS AUTHORITY
COMMISSIONER
MoDOT
JEFF
1-888-ASK-MO

ROUTE 266 REMOVALS

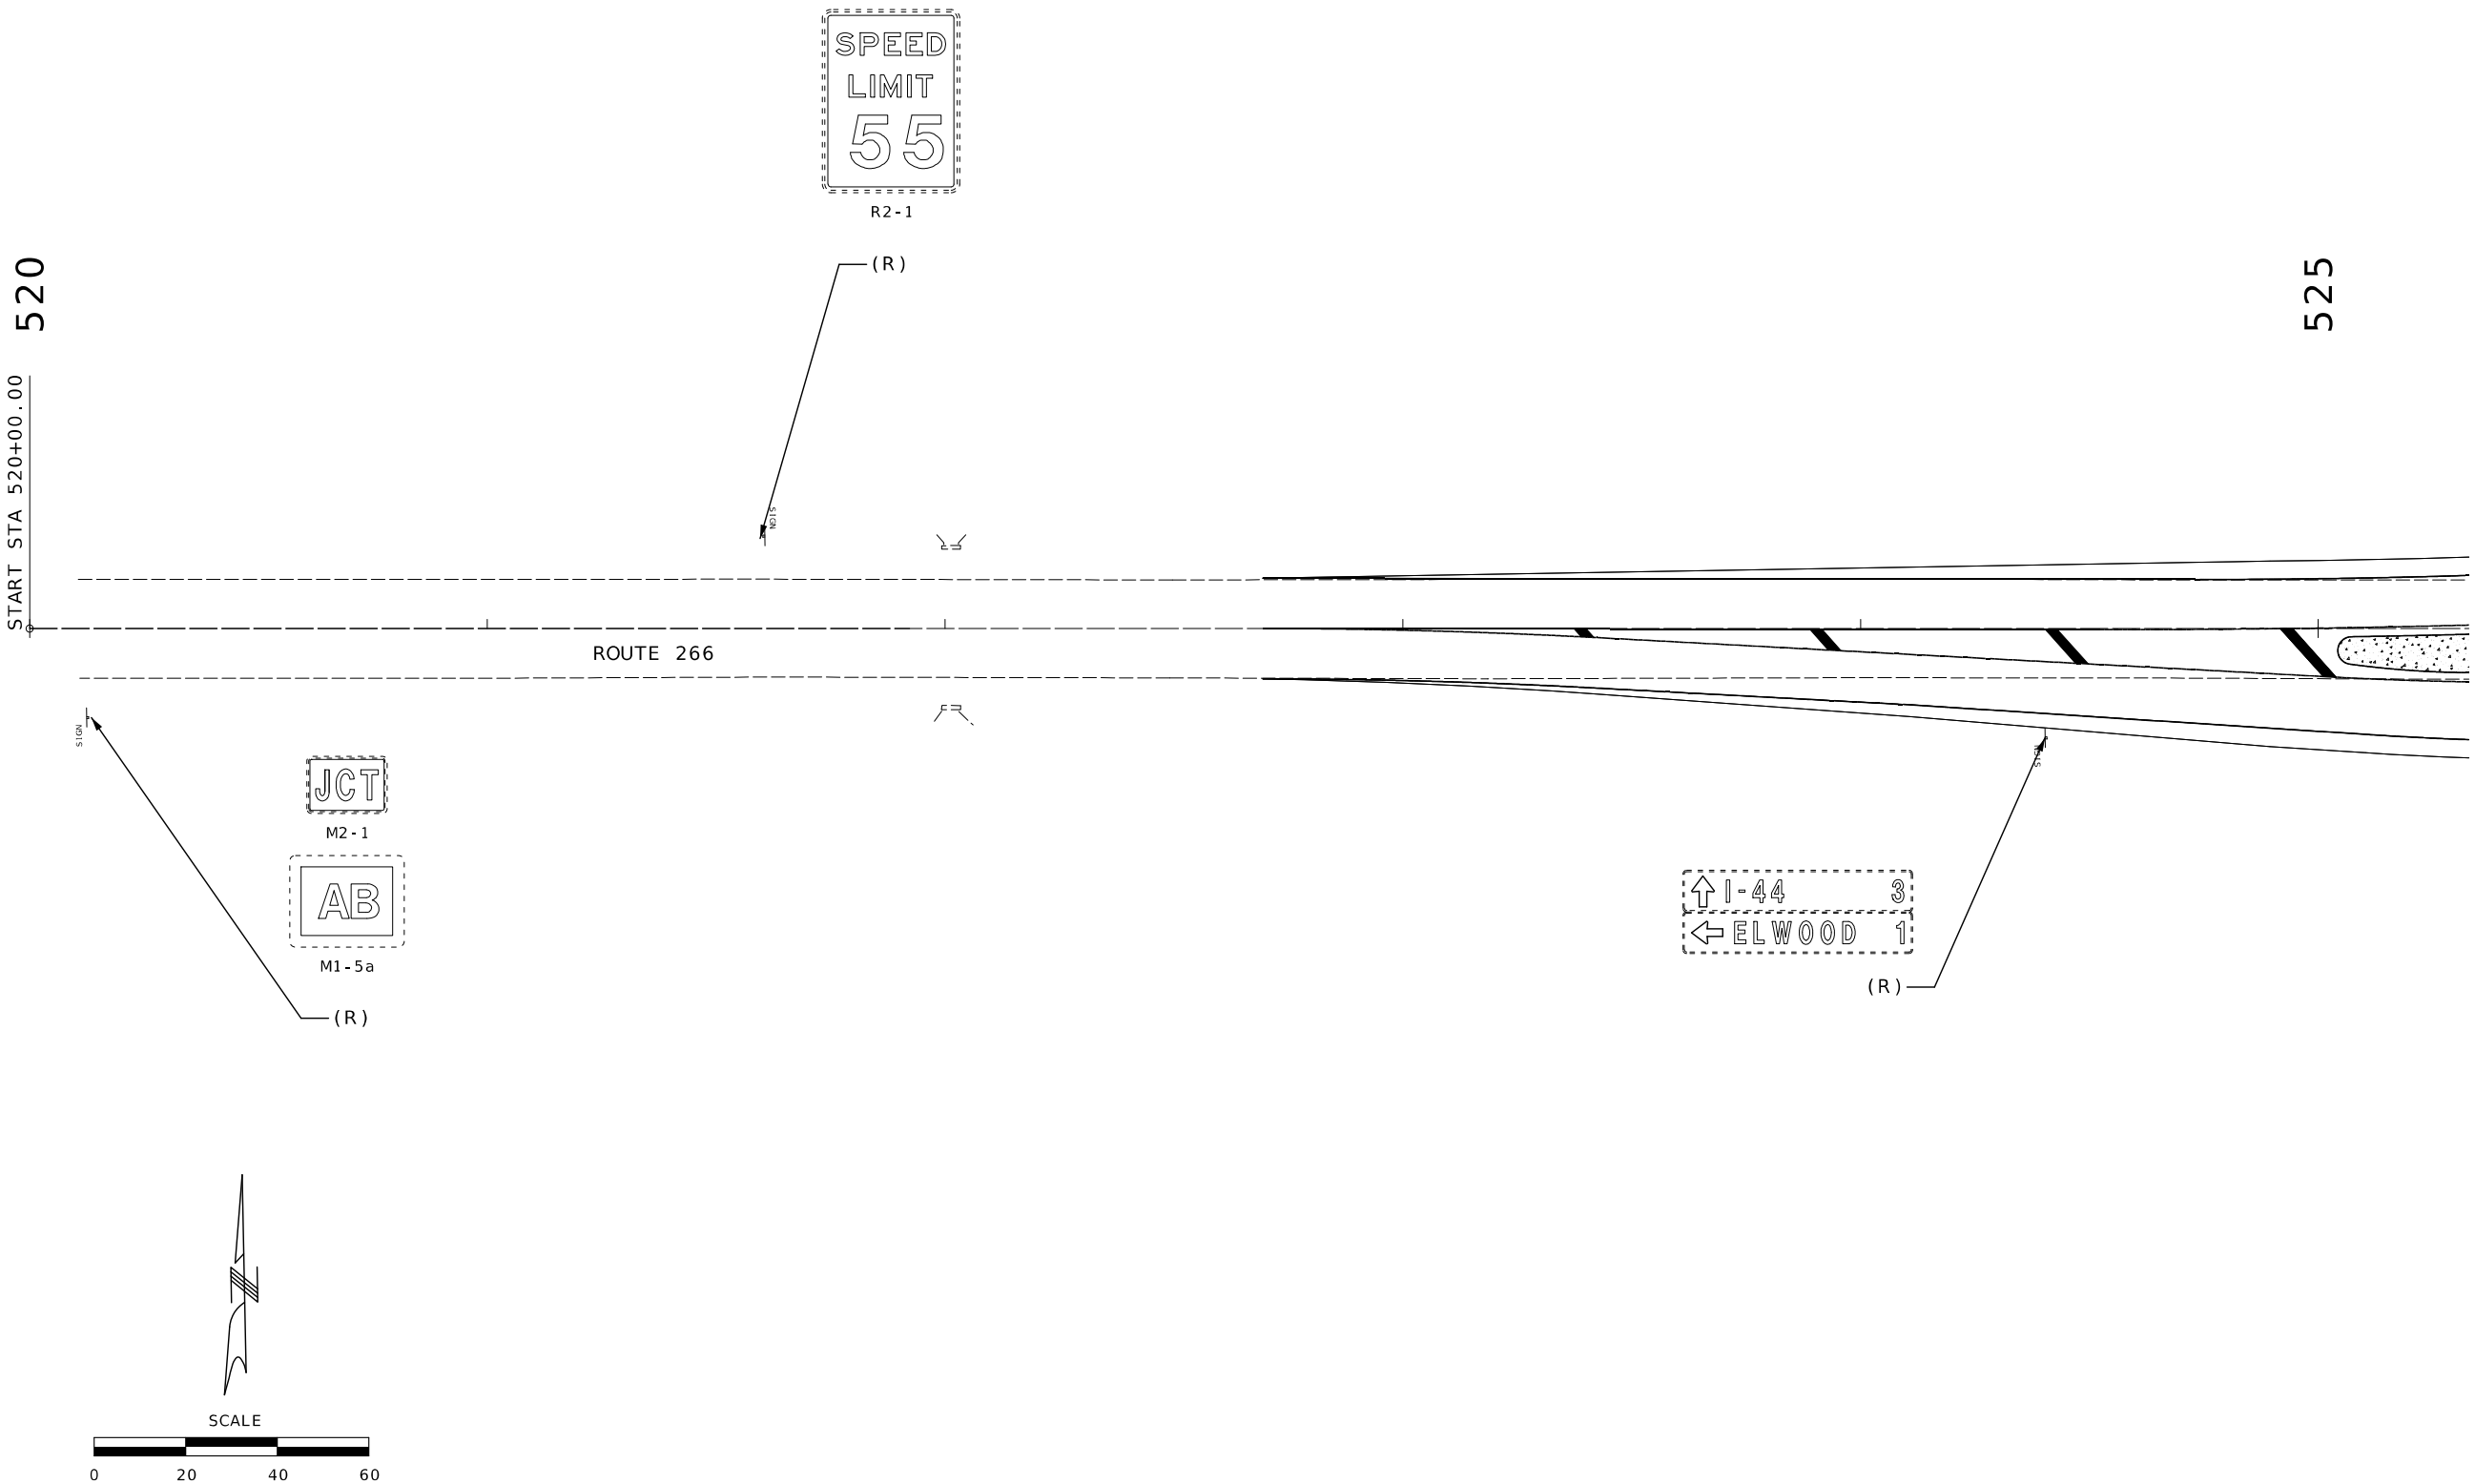

DATE PREPARED
7/24/2026

ROUTE	STATE
266	MO
DISTRICT	SHEET NO.
SW	53

COUNTY
GREENE

JOB NO.
JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.



DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

MoDOT

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

ROUTE 266 REMOVALS

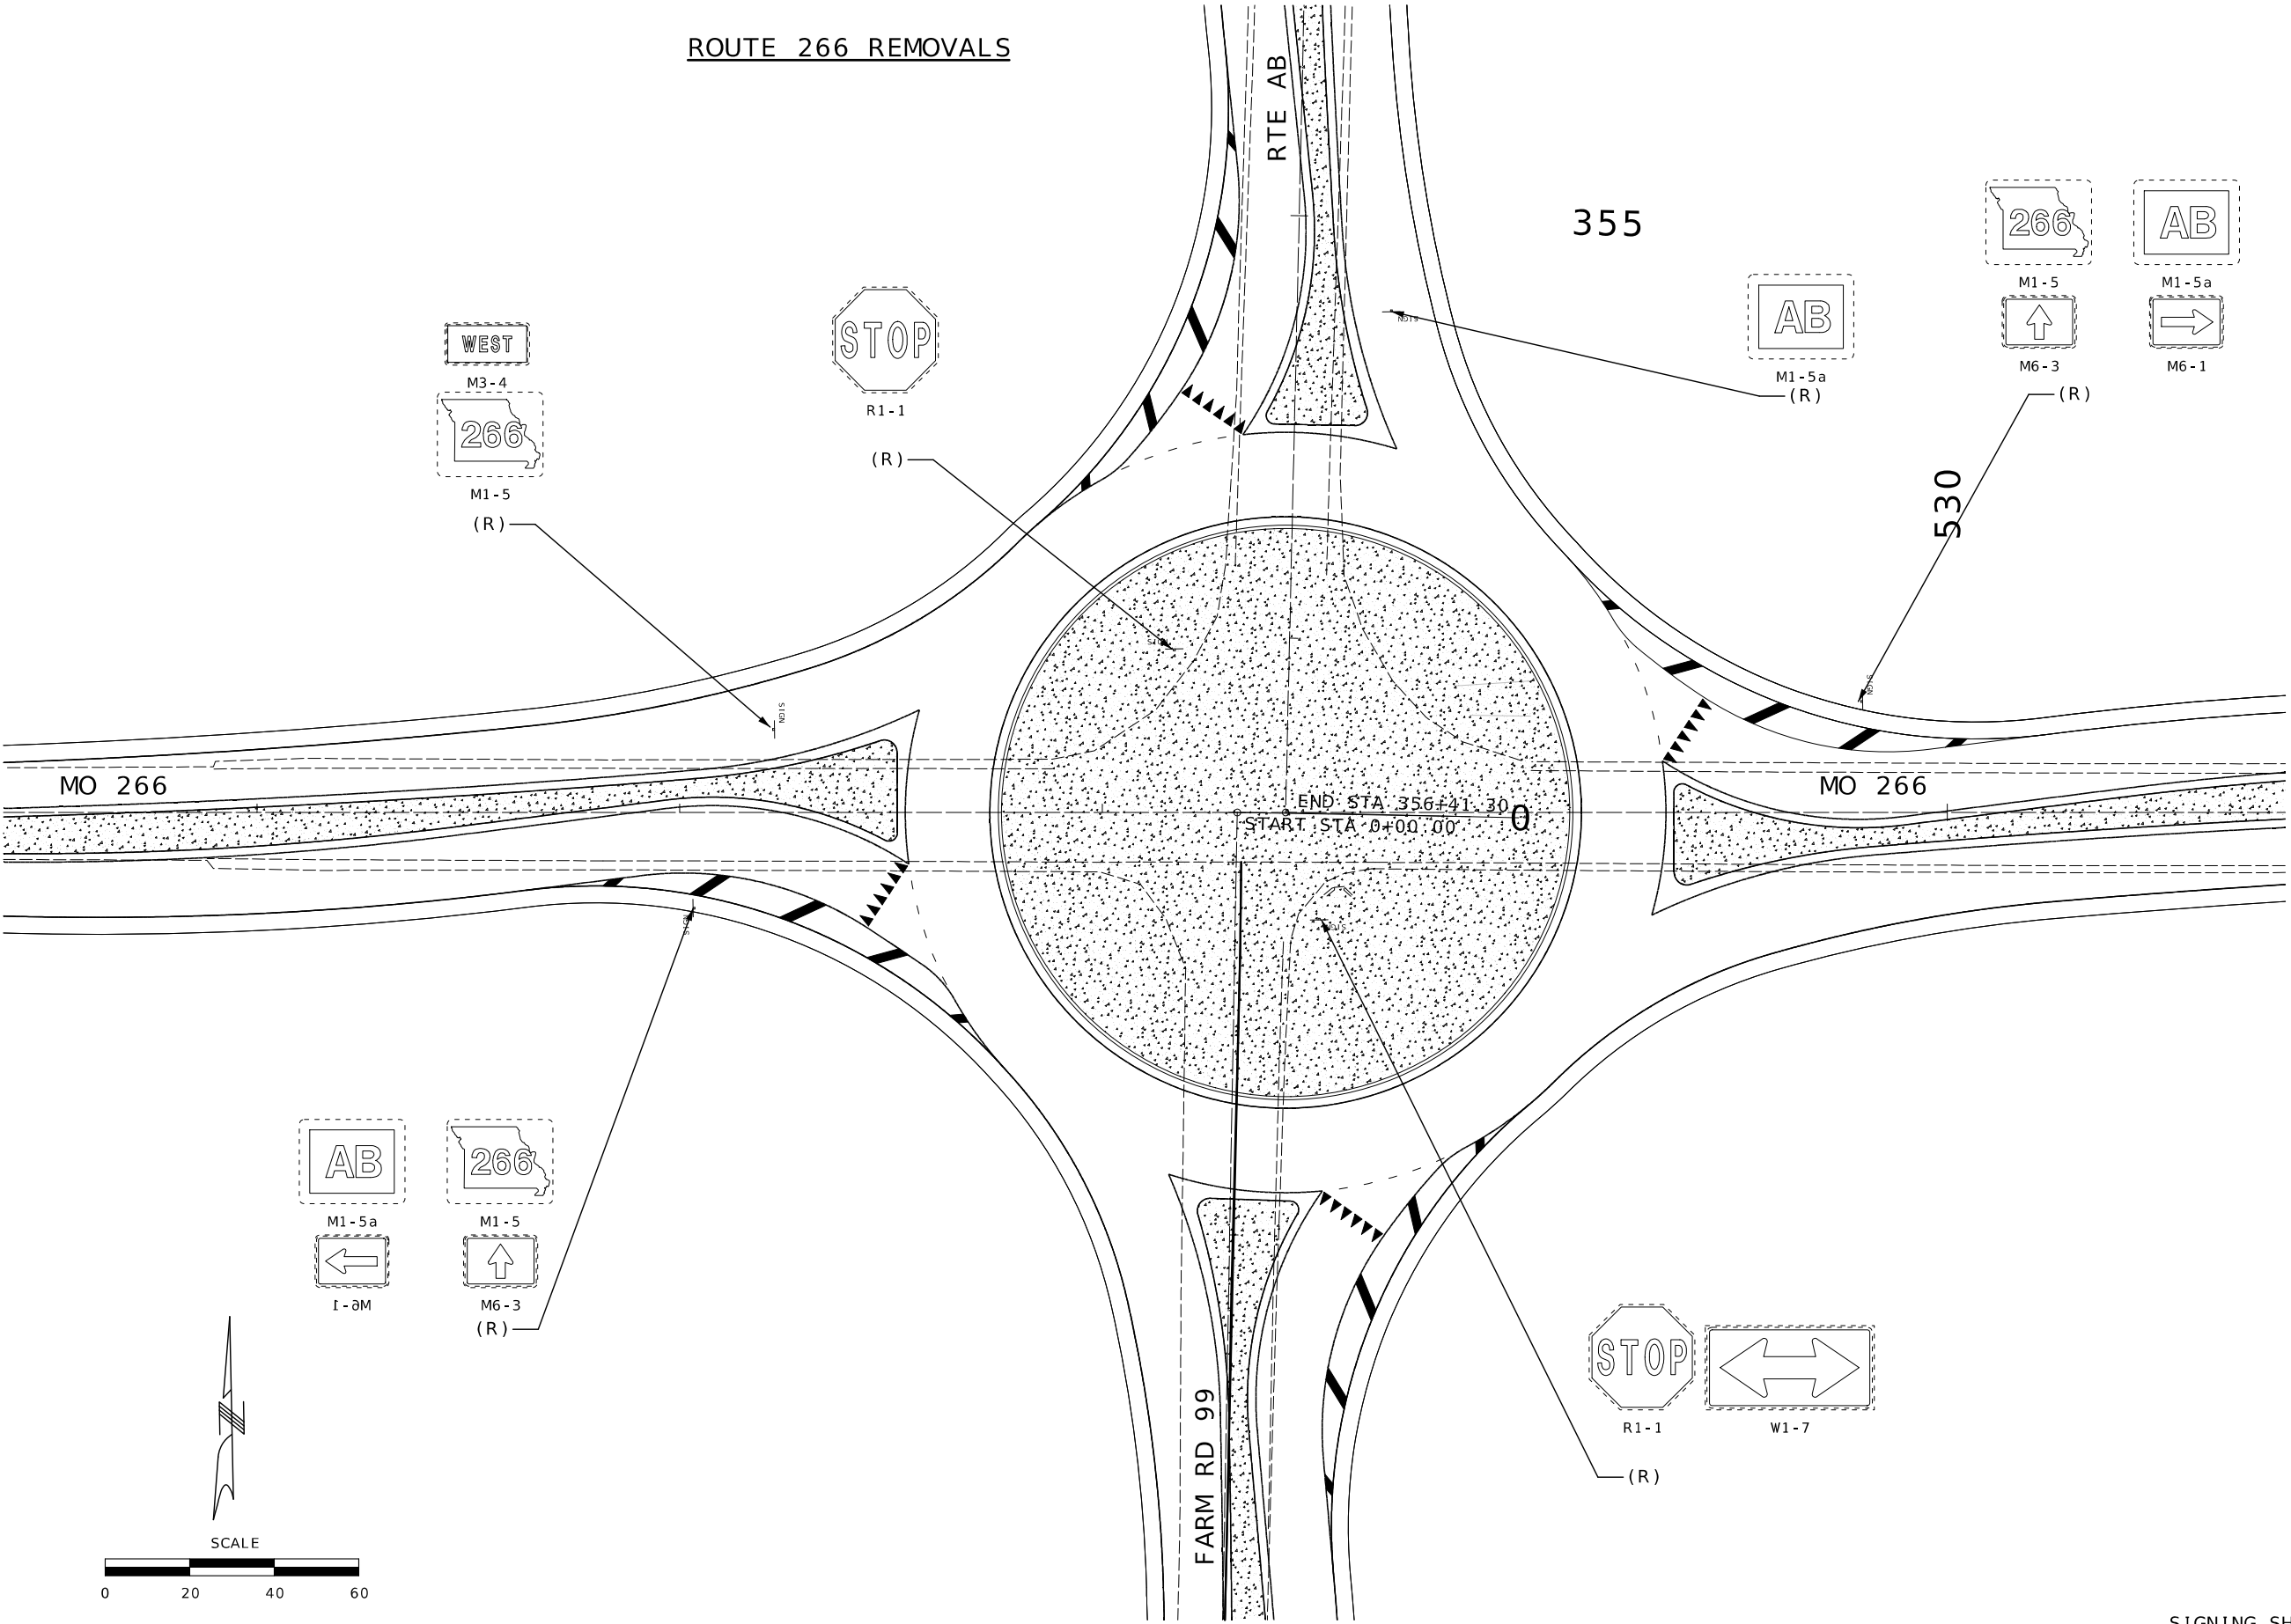

STATE OF MISSOURI
CAMERON SCOTT
NUMBER
PE-2021019715
PROFESSIONAL ENGINEER

DATE PREPARED
7/24/2026

ROUTE
266

DISTRICT
SW

STATE
MO

SHEET NO.
54

COUNTY
GREENE

JOB NO.
JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.



DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION


MoDOT

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

ROUTE 266 REMOVALS

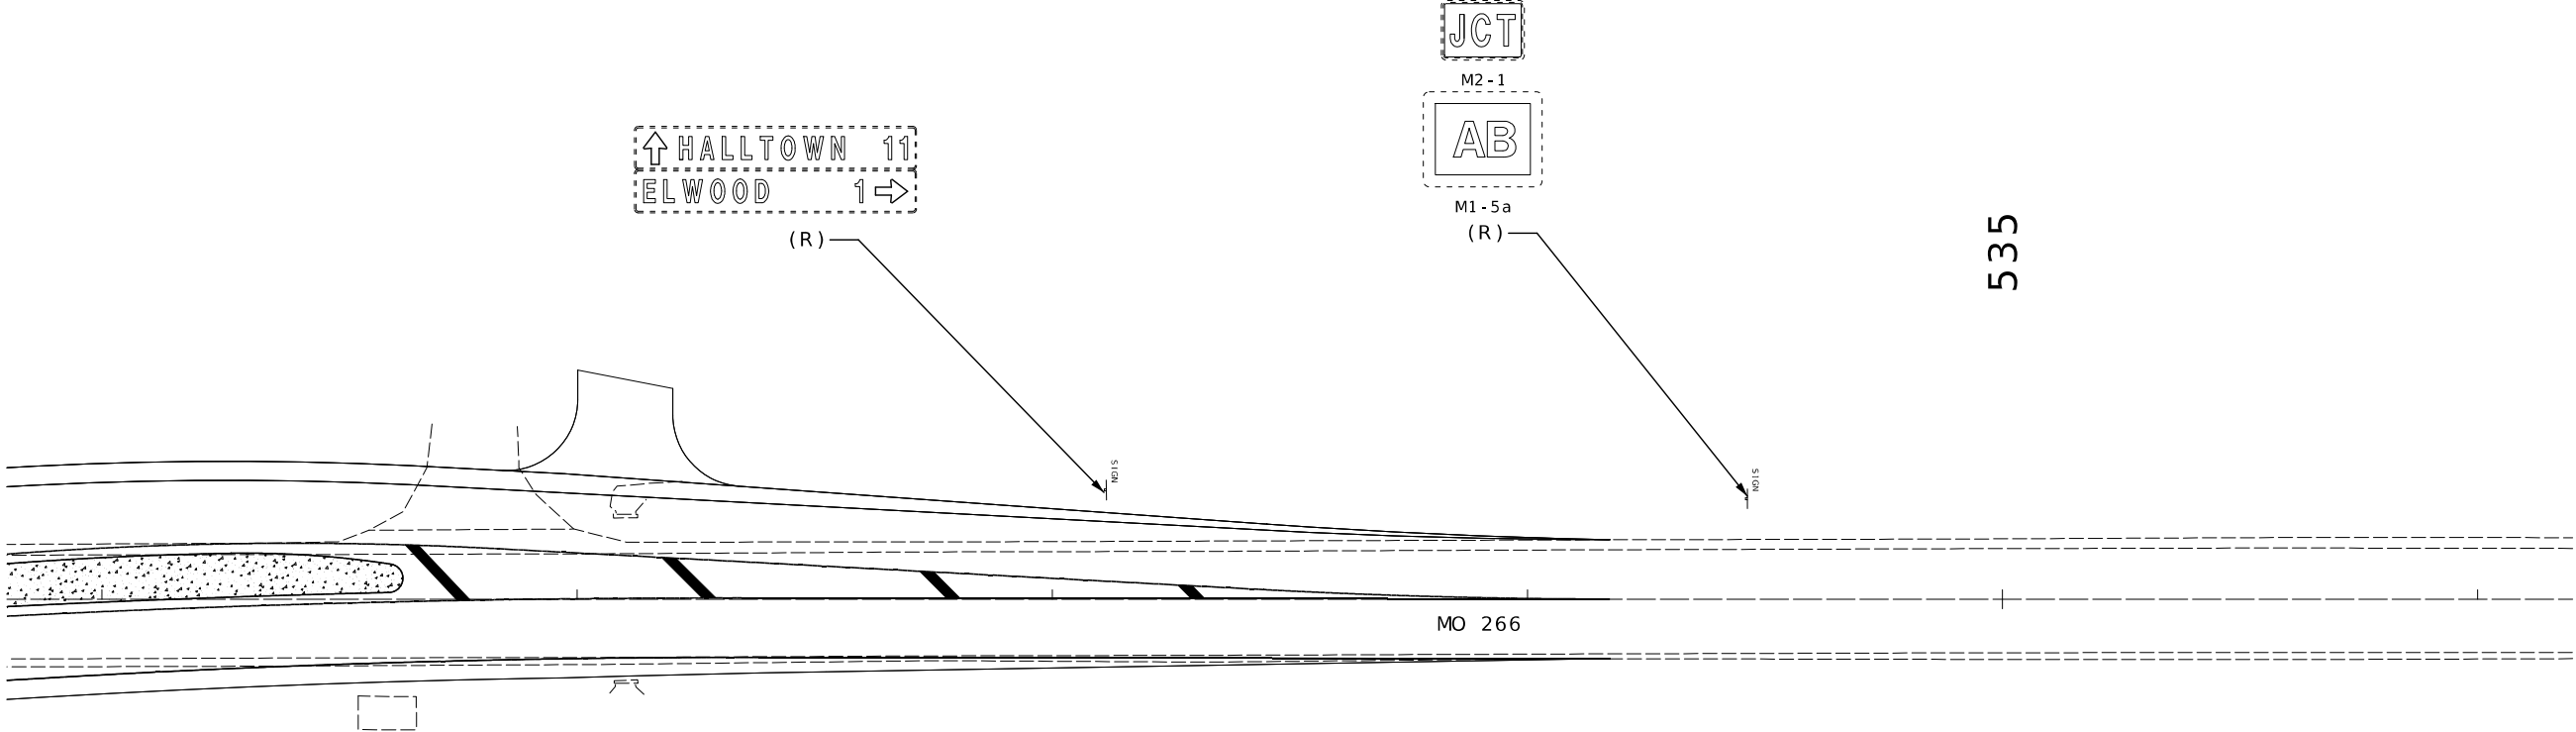

SIGNING SHEET
SHEET 3 OF 31



DATE PREPARED

11/24/2026

266 | M

SW	5
----	---

COUNTY
GREENE

JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102

ROUTE AB REMOVALS



07-25-2020 12:13:11
CAMERON SOOY - CIVIL
MO DE 0001010315

DATE PREPARED

7/24/2026	
ROUTE	STATE

266	MO
-----	----

DISTRICT	SHEET NO.
SW	56

SW	SE
COUNTY	

GREENE

JSU0080

CONTRACT ID.

PROJECT NO.

© 2007 The Authors
Journal compilation © 2007 Blackwell Publishing Ltd



BRIDGE NO.

[illegible]

MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

105 WEST CAPITAL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)



--

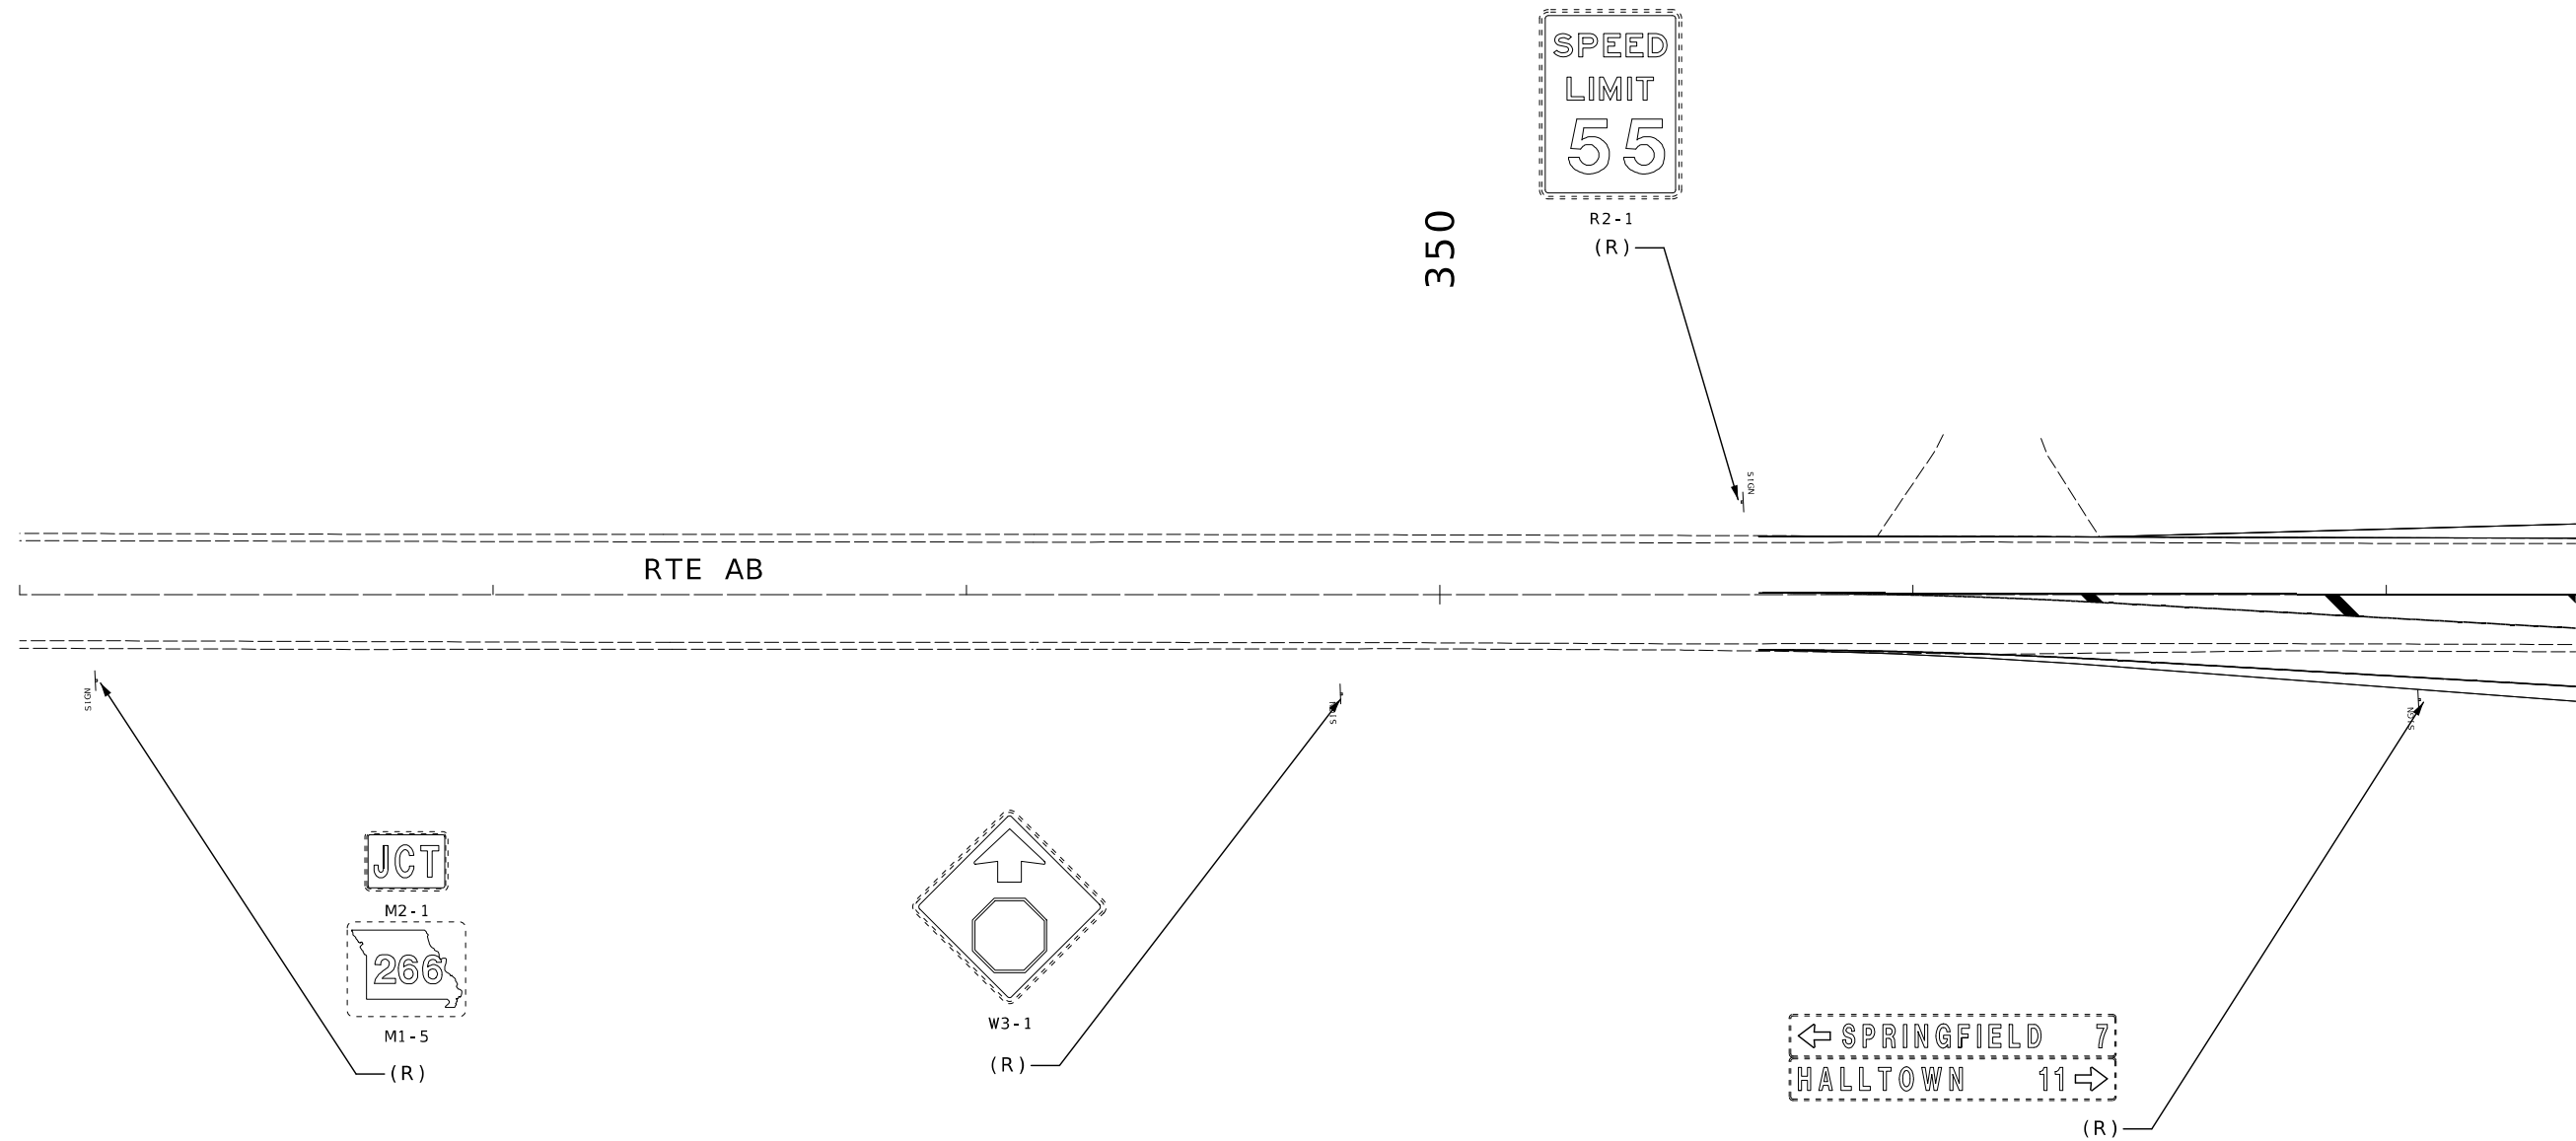

SIGNING SHEET
SHEET 4 OF 31

FR 99 REMOVALS

5

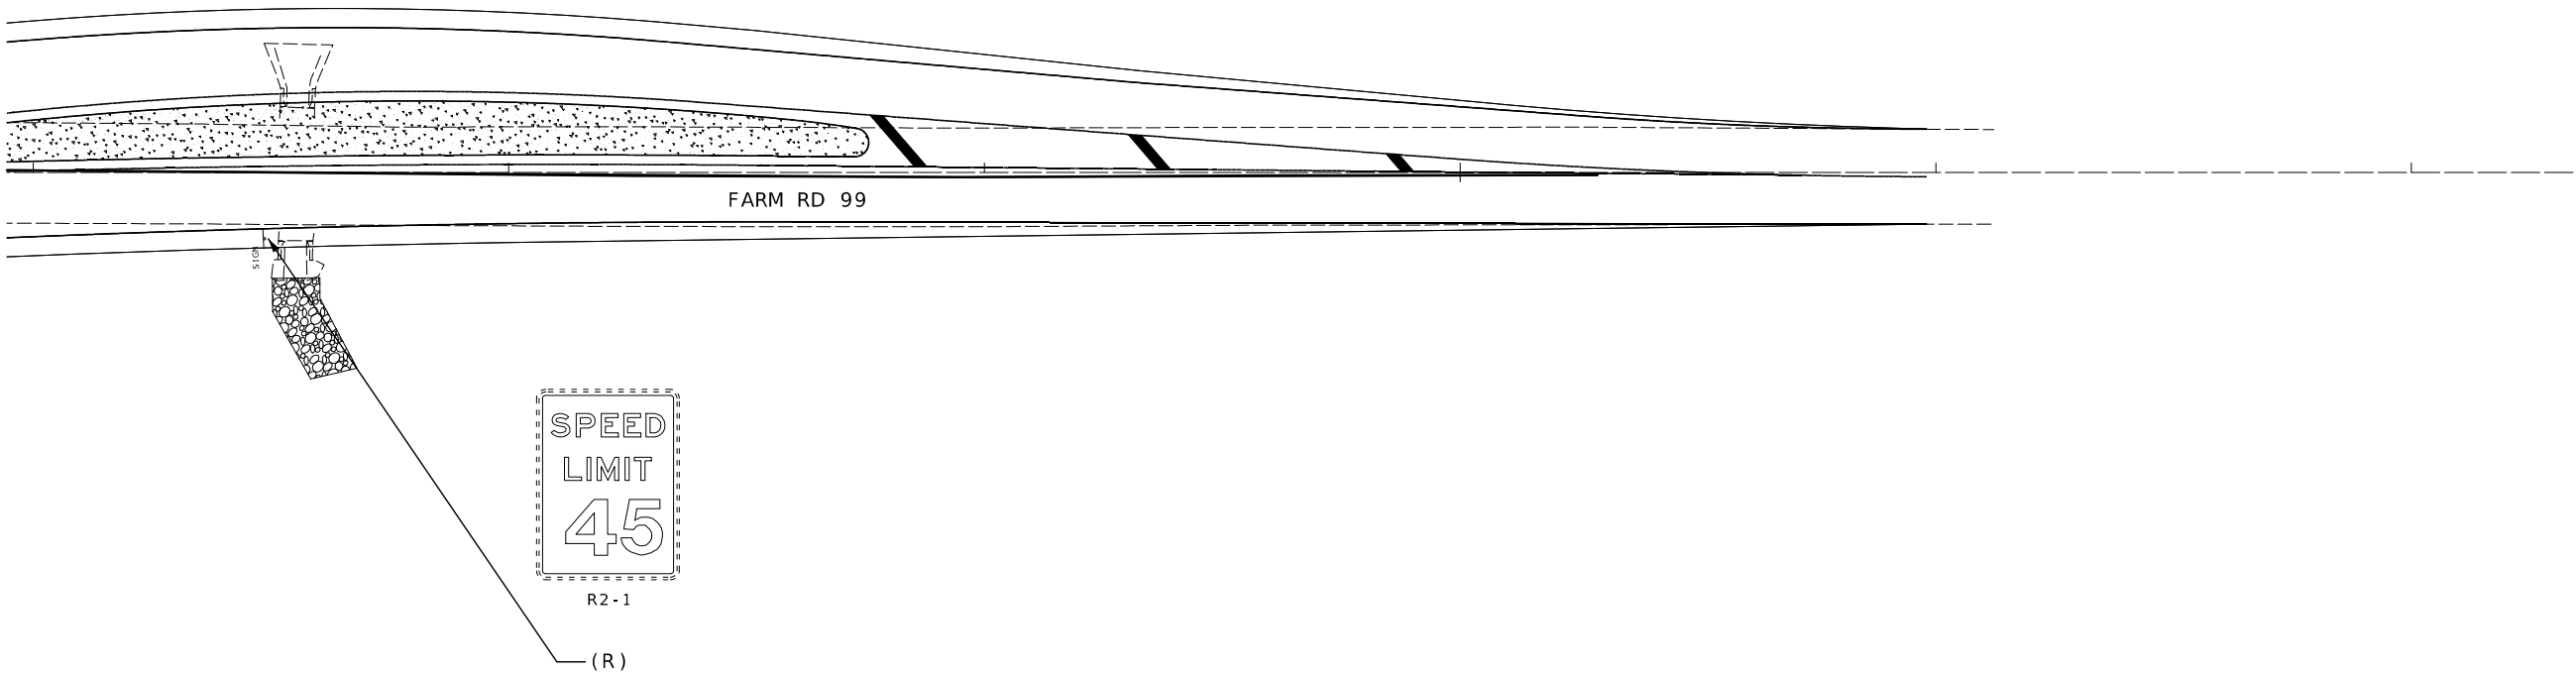


DATE PREPARED 7/24/2026	
ROUTE 266	STATE MO
DISTRICT SW	SHEET NO. 57
COUNTY GREENE	
JOB NO. JSU0080	
CONTRACT ID.	
PROJECT NO.	
BRIDGE NO.	

DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-273-6636)

ROUTE 266 REMOVALS

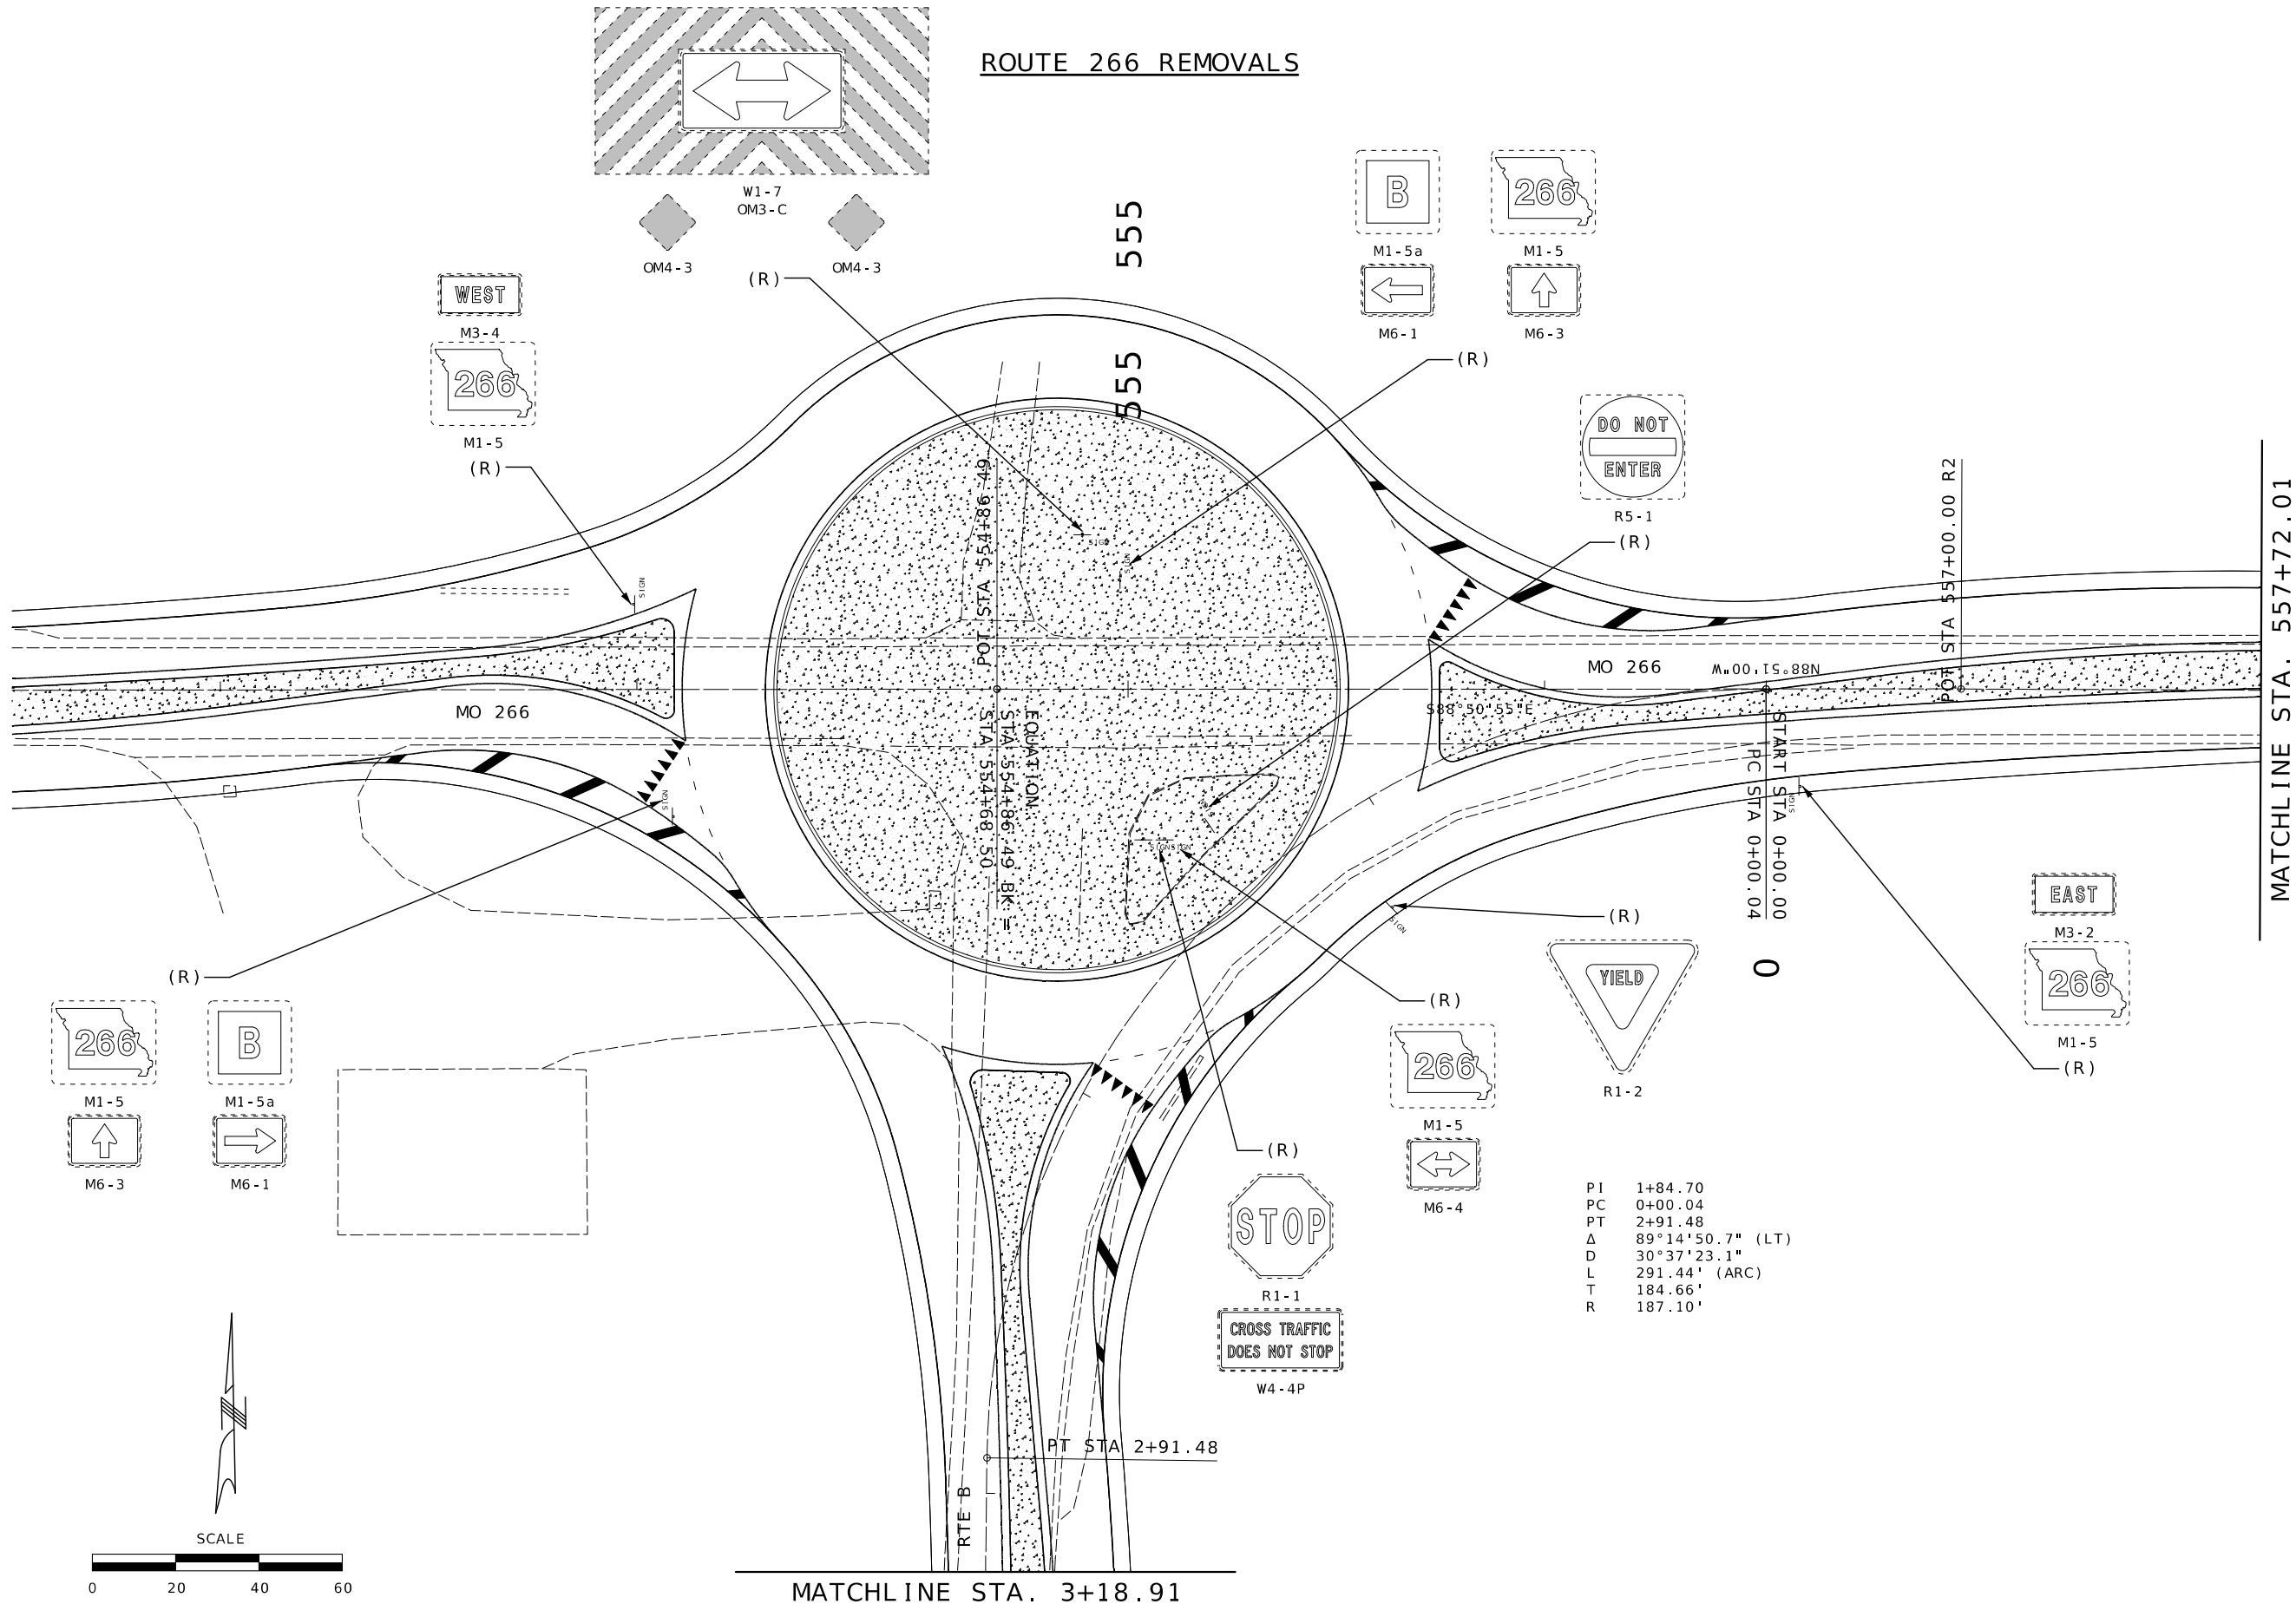

STATE OF MISSOURI
CAMERON SCOTT
NUMBER
PE-2021019715
PROFESSIONAL ENGINEER

DATE PREPARED
7/24/2026

ROUTE
266

DISTRICT
SW

STATE
MO

SHEET NO.
59

COUNTY
GREENE

JOB NO.
JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

SIGNING SHEET
SHEET 7 OF 31

ROUTE 266 REMOVALS

MATCHLINE STA. 557+72.01

560

↑ HALLTOWN 12

↔ JCT. ROUTE I-44 1

(R)

JCT

M2 - 1

B

M1 - 5a

(R)

MO 266


S88°36'55"E

SIGN

(R)

SPEED
LIMIT
55

R2 - 1



DATE PREPARED
7/24/2026

ROUTE	STATE
266	MO
DISTRICT	SHEET NO.
SW	60

COUNTY
GREENE
JOB NO.
JSU0080
CONTRACT ID.

PROJECT NO.





BRIDGE NO.

DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

ROUTE B REMOVALS

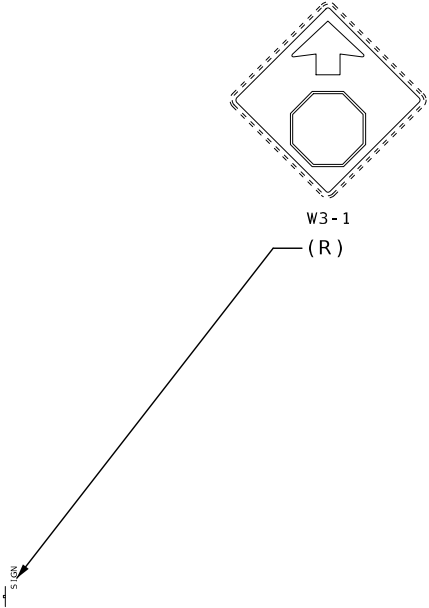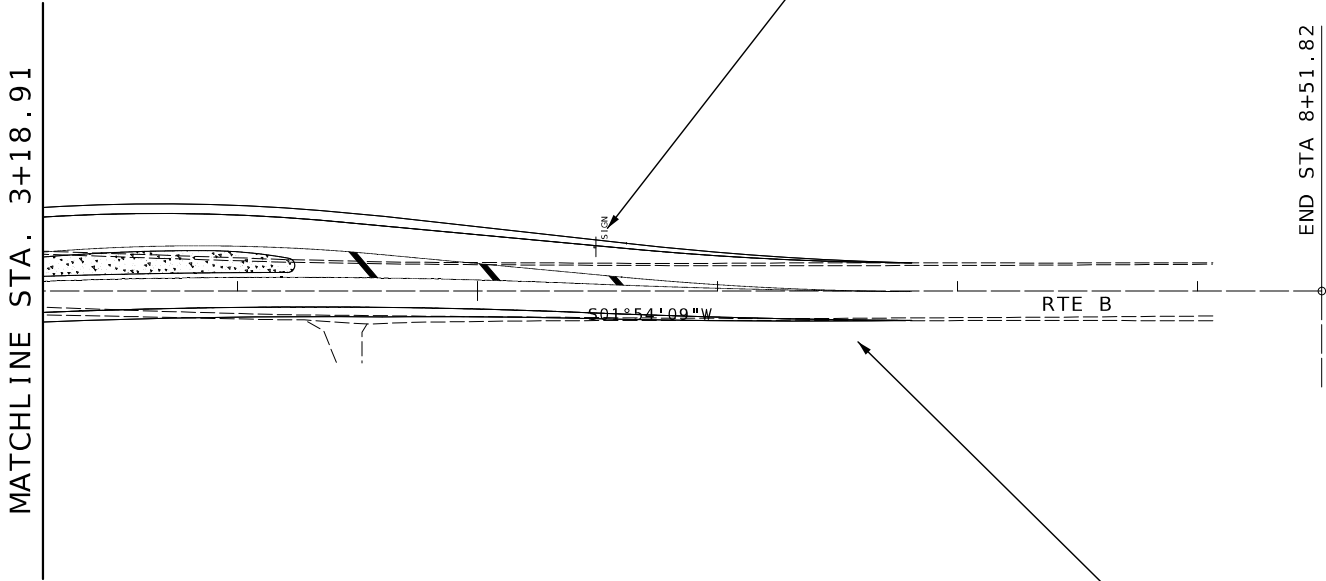

DATE PREPARED
7/24/2026

ROUTE 266	STATE MO
DISTRICT SW	SHEET NO. 61

COUNTY
GREENE

JOB NO.
JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION



105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

ROUTE 266 SIGNING



BRIDGE NO.




MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

--

SIGNING SHEET
SHEET 10 OF 31

ROUTE 266 SIGNING

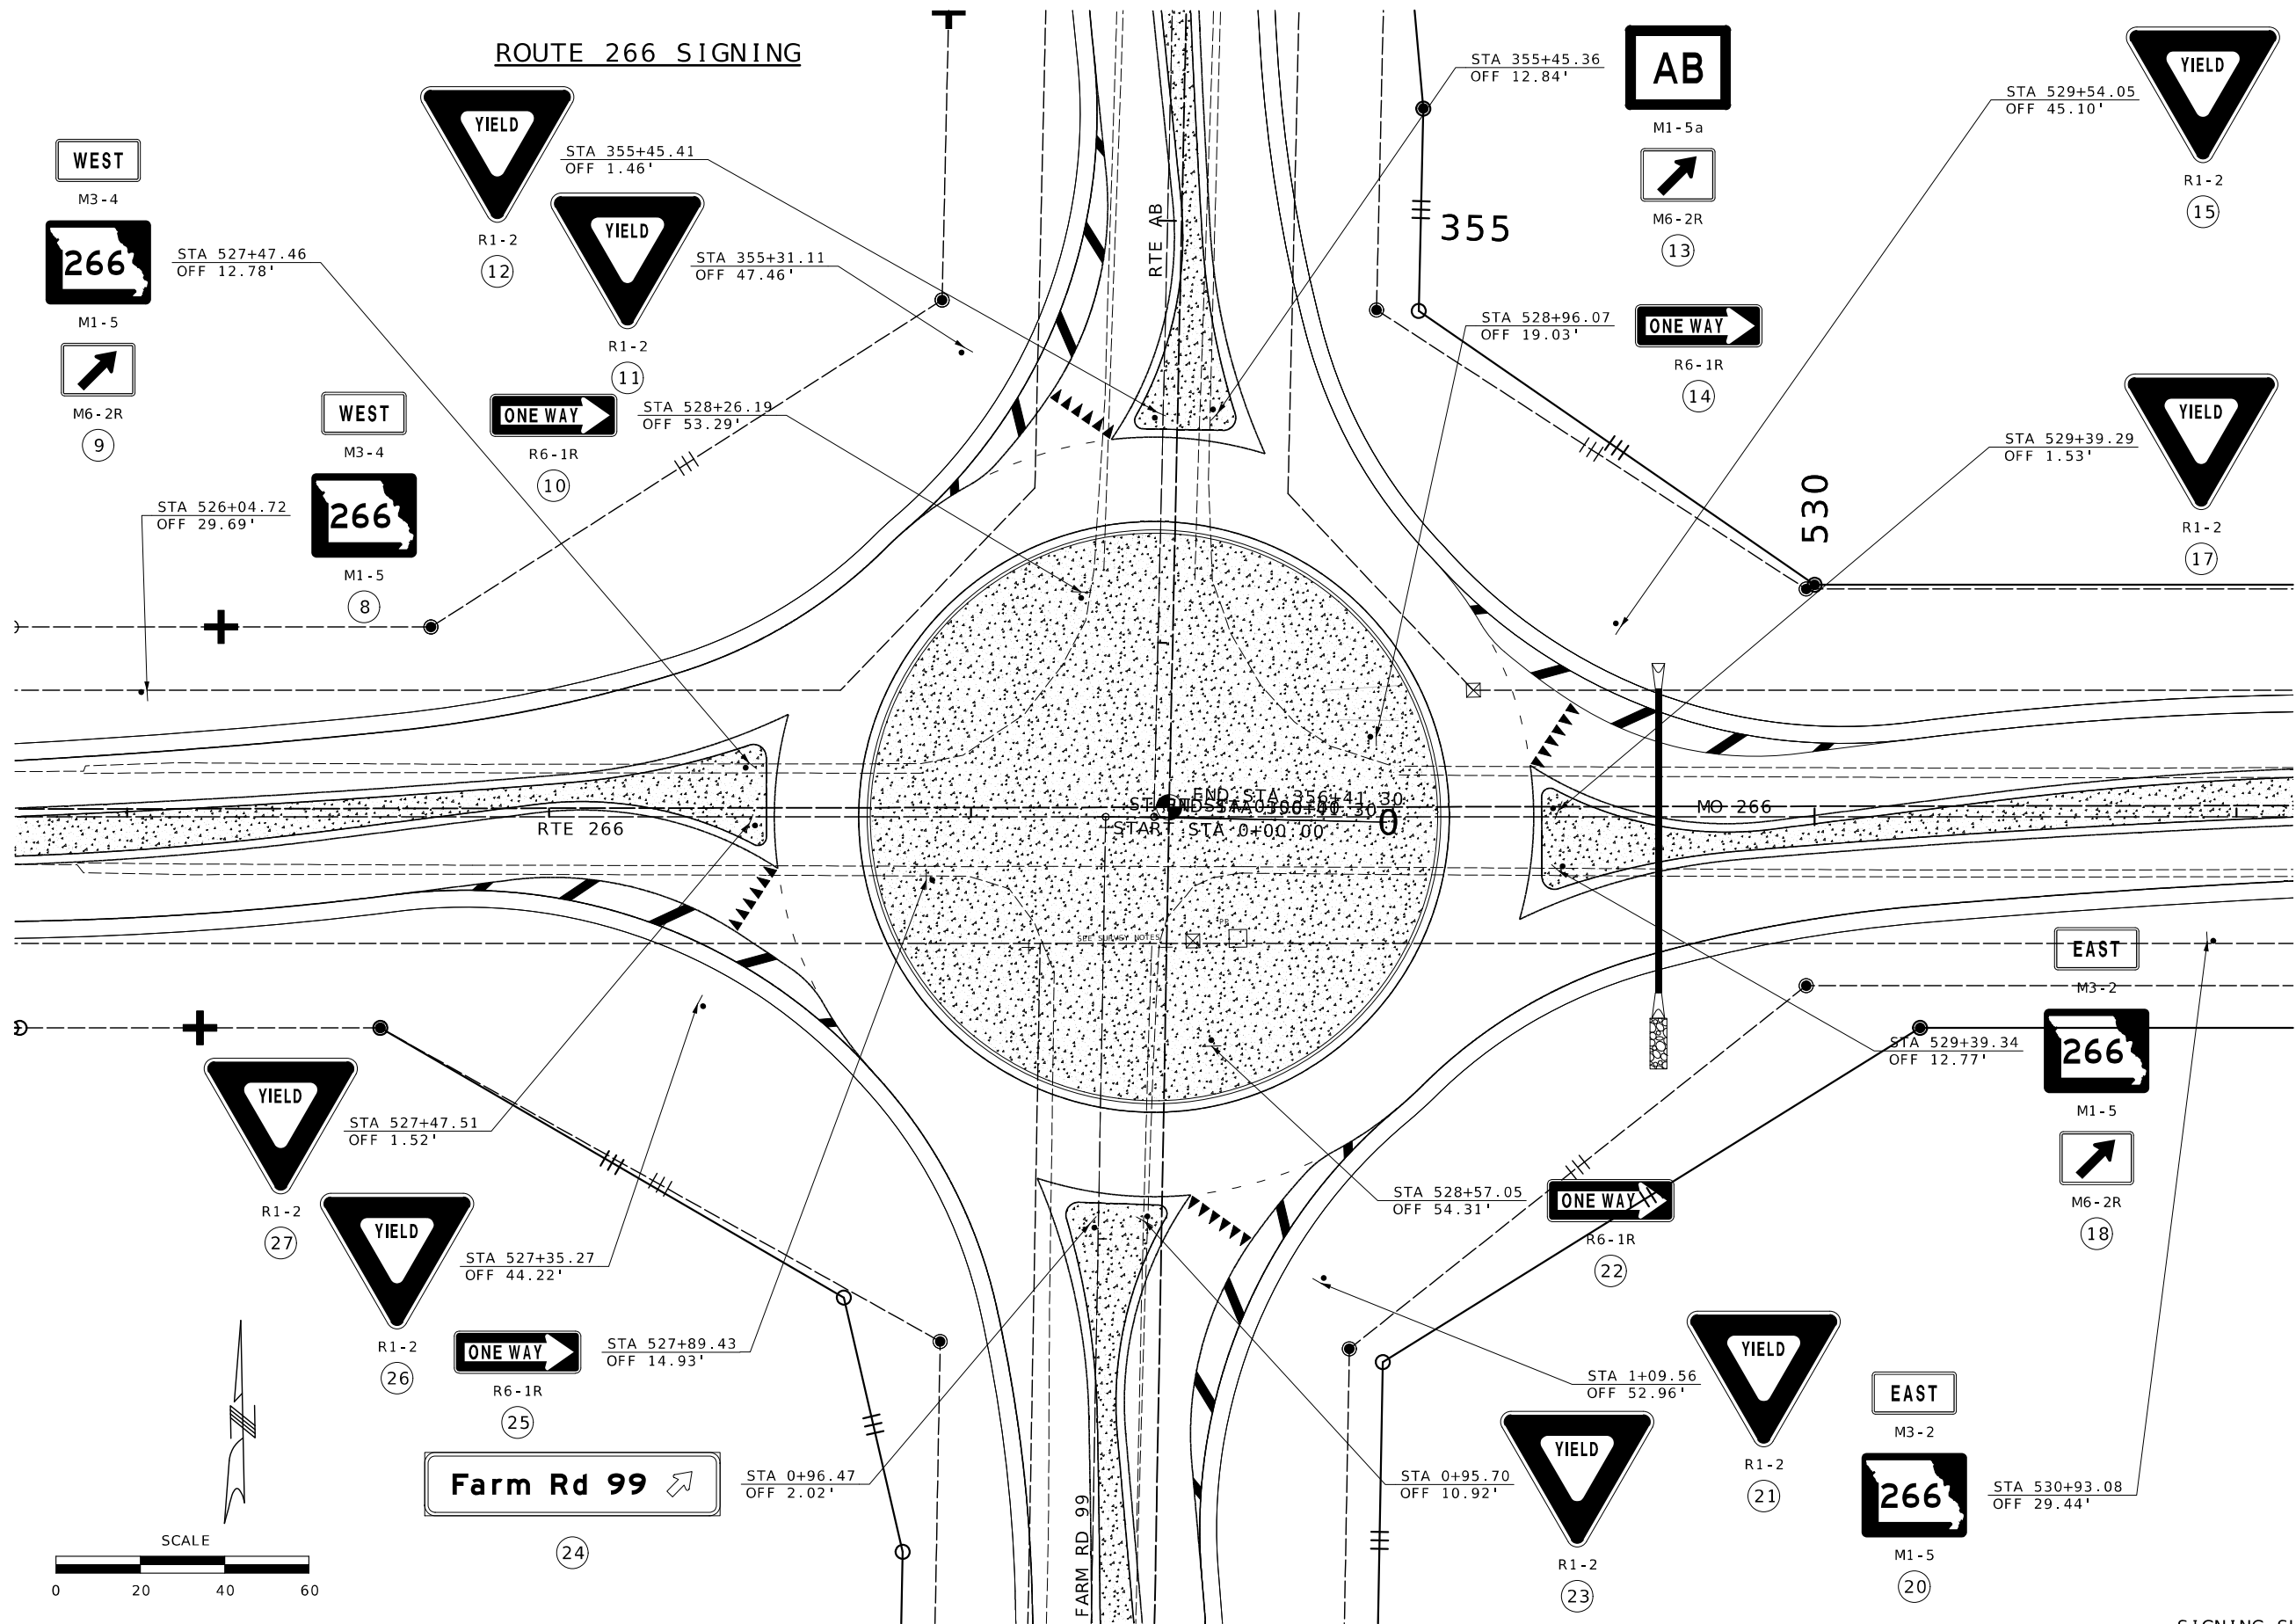

STATE OF MISSOURI

CAMERON

SOOY

NUMBER

PE-2021019715

PROFESSIONAL ENGINEER

DATE PREPARED

8/18/2026

ROUTE

266

STATE

MO

DISTRICT

SW

SHEET NO.

63

COUNTY

GREENE

JOB NO.

JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION

DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION




105 WEST CAPITOL

JEFFERSON CITY, MO 65102


1-888-ASK-MODOT (1-888-275-6636)

MODOT

FARM ROAD 99 SIGNING

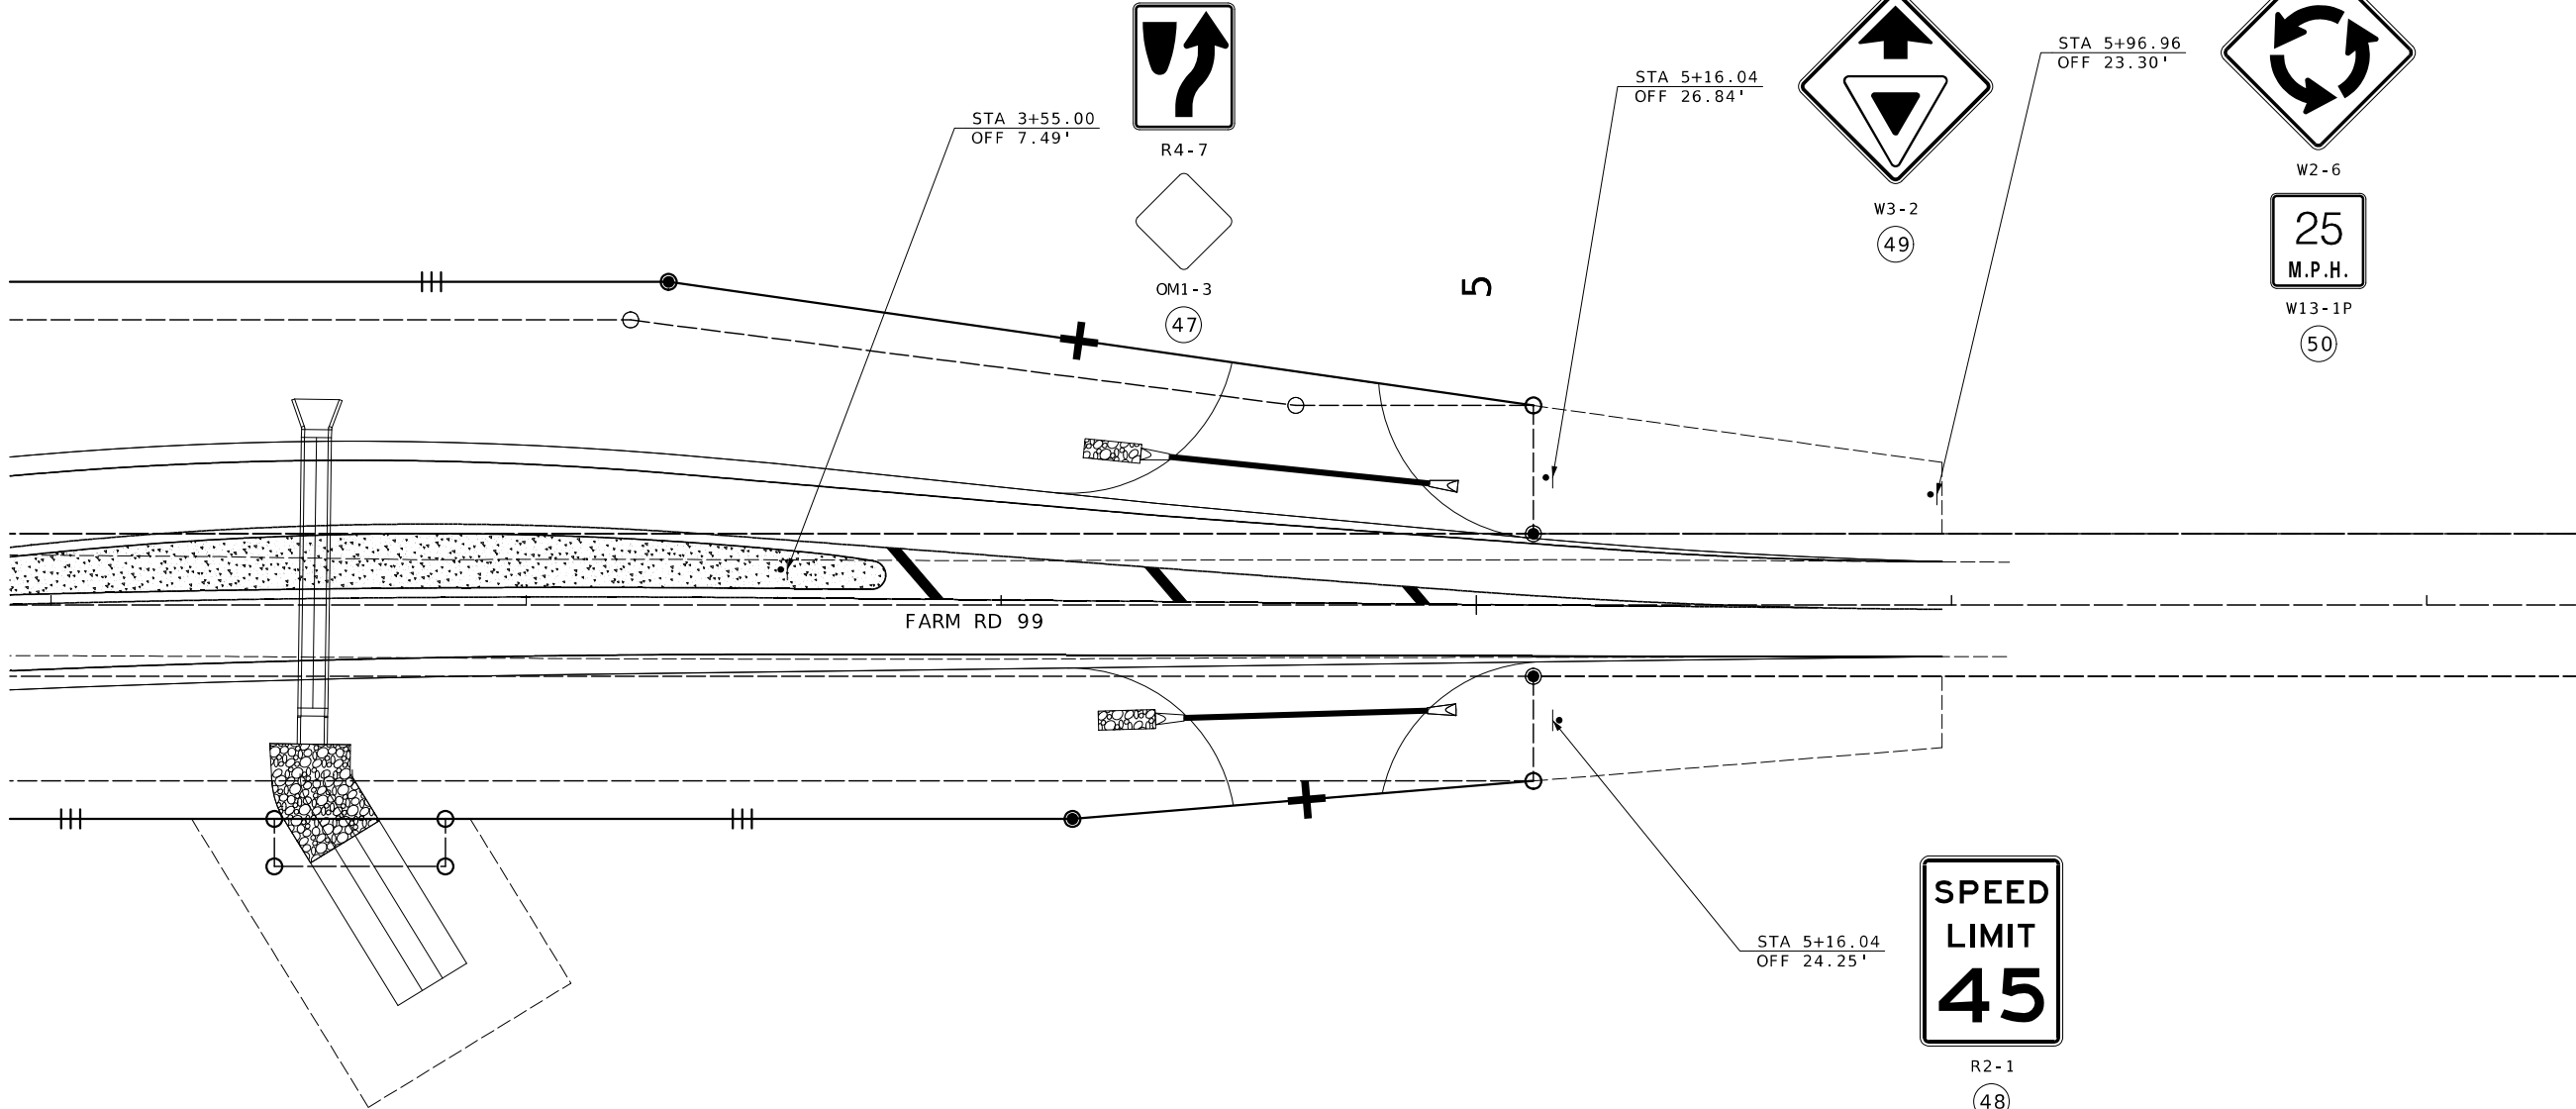

SIGNING SHEET
SHEET 14 OF 31



08-21-2020 10:23:06
CAMERON SOOY - CIVIL
MO DE 0001810315

DATE PREPARED

8 / 18 / 2026

ROUTE	STATE
266	MO

DISTRICT	SHEET NO.
----------	-----------

SW	66
----	----

COUNTY
GREENE

JOB NO.

JSU0080

CONTRACT ID.


PROJECT NO. _____

BRIDGE NO.

[illegible]MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

ROUTE 266 SIGNING

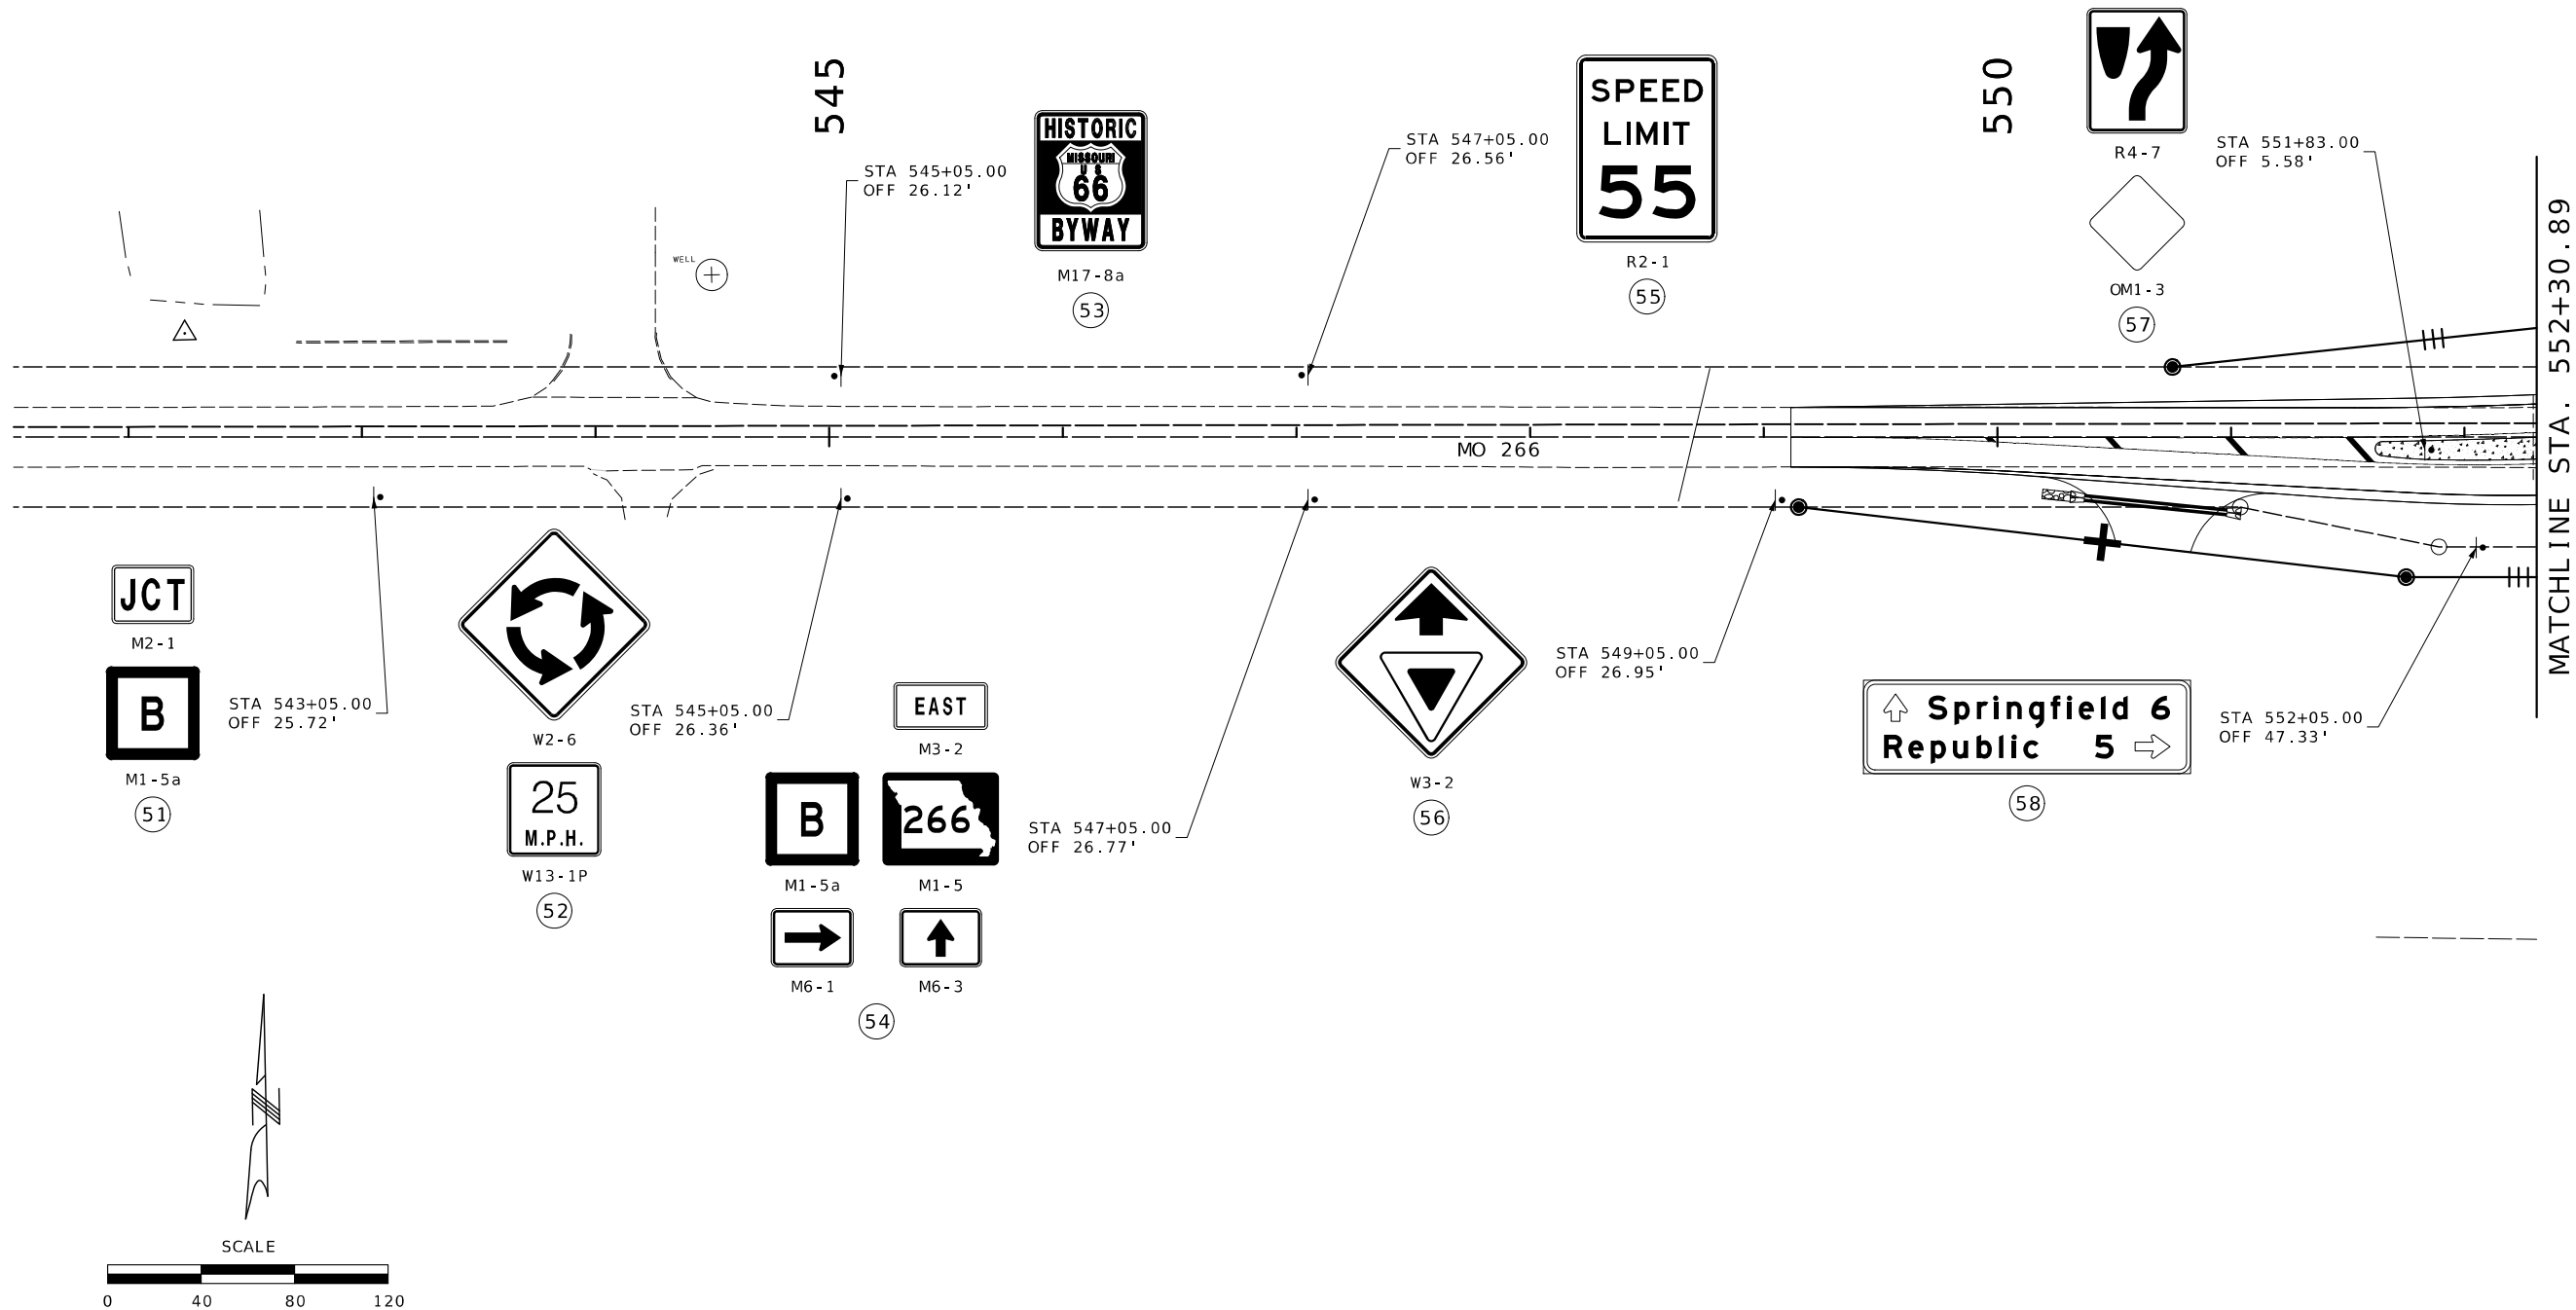

MATCHLINE STA. 552+30.89



DATE PREPARED 8/18/2026	
ROUTE 266	STATE MO
DISTRICT SW	SHEET NO. 67
COUNTY GREENE	
JOB NO. JSU0080	
CONTRACT ID.	


PROJECT NO.
BRIDGE NO.

DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION



105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

ROUTE 266 SIGNING



* - REFER TO STD. PLANS FOR SIGN OFFSET

ROUTE B SIGNING

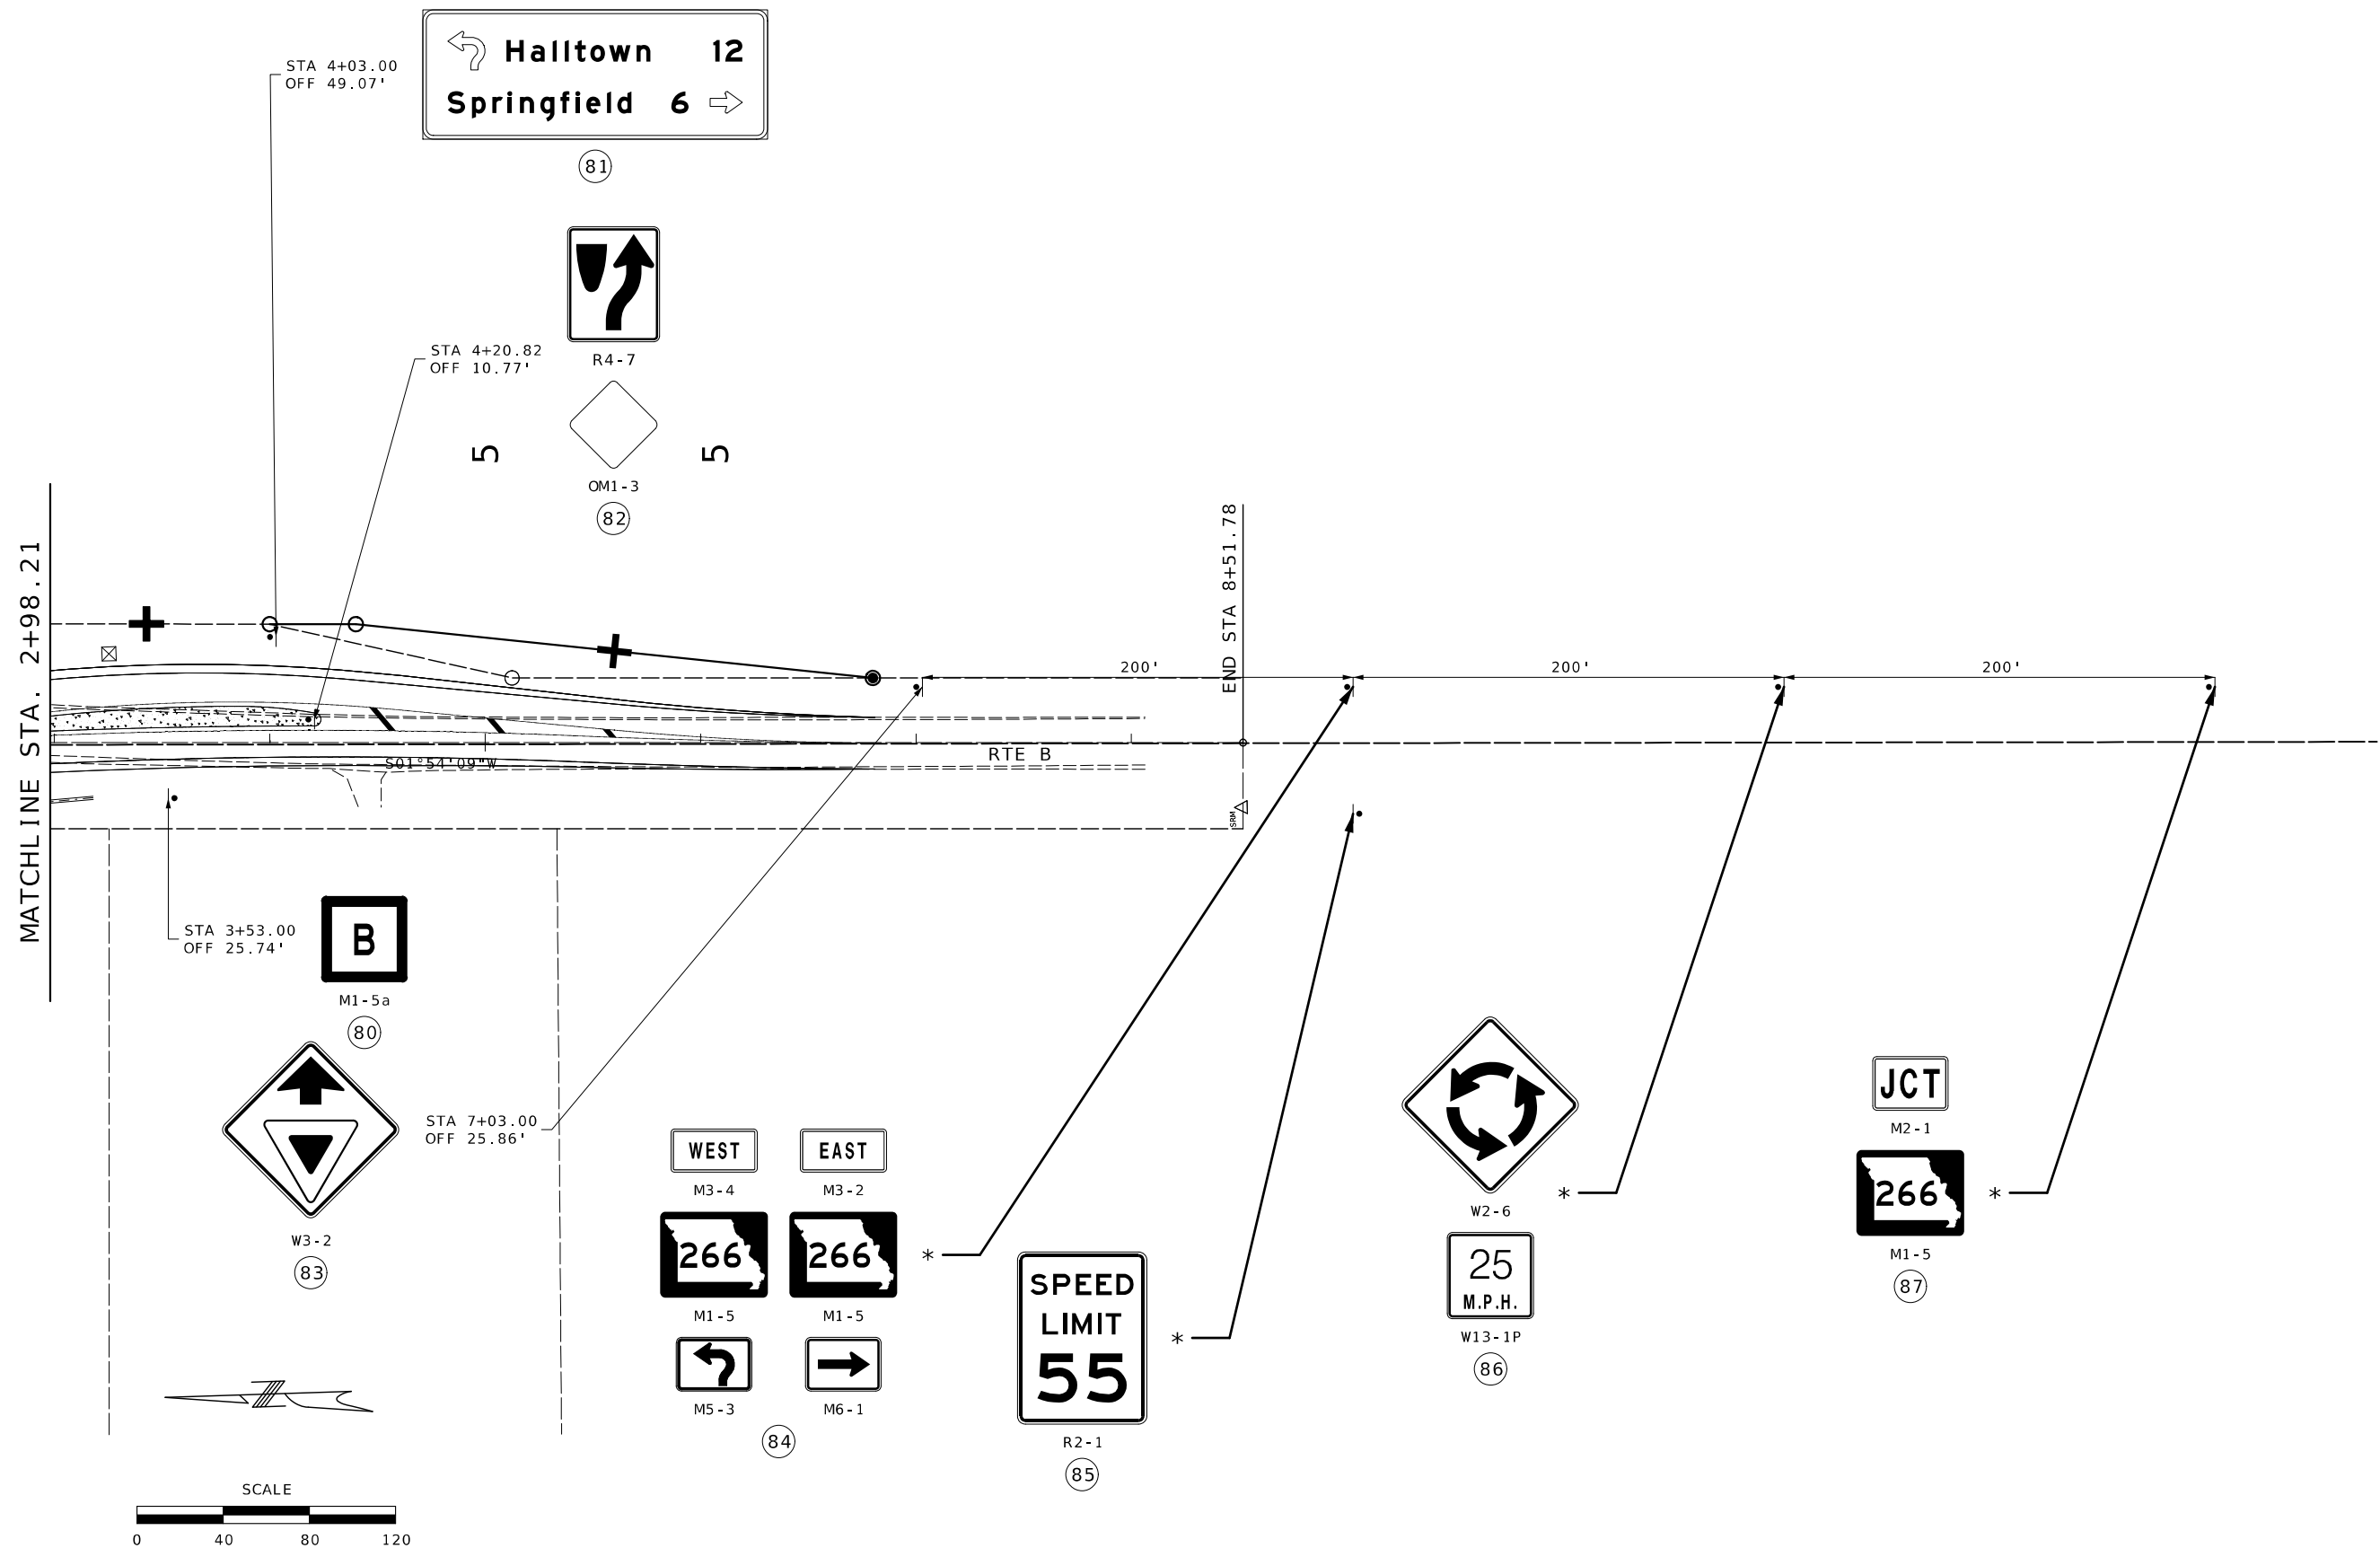










DATE PREPARED 7/24/2026	
ROUTE 266	STATE MO
DISTRICT SW	SHEET NO. 70
COUNTY GREENE	
JOB NO. JSU0080	
CONTRACT ID.	
PROJECT NO.	
BRIDGE NO.	

DESCRIPTION	DATE

MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

MoDOT

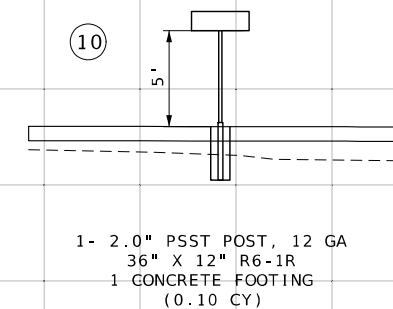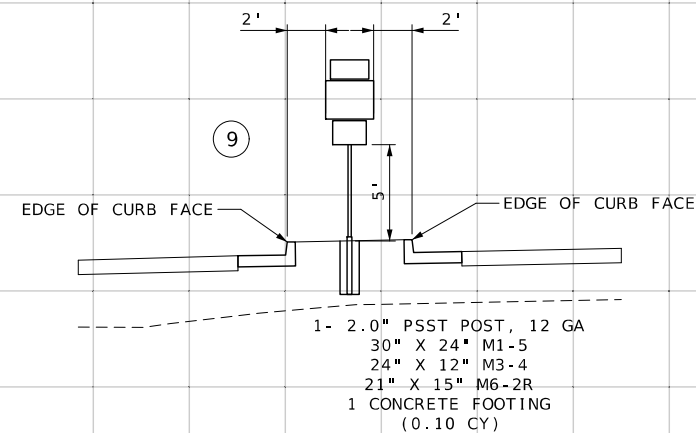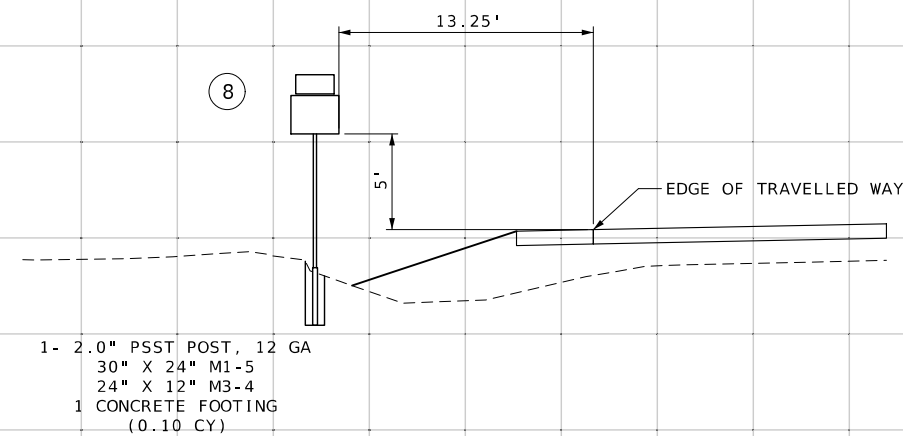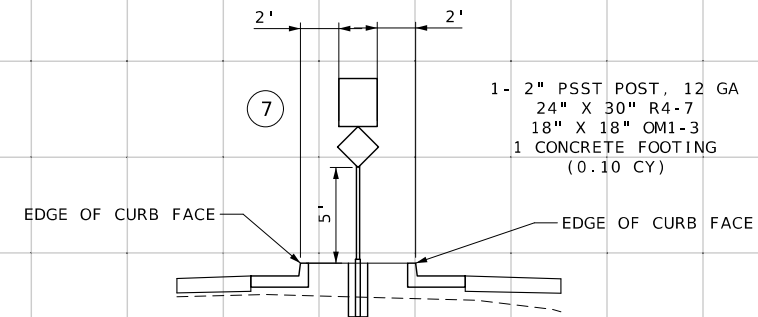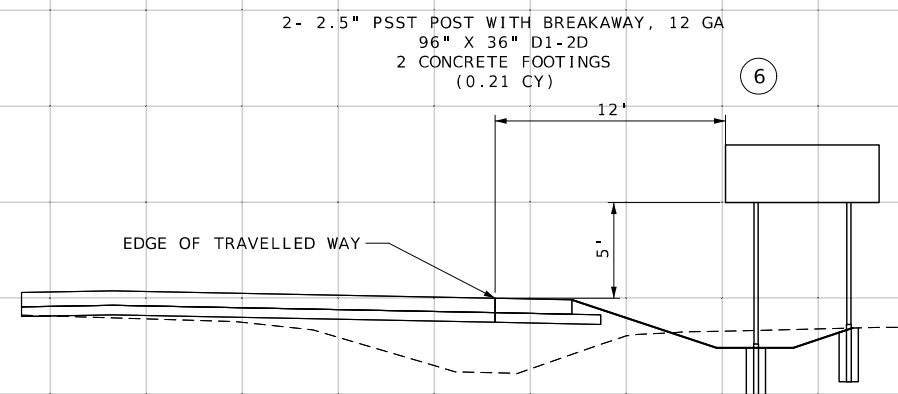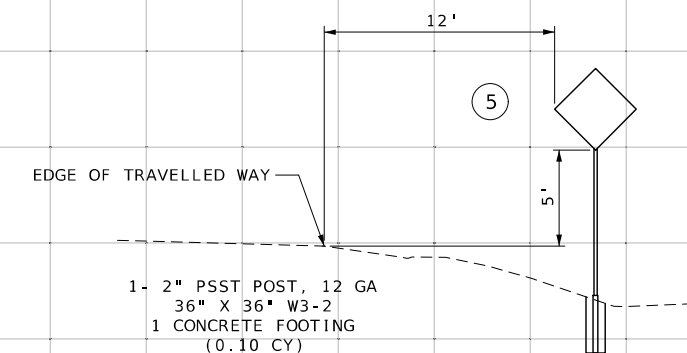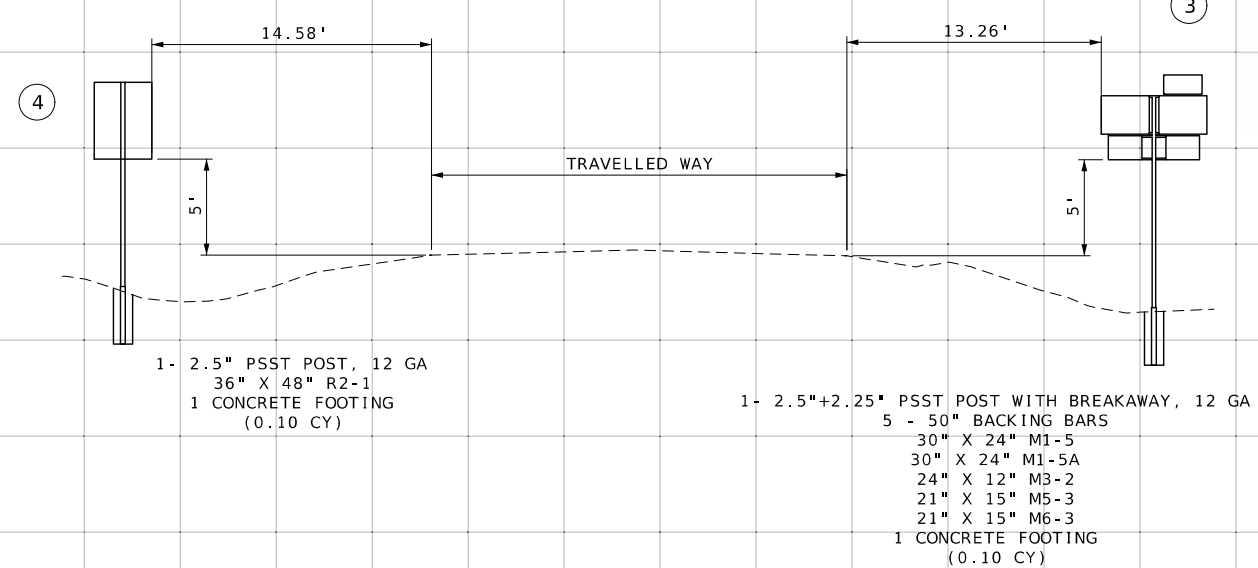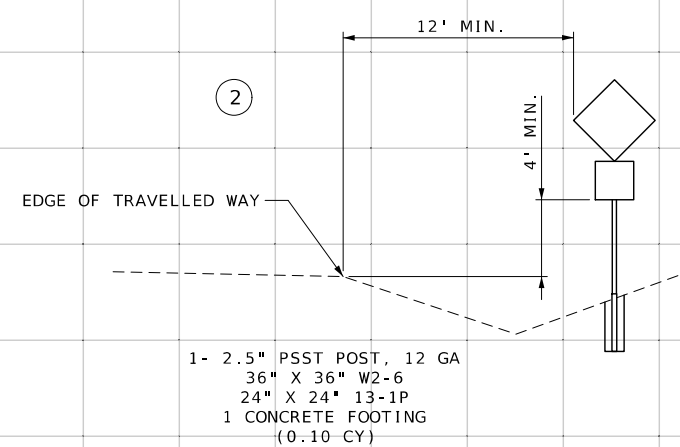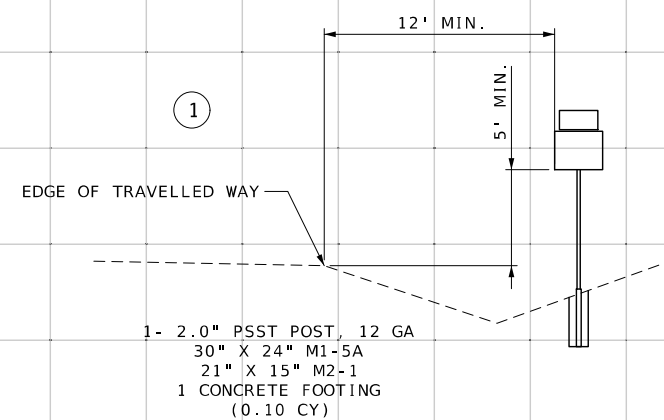

A diagram showing a central point with four arrows pointing up, down, left, and right, labeled '5'.

SIGNING SHEET
SHEET 19 OF 31



07-29-2020 12:19:15
CAMERON SOOY - CIVIL

DATE PREPARED
7/24/2026

ROUTE	STAT
266	MC

DISTRICT	SHEET
CW	71

COUNTY
GREENE

JOB NO.
15110000


CONTRACT ID.

PROJECT NO.

BRIDGE NO.

[illegible]MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102

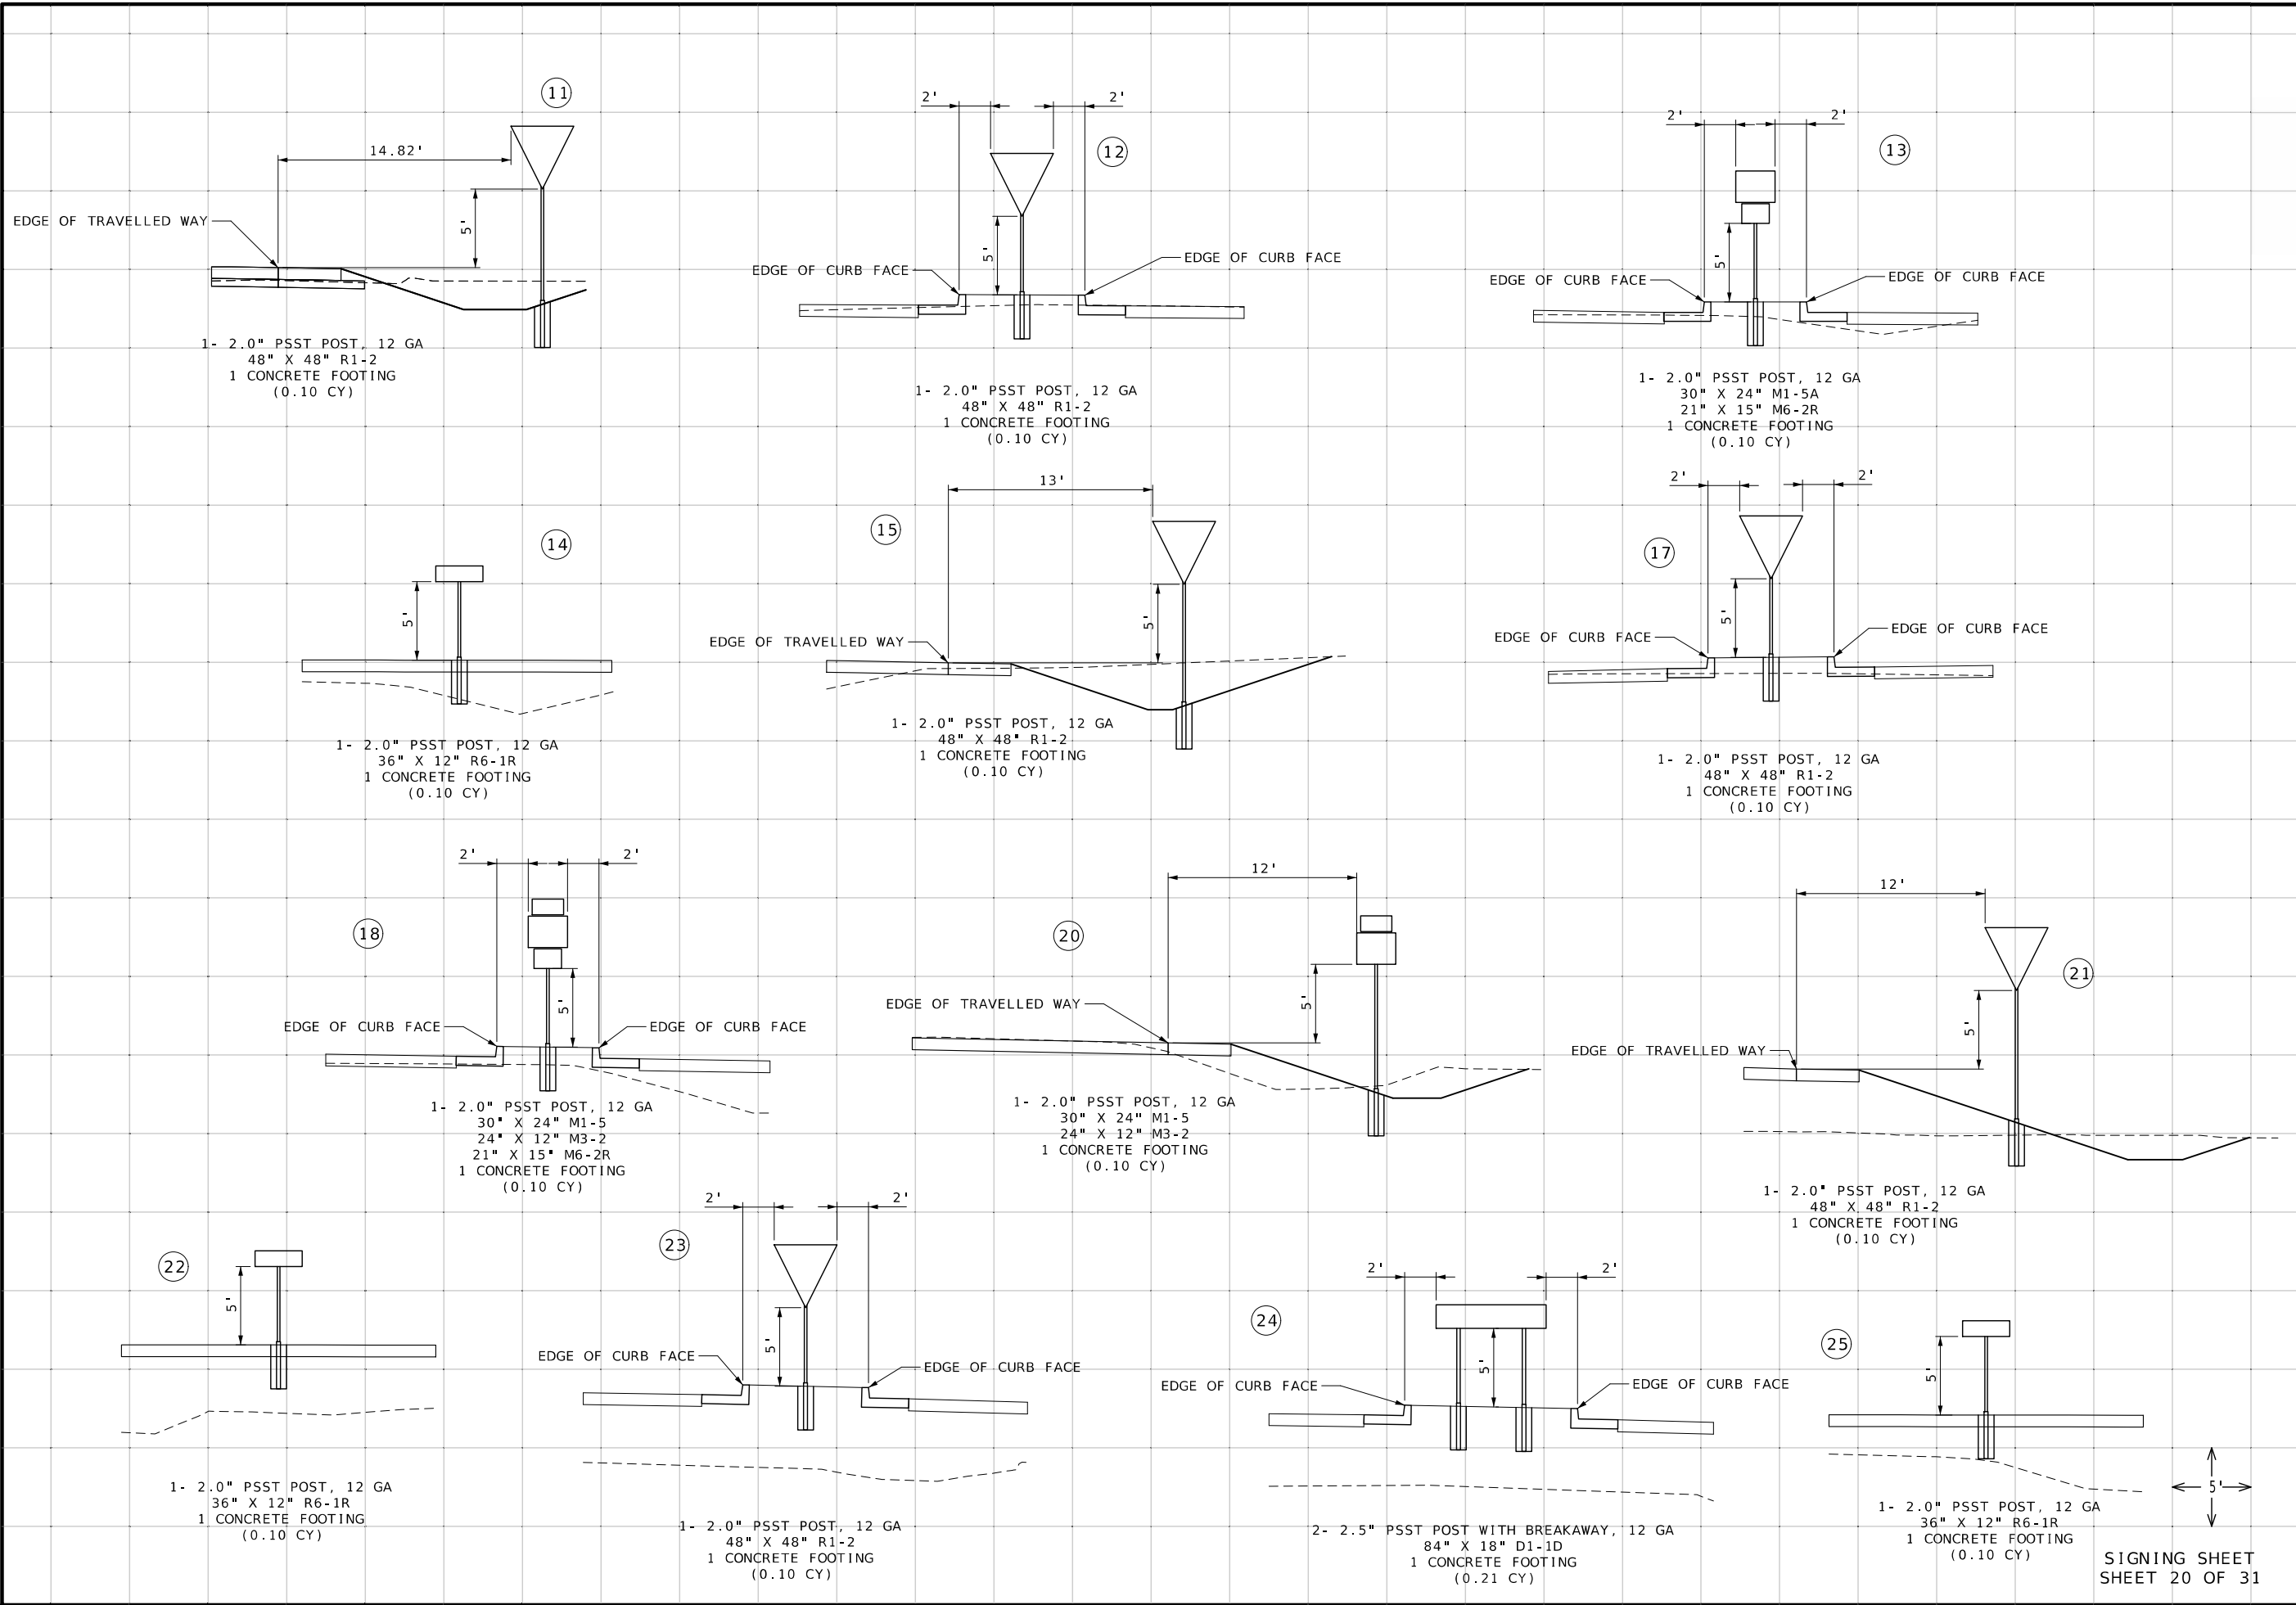

STATE OF MISSOURI
CAMERON SOOY
NUMBER
PE-2021019715
PROFESSIONAL ENGINEER

DATE PREPARED
8/18/2026

ROUTE
266

DISTRICT
SW

COUNTY
GREENE

JOB NO.
JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.


DESCRIPTION


DATE

MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION


105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

SIGNING SHEET
SHEET 20 OF 31

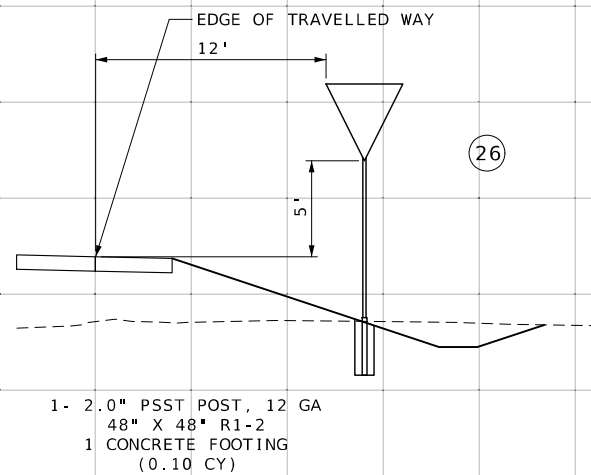


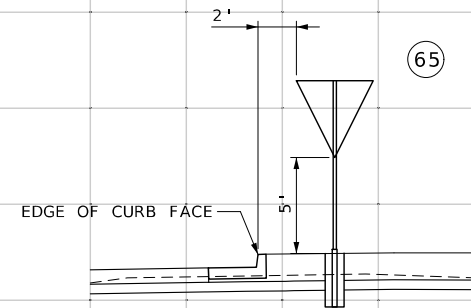


1- 2" PSST POST, 12 GA
48" X 48" R1-2
1 CONCRETE FOOTING
(0.10 CY)

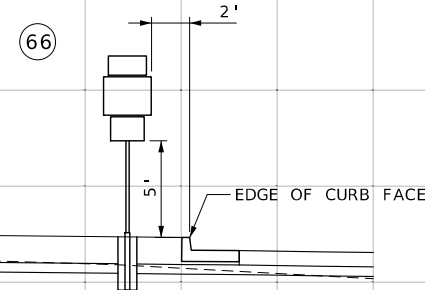


1- 2" PSST POST, 12 GA
24" X 12" M3-2
30" X 24" M1-5
21" X 15" M6-2R
1 CONCRETE FOOTING
(0.10 CY)

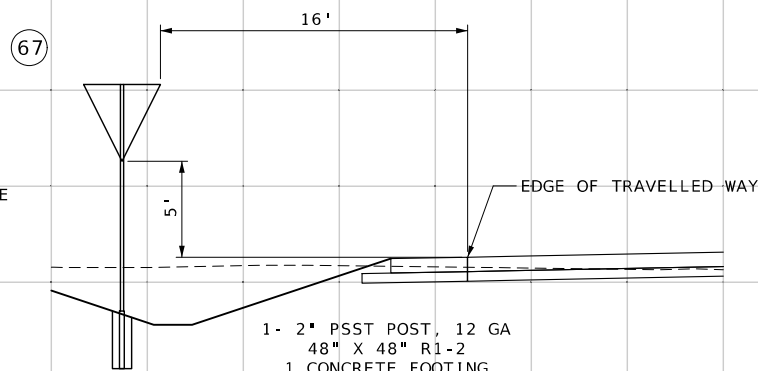


1- 2" PSST POST, 12 GA
48" X 48" R1-2
1 CONCRETE FOOTING
(0.10 CY)

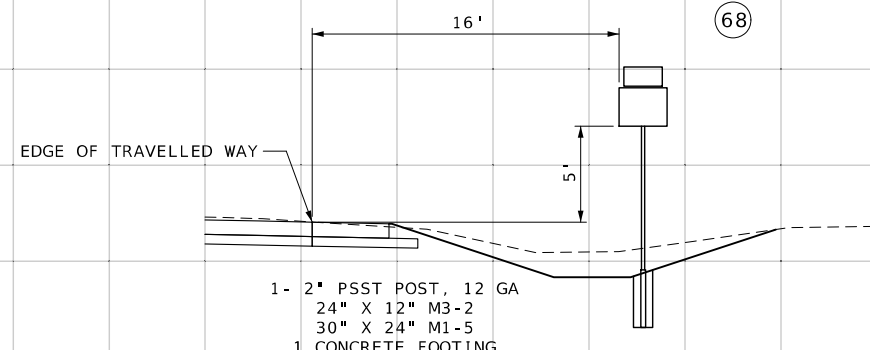


1- 2" PSST POST, 12 GA
24" X 12" M3-2
30" X 24" M1-5
1 CONCRETE FOOTING
(0.10 CY)

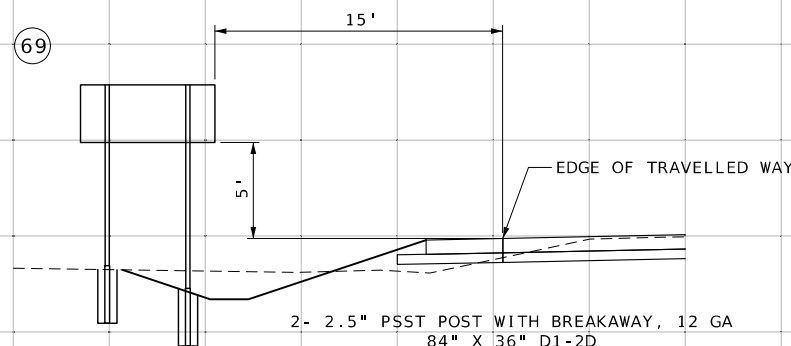


2- 2.5" PSST POST WITH BREAKAWAY, 12 GA
84" X 36" D1-2D
1 CONCRETE FOOTING
(0.21 CY)

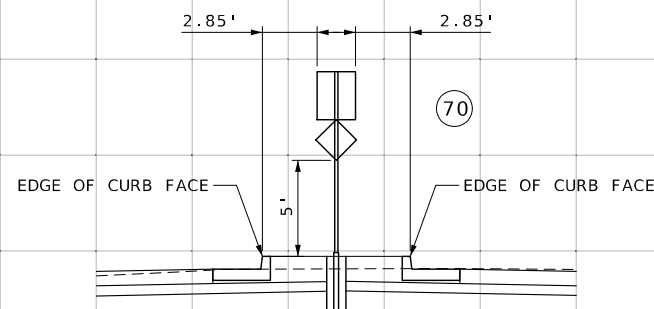


1- 2" PSST POST, 12 GA
24" X 30" R4-7
18" X 18" OM1-3
1 CONCRETE FOOTING
(0.10 CY)

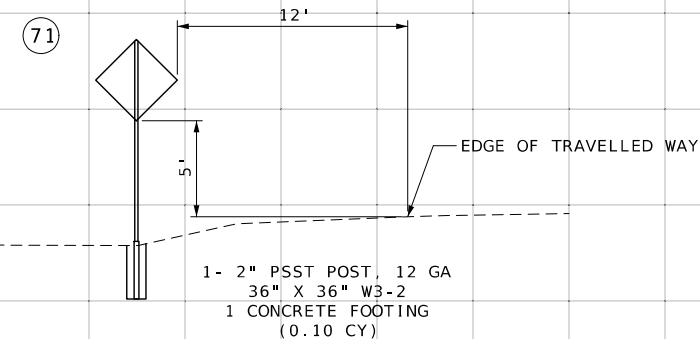


1- 2" PSST POST, 12 GA
36" X 36" W3-2
1 CONCRETE FOOTING
(0.10 CY)

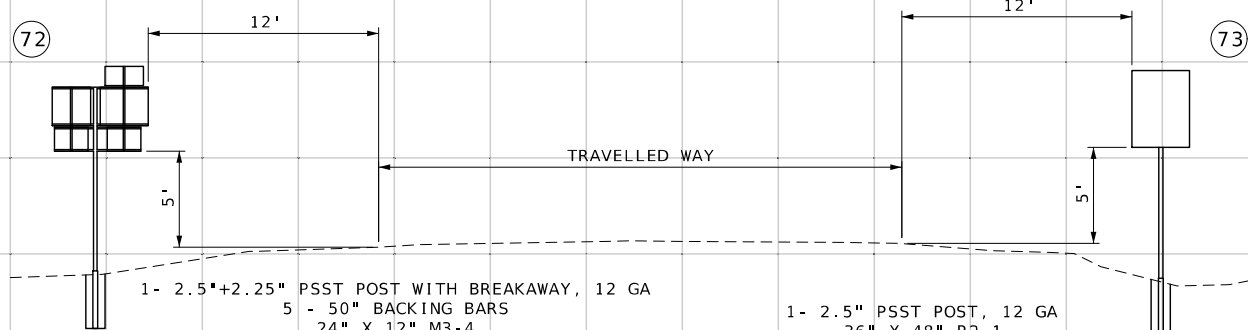


1- 2.5"+2.25" PSST POST WITH BREAKAWAY, 12 GA
5 - 50" BACKING BARS
24" X 12" M3-4
30" X 24" M1-5
21" X 15" M6-3
24" X 24" M1-5A
21" X 15" M5-3
1 CONCRETE FOOTING
(0.10 CY)

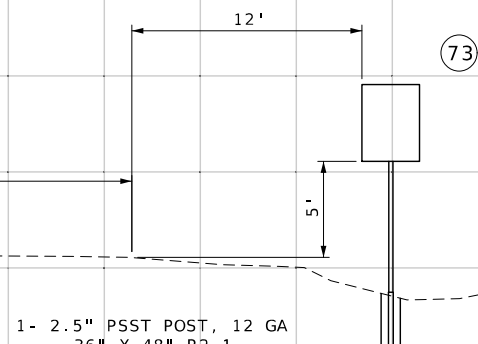


1- 2.5" PSST POST, 12 GA
36" X 48" R2-1
1 CONCRETE FOOTING
(0.10 CY)

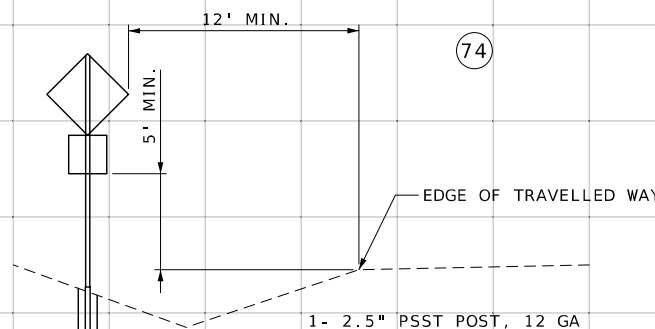

1- 2.5" PSST POST, 12 GA
36" X 36" W2-6
24" X 24" W13-1P
1 CONCRETE FOOTING
(0.10 CY)

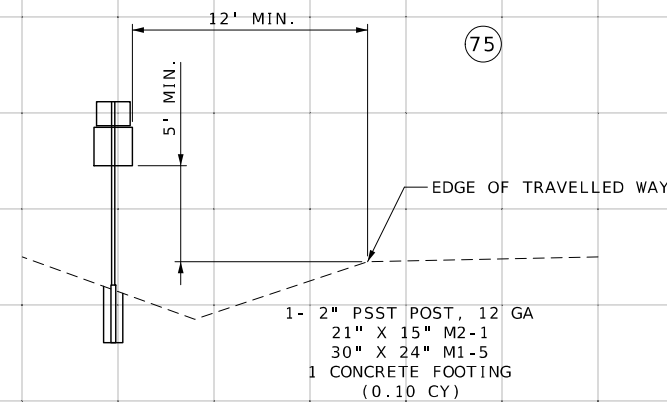

1- 2" PSST POST, 12 GA
21" X 15" M2-1
30" X 24" M1-5
1 CONCRETE FOOTING
(0.10 CY)



SIGNING SHEET
SHEET 24 OF 31



DATE PREPARED
7/24/2026

ROUTE 266 STATE MO

DISTRICT SW SHEET NO. 76

COUNTY GREENE

JOB NO. JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.













DESCRIPTION

DATE

MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION



105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

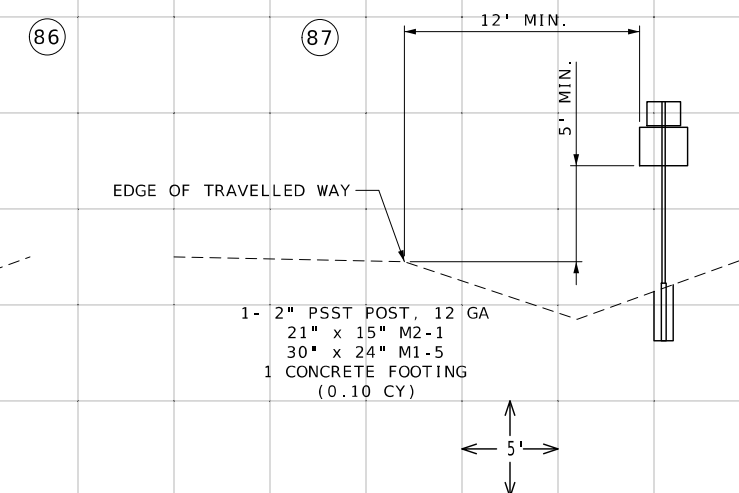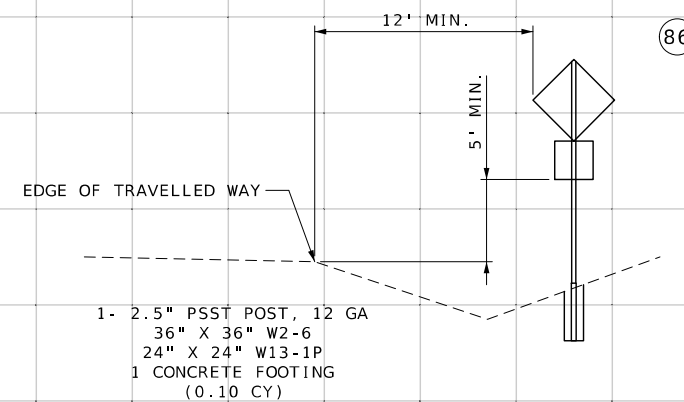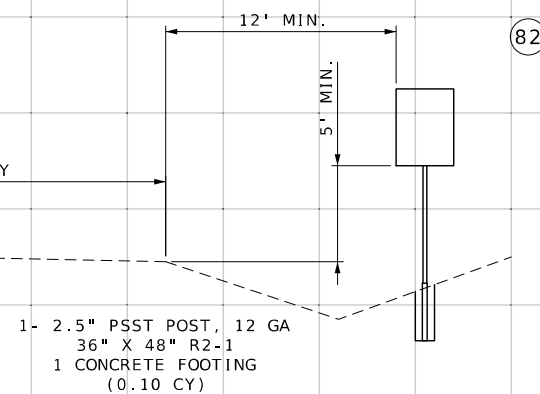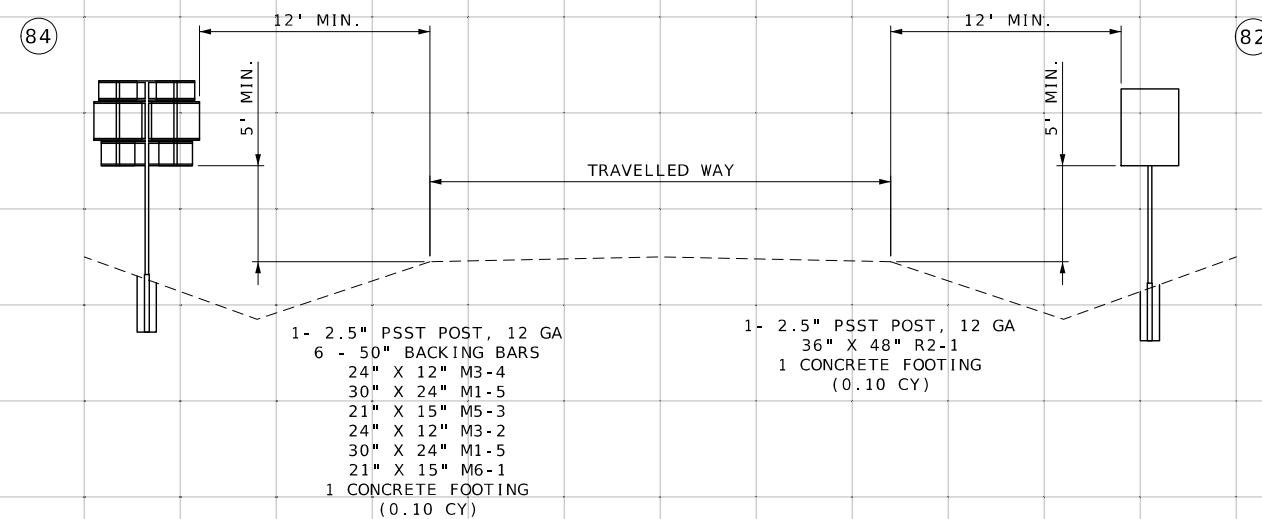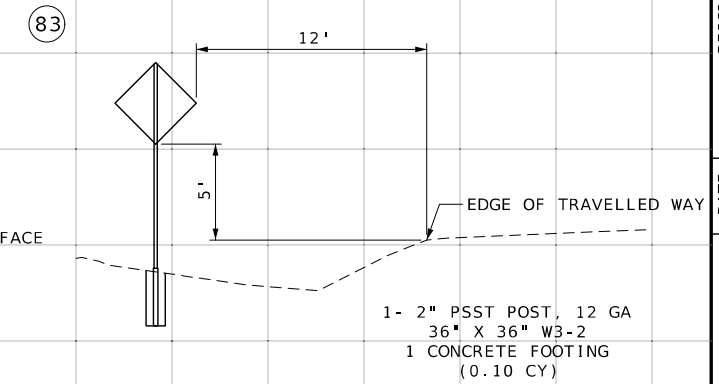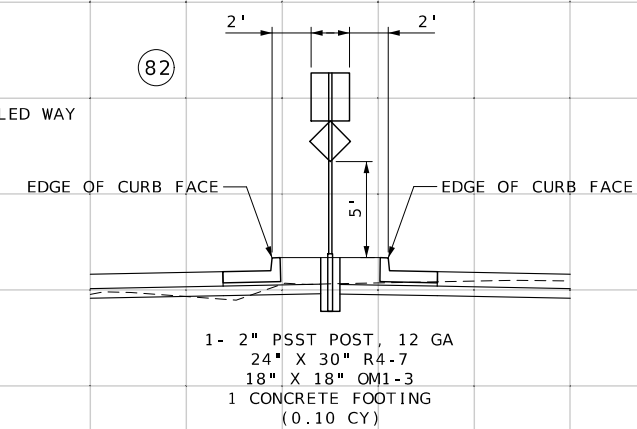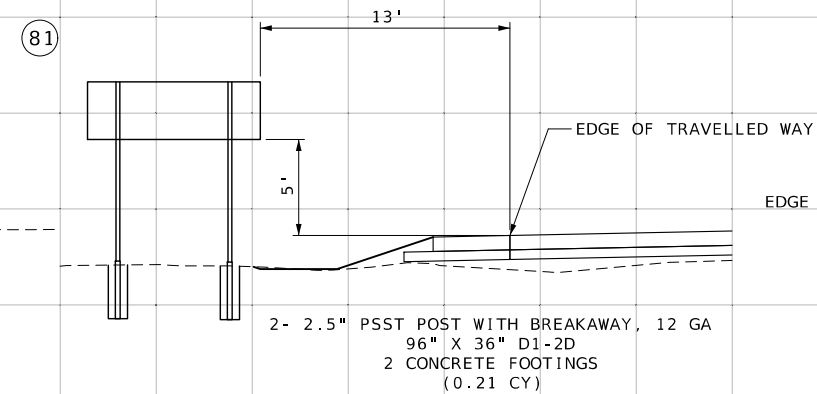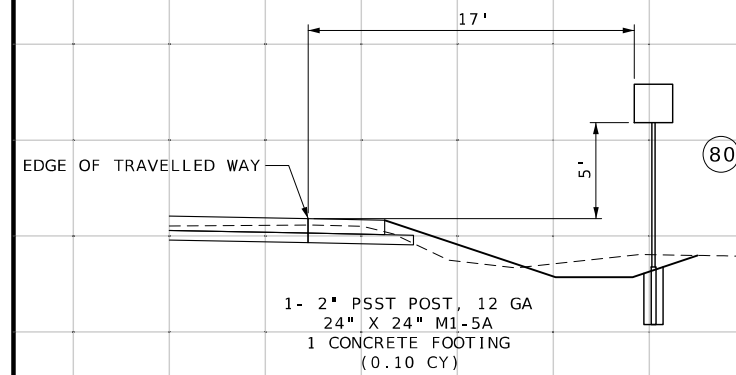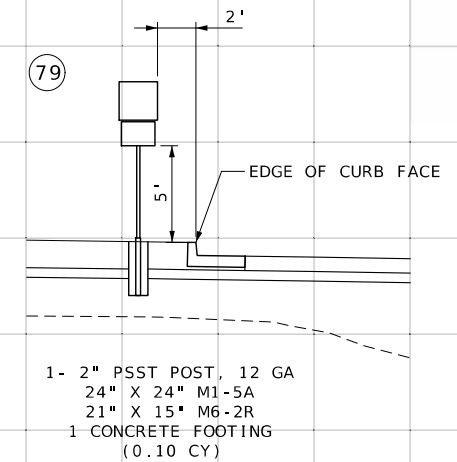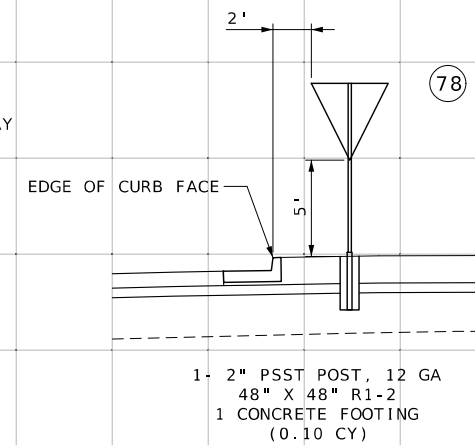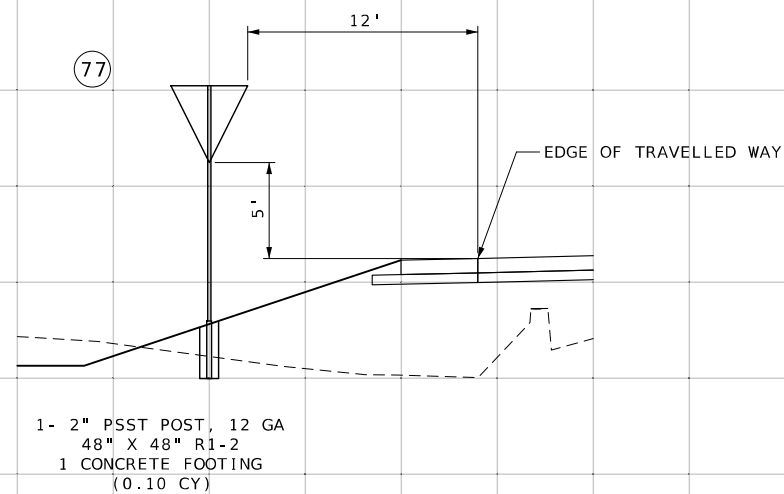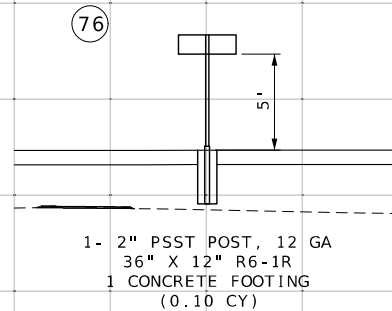

07-29-2020 12:19:17
CAMERON SOOY - CIVIL
MO DE 0001010315

DATE PREPARED

7/24/2026	
ROUTE 266	STATE MO

COUNTY

GREENE

JOB NO.
LSU0080

PROJECT NO.

BRIDGE NO.

[illegible]MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

[illegible]

ROUND PIPE POST AND FOOTING DATA TABLE						
NOM. SIZE	WEIGHT		STUB LENGTH	FOOTING		CONCRETE
(IN.)	LBS/FT	LBS/IN		DIA.	DEPTH	
2½	5.79	0.48	4'- 3½"	12"	4-6"	0.13
4	10.79	0.90	5'- 3½"	18"	5-6"	0.36

STRUCTURAL STEEL POST AND FOOTING DATA TABLE													
POST					FOOTING								
POST DES. NO.	NOM. SIZE	WEIGHT		STUB LENGTH	DIA.	LEVEL GROUND		6:1 GRADE		4:1 GRADE		3:1 OR 2:1 GRADE	
		LBS/FT	LBS/IN			DEPTH	C.Y.	DEPTH	C.Y.	DEPTH	C.Y.	DEPTH	C.Y.
1	W6	9.3	0.75	3'-0"	15"	3'-0"	0.14	3'-3"	0.16	3'-6"	0.17	3'-6"	0.17
2	W6	13.0	1.25	4'-0"	24"	4'-0"	0.47	4'-2"	0.50	4'-6"	0.54	4'-6"	0.54
3	W8	18.0	1.50	4'-0"	28"	4'-6"	0.71	4'-8"	0.73	4'-9"	0.74	5'-0"	0.78
4	W10	22.0	1.83	5'-0"	36"	5'-0"	1.31	5'-2"	1.36	5'-3"	1.39	5'-6"	1.45
5	W10	26.0	2.17	5'-0"	36"	5'-0"	1.31	5'-3"	1.37	5'-5"	1.43	5'-9"	1.52
6	W12	35.0	2.92	5'-6"	36"	5'-6"	1.44	5'-9"	1.52	5'-11"	1.56	6'-3"	1.65


[illegible]

STRUCTURAL STEEL POST AND FOOTING DATA TABLE													
POST					FOOTING								
POST DES. NO.	NOM. SIZE	WEIGHT		STUB LENGTH	DIA.	LEVEL GROUND		6:1 GRADE		4:1 GRADE		3:1 OR 2:1 GRADE	
		LBS/FT	LBS/IN			DEPTH	C.Y.	DEPTH	C.Y.	DEPTH	C.Y.	DEPTH	C.Y.
1	W6	9.0	0.75	3'-0"	15"	3'-0"	0.14	3'-2"	0.15	3'-3"	0.16	3'-6"	0.17
2	W8	15.0	1.25	24"	24"	4'-0"	0.47	4'-2"	0.50	4'-3"	0.51	4'-6"	0.54
3	W8	18.0	1.50	4'-0"	28"	4'-0"	0.71	4'-8"	0.73	4'-9"	0.74	5'-0"	0.78
4	W10	22.0	1.83	5'-0"	36"	5'-0"	1.31	5'-2"	1.36	5'-3"	1.39	5'-6"	1.45
5	W10	26.0	2.17	5'-0"	36"	5'-0"	1.31	5'-3"	1.37	5'-5"	1.43	5'-9"	1.52
6	W12	35.0	2.92	5'-6"	36"	5'-6"	1.44	5'-9"	1.52	5'-11"	1.56	6'-3"	1.65

[illegible]

STANDARD SIGN ASSEMBLIES																			
SIGN, TYPE, DESIGNATION, SIZE & NUMBER OF EACH																			
SIGN NO.	STATION OR LOG MILE	LOCATION	M1-5	M2-1	M3-2	M3-4	M5-3	M6-1	M6-2R	M6-3	R1-2	R2-1	R4-7	R6-1R	W2-6	W3-2	W13-1P	OM1-3	M1-5A
			 M1-5	 M2-1	 M3-2	 M3-4	 M5-3	 M6-1	 M6-2R	 M6-3	 R1-2	 R2-1	 R4-7	 R6-1R	 W2-6	 W3-2	 W13-1P	 OM1-3	 M1-5A
65	555+79.00	RTE 266 LT									1								
66	555+79.00	RTE 266 RT	1		1				1										
67	555+96.67	RTE 266 LT									1								
68	557+33.00	RTE 266 RT	1		1														
70	558+05.00	RTE 266 LT											1					1	
71	560+79.00	RTE 266 LT														1			
72	562+79.00	RTE 266 LT	1			1	1			1									1
73	562+79.00	RTE 266 RT										1							
74	564+79.00	RTE B LT													1		1		
75	566+79.00	RTE B LT		1															1
76	1+63.05	RTE B RT												1					
77	1+95.00	RTE 266 LT									1								
78	2+03.00	RTE B RT									1								
79	2+09.00	RTE B RT							1										1
80	3+53.00	RTE B RT																	1
82	4+20.82	RTE B LT											1					1	
83	7+03.00	RTE B LT														1			
84	9+03.00	RTE 266 LT	2		1	1	1	1											
85	9+03.00	RTE 266 RT										1							
86	11+03.00	RTE 266 LT													1		1		
87	13+03.00	RTE 266 LT	1	1											1				
TOTALS			6	2	3	2	2	1	2	1	4	2	2	1	2	2	2	2	4


[illegible]

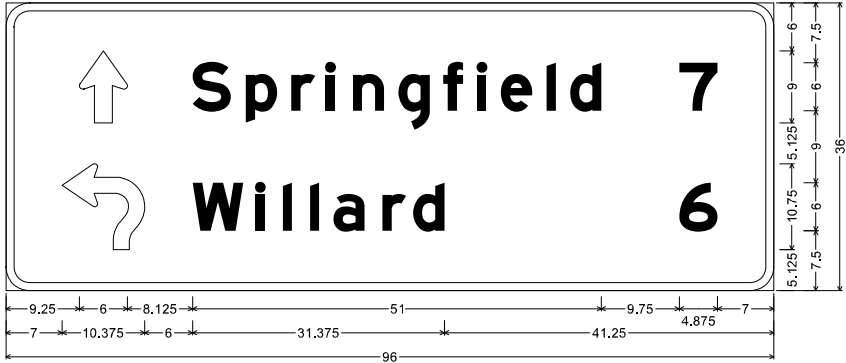

D1-2d ST-STRUCTURAL;
3,000" Radius, 1,000" Border, White on Green;
Standard Arrow Custom 9,000" X 6,000" 90°; "Springfield", E Mod specified length; "7", E Mod;
"Willard", E Mod specified length; "6", E Mod;

4	S	p	r	i	n	g	f	i	e	l	d	7
9,250	23,375	30,000	35,625	40,000	43,375	49,125	54,625	59,000	61,875	67,625	70,500	84,125
7	W	i	l	l	a	r	d	6				
7,000	23,375	31,250	34,625	38,000	41,000	47,125	50,875	54,125				


SIGN NO.	6
STATION	525+47.51
ROADWAY	RTE 266

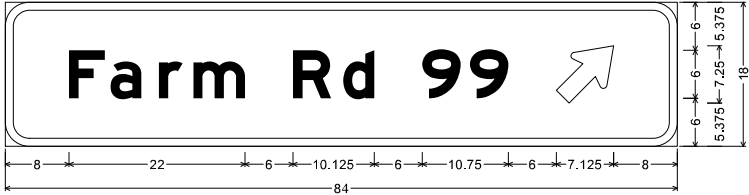

D1-1d ST-STRUCTURAL;
3,000" Radius, 1,000" Border, White on Green;
"Farm Rd 99", E Mod specified length; Standard Arrow Custom 9,000" X 6,000" 45°;

F	a	r	m	R	d	9	9	↗
8,000	13,125	19,250	23,500	36,000	42,250	52,125	58,125	68,875


SIGN NO.	22
STATION	0+96.47
ROADWAY	FR 99

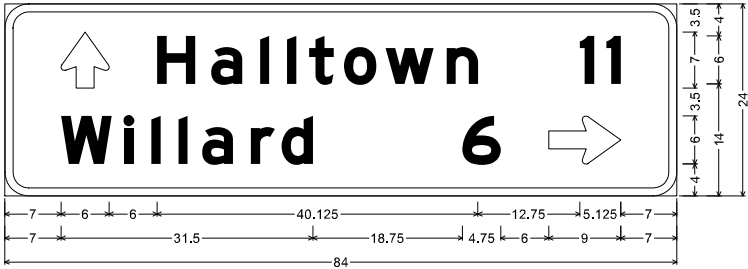

D1-2a ST-STRUCTURAL;
3,000" Radius, 1,000" Border, White on Green;
Standard Arrow Custom 7,000" X 6,000" 90°; "Halltown", E Mod specified length;
"11", E Mod specified length; "Willard", E Mod specified length; "6", E Mod specified length;

4	H	a	i	t	o	w	n	l	l
7,000	19,000	25,750	31,875	35,250	38,000	42,375	47,625	55,250	71,875
7	W	i	l	l	a	r	d	6	
7,000	14,875	18,250	21,750	24,625	30,750	34,625	57,250	68,000	

SIGN NO.	26
STATION	531+39.06
ROADWAY	RTE 266

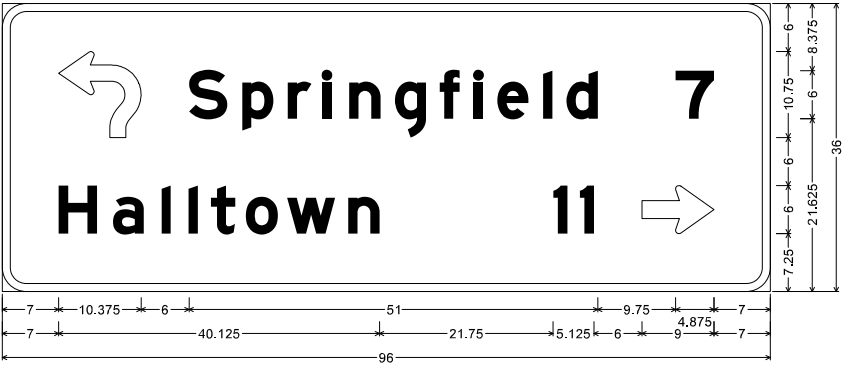

D1-2d ST-STRUCTURAL;
3,000" Radius, 1,000" Border, White on Green;
"Springfield", E Mod specified length; "7", E Mod specified length; "Halltown", E Mod specified length;
"11", E Mod specified length; Standard Arrow Custom 9,000" X 6,000" 0°;

7	S	p	r	i	n	g	f	i	e	l	d	7
7,000	23,375	30,000	35,625	40,000	43,375	49,125	54,625	59,000	61,875	67,625	70,500	84,125
7	H	a	l	l	t	o	w	n	l	l		
7,000	13,875	19,875	23,250	26,000	30,375	35,625	43,250	68,875	72,125	80,000		

SIGN NO.	41
STATION	353+45.30
ROADWAY	RTE AB



DATE PREPARED
7/24/2026
ROUTE 266
STATE MO
DISTRICT SW
SHEET NO. 82
COUNTY GREENE
JOB NO. JSU0080
CONTRACT ID.

PROJECT NO.
BRIDGE NO.

DESCRIPTION	DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)





074-Professional Engineer
CAMERON SOOY-CIVIL
MO-PE-2021019715

DATE PREPARED 7/24/2026	
ROUTE 266	STATE MO
DISTRICT SW	SHEET NO. 83
COUNTY GREENE	
JOB NO. JSU0080	
CONTRACT ID.	
PROJECT NO.	
BRIDGE NO.	


DESCRIPTION	DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION



105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)


SIGN NO.	55
STATION	552+05.00
ROADWAY	RTE 266

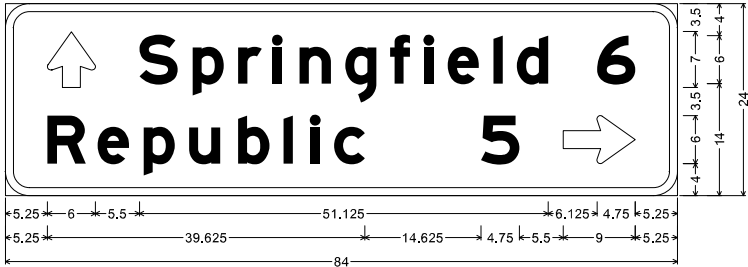

D1-2a ST-STRUCTURAL;
3,000" Radius, 1,000" Border, White on Green;
Standard Arrow Custom 7,000" X 6,000" 90°; "Springfield", E Mod specified length; "6", E Mod;
"Republic", E Mod specified length; "5", E Mod; Standard Arrow Custom 9,000" X 6,000" 0°;
Table of letter and object lefts

U	S	P	R	I	N	Q	F	I	E	L	D	6
5,250	16,750	23,375	29,125	33,375	36,750	42,500	48,125	52,375	55,250	61,000	64,000	74,000
R	E	P	U	B	I	C	5	→				
5,250	11,500	17,250	23,000	29,125	34,750	38,125	41,125	59,500	69,750			


SIGN NO.	78
STATION	4+03.00
ROADWAY	RTE B

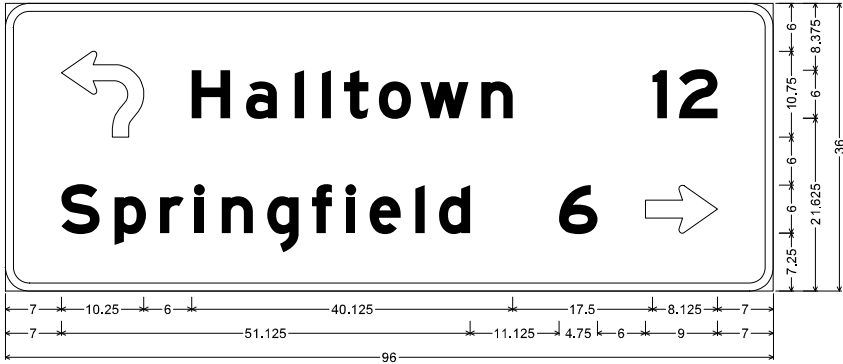

D1-2d ST-STRUCTURAL;
3,000" Radius, 1,000" Border, White on Green;
"Halltown", E Mod specified length; "12", E Mod specified length; "Springfield", E Mod specified length;
"6", E Mod specified length; Standard Arrow Custom 9,000" X 6,000" 0°;
Table of letter and object lefts


U	H	A	I	L	T	O	W	N	I	2		
7,000	23,250	30,125	36,125	39,500	42,375	46,625	51,875	59,500	80,875	84,250		
S	P	R	I	N	G	F	I	E	L	D	6	→
7,000	13,625	19,375	23,625	27,000	32,750	38,375	42,625	45,500	51,250	54,250	69,250	80,000

SIGN NO.	66
STATION	557+79.00
ROADWAY	RTE 266



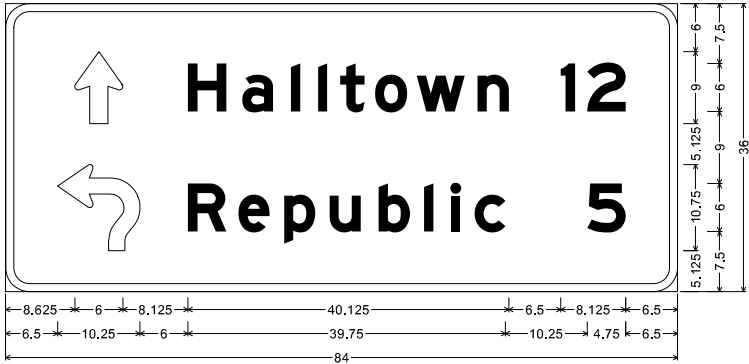


D1-2d ST-STRUCTURAL;
3,000" Radius, 1,000" Border, White on Green;
Standard Arrow Custom 9,000" X 6,000" 90°; "Halltown", E Mod specified length;
"12", E Mod specified length; "Republic", E Mod specified length; "5", E Mod specified length;
Table of letter and object lefts

U	H	A	I	L	T	O	W	N	I	2
8,625	22,750	29,625	35,625	39,000	41,875	46,125	51,375	59,000	69,375	72,750
R	E	P	U	B	I	R	C	5		
6,500	22,750	29,125	34,875	40,500	46,625	52,375	55,750	58,625	72,750	

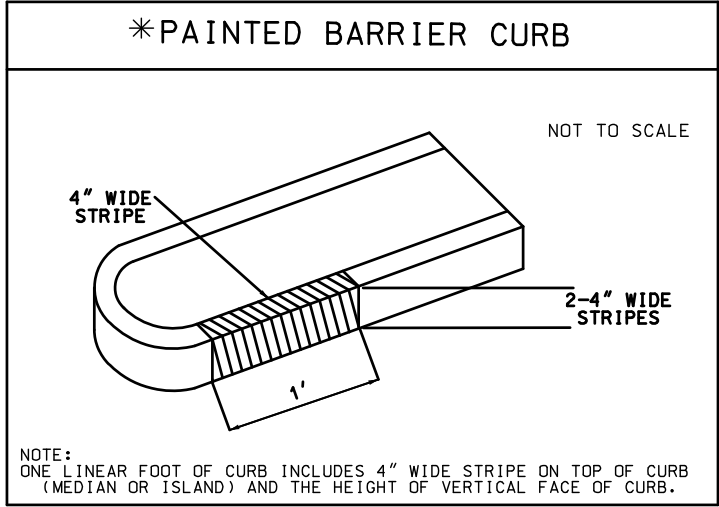

STRIPING LEGEND			
24"	SW	24"	SOLID WHITE
4"	SW	4"	SOLID WHITE
8"	IW	8"	INTERMITTENT WHITE
24"	SY	24"	SOLID YELLOW
4"	SY	4"	SOLID YELLOW

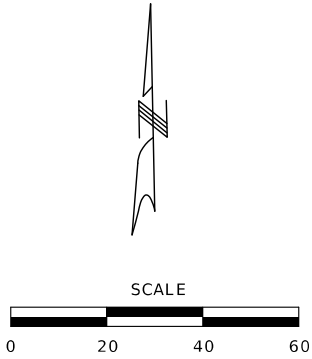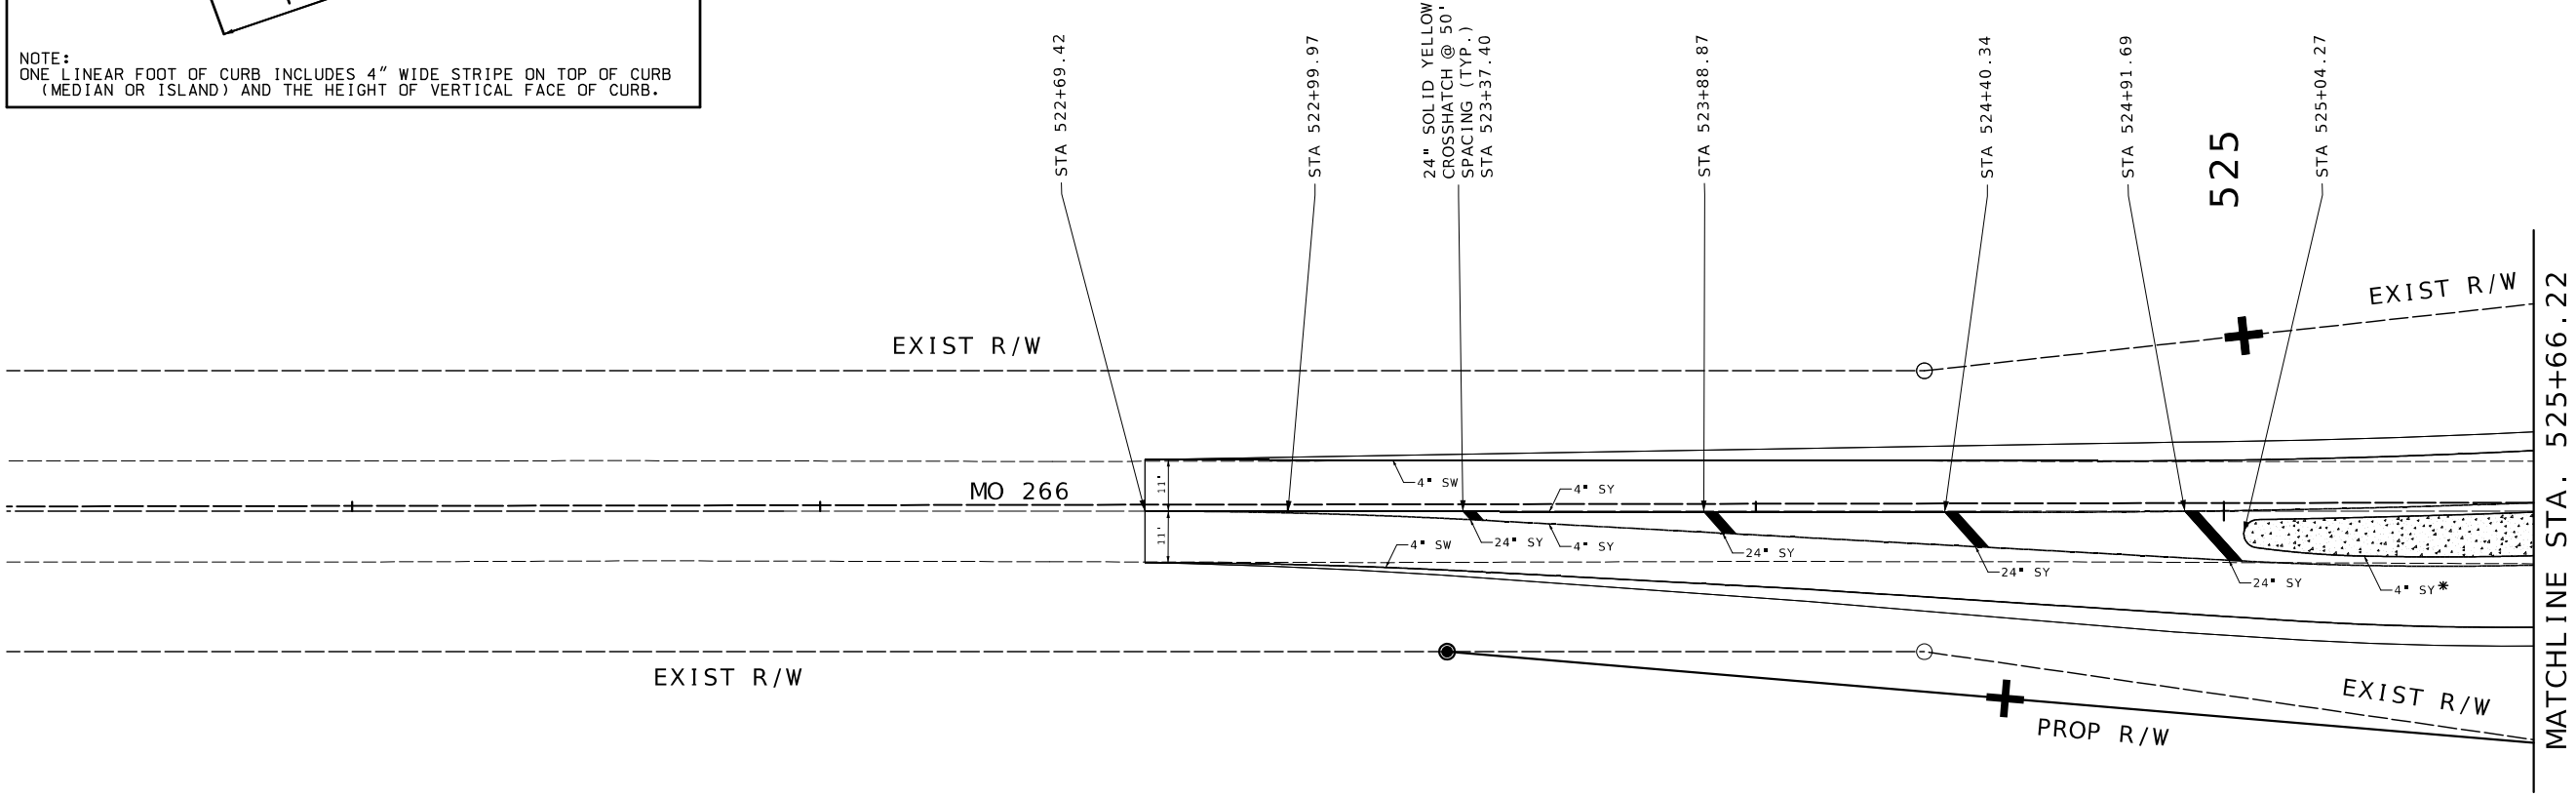


DATE PREPARED 7/24/2026	
ROUTE 266	STATE MO
DISTRICT SW	SHEET NO. 84
COUNTY GREENE	
JOB NO. JSU0080	
CONTRACT ID.	
PROJECT NO.	
BRIDGE NO.	


DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

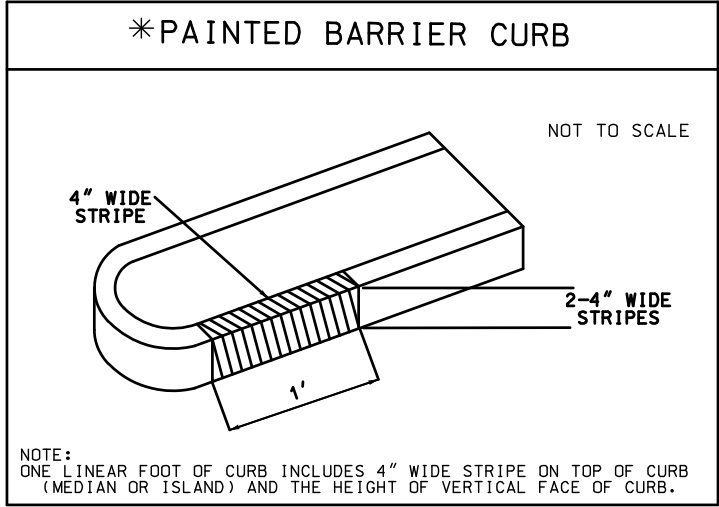

STRIPING LEGEND			
24" SW	24" SOLID WHITE		
4" SW	4" SOLID WHITE		
8" IW	8" INTERMITTENT WHITE		
24" SY	24" SOLID YELLOW		
4" SY	4" SOLID YELLOW		

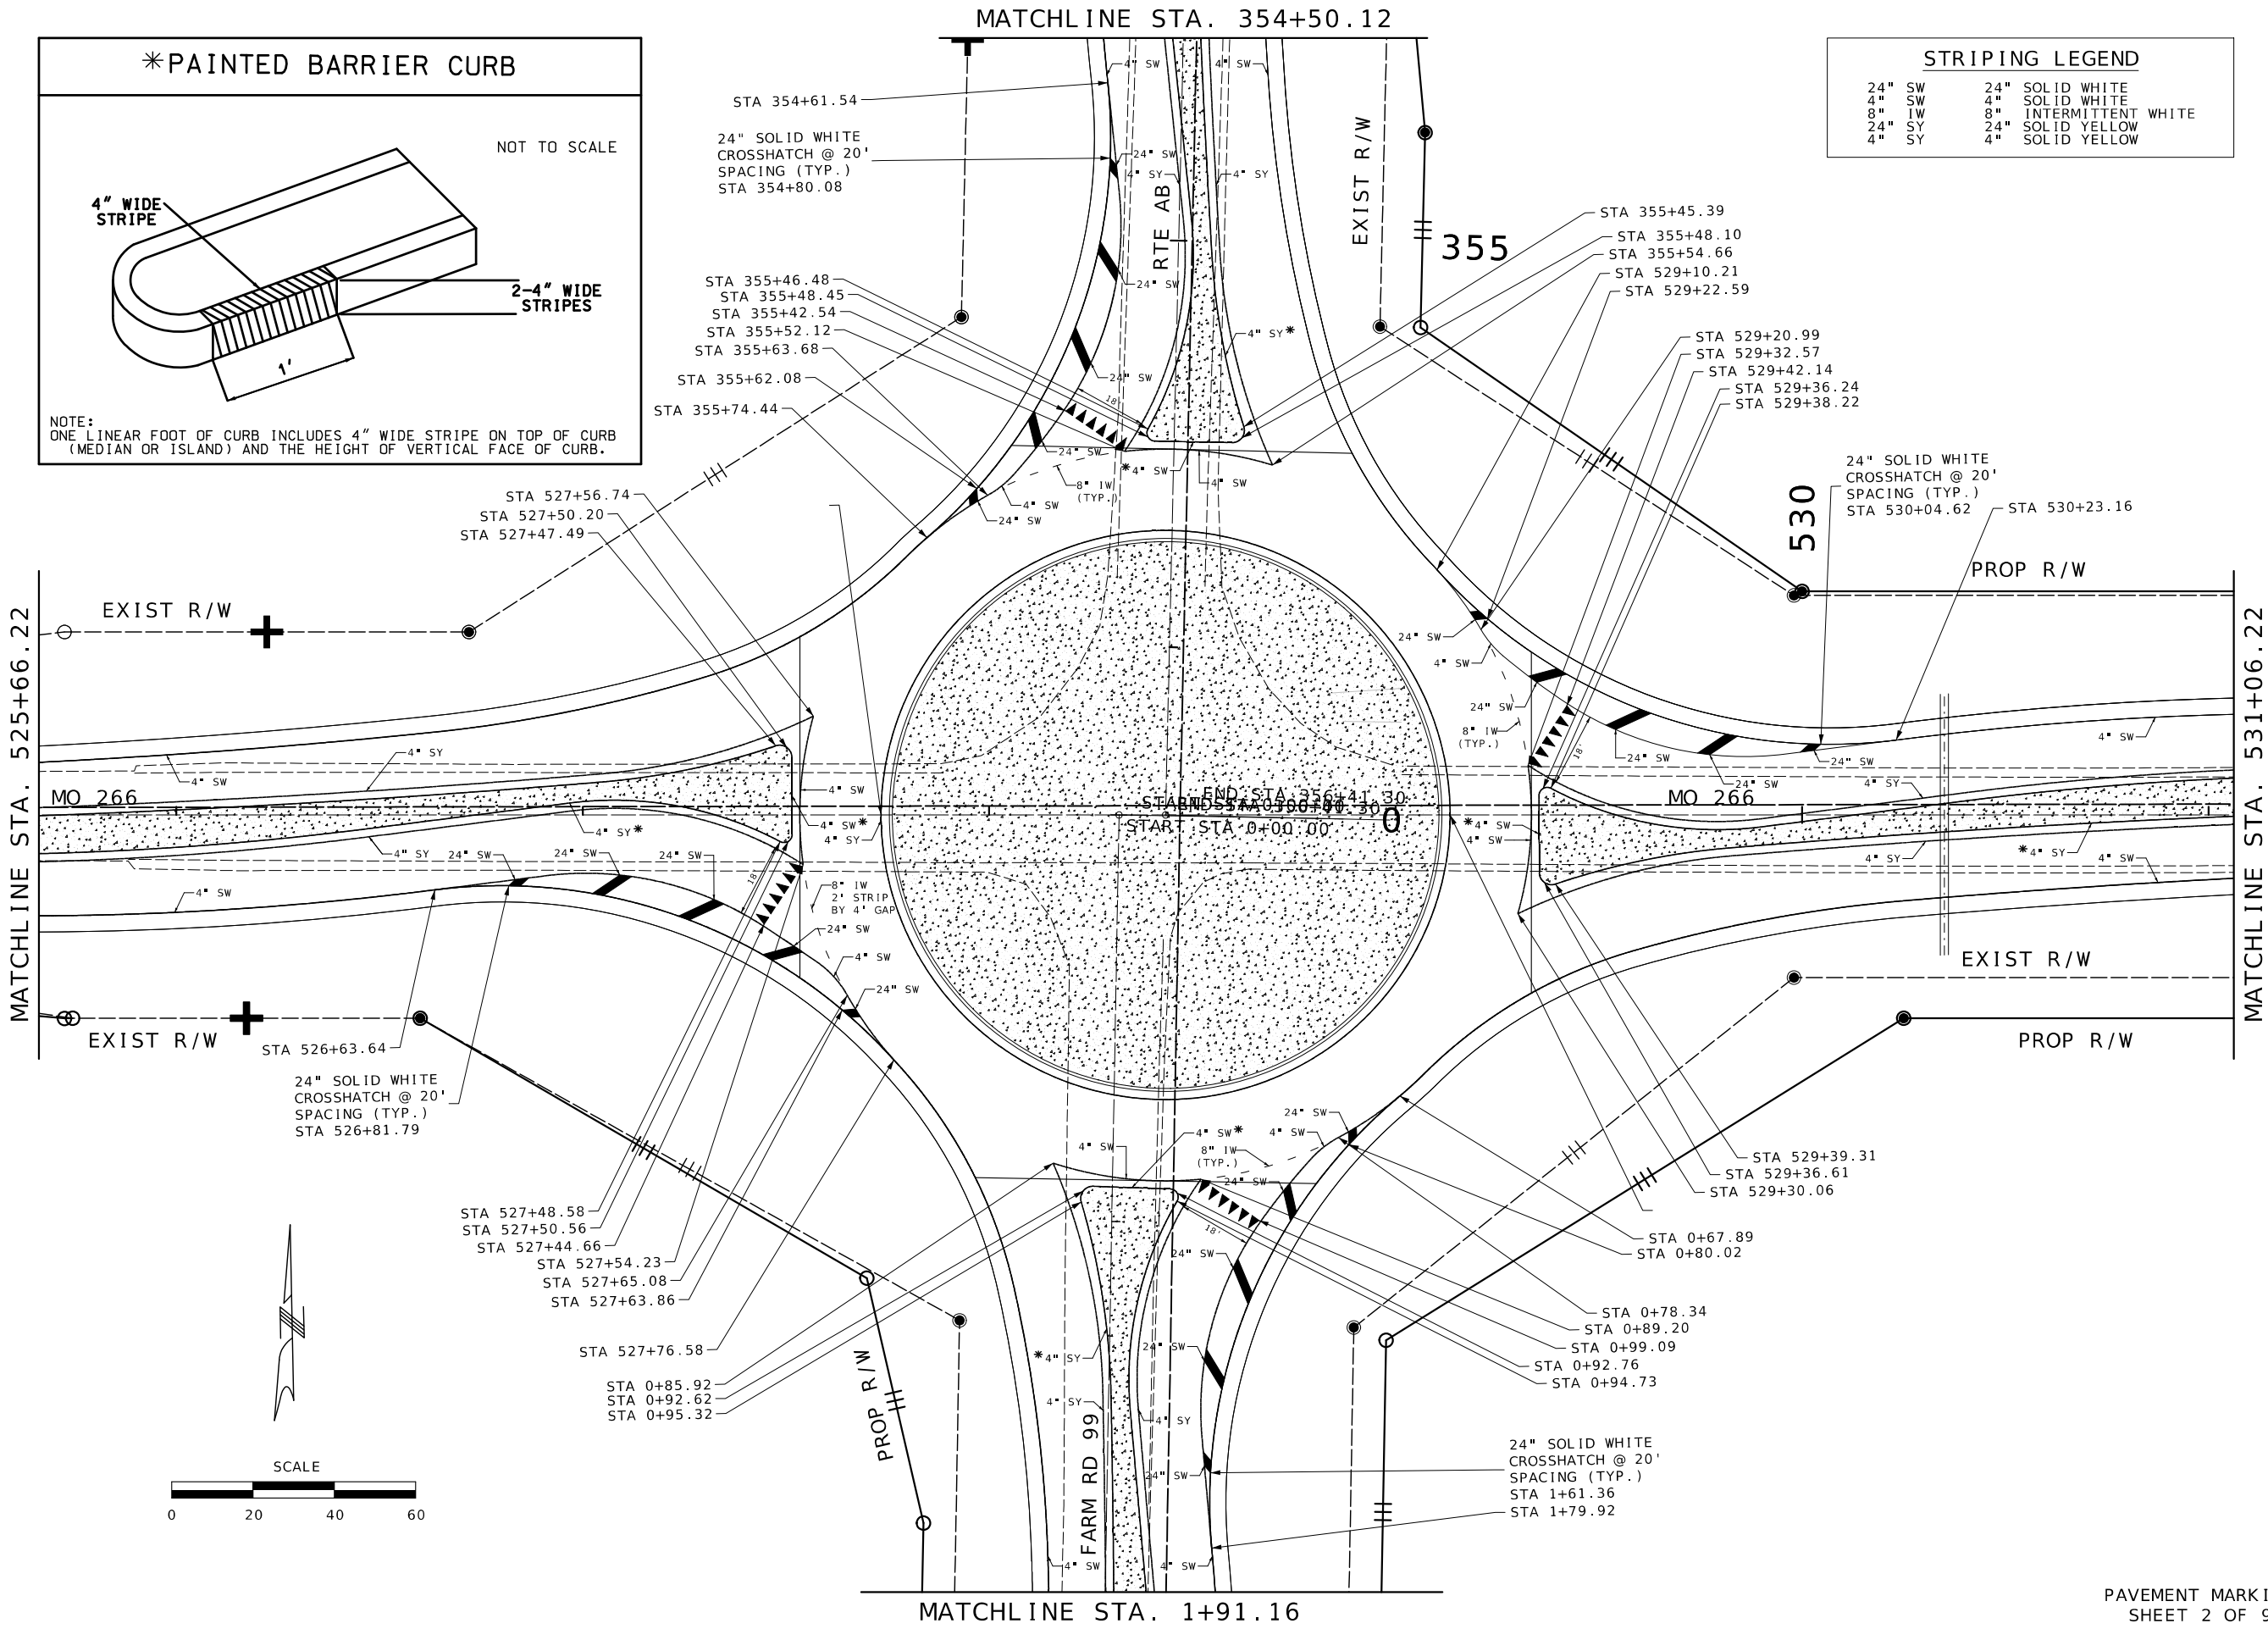

STATE OF MISSOURI
CAMERON SOOY
NUMBER
PE-2021019715
PROFESSIONAL ENGINEER

DATE PREPARED
7/24/2026

ROUTE
266

DISTRICT
SW

COUNTY
GREENE

JOB NO.
JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION



DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

PAVEMENT MARKING
SHEET 2 OF 9

STRIPING LEGEND			
24" SW	24" SOLID WHITE	24" SOLID WHITE	
4" SW	4" SOLID WHITE	4" SOLID WHITE	
8" IW	8" INTERMITTENT WHITE	8" INTERMITTENT WHITE	
24" SY	24" SOLID YELLOW	24" SOLID YELLOW	
4" SY	4" SOLID YELLOW	4" SOLID YELLOW	

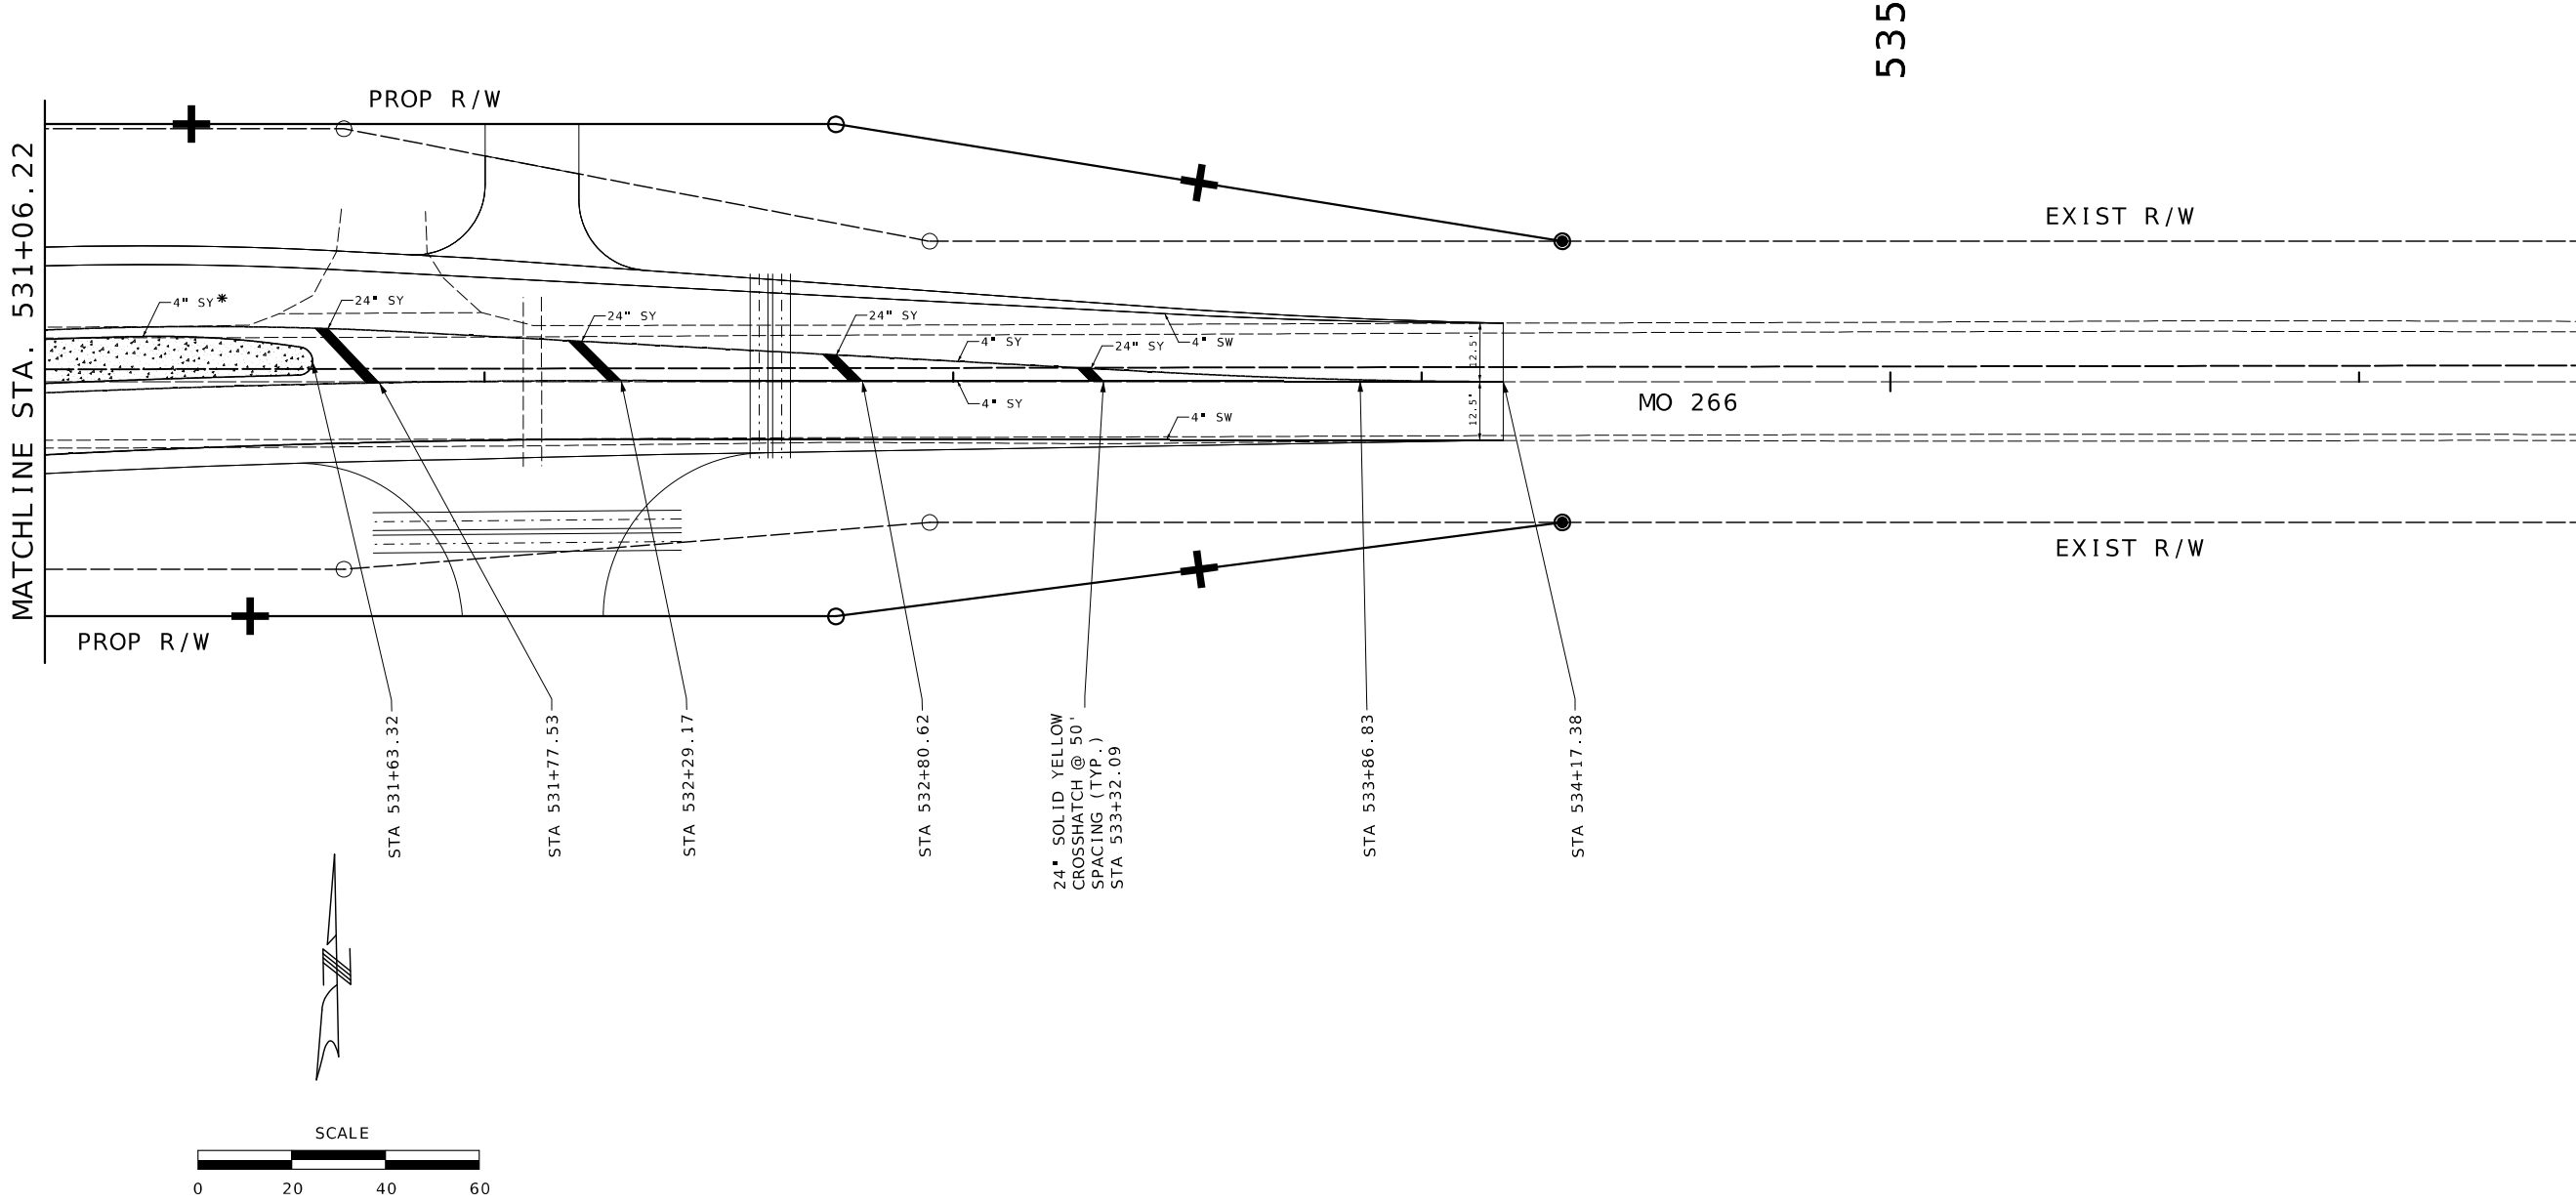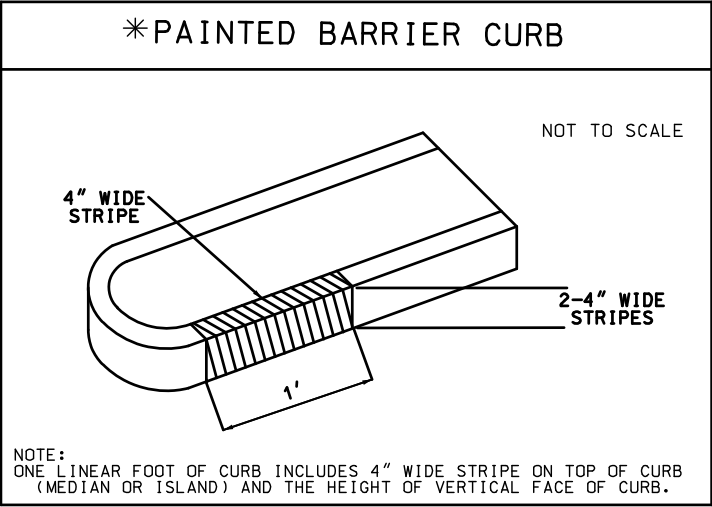

STATE OF MISSOURI

CAMERON SOOY

NUMBER PE-2021019715

PROFESSIONAL ENGINEER

074-Professional-PE-19

CAMERON SOOY - CIVIL

MO-PE-2021019715

DATE PREPARED

7/24/2026

ROUTE

266

STATE

MO

DISTRICT

SW

SHEET NO.

86

COUNTY

GREENE

JOB NO.

JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION

DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION





MoDOT

105 WEST CAPITOL JEFFERSON CITY, MO 65102 1-888-ASK-MODOT (1-888-275-6636)

PAVEMENT MARKING

SHEET 3 OF 9

STRIPING LEGEND			
24"	SW	24"	SOLID WHITE
4"	SW	4"	SOLID WHITE
8"	IW	8"	INTERMITTENT WHITE
24"	SY	24"	SOLID YELLOW
4"	SY	4"	SOLID YELLOW

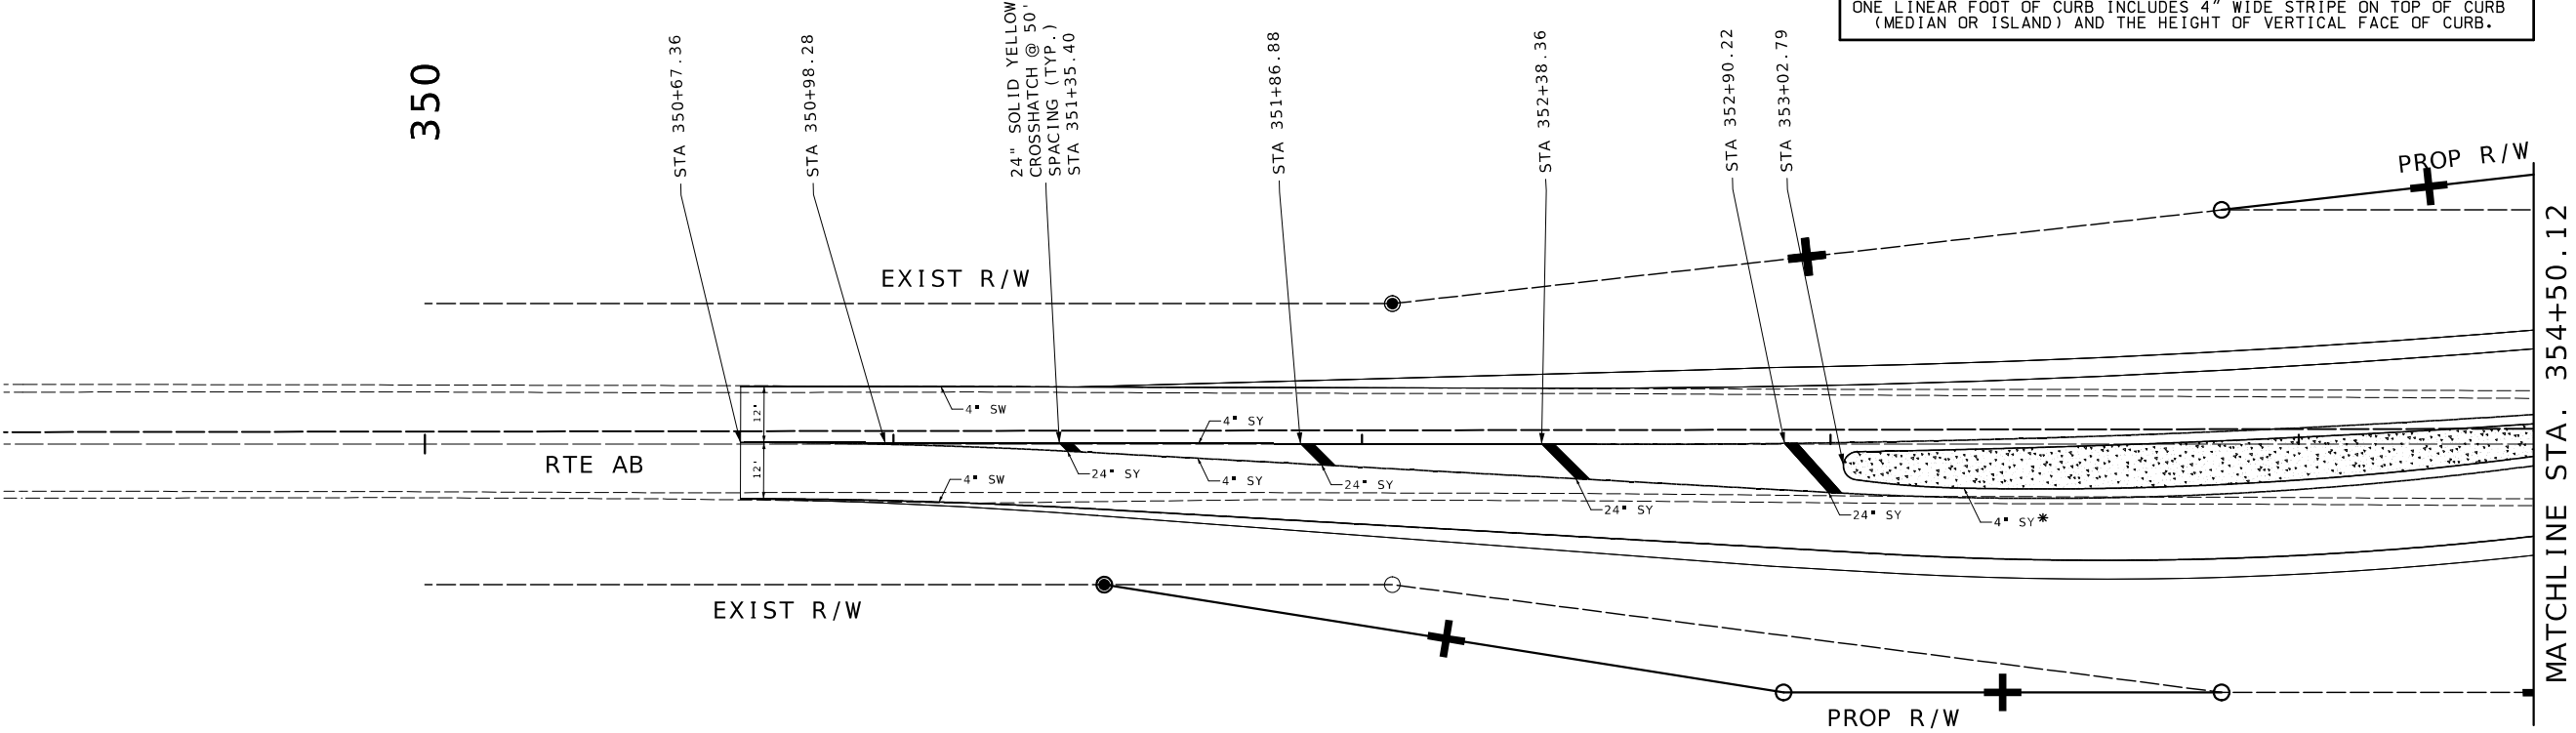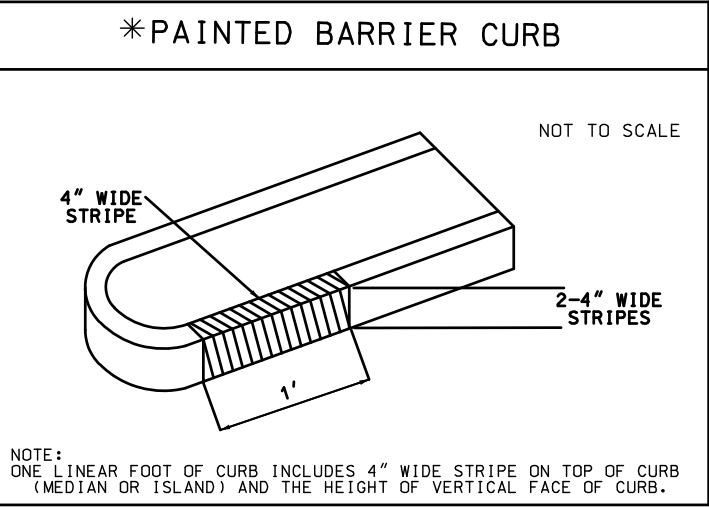



DATE PREPARED 7/24/2026	
ROUTE 266	STATE MO
DISTRICT SW	SHEET NO. 87
COUNTY GREENE	
JOB NO. JSU0080	
CONTRACT ID.	
PROJECT NO.	
BRIDGE NO.	

DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

STRIPING LEGEND			
24" SW	24" SOLID WHITE	24" SOLID WHITE	
4" SW	4" SOLID WHITE	4" SOLID WHITE	
8" IW	8" INTERMITTENT WHITE	8" INTERMITTENT WHITE	
24" SY	24" SOLID YELLOW	24" SOLID YELLOW	
4" SY	4" SOLID YELLOW	4" SOLID YELLOW	

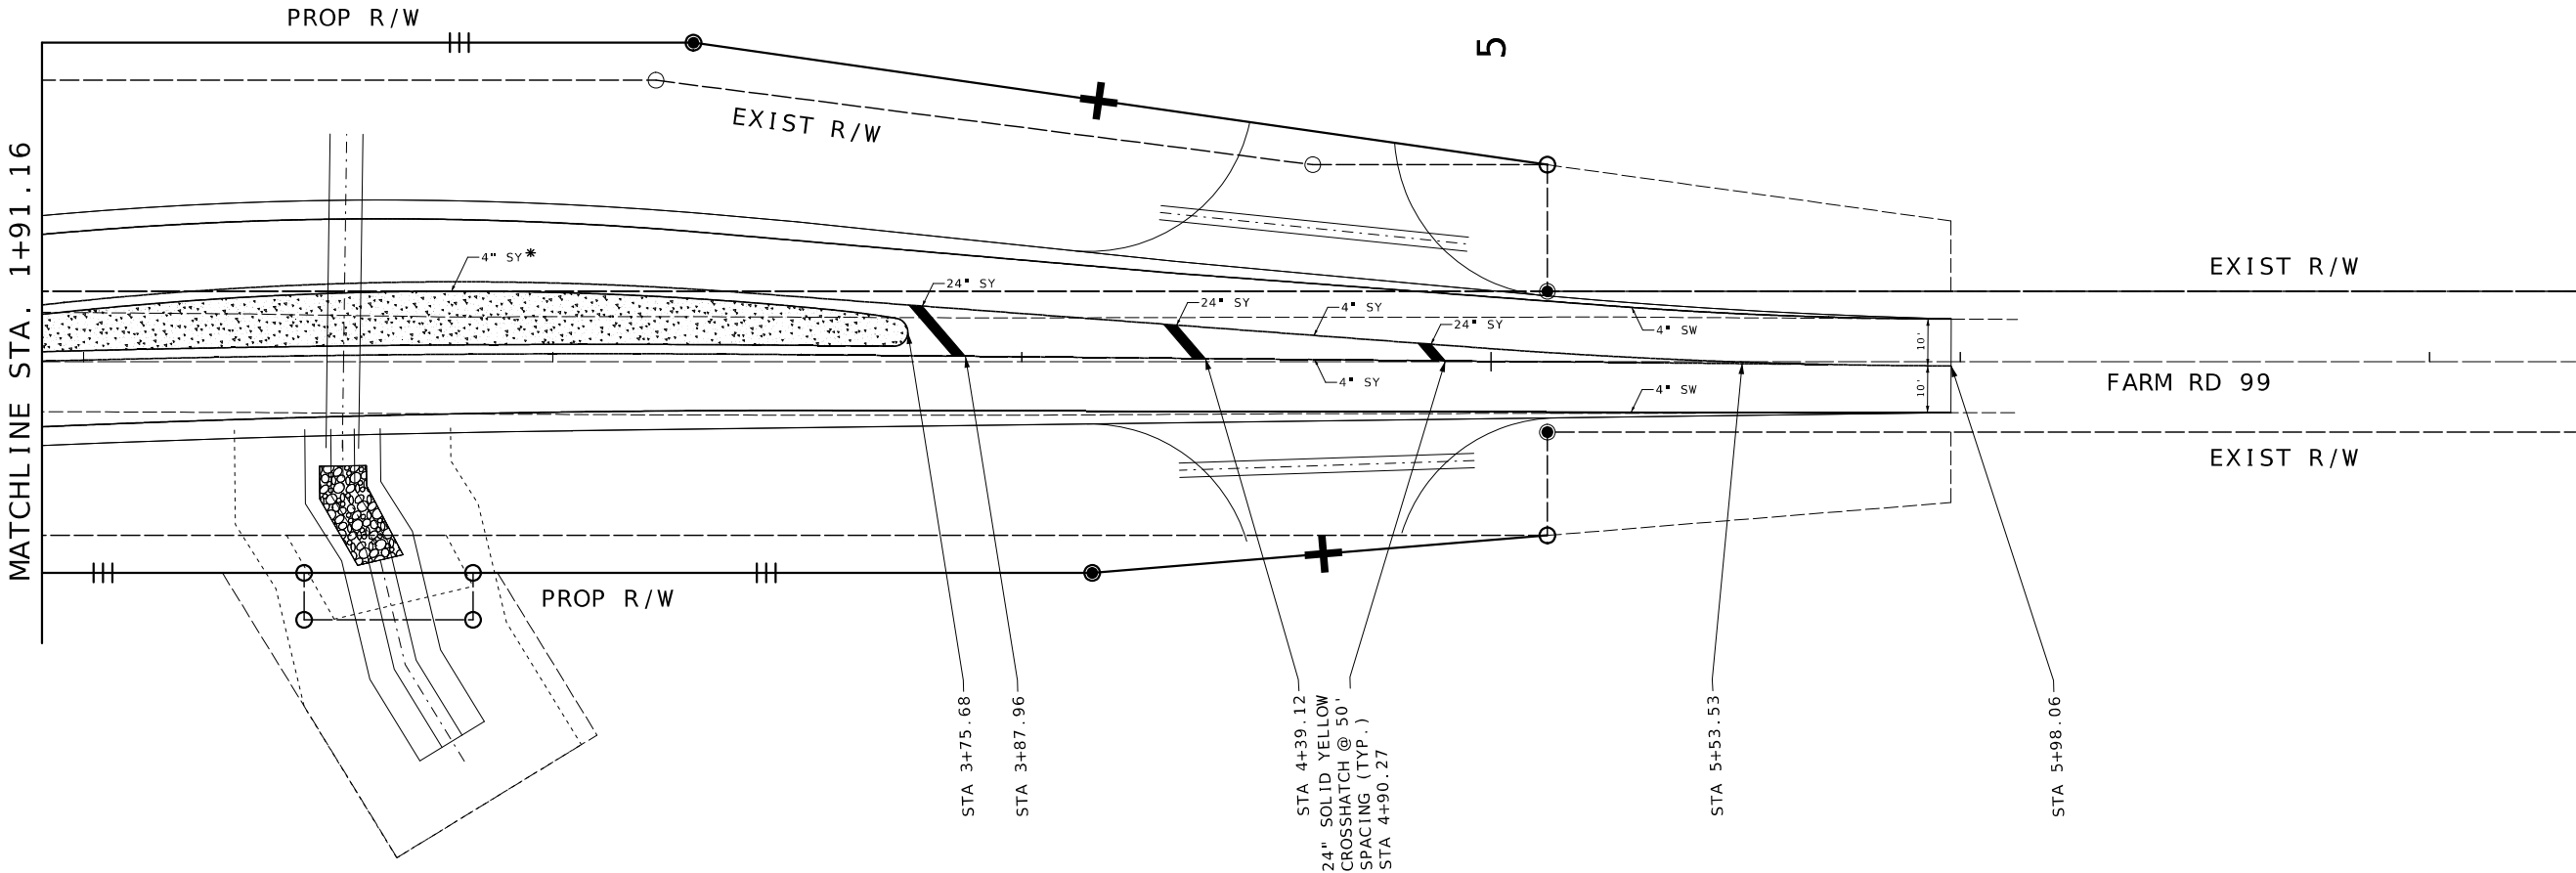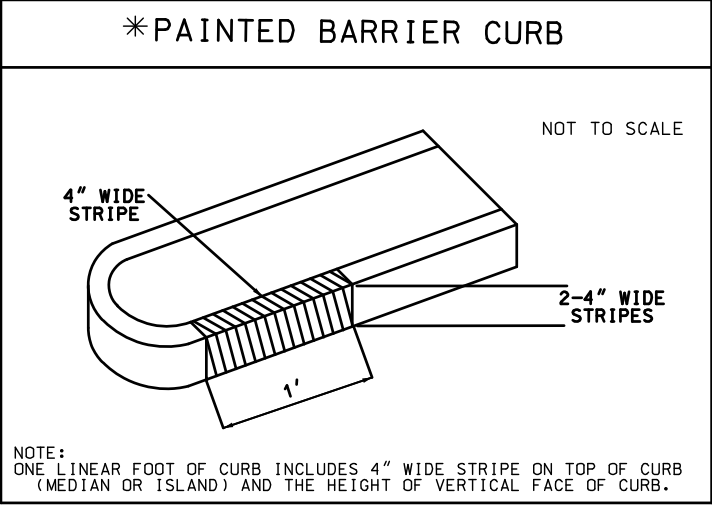

STATE OF MISSOURI

CAMERON SCOTT

NUMBER PE-2021019715

PROFESSIONAL ENGINEER

074-Professional Seal

CAMERON SCOTT - CIVIL

MO-PE-2021019715

DATE PREPARED

7/24/2026

ROUTE

266

STATE

MO

DISTRICT

SW

SHEET NO.

88

COUNTY

GREENE

JOB NO.

JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION


DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION



105 WEST CAPITOL

JEFFERSON CITY, MO 65102

1-888-ASK-MODOT (1-888-275-6636)

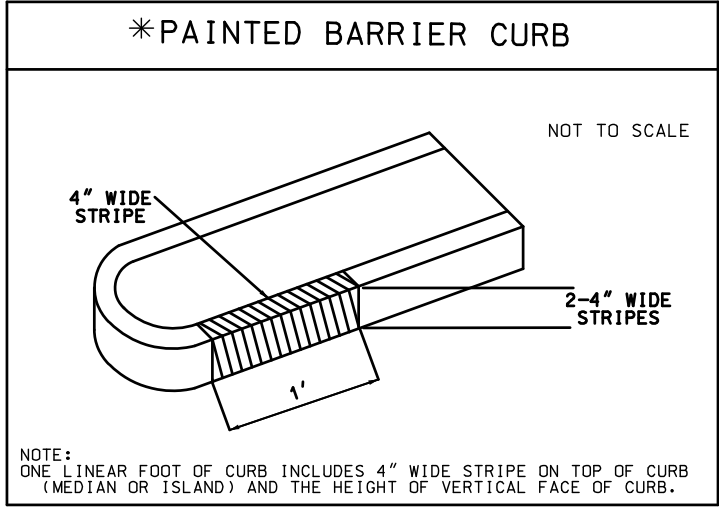

STRIPING LEGEND			
24"	SW	24"	SOLID WHITE
4"	SW	4"	SOLID WHITE
8"	IW	8"	INTERMITTENT WHITE
24"	SY	24"	SOLID YELLOW
4"	SY	4"	SOLID YELLOW

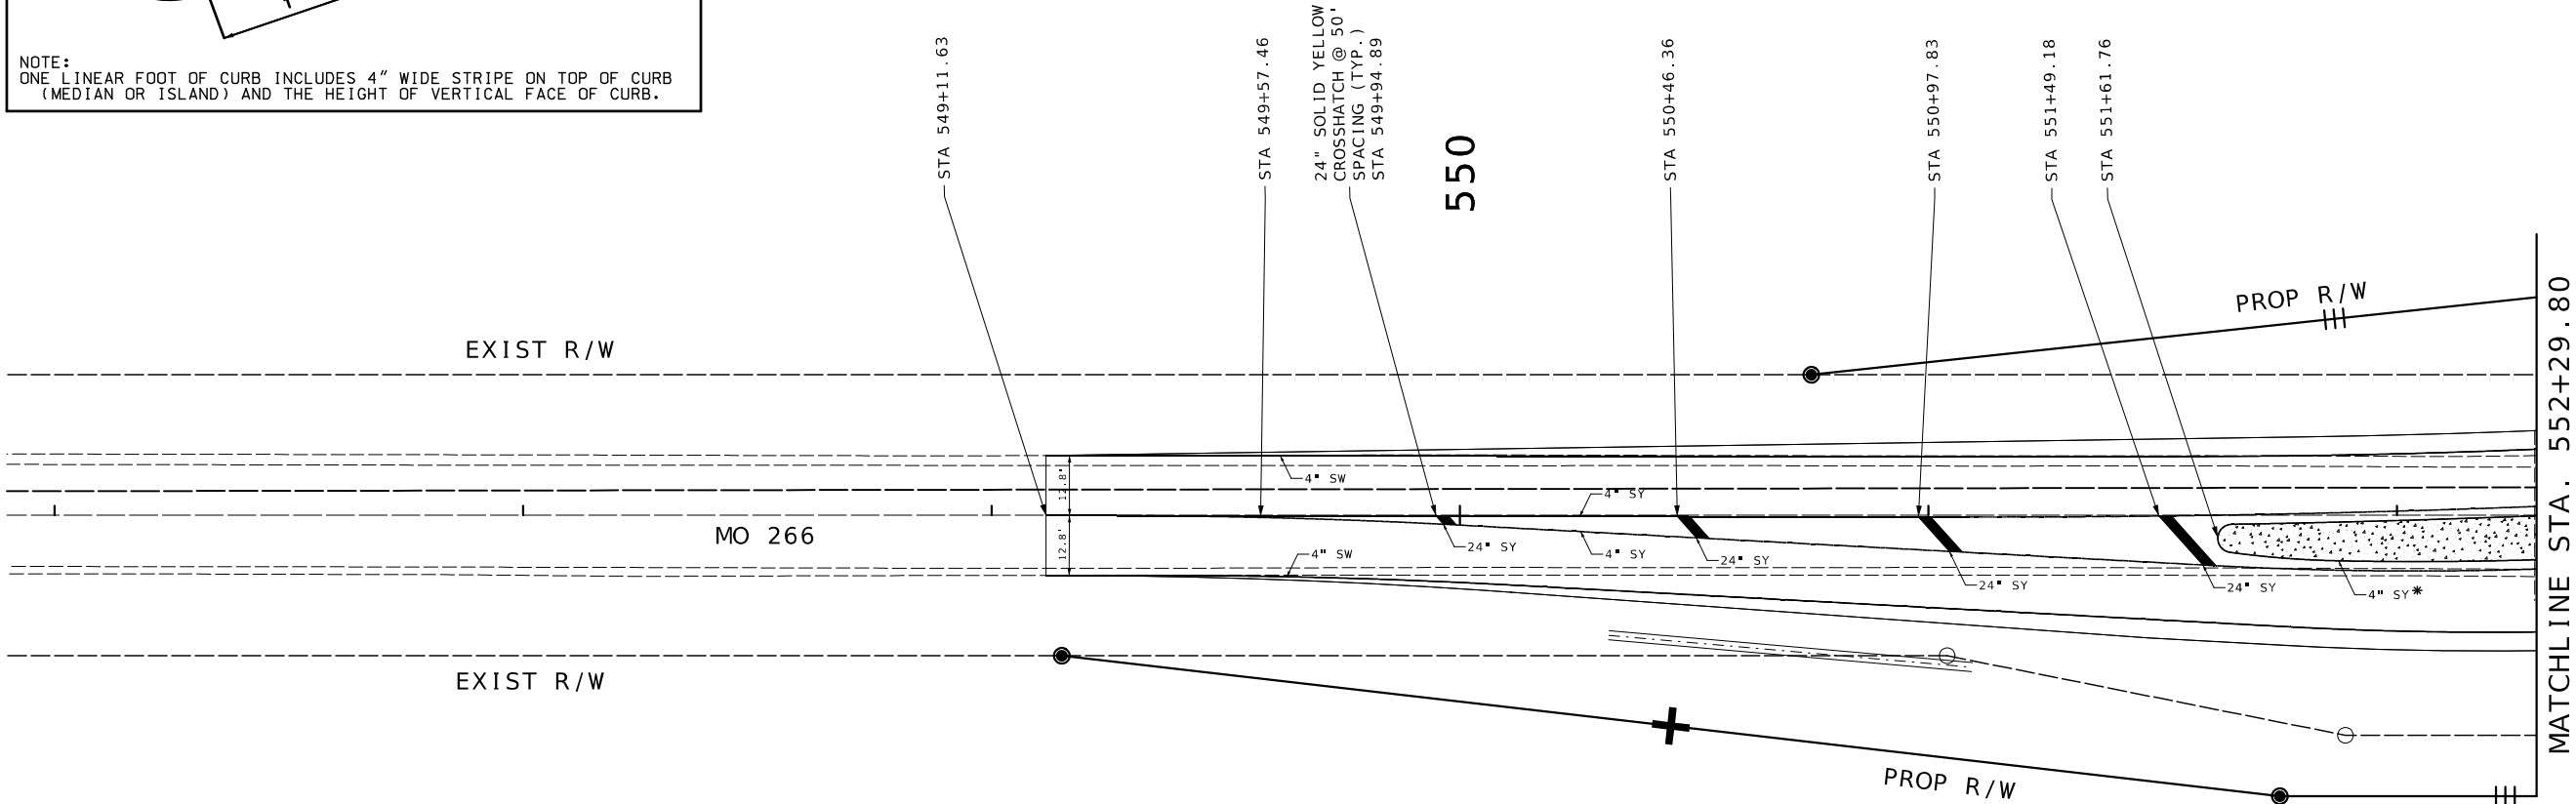

STATE OF MISSOURI
CAMERON
SOOY
NUMBER
PE-2021019715
PROFESSIONAL ENGINEER

074-Professional Seal - #20
CAMERON SOOY - CIVIL
MO-PE-2021019715

DATE PREPARED
7/24/2026

ROUTE
266

DISTRICT
SW

STATE
MO

SHEET NO.
89

COUNTY
GREENE

JOB NO.
JSU0080

CONTRACT ID.

PROJECT NO.


BRIDGE NO.

DATE	DESCRIPTION


MISSOURI HIGHWAYS AND TRANSPORTATION
COMMISSION

MoDOT

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

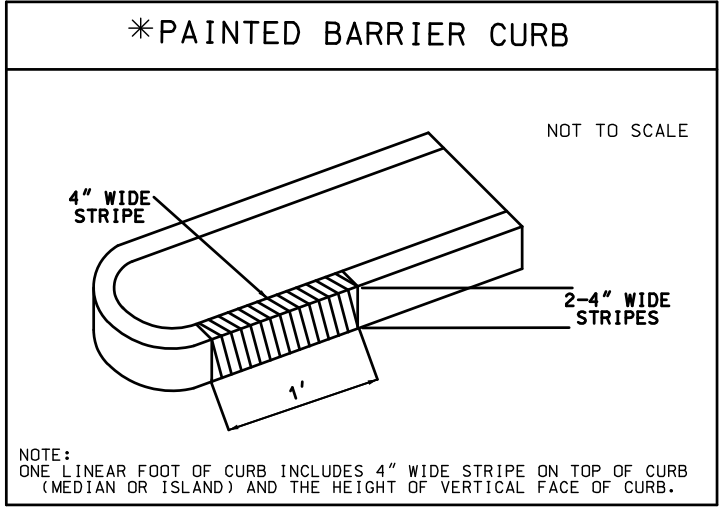

STRIPING LEGEND			
24" SW	24" SOLID WHITE	24" SOLID WHITE	
4" SW	4" SOLID WHITE	4" SOLID WHITE	
8" IW	8" INTERMITTENT WHITE	8" INTERMITTENT WHITE	
24" SY	24" SOLID YELLOW	24" SOLID YELLOW	
4" SY	4" SOLID YELLOW	4" SOLID YELLOW	

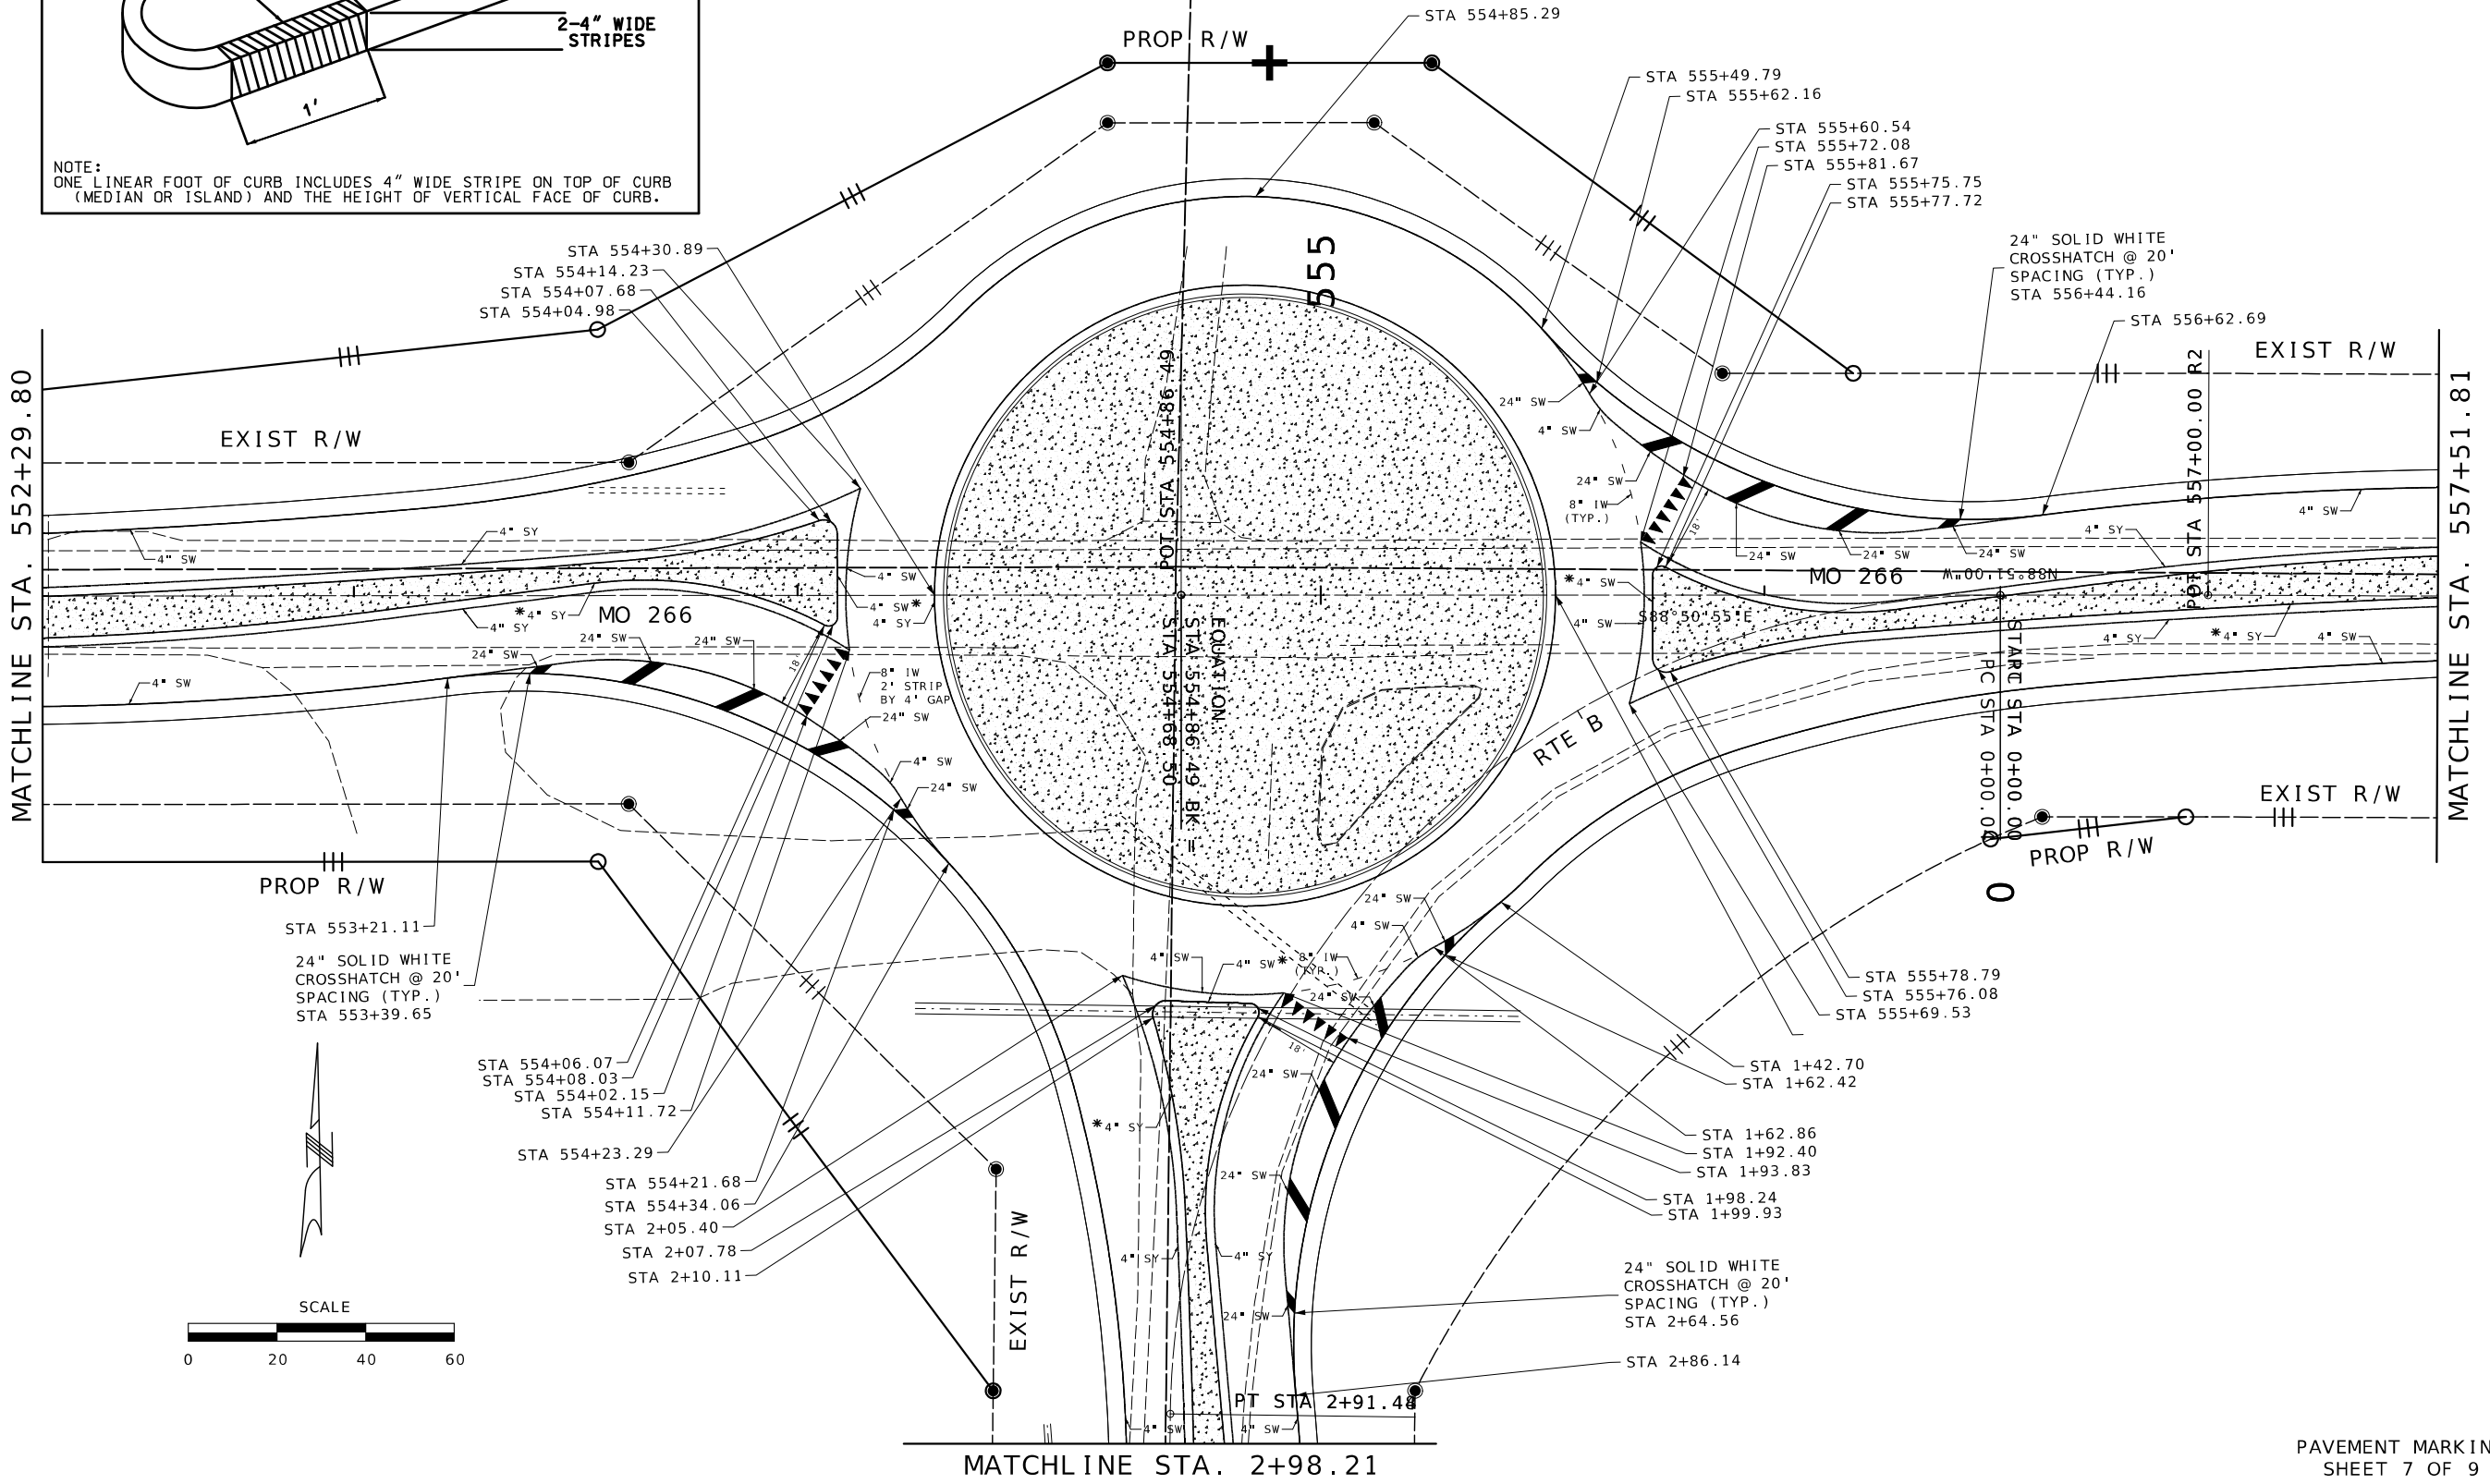

STATE OF MISSOURI
CAMERON SOOY
NUMBER
PE-2021019715
PROFESSIONAL ENGINEER

074-Professional-20
CAMERON SOOY-CIVIL
MO-PE-2021019715

DATE PREPARED
7/24/2026

ROUTE
266

DISTRICT
SW

STATE
MO

SHEET NO.
90

COUNTY
GREENE

JOB NO.
JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION




DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

MoDOT

STRIPING LEGEND			
24" SW	24"	SOLID WHITE	
4" SW	4"	SOLID WHITE	
8" IW	8"	INTERMITTENT WHITE	
24" SY	24"	SOLID YELLOW	
4" SY	4"	SOLID YELLOW	

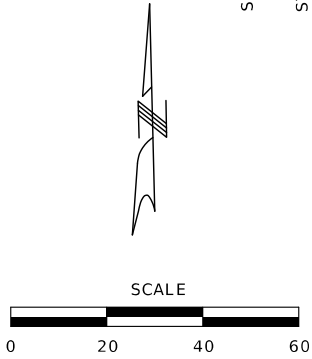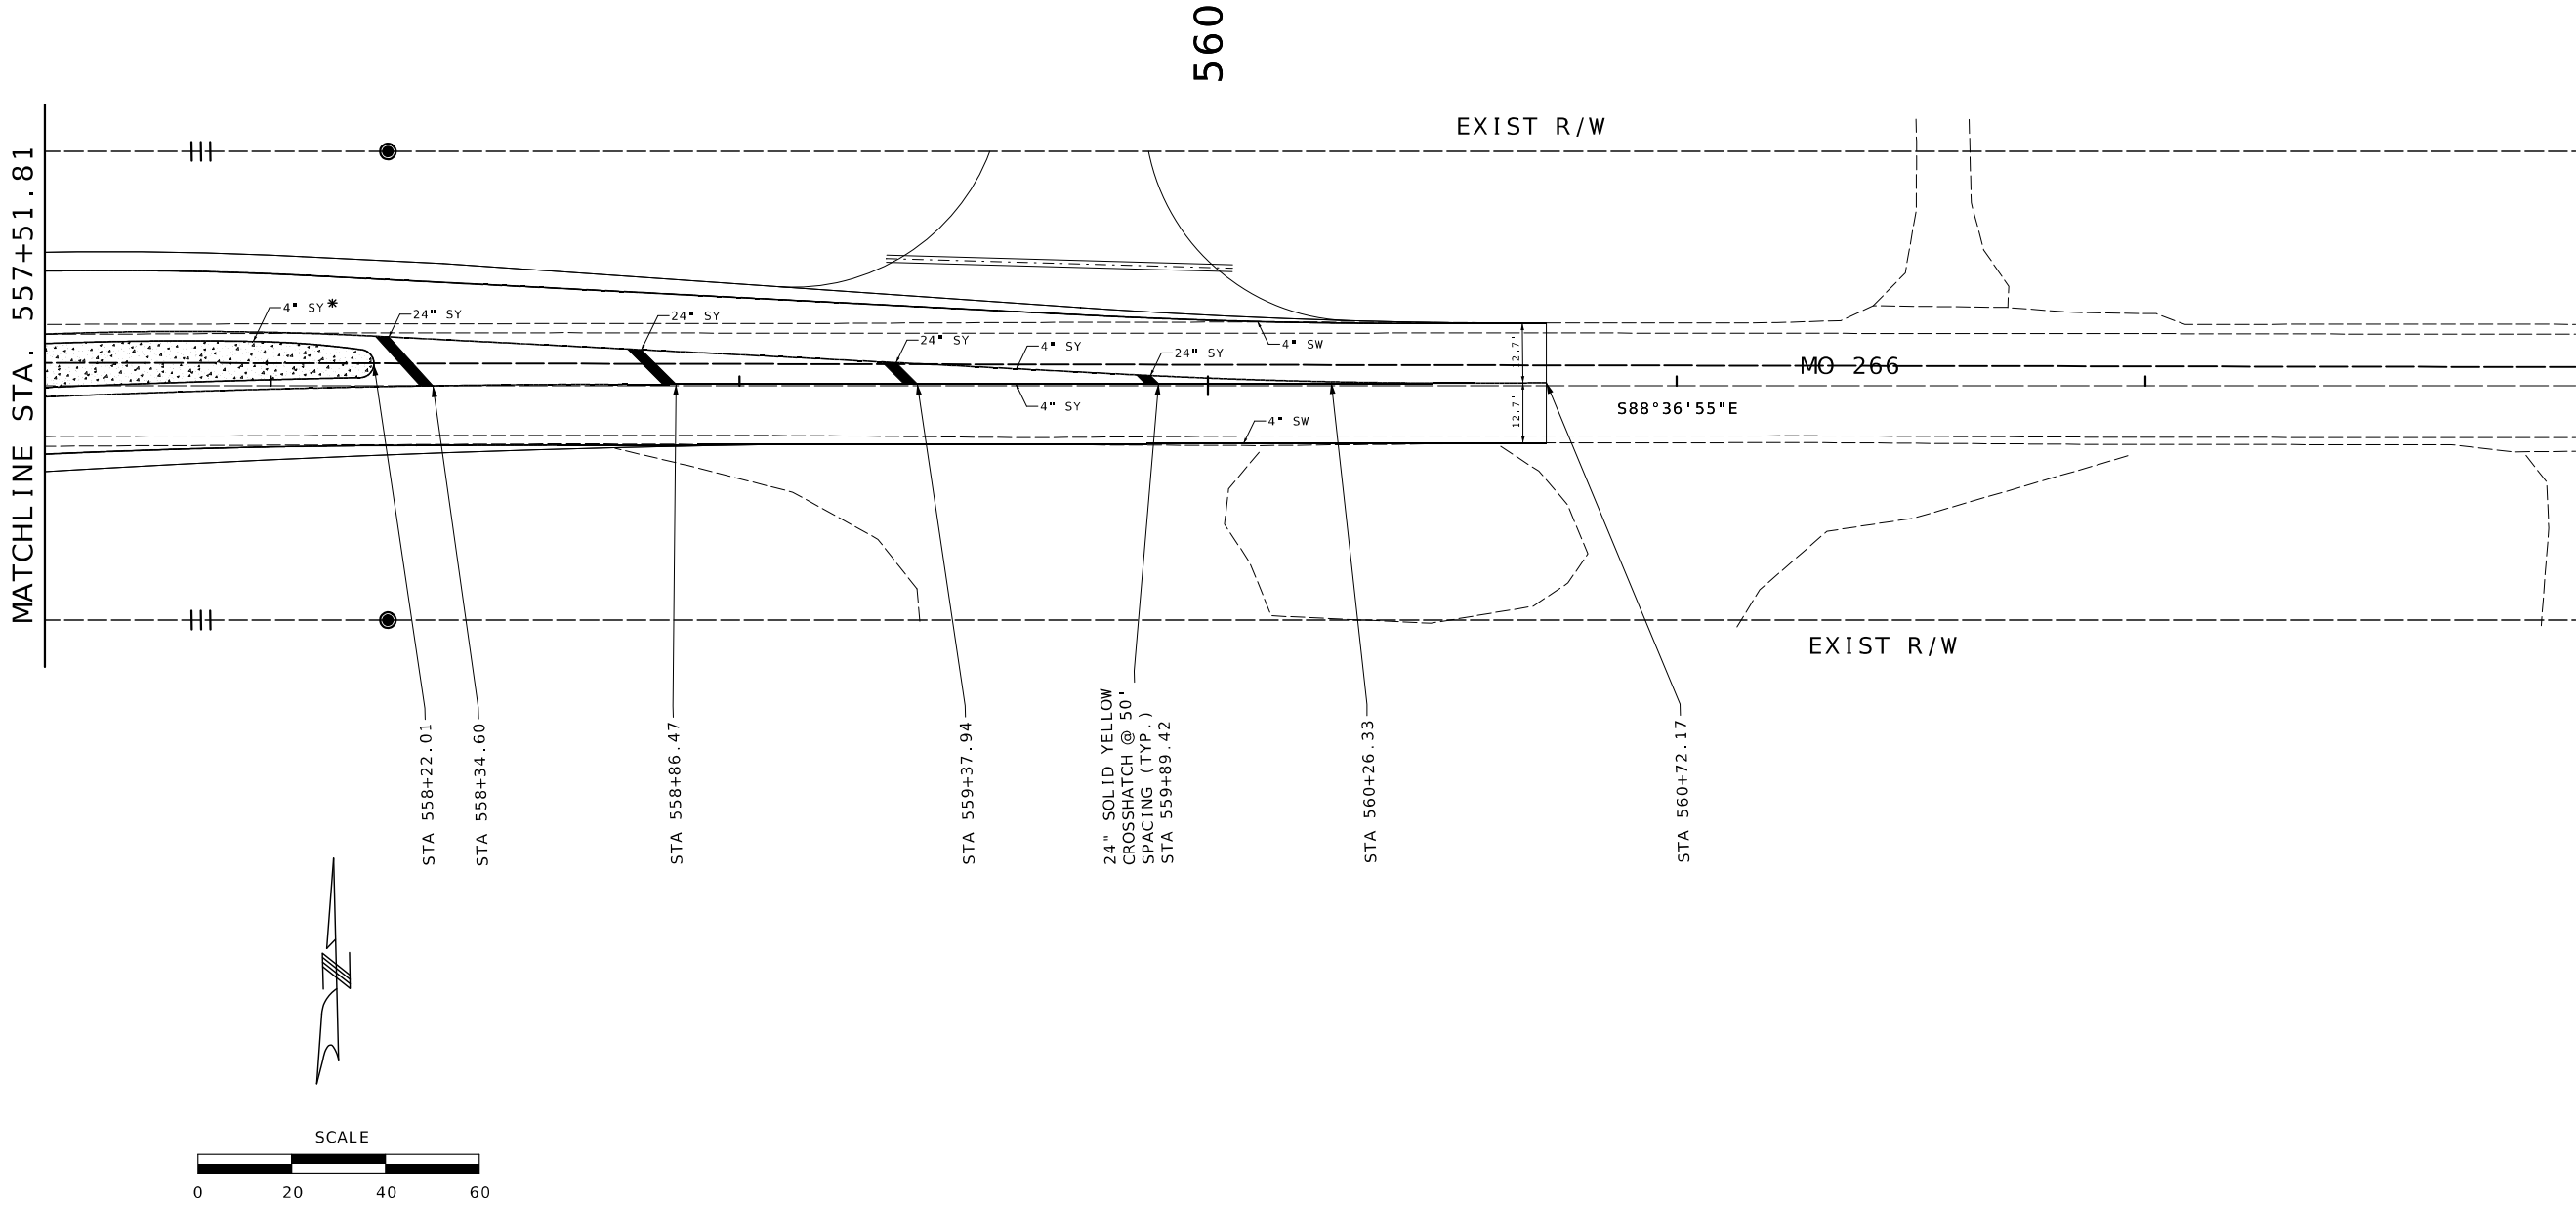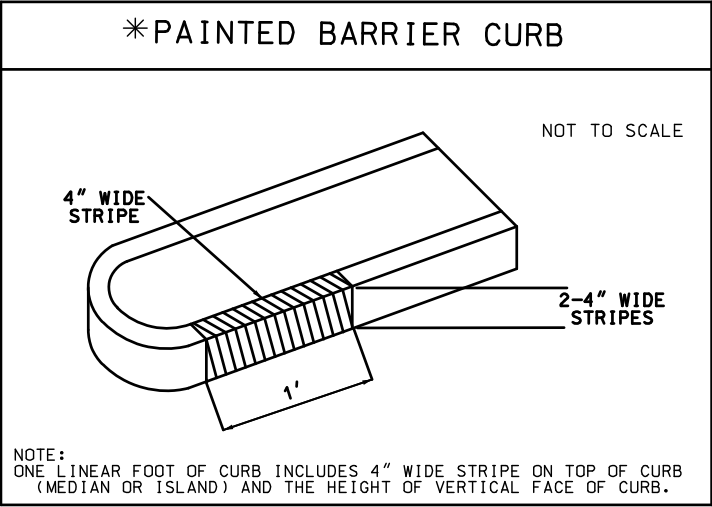

STATE OF MISSOURI

CAMERON SCOTT

NUMBER PE-2021019715

PROFESSIONAL ENGINEER

074-Professional-Stamp

20

CAMERON SCOTT - CIVIL

MO-PE-2021019715

DATE PREPARED

7/24/2026

ROUTE

266

STATE

MO

DISTRICT

SW

SHEET NO.

91

COUNTY

GREENE

JOB NO.

JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION

DATE



MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL

JEFFERSON CITY, MO 65102

1-888-ASK-MODOT (1-888-275-6636)

STRIPING LEGEND			
24" SW	24" SOLID WHITE	24" SOLID WHITE	
4" SW	4" SOLID WHITE	4" SOLID WHITE	
8" IW	8" INTERMITTENT WHITE	8" INTERMITTENT WHITE	
24" SY	24" SOLID YELLOW	24" SOLID YELLOW	
4" SY	4" SOLID YELLOW	4" SOLID YELLOW	

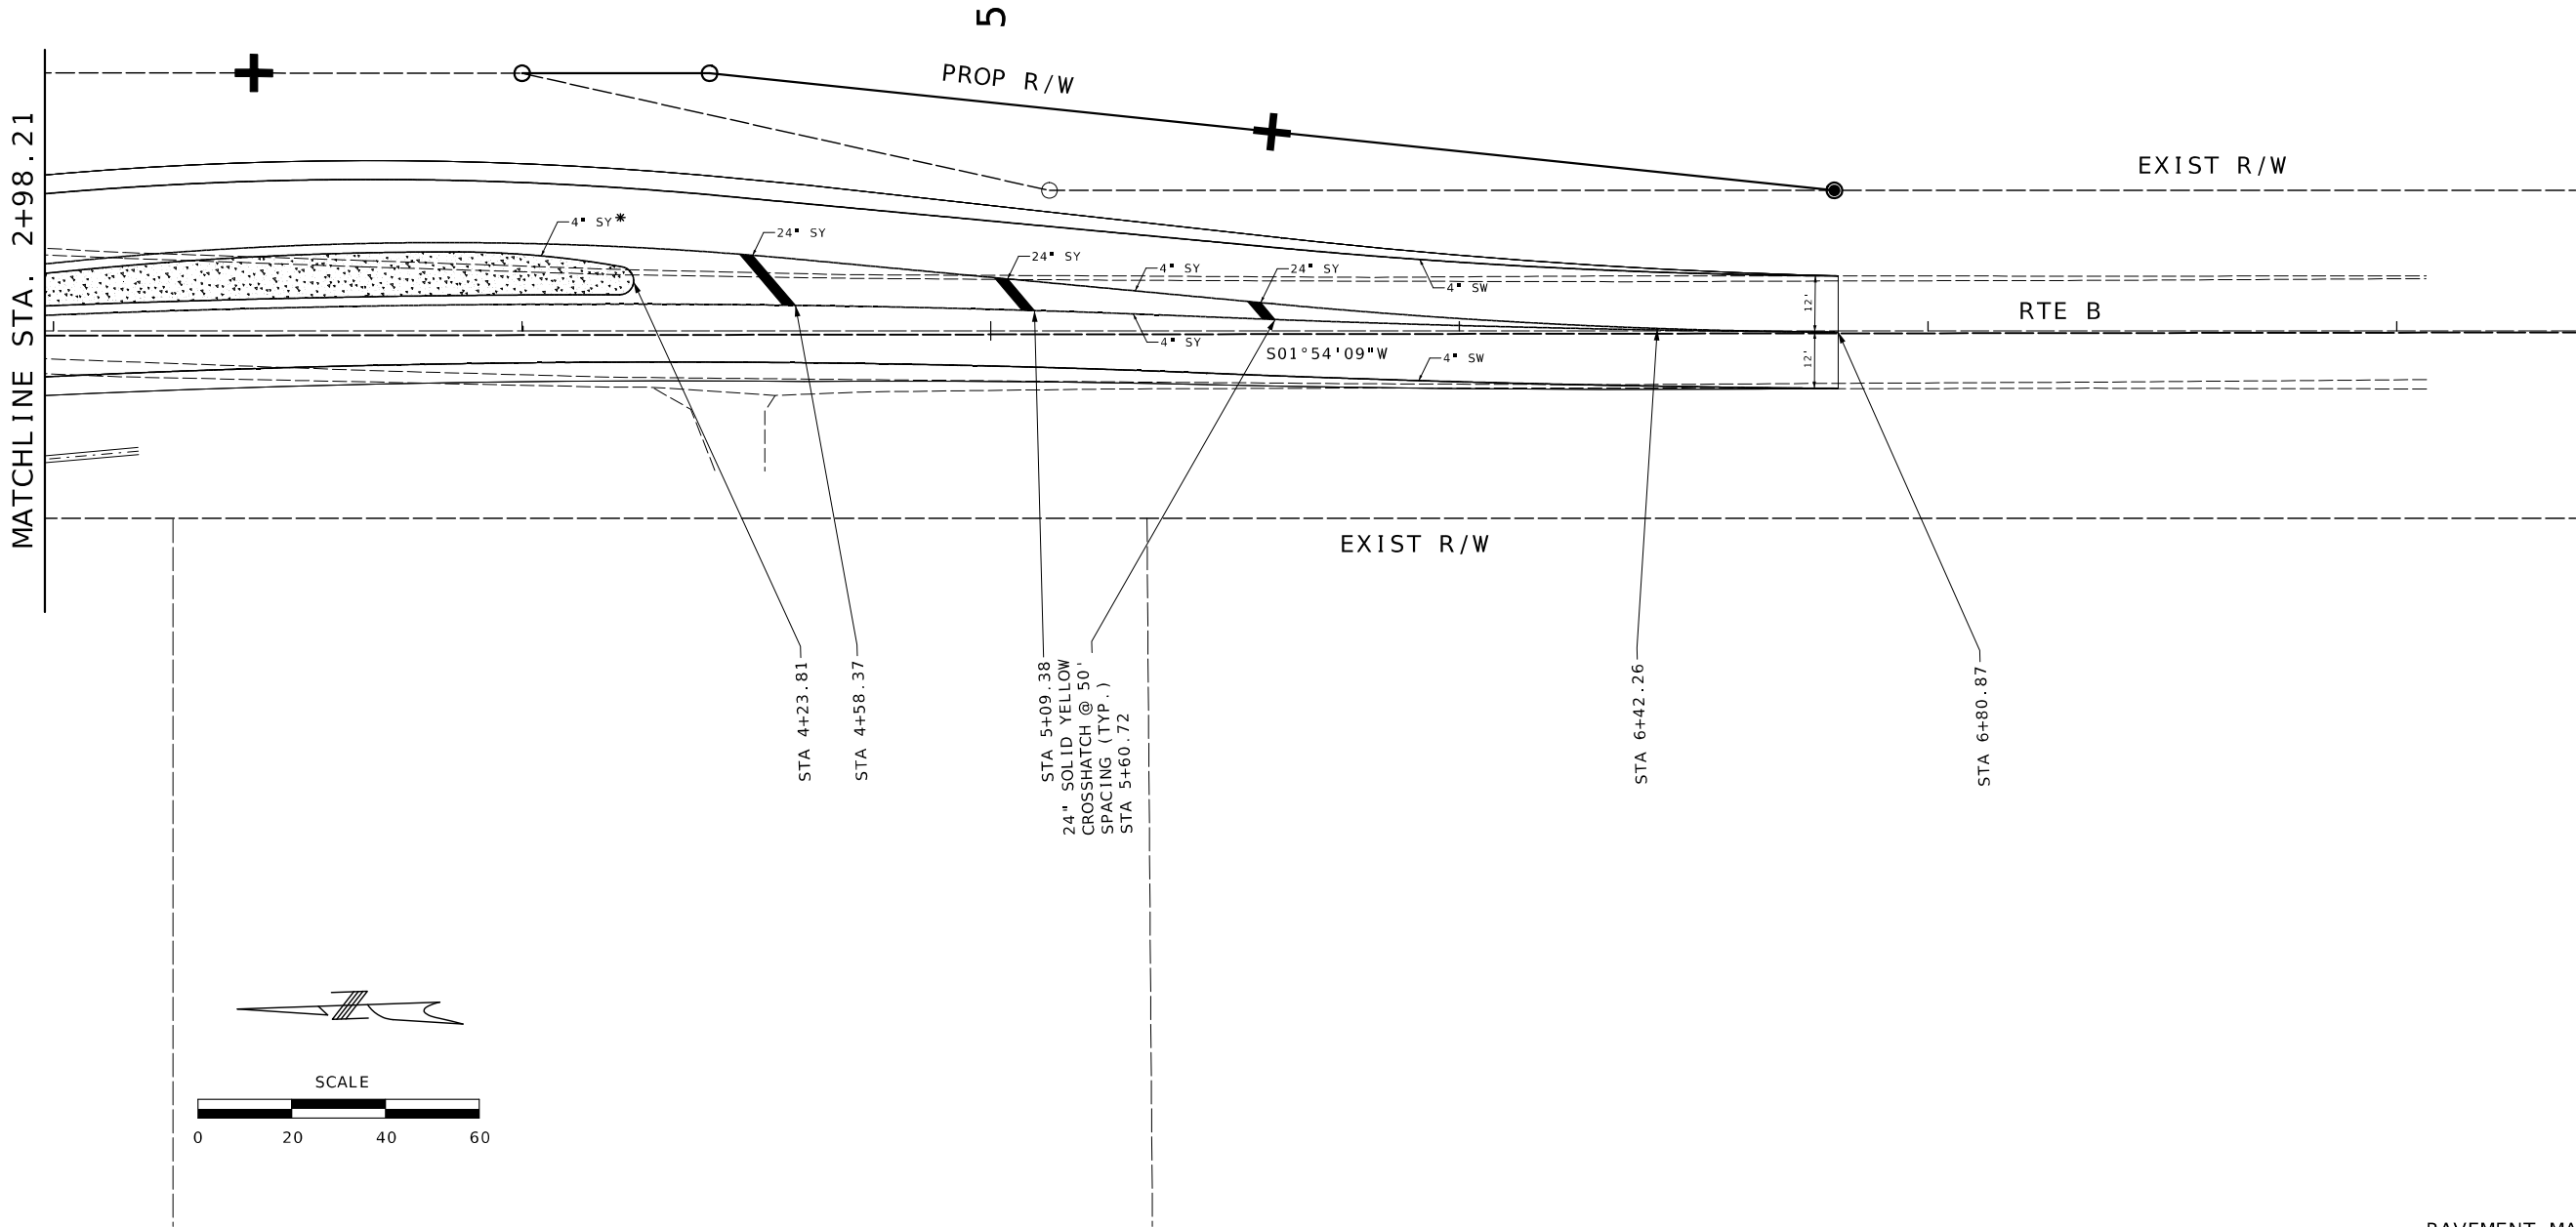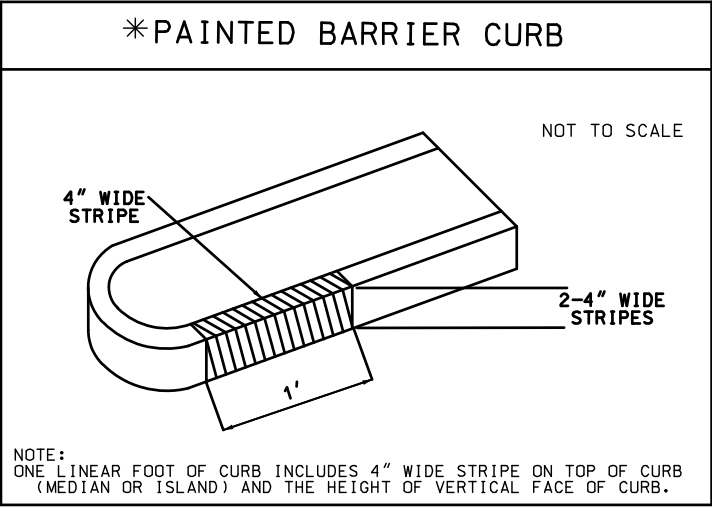

STATE OF MISSOURI

CAMERON SOOY

NUMBER PE-2021019715

PROFESSIONAL ENGINEER

076-Professional-Stamp

CAMERON SOOY - CIVIL

MO-PE-2021019715

DATE PREPARED

7/24/2026

ROUTE

266

STATE

MO

DISTRICT

SW

SHEET NO.

92

COUNTY

GREENE

JOB NO.

JSU0080

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION

DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

MoDOT

105 WEST CAPITOL

JEFFERSON CITY, MO 65102

1-888-ASK-MODOT (1-888-275-6636)

PAVEMENT MARKING

SHEET 9 OF 9

