

Job No.: JKU0299

Route: 2

County: Cass

JOB SPECIAL PROVISIONS TABLE OF CONTENTS (ROADWAY)

(Job Special Provisions shall prevail over General Special Provisions whenever in conflict therewith.)

A.	General - Federal JSP-09-02M	1
B.	Contract Liquidated Damages JSP- 13-01E	1
C.	Work Zone Traffic Management JSP-02-06N	2
D.	Emergency Provisions and Incident Management JSP-90-11A	5
E.	Project Contact for Contractor/Bidder Questions JSP-96-05A	5
F.	Supplemental Revisions JSP-18-01MM	6
G.	Utilities JSP-93-26F	22
H.	Lump Sum Temporary Traffic Control JSP-22-01B	23
I.	ADA Compliance and Final Acceptance of Constructed Facilities JSP-10-01C	25
J.	ADA Material Testing Frequency Modifications JSP-23-01A	27
K.	ADA Compliant Moveable Barricade	27
L.	Asbestos Containing Material	28
M.	Modular Block Wall-Weir	28
N.	Pervious Pavement – 6-foot Sidewalk on lot 3	30
O.	Bottomless Arch Structure	30
P.	Form Liner and Anti-Graffiti Coating	34
Q.	Remove/Replace Signage	35
R.	Native Plantings	35
S.	Liquidated Damages for Winter Months	35
T.	Paving	35
U.	Contractor Quality Control NJSP-15-42	35

Job No.: JKU0299

Route: 2

County: Cass

	MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION 105 W. CAPITOL AVE. JEFFERSON CITY, MO 65102 Phone 1-888-275-6636
	<i>OWN Inc., formerly Anderson Engineering</i> 8455 College Boulevard Overland Park, Kansas 66210 Certificate of Authority: 000062 Consultant Phone: 816-777-0400
	If a seal is present on this sheet, JSP's have been electronically sealed and dated.
	JOB NUMBER: JKU0299 CASS COUNTY, MO DATE PREPARED: 10/29/2026
	ADDENDUM DATE:

Only the following items of the Job Special Provisions (Roadway) are
authenticated by this seal: All

JOB
SPECIAL PROVISION

A. General - Federal JSP-09-02M

1.0 Description. The Federal Government is participating in the cost of construction of this project. All applicable Federal laws, and the regulations made pursuant to such laws, shall be observed by the contractor, and the work will be subject to the inspection of the appropriate Federal Agency in the same manner as provided in [Sec 105.10](#) of the Missouri Standard Specifications for Highway Construction with all revisions applicable to this bid and contract.

1.1 This contract requires payment of the prevailing hourly rate of wages for each craft or type of work required to execute the contract as determined by the Missouri Department of Labor and Industrial Relations and requires adherence to a schedule of minimum wages as determined by the United States Department of Labor. For work performed anywhere on this project, the contractor and the contractor's subcontractors shall pay the higher of these two applicable wage rates. State Wage Rates, Information on the Required Federal Aid Provisions, and the current Federal Wage Rates are available on the Missouri Department of Transportation web page at www.modot.org under "Doing Business with MoDOT", "Contractor Resources". Effective Wage Rates will be posted 10 days prior to the applicable bid opening. These supplemental bidding documents have important legal consequences. It shall be conclusively presumed that they are in the bidder's possession, and they have been reviewed and used by the bidder in the preparation of any bid submitted on this project.

1.2 The following documents are available on the Missouri Department of Transportation web page at www.modot.org under "Doing Business with MoDOT"; "Standards and Specifications". The effective version shall be determined by the letting date of the project.

General Provisions & Supplemental Specifications

Supplemental Plans to July 2026 Missouri Standard Plans
For Highway Construction

These supplemental bidding documents contain all current revisions to the published versions and have important legal consequences. It shall be conclusively presumed that they are in the bidder's possession, and they have been reviewed and used by the bidder in the preparation of any bid submitted on this project.

B. Contract Liquidated Damages JSP- 13-01E

1.0 Description. Liquidated Damages for failure or delay in completing the work on time for this contract shall be in accordance with [Sec 108.8](#). The liquidated damages include separate amounts for road user costs and contract administrative costs incurred by the Commission.

2.0 Period of Performance. Prosecution of work is expected to begin on the date specified below in accordance with [Sec 108.2](#). Regardless of when the work is begun on this contract, all work on all projects shall be completed on or before the date specified below. Completion by this date shall be in accordance with the requirements of [Sec 108.7.1](#).

Job No.: JKU0299
Route: 2
County: Cass

Notice to Proceed: January 19, 2027
Contract Completion Date: November 30, 2027

2.1 Calendar Days. Completion of the project is required as specified herein. The count of calendar days will begin on the date the contractor starts any construction operations on the project.

Project	Calendar Days	Daily Road User Cost
JKU0299	N/A	\$1,800

3.0 Liquidated Damages for Contract Administrative Costs. Should the contractor fail to complete the work on or before the contract completion date specified in Section 2.0, or within the number of calendar days specified in Section 2.1, whichever occurs first, the contractor will be charged contract administrative liquidated damages in accordance with [Sec 108.8](#) in the amount of **\$1500** per calendar day for each calendar day, or partial day thereof, that the work is not fully completed. For projects in combination, these damages will be charged in full for failure to complete one or more projects within the specified contract completion date or calendar days.

4.0 Liquidated Damages for Road User Costs. Should the contractor fail to complete the work on or before the contract completion date specified in Section 2.0, or within the number of calendar days specified in Section 2.1, whichever occurs first, the contractor will be charged road user costs in accordance with [Sec 108.8](#) in the amount specified in Section 2.1 for each calendar day, or partial day thereof, that the work is not fully completed. These damages are in addition to the contract administrative damages and any other damages as specified elsewhere in this contract.

5.0 Liquidated Damages for Winter Months. Delete Sec 108.8.1.3 (a)

Liquidated damages for failure to complete the work on time shall not be waived from December 15 to March 15, both dates inclusive.

C. Work Zone Traffic Management JSP-02-06N

1.0 Description. Work zone traffic management shall be in accordance with applicable portions of Division 100 and Division 600 of the Standard Specifications, and specifically as follows.

1.1 Maintaining Work Zones and Work Zone Reviews. The Work Zone Specialist (WZS) shall maintain work zones in accordance with Sec 616.3.3 and as further stated herein. The WZS shall coordinate and implement any changes approved by the engineer. The WZS shall ensure all traffic control devices are maintained in accordance with Sec 616, the work zone is operated within the hours specified by the engineer, and will not deviate from the specified hours without prior approval of the engineer. The WZS is responsible to manage work zone delay in accordance with these project provisions. When requested by the engineer, the WZS shall submit a weekly report that includes a review of work zone operations for the week. The report shall identify any problems encountered and corrective actions taken. Work zones are subject to unannounced inspections by the engineer and other departmental staff to corroborate the validity of the WZS's review and may require immediate corrective measures and/or additional work zone monitoring.

1.2 Work Zone Deficiencies. Failure to make corrections on time may result in the engineer suspending work. The suspension will be non-excusable and non-compensable regardless if road user costs are being charged for closures.

2.0 Traffic Management Schedule.

2.1 Traffic management schedules shall be submitted to the engineer for review prior to the start of work and prior to any revisions to the traffic management schedule. The traffic management schedule shall include the proposed traffic control measures, the hours traffic control will be in place, and work hours.

2.2 The traffic management schedule shall conform to the limitations specified in Sec 616 regarding lane closures, traffic shifts, road closures and other width, height and weight restrictions.

2.3 The engineer shall be notified as soon as practical of any postponement due to weather, material or other circumstances.

2.4 In order to ensure minimal traffic interference, the contractor shall schedule lane closures for the absolute minimum amount of time required to complete the work. Lanes shall not be closed until material is available for continuous construction and the contractor is prepared to diligently pursue the work until the closed lane is opened to traffic.

2.5 Traffic Congestion. The contractor shall, upon approval of the engineer, take proactive measures to reduce traffic congestion in the work zone. The contractor shall immediately implement appropriate mitigation strategies whenever traffic congestion reaches an excess of 10 minutes to prevent congestion from escalating to 15 minute or above threshold. If disruption of the traffic flow occurs and traffic is backed up in queues of 15 minute delays or longer, then the contractor shall immediately review the construction operations which contributed directly to disruption of the traffic flow and make adjustments to the operations to prevent the queues from reoccurring. Traffic delays may be monitored by physical presence on site or by utilizing real-time travel data through the work zone that generate text and/or email notifications where available. The engineer monitoring the work zone may also notify the contractor of delays that require prompt mitigation. The contractor may work with the engineer to determine what other alternative solutions or time periods would be acceptable.

2.5.1 Traffic Safety.

2.5.1.1 Recurring Congestion. Where traffic queues routinely extend to within 1000 feet of the ROAD WORK AHEAD, or similar, sign on a divided highway or to within 500 feet of the ROAD WORK AHEAD, or similar, sign on an undivided highway, the contractor shall extend the advance warning area, as approved by the engineer.

2.5.1.2 Non-Recurring Congestion. When traffic queues extend to within 1000 feet of the ROAD WORK AHEAD, or similar, sign on a divided highway or to within 500 feet of the ROAD WORK AHEAD, or similar, sign on an undivided highway infrequently, the contractor shall deploy a means of providing advance warning of the traffic congestion, as approved by the engineer. The warning location shall be no less than 1000 feet and no more than 0.5 mile in advance of the end of the traffic queue on divided highways and no less than 500 feet and no more than 0.5 mile in advance of the end of the traffic queue on undivided highways.

3.0 Work Hour Restrictions.

3.1 Except for emergency work, as determined by the engineer, and long term lane closures required by project phasing, all lanes shall be scheduled to be open to traffic during the five major holiday periods shown below, from 12:00 noon on the last working day preceding the holiday until 6:00 a.m. on the first working day subsequent to the holiday unless otherwise approved by the engineer.

Memorial Day
Labor Day
Thanksgiving
Christmas
New Year's Day

3.1.1 Independence Day. The lane restrictions specified in Section 3.1 shall also apply to Independence Day, except that the restricted periods shall be as follows:

When Independence Day falls on:	The Holiday is Observed on:	Halt Lane Closures beginning at:	Allow Lane Closures to resume at:
Sunday	Monday	Noon on Friday	6:00 a.m. on Tuesday
Monday	Monday	Noon on Friday	6:00 a.m. on Tuesday
Tuesday	Tuesday	Noon on Monday	6:00 a.m. on Wednesday
Wednesday	Wednesday	Noon on Tuesday	6:00 a.m. on Thursday
Thursday	Thursday	Noon on Wednesday	6:00 a.m. on Friday
Friday	Friday	Noon on Thursday	6:00 a.m. on Monday
Saturday	Friday	Noon on Thursday	6:00 a.m. on Monday

3.2 The contractor shall not perform any construction operation on the roadway, roadbed or active lanes, including the hauling of material within the project limits, during restricted periods, holiday periods or other special events specified in the contract documents.

4.0 Detours and Lane Closures.

4.1 When a changeable message sign (CMS) is provided, the contractor shall use the CMS to notify motorists of future traffic disruption and possible traffic delays one week before traffic is shifted to a detour or prior to lane closures. The CMS shall be installed at a location as approved or directed by the engineer. If a CMS with Communication Interface is required, then the CMS shall be capable of communication prior to installation on right of way. All messages planned for use in the work zone shall be approved and authorized by the engineer or its designee prior to deployment. When permanent dynamic message signs (DMS) owned and operated by MoDOT are located near the project, they may also be used to provide warning and information for the work zone. Permanent DMS shall be operated by the TMC, and any messages planned for use on DMS shall be approved and authorized by the TMC at least 72 hours in advance of the work.

5.0 Basis of Payment. No direct payment will be made to the contractor to recover the cost of equipment, labor, materials, or time required to fulfill the above provisions, unless specified elsewhere in the contract document. All authorized changes in the traffic control plan shall be provided for as specified in Sec 616.

D. Emergency Provisions and Incident Management JSP-90-11A

1.0 The contractor shall have communication equipment on the construction site or immediate access to other communication systems to request assistance from law enforcement or other emergency agencies for incident management. In case of traffic accidents or the need for law enforcement to direct or restore traffic flow through the job site, the contractor shall notify law enforcement or other emergency agencies immediately as needed. The area engineer's office shall also be notified when the contractor requests emergency assistance.

2.0 In addition to the 911 emergency telephone number for ambulance, fire or law enforcement services, the following agencies may also be notified for accident or emergency situation within the project limits.

Missouri Highway Patrol (Troop A): 816-622-0800 or 800-525-5555	
City of Harrisonville	Cass County Sheriff's Department
Fire: 816-380-8952	Jeff Weber (Sheriff)
Police: 816-380-8940	Sheriff: 816-380-5200

2.1 This list is not all inclusive. Notification of the need for wrecker or tow truck services will remain the responsibility of the appropriate law enforcement agency.

2.2 The contractor shall notify law enforcement and emergency agencies before the start of construction to request their cooperation and to provide coordination of services when emergencies arise during the construction at the project site. When the contractor completes this notification with law enforcement and emergency agencies, a report shall be furnished to the engineer on the status of incident management.

3.0 No direct pay will be made to the contractor to recover the cost of the communication equipment, labor, materials or time required to fulfill the above provisions.

E. Project Contact for Contractor/Bidder Questions JSP-96-05A

1.0 All questions concerning this project during the bidding process shall be forwarded to the project contact listed below.

Christopher West, P.E. Project Contact
Kansas City District
600 NE Colbern Road
Lee's Summit, MO 64086

Telephone Number: (816) 607-2211
Email: christopher.west@modot.mo.gov

Job No.: JKU0299
Route: 2
County: Cass

Carl Brooks, P.E. CFM, Project Contact
City of Harrisonville
300 East Pearl St.
Harrisonville, MO 64701

Telephone Number: 816-380-3997
Email: CBrooks@harrisonville.com

1.1 All questions concerning the bid document preparation can be directed to the Central Office – Design as listed below.

Telephone Number: (573) 751-2876
Email: BCS@modot.mo.gov

2.0 Upon award and execution of the contract, the successful bidder/contractor shall forward all questions and coordinate the work with the engineer listed below:

Russell Penner, Resident Engineer
Kansas City District
600 NE Colbern Road
Lee's Summit, MO 64086

Telephone Number: (816) 347-4143
Email: Russel.Penner@modot.mo.gov

F. Supplemental Revisions JSP-18-01MM

- Compliance with [2 CFR 200.216 – Prohibition on Certain Telecommunications and Video Surveillance Services or Equipment](#).

The Missouri Highways and Transportation Commission shall not enter into a contract (or extend or renew a contract) using federal funds to procure or obtain equipment, services, or systems that uses covered telecommunications equipment or services as substantial or as critical technology as part of any system where the video surveillance and telecommunications equipment was produced by Huawei Technologies Company, ZTE Corporation, Hytera Communications Corporation, Hangzhou Hikvision Digital Technology Company, or Dahua Technology Company (or any subsidiary or affiliate of such entities).

- Stormwater Compliance Requirements

1.0 Description. This provision requires the contractor to provide a Water Pollution Control Manager (WPCM) for any project that includes land disturbance on the project site and the total area of land disturbance, both on the project site, and all Off-site support areas, is one (1) acre or more. Regardless of the area of Off-site disturbance, if no land disturbance occurs on the project site, these provisions do not apply. When a WPCM is required, all sections within this provision shall be applicable, including assessment of specified Liquidated Damages for failure to correct Stormwater Deficiencies, as specified herein. This provision is in addition to any other stormwater, environmental, and land disturbance requirements specified elsewhere in the contract.

1.1 Definitions. The project site is defined as all areas designated on the plans, including temporary and permanent easements. The project site is equivalent to the “permitted site”, as defined in MoDOT’s State Operating Permit. An Off-site area is defined as any location off the project site the contractor utilizes for a dedicated project support function, such as, but not limited to, staging area, plant site, borrow area, or waste area.

1.2 Reporting of Off-Site Land Disturbance. If the project includes any planned land disturbance on the project site, prior to the start of work, the contractor shall submit a written report to the engineer that discloses all Off-site support areas where land disturbance is planned, the total acreage of anticipated land disturbance on those sites, and the land disturbance permit number(s). Upon request by the engineer, the contractor shall submit a copy of its land disturbance permit(s) for Off-site locations. Based on the total acreage of land disturbance, both on and Off-site, the engineer shall determine if these Stormwater Compliance Requirements shall apply. The contractor shall immediately report any changes to the planned area of Off-site land disturbance. The contractor is responsible for obtaining its own separate land disturbance permit for Off-site areas.

2.0 Water Pollution Control Manager (WPCM). The contractor shall designate a competent person to serve as the Water Pollution Control Manager (WPCM) for projects meeting the description in Section 1.0. The contractor shall ensure the WPCM completes all duties listed in Section 2.1.

2.1 Duties of the WPCM:

- (a) Be familiar with the stormwater requirements including the current MoDOT State Operating Permit for construction stormwater discharges/land disturbance activities; MoDOT’s statewide Stormwater Pollution Prevention Plan (SWPPP); the Corps of Engineers Section 404 Permit, when applicable; the project specific SWPPP, the Project’s Erosion & Sediment Control Plan; all applicable special provisions, specifications, and standard drawings; and this provision;
- (b) Successfully complete the MoDOT Stormwater Training Course within the last 4 years. The MoDOT Stormwater Training is a free online course available at MoDOT.org;
- (c) Attend the Pre-Activity Meeting for Grading and Land Disturbance and all subsequent Weekly Meetings in which grading activities are discussed;
- (d) Oversee and ensure all work is performed in accordance with the Project-specific SWPPP and all updates thereto, or as designated by the engineer;
- (e) Review the project site for compliance with the Project SWPPP, as needed, from the start of any grading operations until final stabilization is achieved, and take necessary actions to correct any known deficiencies to prevent pollution of the waters of the state or adjacent property owners prior to the engineer’s weekly inspections;
- (f) Review and acknowledge receipt of each MoDOT Inspection Report (Land Disturbance Inspection Record) for the Project within forty-eight (48) hours of receiving the report and ensure that all Stormwater Deficiencies noted on the report are corrected as soon as possible, but no later than stated in Section 5.0.

3.0 Pre-Activity Meeting for Grading/Land Disturbance and Required Hold Point. A Pre-Activity meeting for grading/land disturbance shall be held prior to the start of any land disturbance operations. No land disturbance operations shall commence prior to the Pre-Activity meeting except work necessary to install perimeter controls and entrances. Discussion items at the pre-activity meeting shall include a review of the Project SWPPP, the planned order of grading operations, proposed areas of initial disturbance, identification of all necessary BMPs that shall be installed prior to commencement of grading operations, and any issues relating to compliance with the Stormwater requirements that could arise in the course of construction activity at the project.

3.1 Hold Point. Following the pre-activity meeting for grading/land disturbance and subsequent installation of the initial BMPs identified at the pre-activity meeting, a Hold Point shall occur prior to the start of any land disturbance operations to allow the engineer and WPCM the time needed to perform an on-site review of the installation of the BMPs to ensure compliance with the SWPPP is met. Land disturbance operations shall not begin until authorization is given by the engineer.

4.0 Inspection Reports. Weekly and post run-off inspections will be performed by the engineer and each Inspection Report (Land Disturbance Inspection Record) will be entered into a web-based Stormwater Compliance database. The WPCM will be granted access to this database and shall promptly review all reports, including any noted deficiencies, and shall acknowledge receipt of the report as required in Section 2.1 (f.).

5.0 Stormwater Deficiency Corrections. All stormwater deficiencies identified in the Inspection Report shall be corrected by the contractor within 7 days of the inspection date or any extended period granted by the engineer when weather or field conditions prohibit the corrective work. If the contractor does not initiate corrective measures within 5 calendar days of the inspection date or any extended period granted by the engineer, all work shall cease on the project except for work to correct these deficiencies, unless otherwise allowed by the engineer. All impact costs related to this halting of work, including, but not limited to stand-by time for equipment, shall be borne by the contractor. Work shall not resume until the engineer approves the corrective work.

5.1 Liquidated Damages. If the contractor fails to complete the correction of all Stormwater Deficiencies listed on the MoDOT Inspection Report within the specified time limit, the Commission will be damaged in various ways, including but not limited to, potential liability, required mitigation, environmental clean-up, fines, and penalties. These damages are not reasonably capable of being computed or quantified. Therefore, the contractor will be charged with liquidated damages specified in the amount of \$2,000 per day for failure to correct one or more of the Stormwater Deficiencies listed on the Inspection Report within the specified time limit. In addition to the stipulated damages, the stoppage of work shall remain in effect until all corrections are complete.

6.0 Basis of Payment. No direct payment will be made for compliance with this provision.

- *Delete Sec 106.9, including all subsections and substitute the following:*

106.9 Buy America Requirements.

Buy America Requirements are waived if the total amount of Federal financial assistance applied to the project, through awards or subawards, is below \$500,000.

106.9.1 Buy America Requirements for Iron or Steel Products.

The contractor's attention is directed to Title 23 CFR 635.410 *Buy America Requirements*. Where articles, materials or supplies that consist wholly or predominantly of iron or steel or a combination of both are to be permanently incorporated into the contract work, steel and iron material shall be manufactured, from the initial melting stage through the application of coatings, in the USA except for "minimal use" as described herein. Predominantly of iron or steel or a combination of both means that the cost of the iron and steel content exceeds 50 percent of the total cost of all its components. Under a general waiver from FHWA the use of pig iron and processed, pelletized, and reduced iron ore manufactured outside of the USA will be permitted in the domestic manufacturing process for steel or iron material.

106.9.1.1 Any sources other than the USA as defined will be considered foreign. The required domestic manufacturing process shall include formation of ingots and any subsequent process. Coatings shall include any surface finish that protects or adds value to the product.

106.9.1.2 "Minimal use" of foreign steel, iron or coating processes will be permitted, provided the cost of such products does not exceed 1/10 of one percent (0.1 percent) of the total contract cost or \$2,500.00, whichever is greater. If foreign steel, iron, or coating processes are used, invoices to document the cost of the foreign portion, as delivered to the project, shall be provided and the engineer's written approval obtained prior to placing the material in any work.

106.9.1.3 Buy America requirements include a step certification for all fabrication processes of all steel or iron materials that are accepted per Sec 1000. The AASHTO Product Evaluation and Audit Solutions compliance program verifies that all steel and iron products fabrication processes conform to 23 CFR 635.410 Buy America Requirements and is an acceptable standard per 23 CFR 635.410(d). AASHTO Product Evaluation and Audit Solutions compliant suppliers will not be required to submit step certification documentation with the shipment for some selected steel and iron materials. The AASHTO Product Evaluation and Audit Solutions compliant supplier shall maintain the step certification documentation on file and shall provide this documentation to the engineer upon request.

106.9.1.3.1 Items designated as Category 1 will consist of steel girders, piling, and reinforcing steel installed on site. Category 1 items require supporting documentation prior to incorporation into the project showing all steps of manufacturing, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410 Buy America Requirements. This includes the Mill Test Report from the original producing steel mill and certifications documenting the manufacturing process for all subsequent fabrication, including coatings. The certification shall include language that certifies all steel and iron materials permanently incorporated in this project was procured and processed domestically and all manufacturing processes, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410.

106.9.1.3.2 Items designated as Category 2 will include all other steel or iron products not in Category 1 and permanently incorporated in the project. Category 2 items shall consist of, but not be limited to items such as fencing, guardrail, signing, lighting and signal supports. The prime contractor is required to submit a material of origin form certification prior to incorporation into the project from the fabricator for each item that the product is domestic. The Certificate of Materials Origin form ([link to certificate form](#)) from the fabricator must show all steps of manufacturing, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410 Buy America Requirements and be signed by a fabricator representative. The engineer reserves the right to request additional information and documentation to verify that all Buy America requirements have been satisfied. These documents shall be submitted upon

request by the engineer and retained for a period of 3 years after the last reimbursement of the material.

106.9.1.3.3 Any minor miscellaneous steel or iron items that are not included in the materials specifications shall be certified by the prime contractor as being procured domestically. Examples of these items would be bolts for sign posts, anchorage inserts, etc. The certification shall read "I certify that all steel and iron materials permanently incorporated in this project during all manufacturing processes, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410 Buy America Requirements procured and processed domestically in accordance with CFR Title 23 Section 635.410 Buy America Requirements. Any foreign steel used was submitted and accepted under minor usage". The certification shall be signed by an authorized representative of the prime contractor.

106.9.1.4 When permitted in the contract, alternate bids may be submitted for foreign steel and iron products. The award of the contract when alternate bids are permitted will be based on the lowest total bid of the contract based on furnishing domestic steel or iron products or 125 percent of the lowest total bid based on furnishing foreign steel or iron products. If foreign steel or iron products are awarded in the contract, domestic steel or iron products may be used; however, payment will be at the contract unit price for foreign steel or iron products.

106.9.2 Buy America Requirements for Construction Materials other than iron or steel products.

Construction materials mean articles, materials, or supplies that consist of only one of the items listed. Minor additions of articles, materials, supplies, or binding agents to a construction material do not change the categorization of the construction material. Upon request by the engineer, the contractor shall submit a domestic certification for all construction materials listed that are incorporated into the project.

- (a) Non-ferrous metals
- (b) Plastic and Polymer-based products (including polyvinylchloride, composite building materials, and polymers used in fiber optic cables)
- (c) Glass (including optic glass)
- (d) Fiber optic cable (including drop cable)
- (e) Optical fiber
- (f) Lumber
- (g) Engineered wood
- (h) Drywall

106.9.3 Buy America Requirements for Manufactured Products.

Manufactured products mean articles, materials or supplies that have been processed into a specific form and shape, or combined with other articles, materials or supplies to create a product with different properties than the individual articles, materials or supplies. If an item is classified as an iron or steel product, an excluded material, or other product category as specified by law or in 2 CFR part 184, then it is not a manufactured product. However, an article, material or supply classified as a manufactured product may include components that are iron or steel products, excluded materials, or other product categories as specified by law or in 2 CFR part 184. Mixtures of excluded materials delivered to a work site without final form for incorporation into a project are not a manufactured product.

106.9.3.1 Produced in the United States, in the case of manufactured products, means:

(A) For projects obligated on or after October 1, 2025, the product was manufactured in the United States; and

(B) For projects obligated on or after October 1, 2026, the product was manufactured in the United States and the cost of the components of the manufactured product that are mined, produced, or manufactured in the United States is greater than 55 percent of the total cost of all components of the manufactured product.

106.9.3.2 (i) With respect to precast concrete products that are classified as manufactured products, components of precast concrete products that consist wholly or predominantly of iron or steel or a combination of both shall meet the requirements of paragraph (b) of this section. The cost of such components shall be included in the applicable calculation for purposes of determining whether the precast concrete product is produced in the United States.

(ii) With respect to intelligent transportation systems and other electronic hardware systems that are installed in the highway right of way or other real property and classified as manufactured products, the cabinets or other enclosures of such systems that consist wholly or predominantly of iron or steel or a combination of both shall meet the requirements of paragraph (b) of this section. The cost of cabinets or other enclosures shall be included in the applicable calculation for purposes of determining whether systems referred to in the preceding sentence are produced in the United States.

106.9.4 Waiver for De Minimis Costs for Manufactured and Construction Materials other than iron or steel products.

“The total value of the non-compliant products is no more than the lesser of \$1,000,000 or 5% of total applicable costs for the project.” The contractor shall submit to the engineer any non-domestic materials and their total material cost to the engineer. The contractor and the engineer will both track these totals to assure that the minimal usage allowance is not exceeded.

- Third-Party Test Waiver for Concrete Aggregate

1.0 Description. Third party tests may be allowed for determining the durability factor for concrete pavement and concrete masonry aggregate.

2.0 Material. All aggregate for concrete shall be in accordance with [Sec 1005](#).

2.1 MoDOT personnel shall be present at the time of sampling at the quarry. The aggregate sample shall be placed in an approved tamper-evident container (provided by the quarry) for shipment to the third-party testing facility.

2.2 AASHTO T 161 Method B Resistance of Concrete to Rapid Freezing and Thawing, shall be used to determine the aggregate durability factor. All concrete beams for testing shall be 3-inch wide by 4-inch deep by 16-inch long or 3.5-inch wide by 4.5-inch deep by 16-inch long. All beams for testing shall receive a 35-day wet cure fully immersed in saturated lime water prior to initiating the testing process.

2.3 Concrete test beams shall be made using a MoDOT approved concrete pavement mix design.

3.0 Testing Facility Requirements. All third-party test facilities shall meet the requirements outlined in this provision.

3.1 The testing facility shall be AASHTO accredited.

3.1.1 For tests ran after January 1, 2025, accreditation documentation shall be on file with the Construction and Materials Division prior to any tests being performed.

3.1.2 Construction and Materials Division may consider tests completed prior to January 1, 2025, to be acceptable if all sections of this provision are met, with the exception of 3.1.1. Accreditation documentation shall be provided with the test results for tests completed prior to January 1, 2025. No tests completed prior to September 1, 2024, will be accepted.

3.2 The testing facility shall provide their testing process, list of equipment, equipment calibration documentation, and testing certifications or qualifications of technicians performing the AASHTO T 161 Procedure B tests. The testing facility shall provide details on their freezing and thawing apparatus including the time and temperature profile of their freeze-thaw chamber. The profile shall include the temperature set points throughout the entirety of the freeze-thaw cycle. The profile shall show the cycle time at which the apparatus drains/fills with water and the cycle time at which the apparatus begins cooling the specimens.

3.3 Results, no more than five years old, from the third-party test facility shall compare within ± 2.0 percent of an independent test from another AASHTO accredited test facility or with MoDOT test records, in order to be approved for use (e.g. test facility results in a durability factor of 79, MoDOT's recent durability test factor is 81; this compared within +2 percent). The independent testing facility shall be in accordance with this provision. The comparison test can be from a different sample of the same ledge combination.

3.4 When there is a dispute between the third party durability test results and MoDOT durability test results, the MoDOT durability test result shall govern.

3.5 Test results shall be submitted to MoDOT's Construction and Materials division electronically for final approval. Test results shall include raw data for all measurements of relative dynamic modulus of elasticity and percent length change for each individual concrete specimen. Raw data shall include initial measurements made at zero cycles and every subsequent measurement of concrete specimens. Raw data shall include the cycle count and date each measurement was taken. Test results shall also include properties of the concrete mixture as required by AASHTO T 161. This shall include the gradation of the coarse aggregate sample. If AASHTO T 152 is used to measure fresh air content, then the aggregate correction factor for the mix determined in accordance with AASHTO T 152 shall also be included.

4.0 Method of Measurement. There is no method of measurement for this provision. The testing requirements and number of specimens shall be in accordance with AASHTO T 161 Procedure B.

5.0 Basis of Payment. No direct payment will be made to the contractor or quarry to recover the cost of aggregate samples, sample shipments, testing equipment, labor to prepare samples or test samples, or developing the durability report.

- *Delete paragraph 15.0 of the General Provision Disadvantaged Business Enterprise (DBE) Program Requirements and substitute the following:*

15.0 Bidder's List Quote Summary. MoDOT is a recipient of federal funds and is required by 49 CFR 26.11 to provide data about its DBE program. All bidders who seek to work on federally

assisted contracts must submit data about all DBE and non-DBEs in accordance with Sec 102.7.9. MoDOT will not compare the submitted Bidder's List Quote Summary to any other documents or submittals, pre or post award. All information will be used by MoDOT in accordance with 49 CFR 26.11 for reporting to USDOT and to aid in overall DBE goal setting.

- *Add Sec 102.7.9 to include the following:*

102.7.9 Bidder's List Quote Summary. Each bidder shall submit with each bid a summary of all subcontractors, material suppliers, and service providers (e.g. hauling) considered on federally funded projects pursuant to 49 CFR 26.11. The bidder will provide the firm's name, the corresponding North American Industry Classification System (NAICS) code(s) the firm(s) were considered for, and whether or not they were used in the bid. The information submitted should be the most complete information available at the time of bid. The information shall be disclosed on the Bidder's List Quote Summary form provided in the bidding documents and submitted in accordance with [Sec 102.10](#). Failure to disclose this information may result in a bid being declared irregular.

- Revisions to General Conditions of the Contract for Missouri Standard Specifications for Highway Construction

Insert the following definitions into Sec 101.2:

Agent of Contractor. Subcontractors, its employees, assigns, and agents.

Agent of MoDOT. Any private contractors, subcontractors, engineers, or the employees thereof performing work in accordance with the plans and specifications approved by MoDOT.

Commencement of Work. Also defined as the start of construction operations/activities, this is the date the contractor, its employees, agents, and/or assigns first begins performing work pursuant to the terms of the contract, including the furnishing of labor, material, equipment, and other incidentals necessary or convenient to the successful completion of the project and the carrying out of duties and obligations imposed by the contract. For purposes of clarity, this date shall be deemed to occur on the date certified payroll activities on the project commence.

Exceptions. Work items identified by the engineer, as documented on the semi-final inspection, that are allowed to be completed after the contract completion date but prior to the item-specific completion date established by the engineer. Failure to complete any excepted work item by the item-specific completion date will result in assessment of contract liquidated damages. Designation of exceptions not mandated by the contract is at the sole discretion of the engineer.

Typical exceptions include:

- (a) Seasonal items (e.g., sodding, overseeding, establishment of grass for soil stabilization, or tree/shrub plantings)
- (b) Tasks that have contractually required or allowed delays (e.g., removal of sediment control devices, waiting periods for signal/lighting systems, pause for retroreflectivity evaluation of pavement markings)

- (c) Other tasks in which the engineer determines it is in the best interest of the Commission to allow completion of such task to extend beyond the contract completion date, but within a designated period of time.

Delete Sec 105.10.7, including all subsections and substitute the following:

105.10.7 Final Inspection. Upon apparent completion of the entire project, the engineer will make a Final Inspection of the work to determine acceptance for maintenance in accordance with [Sec 105.15](#).

Delete Sec 105.15, including all subsections and substitute the following:

105.15 Acceptance.

105.15.1 Partial Acceptance. At the discretion of the engineer, portions of the work within a project may be accepted for maintenance prior to the Final Inspection of all work for that project. When a portion of the work or a specific item is partially accepted, the contractor is relieved from maintenance on the identified portion of the work, but this is not the Final Inspection, as defined in [Sec 105.15.2](#), and will not excuse the contractor from liability or responsibility to the Commission for work performed.

105.15.1.1 Acceptance of a Specific Item or Section of Work. Upon completion of any of the items or sections of work listed herein, the contractor may request the engineer's inspection of the work and partial acceptance. If the engineer finds the work to be complete and acceptable, including submittal by the contractor of all required documentation, partial acceptance will be made for that item or section. The following items, complete in place, as determined by the engineer, are eligible for consideration of partial acceptance:

- (a) Any section 0.5 mile or more in length.
- (b) Any section 0.5 mile or more in length in one direction of a divided highway.
- (c) A complete bridge.
- (d) An intersection traffic signal system. Partial acceptance may be made for signal equipment prior to the 30-day testing period though any required performance tests and/or guarantees shall remain applicable.
- (e) Devices intended to be used for traffic safety and control. Acceptance of traffic safety devices is limited to guardrail, impact attenuation barriers, traffic signal items, signs, delineators, lighting, concrete barrier walls, concrete bridge parapet, bridge railing, guard cable, crash cushions and fence, which are permanently installed in their final position in accordance with the contract documents.

105.15.1.2 Semi-Final Inspection, Corrections and Exceptions. The contractor shall submit a written request for a semi-final inspection at least seven days prior to the anticipated completion of work, excluding exceptions. If the engineer postpones the inspection beyond the date the contractor completes all work, the period of postponement will be considered an excusable but non-compensable delay.

105.15.1.2.1 Immediately following the semi-final inspection, the engineer will provide the contractor with a list of any remaining items of work, corrections, and exceptions. The count of contract time will continue until all work and corrections are complete. If the engineer determines all work is complete, with no exceptions, the semi-final inspection will be considered the Final Inspection in accordance with [Sec 105.15.2](#).

105.15.1.2.2 Work Complete Date. Upon verification by the engineer that all work, exclusive of exceptions, is complete, the engineer will declare partial acceptance and cease the count of contract time. The count of contract time will resume should the contractor fail to complete one or more exceptions by the required date.

105.15.2 Final Inspection and Acceptance for Maintenance. The contractor shall promptly notify the engineer when all work on a project, including exceptions, is complete. Upon Final Inspection by the engineer and verification that all work on a project is complete, a notice of acceptance for maintenance will be submitted to the contractor. Acceptance for maintenance excludes any items covered by item-specific performance bonds. Final Inspection shall occur not later than ten (10) business days after contractor's notification to the engineer that all corrections and exceptions have been completed. If the Final Inspection has not occurred within the ten (10) business-day time frame, all corrections and exceptions shall be deemed completed and MoDOT will be deemed to have accepted maintenance. If written acceptance for maintenance is not received within twenty (20) business days after the date of the Final Inspection, nor any objections sent to the Agent of MoDOT during this twenty (20) business-day period, the project and the work shall automatically be deemed accepted for maintenance.

105.15.2.1 Following the Final Inspection, the Agent of MoDOT will be relieved of any new or additional liability to third parties for personal injury, death or property damages which may be alleged to result from the design or construction of the work, unless additional work is performed by the Agent of MoDOT on the right of way after Final Inspection.

105.15.2.2 Nothing in these specifications shall be deemed to excuse the contractor of liability or responsibility for any personal injury, death or property damages which may have occurred during the time period from the Commencement of Work through the Final Inspection.

105.15.2.3 Acceptance of a project shall not be construed to relieve the contractor of full responsibility for making good any non-latent defect in work or material found on any section of work prior to final acceptance of the entire project, to alter in any manner the method of payment prescribed in the contract or to constitute a waiver of any claim the Commission might have against the contractor on the entire project.

105.15.2.4 Contracts with Multiple Projects. For contracts that include two or more projects, the contractor may request a separate final inspection and acceptance for maintenance as the work is completed on each project.

105.15.3 Final Acceptance and Payment. Following Final Inspection and acceptance for maintenance, the engineer will prepare the final tabulation of quantities in accordance with [Sec 109.8](#). A final change order, if necessary, and the final tabulation of quantities will be submitted to the contractor for review. Upon receipt of the final tabulation of quantities, the contractor shall promptly submit to the engineer any remaining project documentation including, but not limited to, those listed in [Sec 105.15.3.2](#).

105.15.3.1 A Final Acceptance report will be submitted to the contractor, and final payment will be made, no later than thirty days following concurrence on tabulation of quantities, receipt by the engineer of all project documentation, and verification by the engineer that all material incorporated into the work has been properly inspected. If the final tabulation of

quantities determines the contractor was overpaid, the contractor, or in case of default, the surety, shall return the amount of overpayment to the Commission within thirty days of receiving notice of the overpayment from the engineer.

105.15.3.2 When required by the contract, project documentation shall consist of the following:

- (a) Contractor's Affidavit Regarding Settlement of Claims (Form C-242)
- (b) Final Change Order
- (c) DBE Participation List and Final Verification
- (d) Affidavit – Compliance with the Prevailing Wage Law

105.15.3.3 Final acceptance will not excuse the contractor's liability or responsibility to the Commission for any latent defects in the work or material incorporated into the work, or for claims relating to any work or material incorporated into the work, except as barred by Sections 537.600 and 537.610, RSMo.

Delete Sec 107.11, including all subsections, and substitute the following:

107.11 Responsibility for Claims for Damage or Injury. The contractor shall be responsible, to the extent imposed by applicable law, for injury, property damage, damage to the Work, or other loss caused by the negligent, wrongful, intentional, reckless, or contractually noncompliant acts or omissions of the contractor or an Agent of Contractor from Commencement of construction activities through Final Inspection and acceptance for maintenance.

107.11.1 The contractor shall not be responsible for damage relating to personal injury or death, arising from the design, condition, or maintenance of the project area prior to commencement of work and after Final Inspection and acceptance of the work, in accordance with [Sec 101.2](#) and [105.15.2](#), unless any of the following conditions exist:

- (a) The work is so defective that it creates an imminent danger to third parties;
- (b) A defect in the work was concealed and not discoverable by a reasonable inspection by the Commission;
- (c) The agent of MoDOT knew of the dangerous condition and did not disclose it to the Commission; or
- (d) The plans or specifications followed were so imperfect or improper that the agent of MoDOT should have known the work to be done thereunder would result in an unsafe condition.

107.11.2 Neither the Commission nor the contractor, by execution of a contract, shall intend to or create a new or enlarge an existing cause of action in any third party. This provision shall not be interpreted to create any new liability that does not exist under the law, or to waive or extinguish any defense that either party to this contract or their respective agents and employees may have to an action or suit by a third party.

Delete Sec 107.12, including all subsections, and substitute the following:

107.12 Contractor's Responsibility for Work Damages to any portion of the work occurring after the date of Commencement of Work and before the work is deemed approved and accepted, caused by the action of the elements or from any other reason, shall be

repaired or replaced at the contractor's expense. The contractor, at the contractor's option, may insure against any such damages. The Commission may, in its discretion, make such a payment, determined in accordance with [Sec 109.4](#), for damage to the work due to unforeseeable causes beyond the control of, and without fault or negligence on the part of the contractor, unless the contractor has been reimbursed for such damages by the contractor's insurer. Prior to reimbursement, the contractor shall furnish documentary evidence of all efforts to recover such repair costs.

107.12.1 The contractor shall immediately give written notice to the engineer of any pedestrian, worker and/or vehicular accident that occurs in or near the work zone. The contractor may be directed by the engineer to repair permanent Commission facilities that have been damaged by events that are beyond the control of the contractor. Reimbursement will be provided by the Commission, determined in accordance with [Sec 109.4](#), for the actual direct cost of labor, equipment and material, exclusive of overhead, indirect or consequential costs of profit. The Commission may elect to make such repairs in lieu of the contractor.

Delete Sections 107.13, 107.13.1, 107.13.2, 107.13.3, 107.13.3.4, 107.13.5, 107.13.6, 107.13.9, 107.13.10.4, 107.13.10.8, and substitute the following:

107.13 General Insurance Requirements. From the commencement of construction activities through the Final Inspection and acceptance for maintenance of the project by the engineer, the contractor shall procure and maintain at the contractor's expense, insurance for all damages and losses imposed by law and assumed under the contract, of the kinds and in the amounts specified in [Secs 107.13.1](#) through [107.13.8](#).

107.13.1 Sovereign Immunity Limits for Missouri Public Entities. The contractor shall procure and maintain at least minimum insurance coverages to meet the sovereign immunity limits for Missouri public entities as calculated by the Missouri Department of Insurance and published annually in the Missouri Register pursuant to Section 537.610, RSMo for [Sec 107.13.2](#) through [107.13.5](#), unless specified otherwise for each type of insurance coverage. Each policy shall provide additional insured status for the Missouri Highways and Transportation Commission, its members, the Missouri Department of Transportation, and its employees up to Missouri's sovereign immunity limits. Provided, however, additional insured coverage applies only to liability caused in whole or in part by the acts or omissions of the named insured or those acting on its behalf and does not provide defense or indemnity for liability that Section 537.600, RSMo. places solely on MoDOT or another public entity. Each policy shall be endorsed to not waive sovereign immunity limits. The naming of the Commission, its members, MoDOT, and its employees as additional insureds under any insurance policy shall not be construed as a waiver of any sovereign, official, or other governmental immunity. The Commission, its members, MoDOT, and its employees reserve the right to assert any sovereign, official, or any other governmental immunities. Nothing in the Section shall be construed to enlarge the liability of the contractor beyond that imposed by applicable law, create a contractual duty to defend or indemnify prohibited by Section 537.600, RSMo, or require insurance coverage for liability that Section 537.600, RSMo places solely upon MoDOT. Insurance coverage and priority shall otherwise be determined in accordance with the applicable policies and endorsements.

107.13.2 Commercial General Liability Insurance. The contractor shall procure, and maintain during the term of the project, commercial general liability insurance with coverage at least as broad as Insurance Services Office (ISO) policy form CG 00 01. The general aggregate limit shall, by endorsement or otherwise, provide a designated aggregate limit

solely for this project using ISO form CG 25 03 05 09 or an equivalent form. General liability policies shall be endorsed to add the Commission, its members, MoDOT, its employees, agents, and assigns as additional insureds (the "Additional Insureds") using Insurance Services Office forms CG 20 10 or the equivalent under such policy. For construction contracts, an endorsement providing completed operations coverage to the Additional Insureds, ISO form CG 20 37 or the equivalent, is also required. This form, CG 20 37, shall be endorsed on each subsequent commercial general liability policy issued to the contractor for three (3) years after final acceptance of the project. Should work on the project be discontinued, the commercial general liability insurance coverage shall remain in effect for three (3) years after the date of discontinuation, when applicable. Coverage shall not be reduced by insured versus insured exclusions or by explosion, collapse and underground (XCU) exclusions.

107.13.3 Commercial Automobile Liability Insurance. The contractor shall procure and maintain automobile liability coverage at least as broad as ISO policy form CA 00 01 covering owned, hired, and non-owned autos. The policy shall be endorsed to Commission, its members, MoDOT, and its employees, agents, and assigns as additional insureds (the "Additional Insureds").

107.13.4 Contractor's Pollution Liability (CPL) Insurance. The contractor shall procure and maintain contractor's pollution liability insurance for liability arising out of sudden, accidental, and gradual pollution and remediation. The policy shall have minimum limits of \$1,000,000. The Commission, its members, MoDOT, and its employees, agents, and assigns shall be endorsed as additional insureds under such policy. The policy shall provide coverage for hauling of waste from the project site to the final disposal location including non-owned disposal sites. Completed operations coverage for pollution liability shall extend a minimum of three (3) years after final acceptance of the project. Contractor shall require any subcontractor that performs environmental remediation, hazardous material removal or related work including the transportation, disposal, or environmental engineering work, to provide contractor's pollution liability insurance with limits and scope of coverage appropriate to the exposure. The Commission, its members, MoDOT, and its employees, agents, and assigns shall be endorsed as additional insured under such policy. The policy shall not contain a cross suits exclusion or other provisions that would eliminate additional insured claims against the contractor or subcontractor.

107.13.5 Aircraft Liability Insurance. If aircraft, including unmanned aircraft, will be used on the project, contractor shall provide, or cause to be provided, aircraft liability insurance protecting against claims for damages resulting from such use in all cases where any aircraft that is owned, leased or chartered by any Contractor-Related Entity used on the Project. The policy shall have minimum limits of \$1,000,000 and the Commission, its members, MoDOT, and its employees, agents, and assigns shall be additional insureds on the policy by endorsement or policy provision. The use of any aircraft in performance of the Work, the aircraft crew, flight path and altitude, including landing of any aircraft on the Site or on any property owned by the Commission, MoDOT or other parties at interest, shall be subject to review and written acceptance by the Commission prior to any such usage. If any aircraft are leased or chartered with crew and/or pilot, evidence of non-owned aircraft liability insurance will be acceptable to meet these requirements but must be provided prior to use of the aircraft. For use of unmanned aircraft vehicles, the contractor may provide insurance either through an aircraft liability insurance policy, or by endorsement to the contractor's commercial general liability insurance policy and excess liability policies. Use of unmanned

aircraft must comply with all state and federal rules and regulations, including FAA requirements.

107.13.6 Excess or Umbrella Liability Insurance. The contractor may satisfy the required limits for [Secs 107.13.2](#) through [107.13.5](#) by use of excess or umbrella liability insurance policies in any combination that meets the contract limits requirements. Such policies shall include as additional insureds, the Commission, its members, MoDOT, and its employees, agents, and assigns.

107.13.9 Evidence of Insurance. Required evidence of insurance providing confirmation of compliance with these requirements shall consist of a certificate of insurance and any endorsements adding the Commission, MoDOT and its employees as additional insureds where specified. "Blanket" or "automatic" additional insured endorsements providing additional insured coverage "where required by contract," may be used, provided that such forms provide coverage at least as broad as provided by the specified endorsement forms required. The contractor and any subcontract work shall not commence under the contract until the contractor obtains the applicable insurance coverage required and receives approval for such insurance from the engineer. No later than five (5) business days prior to the Commencement of Work, all evidence of insurance for the prime contractor, including certificates of insurance and required endorsements, and notices shall be submitted electronically by the insurance agent to ContractorSupport@MoDOT.mo.gov. The aforementioned evidence of insurance shall also be submitted in the same manner no fewer than five (5) business days prior to the effective date of any change or renewal of insurance during the term of the project. All evidence of insurance for the prime contractor, including certificates of insurance and required endorsements, and notices shall be submitted electronically by the insurance agent to ContractorSupport@MoDOT.mo.gov. The contractor shall promptly furnish the engineer with a complete copy of its policy upon request. Failure to furnish evidence of proper insurance, or complete insurance policies when requested, may result in the suspension of work as provided in [Sec 108](#), and may result in other claims or actions for breach of contract or otherwise, as may be recognized at law or in equity.

107.13.10.4 Primary and Non-contributory. For any claims related to this contract or insurance requirements herein identified, the contractor's insurance coverage shall be primary insurance with respect to the Commission, its members, MoDOT, and its employees, as the additional insureds. Any other insurance or self-insurance maintained by any of these parties shall be excess of the contractor's insurance and shall not contribute with the contractor's insurance, unless liability caused in whole or in part by the acts or omissions of the named insured or those acting on its behalf and does not provide defense or indemnity for liability that Section 537.600, RSMo places solely upon MoDOT or another public entity. Priority and allocation shall be governed by the applicable policies and endorsements. MoDOT may not unilaterally alter priority among the contractor's, any subcontractor's, or any additional insured's policies.

107.13.10.8 Timely Notice of Claims. Contractor shall give the engineer prompt and timely notice of claims made or suits instituted that arise out of or result from contractor's or agent of contractor's performance under this Agreement, and that involve or may involve coverage under any of the required liability policies. The Commission and MoDOT will provide timely notice to the contractor of any claims or lawsuits that it receives.

Delete Sec 107.14 and substitute the following:

107.14 Cooperation in Defense. The Agent of MoDOT and MoDOT shall reasonably cooperate in the defense of the other against potential third party claims. This cooperation includes providing reasonable access to relevant records, documents, and personnel. Nothing in this section creates a contractual duty to defend prohibited by RSMo 537.600(5).

Delete Sec 107.18 and substitute the following:

107.18 Basis of Payment. No direct payment will be made for compliance with [Sec 107](#).

- Payment for Excess Piling

Delete Sec 702.6.3 and insert the following:

702.6.3 Pile Cut-Offs. No direct payment will be made for routine pile cut-offs, except as otherwise provided herein.

702.6.3.1 Excess Piling. If the total measured length of installed piling on a given structure, per item, is 85 percent or less of the plan quantity, the difference between plan quantity and installed quantity shall be deemed as excess piling. Reimbursement will be made for excess piling, as determined by the engineer. No reimbursement will be made for piling purchased in excess of plan quantity. The contractor shall provide the engineer with all paid invoices, which may be used to determine an equitable reimbursement. Shipping costs on the invoice will be included in the reimbursement payment, but no handling, overhead or profit will be included. All excess piling shall be removed from the project and retained by the contractor.

- *Delete Sec 102.18.1 and renumber existing Sec 102.18.2 through 102.18.5.4 including all subsections:*

102.18.1 Certification Regarding Disbarment, Eligibility, Indictments, Convictions or Civil Judgments. The president or authorized official of the bidder, under penalty of perjury under the laws of the USA, shall certify that, except as noted in the exceptions, the company or any person associated therewith in the capacity of owner, partner, director, officer, principal investor, project director, manager, auditor or any position involving the administration of federal funds:

(a) Is not currently under suspension, debarment, voluntary exclusion or determination of ineligibility by any federal agency.

(b) Has not been suspended, debarred, voluntarily excluded or determined ineligible by any federal agency within the past three years.

(c) Does not have a proposed debarment or suspension pending.

(d) Has not been indicted, convicted or had a civil judgment rendered against any of the listed parties by a court of competent jurisdiction in any matter involving fraud or official misconduct within the past three years.

102.18.1.1 If there are any exceptions, the bidder shall submit the exceptions on company letterhead, signed by the bidder and inserted inside the bid submitted.

102.18.1.2 Exceptions will not necessarily result in denial of award but will be considered in determining bidder responsibility.

102.18.1.3 For any exception noted, the bidder shall indicate to whom it applies, the initiating agency, and dates of action.

102.18.1.4 Providing false information may result in criminal prosecution or administrative sanctions.

102.18.2 Certification Regarding Anti-Collusion. In accordance with 23 USC 112, the bidder shall certify, under penalty of perjury, that the bidder has not, either directly or indirectly, entered into any agreement, participated in any collusion or otherwise taken any action in restraint of free competitive bidding in connection with this contract.

102.18.3 Certification Regarding Lobbying Activities. In accordance with 31 USC 1352, the bidder shall certify that:

(a) No federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any federal agency, a member of Congress, an officer or employee of Congress or an employee of a member of Congress in connection with the awarding of any federal contract, the making of any federal grant, the making of any federal loan, the entering into of any cooperative agreement and the extension, continuation, renewal, amendment or modification of any federal contract, grant, loan or cooperative agreement.

(b) If any funds other than federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any federal agency, a member of Congress, an officer or employee of Congress or an employee of a member of Congress in connection with this federal contract, grant, loan or cooperative agreement, the bidder shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with the instructions.

102.18.3.1 This certification shall be a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification shall be a prerequisite for making or entering into this transaction imposed by 31 USC 1352. Any person who fails to file the required certification will be subject to a civil penalty of no less than \$10,000 and no more than \$100,000 for each such failure.

102.18.3.2 The bidder also agrees by submitting a bid that the bidder shall require that the language of this certification be included in all subcontracts that exceed \$100,000, and that all such subrecipients shall certify and disclose any lobbying activities accordingly.

102.18.4 Certification Regarding Missouri Domestic Products Procurement Act. This certification will only apply to state-funded projects as noted on the cover of the Request for Bid. The bidder's attention is directed to Sections 34.350 through 34.359 RSMo 2000, which requires all manufactured goods or commodities used or supplied in the performance of the contract or any subcontract to be manufactured, assembled or produced in the USA. Sections 34.350 through 34.359 RSMo will not apply if the total bid is less than \$1,000.00.

102.18.4.1 Section 34.355 RSMo requires the vendor or bidder to certify compliance with Section 34.353 RSMo and, if applicable, Section 34.359 RSMo at the time of bidding and prior to payment. Failure to comply with Section 34.353 RSMo during performance of the contract and to provide certification of compliance prior to payment will result in nonpayment for those goods or commodities.

102.18.4.2 The bidder shall certify that all the specified goods or products for which this bid was solicited are manufactured, assembled or produced in the USA. If there are any exceptions, the bidder shall submit a list of the exceptions on company letterhead, signed by the bidder and attached to the inside of the bid submitted. The list shall include the pay item number and the location where the item is manufactured. The bidder shall identify any of the exceptions in the list that are specified goods or products that are treated as manufactured, assembled or produced in the USA under an existing treaty, law, agreement or regulation of the USA regarding export/import restrictions and international trade.

102.18.4.3 The bidder shall notify the contact listed in the Request for Bid of any specified goods or products that cannot be manufactured, assembled or produced in the USA in sufficient quantities or in time to meet the contract specifications.

102.18.4.4 The bidder shall certify that the bid complies with all provisions of Section 34.350 et seq RSMo.

Delete Sec 106.10 and substitute the following:

106.10 Missouri Domestic Products Requirement. For state funded projects, as noted on the cover of the contract, material shall be in accordance with [Sec 102.18.4](#).

G. Utilities JSP-93-26F

1.0 For informational purposes only, the following is a list of names, addresses, and telephone numbers of the known utility companies in the area of the construction work for this improvement:

<u>Utility Name</u>	<u>Known Required Adjustment</u>	<u>Type</u>
Spire Gas Richi Garcia Email: Richi.Garcia@spireenergy.com 7500E 35 th Terrace Kansas City, MO 64129 (816) 507-0713	None Section 2.1	Gas

Brightspeed Communications Tonjia Baldwin Email: Tonjia.Baldwin@Brightspeed.com 625 Cherry St Columbia, MO 65201 (980) 376-1492	None	Communications – on aerial power poles Protect from backhoe boom swing
Fidelity Communications 9503 Highway 100 New Haven, MO 63068 (573) 237-2103	None	Communications – on aerial power poles Protect from backhoe boom swing
City of Harrisonville - Electric Brent Stockstill Email: bstockstill@harrisonville.com 2108 Royal St Harrisonville, MO 64701 (816) 564-4666	None	Electric
City of Harrisonville - Water Matt Carver Email: mcarver@harrisonville.com 201 W Chestnut St Harrisonville, MO 64701 (816) 745-6127	None	Water

1.1 The existence and approximate location of utility facilities known to exist, as shown on the plans, are based upon the best information available to the Commission at this time. This information is provided by the Commission "as-is" and the Commission expressly disclaims any representation or warranty as to the completeness, accuracy, or suitability of the information for any use. Reliance upon this information is done at the risk and peril of the user, and the Commission shall not be liable for any damages that may arise from any error in the information. It is, therefore, the responsibility of the contractor to verify the above listed information indicating existence, location and status of any facility. Such verification includes direct contact with the listed utilities.

2.0 Project Specific Provisions:

2.1 Spire Gas

Spire issued a relocation work order (WO 31000960) on 1/31/2024. Unverified if the relocation has been completed.

H. Lump Sum Temporary Traffic Control JSP-22-01B

1.0 Delete Sec 616.11 and insert the following:

616.11 Method of Measurement. Measurement for relocation of post-mounted signs will be made to the nearest square foot of sign area only for the signs designated for payment on the plans. All other sign relocations shall be incidental. Measurement for construction signs will be

made to the nearest square foot of sign area. Measurement will be made per each for each of the temporary traffic control items provided in the contract.

616.11.1 Lump Sum Temporary Traffic Control. No measurement will be made for temporary traffic control items grouped and designated to be paid per lump sum. The list of lump sum items provided in the plans or contract is considered an approximation and may be subject to change based on field conditions. This is not a complete list and may exclude quantities for duplicate work zone packages used in simultaneous operations. The contractor shall provide all traffic control devices required to execute the provided traffic control plans for each applicable operation, stage, or phase. No measurement will be made for any additional signs or devices needed except for changes in the traffic control plan directed by the engineer.

2.0 Delete Sec 616.12 and insert the following:

616.12 Basis of Payment. All temporary traffic control devices authorized for installation by the engineer will be paid for at the contract unit price for each of the pay items included in the contract. Whether the devices are paid individually, or per lump sum, no direct payment will be made for the following:

- (a) Incidental items necessary to complete the work, unless specifically provided as a pay item in the contract.
- (b) Installing, operating, maintaining, cleaning, repairing, removing, or replacing traffic control devices.
- (c) Covering and uncovering existing signs and other traffic control devices.
- (d) Relocating temporary traffic control devices, including permanent traffic control devices temporarily relocated, unless specifically included as a pay item in the contract.
- (e) Worker apparel.
- (f) Flaggers, AFADs, PFDs, pilot vehicles, and appurtenances at flagging stations.
- (g) Furnishing, installing, operating, maintaining, and removing construction-related vehicle and equipment lighting.
- (h) Construction and removal of temporary equipment crossovers, including restoring pre-existing crossovers.
- (i) Provide and maintaining work zone lighting and work area lighting.

616.12.1 Lump Sum Temporary Traffic Control. Traffic control items grouped together in the contract or plans for lump sum payment shall be paid incrementally per Sec 616.12.1.1. Alternately, upon request from the contractor, the engineer will consider a modified payment schedule that more accurately reflects completion of traffic control work. No payment will be made for any additional signs or devices needed except for changes in the traffic control plan directed by the engineer. Additional items directed by the engineer will be paid for in accordance with Sec 109.4. No adjustment to the price will be made for overruns or underruns of other work or for added work that is completed within existing work zones.

616.12.1.1 Partial payments. For purposes of determining partial payments, the original contract amount will be the total dollar value of all original contract line items less the price for Lump Sum Temporary Traffic Control (LSTTC). If the contract includes multiple projects, this determination will be made for each project. Partial payments will be made as follows:

- (a) The first payment will be made when five percent of the original contract amount is earned. The payment will be 50 percent of the price for LSTTC, or five percent of the original contract amount, whichever is less.
- (b) The second payment will be made when 50 percent of the original contract amount is earned. The payment will be 25 percent of the price for LSTTC, or 2.5 percent of the original contract amount, whichever is less.
- (c) The third payment will be made when 75 percent of the original contract amount is earned. The payment will be 20 percent of the price for LSTTC, or two percent of the original contract amount, whichever is less.
- (d) Payment for the remaining balance due for LSTTC will be made when the contract has been accepted for maintenance or earlier as approved by the engineer.

616.12.1.2 Temporary traffic control will be paid for at the contract lump sum price for Item:

Item No.	Unit	Description
616-99.01	Lump Sum	Misc. Lump Sum Temporary Traffic Control

I. ADA Compliance and Final Acceptance of Constructed Facilities JSP-10-01C

1.0 Description. The contractor shall comply with all laws pertaining to the Americans with Disabilities Act (ADA) during construction of pedestrian facilities on public rights of way for this project. An ADA Checklist is provided herein to be utilized by the contractor for verifying compliance with the ADA law. The contractor is expected to familiarize himself with the plans involving pedestrian facilities and the ADA Post Construction Checklist prior to performing the work.

2.0 ADA Checklist. The contractor can locate the ADA Checklist form on the Missouri Department of Transportation website:

<https://www.modot.org/forms-contractor-use>

2.1 The ADA Checklist is not to be considered all-inclusive, nor does it supersede any other contract requirements. The ADA checklist is a required guide for the contractor to use during the construction of the pedestrian facilities and a basis for the commission's acceptance of work. Prior to work being performed, the contractor shall bring to the engineer's attention any planned work that is in conflict with the design or with the requirement shown in the checklist. This notification shall be made in writing. Situations may arise where the checklist may not fully address all requirements needed to construct a facility to the full requirements of current ADA law. In those situations, the contractor shall propose a solution to the engineer that is compliant with current ADA law using the following hierarchy of resources: 2010 ADA Standards for Accessible Design, Draft Public Rights of Way Accessibility Guidelines (PROWAG) dated November 23,

2005, MoDOT's Engineering Policy Guidelines (EPG), or a solution approved by the U.S. Access Board.

2.2 It is encouraged that the contractor monitor the completed sections of the newly constructed pedestrian facilities in attempts to minimize negative impacts that his equipment, subcontractors or general public may have on the work. Completed facilities must comply with the requirements of ADA and the ADA Checklist or have documented reasons for the non-compliant items to remain.

3.0 Coordination of Construction.

3.1 Prior to construction and/or closure on an existing pedestrian path of travel, the contractor shall submit a schedule of work to be constructed, which includes location of work performed, the duration of time the contractor expects to impact the facility and an accessible signed pedestrian detour compliant with MUTCD Section 6D that will be used during each stage of construction. This plan shall be submitted to the engineer for review and approval at or prior to the pre-construction conference. Accessible signed detours shall be in place prior to any work being performed that has the effect of closing an existing pedestrian travel way.

3.2 When consultant survey is included in the contract, the contractor shall use their survey crews to verify that the intended design can be constructed to the full requirements as established in the 2010 ADA Standards. When 2010 ADA Standards do not give sufficient information to construct the contract work, the contractor shall refer to the PROWAG.

3.3 When consultant survey is not included in the contract, the contractor shall coordinate with the engineer, prior to construction, to determine if additional survey will be required to confirm the designs constructability.

4.0 Final Acceptance of Work. The contractor shall provide the completed ADA Checklist to the engineer at the semi-final inspection. ADA improvements require final inspection and compliance with the ADA requirements and the ADA Checklist. Each item listed in the checklist must receive either a "YES" or an "N/A" score. Any item receiving a "NO" will be deemed non-compliant and shall be corrected at the contractor's expense unless deemed otherwise by the engineer. Documentation must be provided about the location of any non-compliant items that are allowed to remain at the end of the construction project. Specific details of the non-compliant items, the ADA requirement that the work was not able to comply with, and the specific reasons that justify the exception are to be included with the completed ADA Checklist provided to the engineer.

4.1 Slope and grade measurements shall be made using a properly calibrated, 2 foot long, electronic digital level approved by the engineer.

5.0 Basis of Payment. The contractor will receive full pay of the contract unit cost for all sidewalk, ramp, curb ramp, median, island, approach work, cross walk striping, APS buttons, pedestrian heads, detectible warning systems and temporary traffic control measures that are completed during the current estimate period as approved by the engineer. Based upon completion of the ADA Checklist, the contractor shall complete any necessary adjustments to items deemed non-compliant as directed by the engineer.

5.1 No direct payment will be made to the contractor to recover the cost of equipment, labor, materials, or time required to fulfill the above provisions, unless specified elsewhere in the contract documents.

J. ADA Material Testing Frequency Modifications JSP-23-01A

1.0 Description. This provision revises the Inspection and Testing Plan (ITP) for the construction of ADA compliant features to better match the nature of the work. The minimum Quality Control (QC) testing frequencies shall be as stated in these provisions.

2.0 Compaction Test on Base Rock Under Sidewalk, Curb Ramps and Paved Approaches. (Revises ITP Sec 304.3.4) The required test frequency shall be one per 600 tons.

3.0 Gradation Test on Base Rock Under Sidewalk, Curb Ramps and Paved Approaches. (Revises ITP Sec 304.4.1) The required frequency shall be one per 500 tons.

4.0 Concrete Plant Checklists. (Revises ITP Sec 501) Submittal of the 501 Concrete Plant Checklist shall be once per week when the contractor is only pouring curb, sidewalk, paved approaches, and curb ramps.

5.0 Concrete Median, Median Strip, Sidewalk, Curb Ramps, Steps and Paved Approaches. The required frequency shall remain as stated in ITP Sec 608 and further detailed in Sec 608.3.7.

6.0 Concrete Curb. (Revises ITP Sec 609 only for Concrete Curb) For concrete curb, the required frequency shall be equivalent to ITP Sec 608 (concrete median, median strip, sidewalk, curb ramps, steps and paved approaches) and Sec 608.3.7.

K. ADA Compliant Moveable Barricade

1.0 Description. The work shall consist of providing moveable barricades to satisfy the requirements of the pedestrian traffic control plans as shown in the bidding documents. The contractor will be responsible for moving the pedestrian barricades to coincide with their planned order of work.

2.0 Construction Requirements. The contractor shall use a moveable barricade that meets the requirements as established by the ADA. The pedestrian barricades shall be of self-supporting type having a minimum length of 6 feet per unit. The face of the barricade shall not extend into adjacent sidewalk considered open for pedestrian use. The contractor will be responsible for setting and maintaining the pedestrian barricades until all the proposed improvements have been constructed.

3.0 Method of Measurement. Measurement for ADA Compliant Moveable Barricade will be made per each for each 6 feet (min.) unit provided.

4.0 Basis of Payment. Payment for all work necessary to fulfill the requirements noted above will be considered completely covered in the contract unit price for Pay Item No. 616-99.02 ADA Compliant Moveable Barricade, per each. No direct payment will be made for any necessary relocation of the ADA Compliant Moveable Barricade.

L. Asbestos Containing Material

1.0 Description. The existing bridge was inspected by OWN Inc. sub-consultant Mustardseed Cultural and Environmental Services, LLC for asbestos containing materials (ACM's).

ACM report is attached.

The Contractor must send a demolition notice to DNR at least 10 days prior to construction. Contractor cannot begin demolition until DNR has issued a permit. These forms can be found in the Permits section of these specs.

M. Modular Block Wall-Weir

The work covered by this section includes the furnishing of all labor, materials, equipment and incidentals for geotechnical investigations, design, construction and installation of a modular concrete retaining wall including drainage materials as shown on the Construction Drawings or as described by the Contract Specifications. The work included in this section consists of, but is not limited, to the following:

- Geotechnical investigations and wall design.
- Excavation and foundation soil preparation.
- Furnishing and placement of the leveling base.
- Furnishing and placement of drainage system at the base of the wall.
- Furnishing and placement of modular unit wall facing units and cap or coping units.
- Furnishing and compaction of infill, drainage and retained soils.

Work under this section shall be performed in accordance with the sections of the Standard Specifications and with the following ASTM Standards:

- ASTM C 90 - Standard Specification for Load-Bearing Concrete Masonry Units
- ASTM C 140 - Standard Methods of Sampling and Testing Concrete Masonry Units
- ASTM D 4751 - Standard Test Method for Apparent Opening Size

A. Definitions:

- MODULAR CONCRETE RETAINING WALL UNITS are dry-cast solid concrete units that form the external fascia of a modular unit retaining wall system.
- COPING UNITS are the last course of concrete units used to finish the top of the wall.
- INFILL soil is a specified soil that is placed directly behind the drainage soil and within the reinforced zone, if applicable.
- RETAINED SOIL is an in-situ soil or a specified soil that is placed behind the wall infill soil. Typically, the retained soil is native soil unless otherwise specified.
- FOUNDATION SOIL is the in-situ soil beneath the wall structure.
- DRAINAGE SOIL is a free draining soil with natural soil filtering capability, or a free draining soil encapsulated in a suitable geotextile, or a combination of free draining soil and perforated pipe all wrapped in a geotextile, placed directly behind the modular concrete units.

- DRAINAGE PIPE is a perforated polyethylene pipe used to carry water, collected at the base of a soil retaining wall, to outlets in order to prevent pore water pressures from building up behind the wall facing modules.
- NONWOVEN GEOTEXTILES are permeable synthetic fabrics formed from a random arrangement of fibers in a planar structure. They allow the passage of water from one soil medium to another while preventing the migration of fine particles that might clog a drainage medium.

B. Materials:

The wall materials shall be modular concrete units.

INFILL SOIL: The infill soil in this case shall be native soil found in stream bed.

RETAINED SOIL: The retained soil shall be on site soils unless specified otherwise in the Construction Specifications or as directed by the Engineer. If imported fill is required, it shall be examined and approved by the Engineer.

FOUNDATION SOIL: The foundation soil shall be on site soils, subject to approval by the Engineer.

LEVELING BASE MATERIAL

The footing material shall be well graded (GW - Unified Soil Classification System) compacted crushed stone, or a concrete leveling base, or as shown on the construction drawings.

C. Site Preparation:

The foundation soil shall be excavated or filled as required to the grades and dimensions shown on the Construction Drawings or as directed by the Engineer.

In cut situations, the native soil shall be excavated to the lines and grades shown on the Construction Drawings and moved off site or to a suitable location for reuse as retained soil, if applicable. Site preparation shall be either Excavation & Grading or Embankment & Grading.

D. Leveling Base or Spread Footing Placement:

The leveling base material shall be placed and compacted crushed stone, or vibrated concrete along the grades and dimensions shown on the Construction Drawings or as directed by the Engineer. The minimum thickness of the leveling base shall be 6 in.

E. Installation of Retaining Wall Units:

The bottom row of retaining wall modules shall be placed on the prepared leveling base as shown on the Construction Drawings. Care shall be taken to ensure that the wall modules are aligned properly, level and in complete contact with the base material.

The wall modules above the bottom course shall be placed such that the tongue and groove arrangement provides the design batter (i.e. setback) of the wall face.

The wall modules shall be swept clean before placing additional levels to ensure that no dirt, concrete or other foreign materials become lodged between successive lifts of the wall modules.

The Contractor shall check the level of wall modules with each lift to ensure that no gaps are formed between successive lifts that may affect the pullout resistance of geogrid reinforcement, if applicable.

Care shall be taken to ensure that the wall modules are not broken or damaged during handling and placement.

No heavy compaction equipment shall be allowed within 3 ft. of the back of the wall fascia.

F. Retained Soil:

Retained soils shall be placed and compacted behind the drainage soil, or infill soil if applicable, in maximum lift thickness of 6 in.

All installations shall be in strict compliance with the manufacturer's specifications.

N. Pervious Pavement – 6-foot Sidewalk on lot 3

Material Specifications:

- Aggregate: Stabilized permeable base must use Grade 4 drainage aggregate in accordance with Section 1009 of the MoDOT Standard Specifications. This aggregate should be clean, hard, and coarse-graded.
- Cement Factor: The mixture must have a cement factor of 2.5 sacks per cubic yard.
- Admixtures: Fly ash and ground granulated blast furnace slag shall not be used in the cement-stabilized permeable base.
- Water: Water must conform to material requirements in Sections 1019 and 1070 and be free from substances deleterious to the hardening of cement.

Construction Requirements

Construction of the cement stabilized permeable base has specific requirements. Mixing, proportioning, and transporting must follow MoDOT **Section 501**. Compaction equipment, such as vibrators, can be used to consolidate the mixture, provided it is effective and minimizes segregation. The maximum compacted thickness for a single lift is **4 inches**. It is crucial to prevent contamination of the finished base, and any contaminated areas must be removed. Subgrade preparation, including the removal of soft areas, should adhere to Section 209. The contractor is responsible for protecting the concrete from freezing when temperatures are expected to drop below 32°F; frozen material is unacceptable.

O. Bottomless Arch Structure

1.0 STANDARDS AND DEFINITIONS

- 1.1 STANDARDS - All standards refer to latest edition unless otherwise noted.

- 1.1.1 ASTM A-761 "Corrugated Steel Structural Plate, Zinc Coated for Field-Bolted Pipe, Pipe-Arches and Arches" (AASHTO Designation M-167).
- 1.1.2 AASHTO LRFD Specification for Highway Bridges - Section 12.
- 1.1.3 AASHTO LRFD Specification for Highway Bridges - Section 26.
- 1.2 DEFINITIONS
 - 1.2.1 Owner - In these specifications the word "Owner" shall mean City of Harrisonville, MO.
 - 1.2.2 Engineer - In these specifications the word "Engineer" shall mean the Engineer of Record or Owner's designated engineering representative.
 - 1.2.3 Manufacturer - In these specifications the word "Manufacturer" shall mean CONTECH Engineered Solutions, LLC
913-216-3818 Todd Black local representative.
 - 1.2.4 Contractor - In these specifications the word "Contractor" shall mean the firm or corporation undertaking the execution of any installation work under the terms of these specifications.
 - 1.2.5 Approved - In these specifications the word "approved" shall refer to the approval of the Engineer or his designated representative.
 - 1.2.6 As Directed - In these specifications the words "as directed" shall refer to the directions to the Contractor from the Owner or his designated representative.

2.0 GENERAL CONDITIONS

- 2.1 The Contractor shall furnish all labor, material and equipment and perform all work and services except those set out and furnished by the Owner, necessary to complete in a satisfactory manner the site preparation, excavation, filling, compaction, grading as shown on the plans and as described therein. This work shall consist of all mobilization clearing and grading, grubbing, stripping, removal of existing material unless otherwise stated, preparation of the land to be filled, filling of the land, spreading and compaction of the fill, and all subsidiary work necessary to complete the grading of the cut and fill areas to conform with the lines, grades, slopes, and specifications. This work is to be accomplished under the observation of the Owner or his designated representative.
- 2.2 Prior to bidding the work, the Contractor shall examine, investigate and inspect the construction site as to the nature and location of the work, and the general and local conditions at the construction site, including without limitation, the character of surface or subsurface conditions and obstacles to be encountered on and around the construction site and shall make such

additional investigation as he may deem necessary for the planning and proper execution of the work.

If conditions other than those indicated are discovered by the Contractor, the Owner shall be notified immediately. The material which the Contractor believes to be a changed condition shall not be disturbed so that the owner can investigate the condition.

2.3 The construction shall be performed under the direction of the Engineer.

2.4 All aspects of the structure design and site layout including foundations, backfill, end treatments and necessary scour consideration shall be performed by the Engineer.

Any installation guidance provided herein shall be endorsed by the Engineer or superseded by the Engineer's plans and specifications.

II - CONTECH BRIDGECOR PLATE STRUCTURE

1.0 GENERAL

1.1 Manufacturer shall fabricate the BRIDGECOR PLATE STRUCTURE as shown on the plans. Fabrication shall conform to the requirements of ASTM A-761 and shall consist of plates, fasteners, and appurtenant items.

Plate thickness, end treatment and type of invert and foundation shall be as indicated on the plans. All manufacturing processes including corrugating, punching, curving and required galvanizing shall be performed within the United States of America.

1.2 The contractor shall verify all field dimensions and conditions prior to ordering materials.

2.0 DIMENSIONS

2.1 The proposed structure shall be a CONTECH BRIDGECOR s #29 with the following dimensions:

Span: 28.25' Rise: 7.42' Gage: 7

2.2 All plan dimensions on the contract drawings are measured in a true horizontal plan unless otherwise noted.

3.0 ASSEMBLY AND INSTALLATION

- 3.1 Bolts and nuts shall conform to the requirements of ASTM A-449. The CONTECH BRIDGECOR shall be assembled in accordance with the plate layout drawings provided by the manufacturer and per the manufacturer's recommendations.

Bolts shall be tightened using an applied torque of between 100 and 300 ft.-lbs.

- 3.2 The CONTECH BRIDGECOR shall be installed in accordance with the plans and specifications, the manufacturer's recommendations, and AASHTO Standard Specification for Highway Bridges - Section 26.
- 3.3 Trench excavation shall be made in embankment material that is structurally adequate. The trench width shall be shown on the plans. Poor quality in situ embankment material must be removed and replaced with suitable backfill as directed by the Engineer.
- 3.4 Adequate soil bearing capacity or strength shall be provided to the Engineer. Foundation details shall be provided by the Engineer.
- 3.5 The structure shall be assembled in accordance with the Manufacturer's instructions. All plates shall be unloading and handled with reasonable care. Plates shall not be rolled or dragged over gravel rock and shall be prevented from striking rock or other hard objects during placement in trench or on bedding.


When assembled on a cast in place spread footing, the structure shall be assembled in the footing starting at the upstream end. Circumferential seams shall be installed with the plate laps shingled downstream as viewed from the inside of the structure.

The structure shall be backfilled using clean well graded granular material A-1, A-2-4, A-2-5 or A-3 according to the table. That meets the requirements of AASHTO M-145 for soil classifications

Backfill must be placed symmetrically on each side of the structure in 6 to 8 inch loose lifts. Each lift shall be compacted to a minimum of 90 percent density per AASHTO T-180.

- 3.7 **Construction loads that exceed highway load limits are not allowed to cross the structure without approval from the Engineer.**

Normal highway traffic is not allowed to cross the structure until the structure has been backfilled and paved. If the road is unpaved, cover allowance to accommodate rutting shall be as directed by the Engineer.

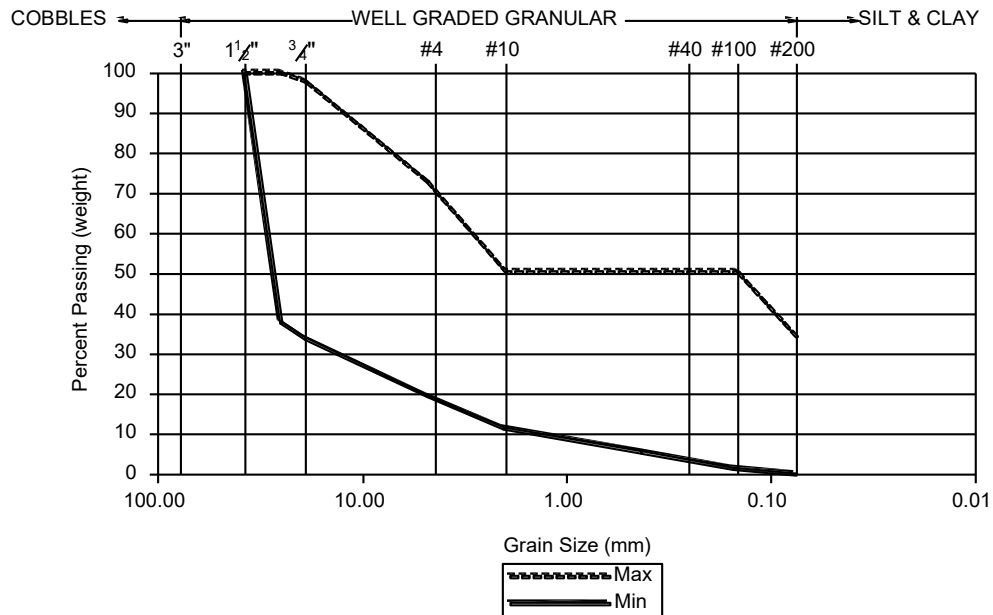

GROUP CLASSIFICATION	A-1-a	A-1-b	A-2-4	A-2-5	A-3
Sieve Analysis Percent Passing					
No. 10 (2.000 mm)	50 max.	----	----	----	----
No. 40 (0.425 mm)	30 max.	50 max.	----	----	51 max.
No. 100 (0.150 mm)	----	----	50 max.	50 max.	----
No. 200 (0.075 mm)	15 max.	25 max.	20 max.	20 max.	10 max.
Atterberg Limits for Fraction Passing No. 40 (0.425 mm)					
Liquid Limits	----	----	40 max.	41 max.	----
Plasticity Index	6 max.	6 max.	10 max.	10 max.	Non-Plastic
Usual Materials	Stone Fragment, Gravel and Sand		Silty or Clayey Gravel and Sand		Coarse Sand

NOTE: Atterberg Limits are modified to provide material that are primarily granular

P. Form Liner and Anti-Graffiti Coating

The form liner for structure headwall and wingwalls shall be **Sika Greenstreak #460 Ashlar Cutr Stone**. Minimum steel cover shall be maintained over all points of form liner. A sample of form liner shall be presented to Public Work of Harrisonville for approval before use. Anti-graffiti coating shall be Prosco sure Klean block guard and graffiti control 15 or approved equal.

Q. Remove/Replace Signage

Removal and replacement of existing monument signage shall be coordinated with School representatives. Removal and replacement of pedestrian crossing signage shall be as indicated in project drawings.

R. Native Plantings

Native plant species shall be planted along disturbed creek banks at completion of project in accordance with project drawings and specifications.

S. Liquidated Damages for Winter Months

1.0 Description. Revise Sec 108.8.1.2 (a) and (b) and substitute the following for the project:

- (a) Liquidated damages will be assessed from December 15 to March 15
- (b) Liquidated damages will be assessed for Saturdays, Sundays and Holidays.

T. Paving

1.0 Description. This special provision shall cover APWA Concrete Curb & Gutter Type CG-1, driveways, concrete curb ramps, and concrete sidewalk.

1.1 All subgrade preparation, subgrade stabilization, compacted subgrade, asphalt pavement, cold milling, concrete pavement, and curbing shall comply with the current edition of the APWA Standard Specifications Section 2200 with the exception of the measurement and payment sections referred to in each section.

U. Contractor Quality Control NJSP-15-42

1.0 The contractor shall perform Quality Control (QC) testing in accordance with the specifications and as specified herein. The contractor shall submit a Quality Control Plan (QC Plan) to the engineer for approval that includes all items listed in Section 2.0, prior to beginning work.

2.0 Quality Control Plan.

- (a) The name and contact information of the person in responsible charge of the QC testing.
- (b) A list of the QC technicians who will perform testing on the project, including the fields in which they are certified to perform testing.
- (c) A proposed independent third party testing firm for dispute resolution, including all contact information.
- (d) A list of Hold Points, when specified by the engineer.
- (e) The MoDOT Standard Inspection and Testing Plan (ITP). This shall be the version that is posted at the time of bid on the MoDOT website (www.modot.org/quality).

3.0 Quality Control Testing and Reporting. Testing shall be performed per the test method and frequency specified in the ITP. All personnel who perform sampling or testing shall be certified in the MoDOT Technician Certification Program for each test that they perform.

3.1 Reporting of Test Results. All QC test reports shall be submitted as soon as practical, but no later than the day following the test. Test data shall be immediately provided to the engineer upon request at any time, including prior to the submission of the test report. No payment will be made for the work performed until acceptable QC test results have been received by the engineer and confirmed by QA test results.

3.1.1 Test results shall be reported on electronic forms provided by MoDOT. Forms and Contractor Reporting Excel2Oracle Reports (CRE2O) can be found on the MoDOT website. All required forms, reports and material certifications shall be uploaded to a Microsoft SharePoint® site provided by MoDOT, and organized in the file structure established by MoDOT.

3.2 Non-Conformance Reporting. A Non-Conformance Report (NCR) shall be submitted by the contractor when the contractor proposes to incorporate material into the work that does not meet the testing requirements or for any work that does not comply with the contract terms or specifications.

3.2.1 Non-Conformance Reporting shall be submitted electronically on the Non-Conformance Report form provided on the MoDOT Website. The NCR shall be uploaded to the MoDOT SharePoint® site and an email notification sent to the engineer.

3.2.2 The contractor shall propose a resolution to the non-conforming material or work. Acceptance of a resolution by the engineer is required before closure of the non-conformance report.

4.0 Work Planning and Scheduling.

4.1 Two-week Schedule. Each week, the contractor shall submit to the engineer a schedule that outlines the planned project activities for the following two-week period. The two-week schedule shall detail all work and traffic control events planned for that period and any Hold Points specified by the engineer.

4.2 Weekly Meeting. When work is active, the contractor shall hold a weekly project meeting with the engineer to review the planned activities for the following week and to resolve any outstanding issues. Attendees shall include the engineer, the contractor superintendent or project manager and any foreman leading major activities. This meeting may be waived when, in the opinion of the engineer, a meeting is not necessary. Attendees may join the meeting in person, by phone or video conference.

4.3 Pre-Activity Meeting. A pre-activity meeting is required in advance of the start of each new activity, except when waived by the engineer. The purpose of this meeting is to review construction details of the new activity. At a minimum, the discussion topics shall include: safety precautions, QC testing, traffic impacts, and any required Hold Points. Attendees shall include the engineer, the contractor superintendent and the foreman who will be leading the new activity. Pre-activity meetings may be held in conjunction with the weekly project meeting.

4.4 Hold Points. Hold Points are events that require approval by the engineer prior to continuation of work. Hold Points occur at definable stages of work when, in the opinion of the engineer, a review of the preceding work is necessary before continuation to the next stage.

4.4.1 A list of typical Hold Point events is available on the MoDOT website. Use of the Hold Point process will only be required for the project-specific list of Hold Points, if any, that the engineer submits to the contractor in advance of the work. The engineer may make changes to the Hold Point list at any time.

4.4.2 Prior to all Hold Point inspections, the contractor shall verify the work has been completed in accordance with the contract and specifications. If the engineer identifies any corrective actions needed during a Hold Point inspection, the corrections shall be completed prior to continuing work. The engineer may require a new Hold Point to be scheduled if the corrections require a follow-up inspection. Re-scheduling of Hold Points require a minimum 24-hour advance notification from the contractor unless otherwise allowed by the engineer.

5.0 Quality Assurance Testing and Inspection. MoDOT will perform quality assurance testing and inspection of the work, except as specified herein. The contractor shall utilize the inspection checklists provided in the ITP as a guide to minimize findings by MoDOT inspection staff. Submittal of completed checklists is not required, except as specified in 5.1.

5.1 Inspection and testing required in the production of concrete for the project shall be the responsibility of the contractor. Submittal of the 501 Concrete Plant Checklist is required.

6.0 Basis of Payment. No direct payment will be made for compliance with this provision.