DESIGN DESIGNATION

S/O RT P

A.A.D.T. - 2026 = 3550
A.A.D.T. - 2046 = 3923
T = 26.66%
V = 35-55 M.P.H.

S/O RT F

A.A.D.T. - 2026 = 763
A.A.D.T. - 2046 = 872
T = 21.06%
V = 55 M.P.H.

S/O RT E

A.A.D.T. - 2026 = 673
A.A.D.T. - 2046 = 802
T = 20.27%
V = 55 M.P.H.

S/O RT P

A.A.D.T. - 2026 = 1504
A.A.D.T. - 2046 = 1789
T = 12.18%
V = 33-55 M.P.H.

FUNCTIONAL CLASSIFICATION-MINOR ARTERIAL

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION


PLANS FOR PROPOSED STATE HIGHWAY

KNOX/SHELBY COUNTY

T62-58N, R11W



KEY MAP
LOCATION OF KNOX & SHELBY COUNTY

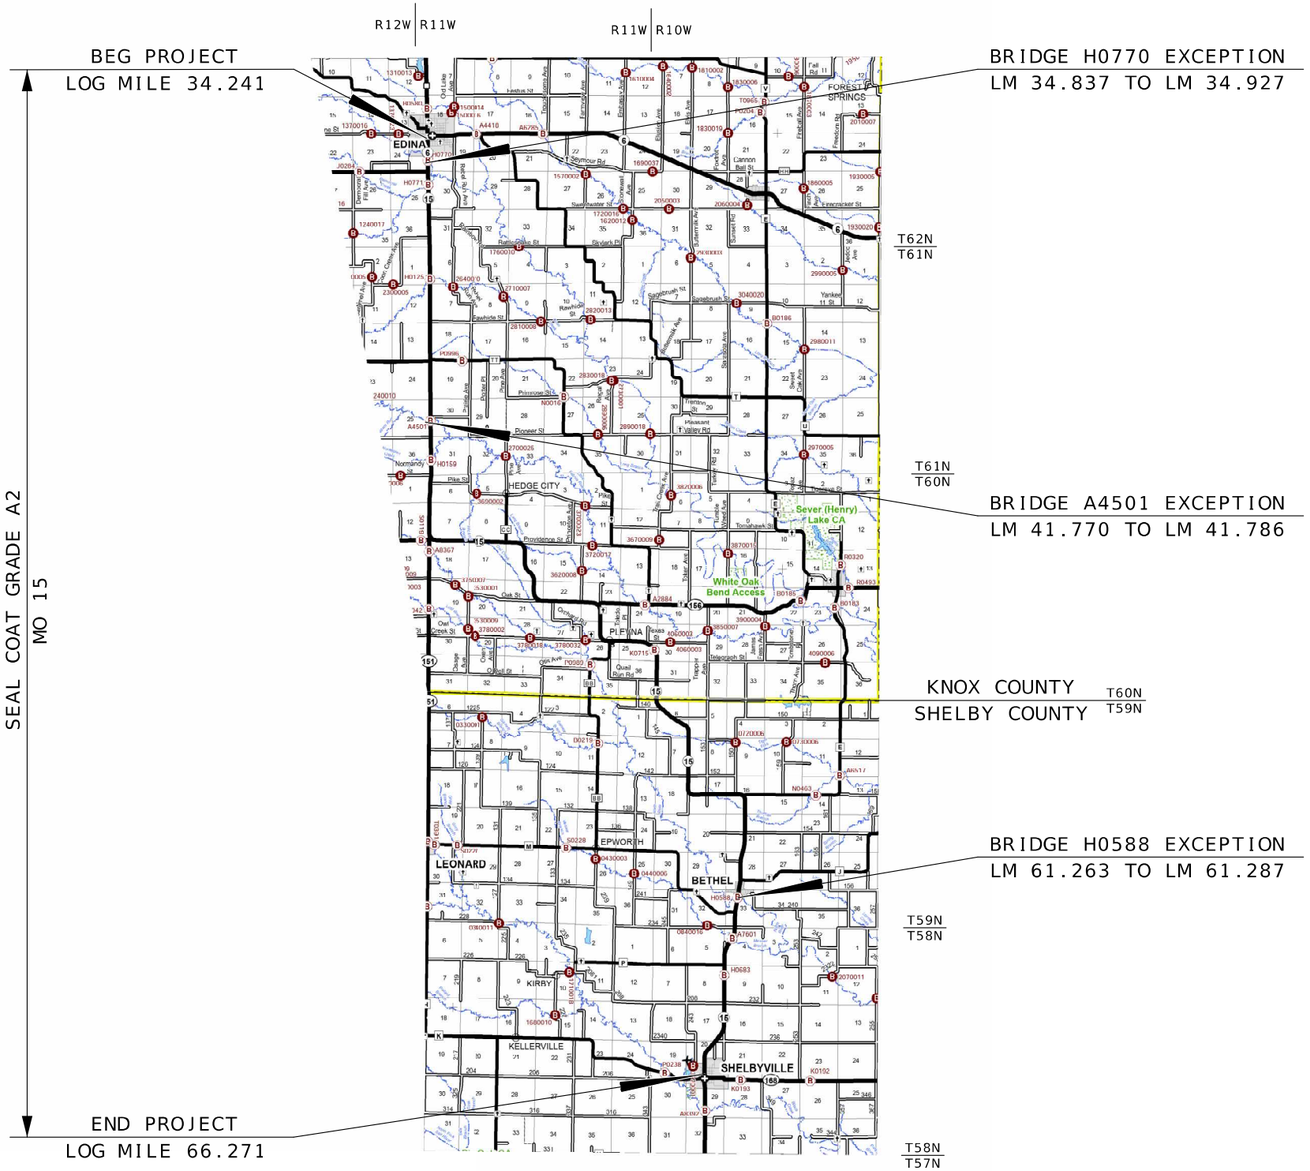

INDEX OF SHEETS

DESCRIPTION	SHEET NUMBER
TITLE SHEET	1
TYPICAL SECTIONS (TS) (1 SHEET)	2
QUANTITIES (QU) (4 SHEETS)	3
SPECIAL SHEETS (SS)	4-6

LENGTH OF PROJECT

MO 15

BEGIN OF PROJECT LOG MILE 34.241
END OF PROJECT LOG MILE 66.271
APPARENT LENGTH MILES 32.030

EQUATIONS AND EXCEPTIONS:

BR H0770 0.090 MILES
BR A4501 0.016 MILES
BR H0588 0.024 MILES

TOTAL CORRECTIONS 0.130 MILES
NET LENGTH OF PROJECT 31.900 MILES
STATE LENGTH 31.900 MILES

FOR INFORMATION ONLY
ESTIMATED DISTURBED ACRES 0 ACRES

STATE OF MISSOURI
ZACHARY S. WALKER
NUMBER PE-2010000877
PROFESSIONAL ENGINEER
09/25/2026 10:53:35 AM
ZACHARY S. WALKER - CIVIL
MO-PE-2010000877

DATE PREPARED
9/24/2026

ROUTE	STATE
15	MO
DISTRICT	SHEET NO.
NE	1

COUNTY
KNOX/SHELBY

JOB NO.
JNE0101

CONTRACT ID.


PROJECT NO.

BRIDGE NO.

DESCRIPTION	DATE


MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

TITLE SHEET

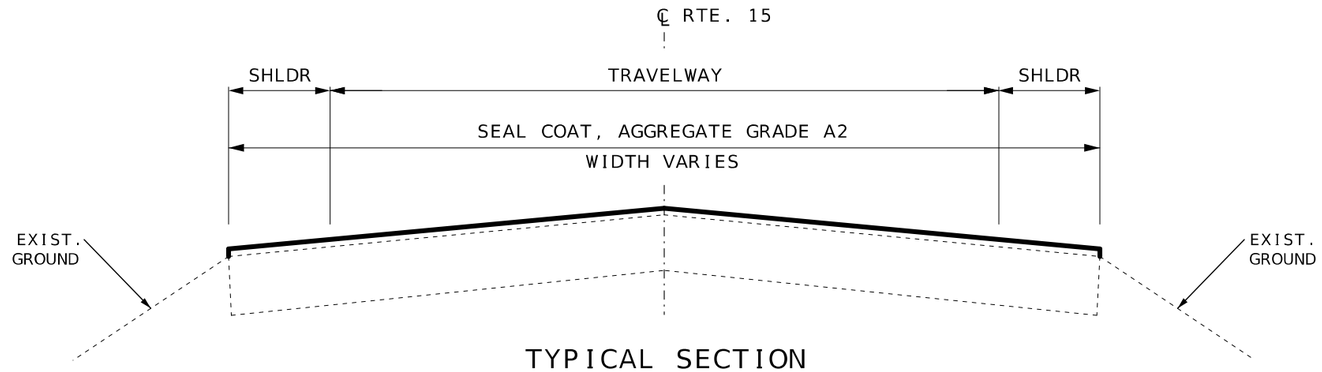

TYPICAL SECTION

LM 34.241 TO LM 34.295 - 28'
LM 34.295 TO LM 34.535 - 32'
LM 34.535 TO LM 34.837 - 30'
(BRIDGE H0770 EXCEPTION LM 34.837 TO LM 34.927)
LM 34.927 TO LM 35.522 - 28'
LM 35.522 TO LM 35.552 - 24'(BR H0771: SEE SS 2 OF 3)
LM 35.552 TO LM 38.023 - 28'
LM 38.023 TO LM 38.032 - 22'(BR H0125: SEE SS 3 OF 3)
LM 38.032 TO LM 41.770 - 38'
(BRIDGE A4501 EXCEPTION LM 41.770 TO LM 41.786)
LM 41.786 TO LM 41.854 - 38'
LM 41.854 TO LM 51.579 - 28'
LM 51.579 TO LM 51.596 - 26'
LM 51.596 TO LM 51.620 - 32'
LM 51.620 TO LM 51.808 - 38'
LM 51.808 TO LM 60.814 - 28'
LM 60.814 TO LM 61.263 - 24'
(BRIDGE H0588 EXCEPTION LM 61.263 TO LM 61.287)
LM 61.287 TO LM 65.811 - 28'
LM 65.811 TO LM 66.221 - 24'

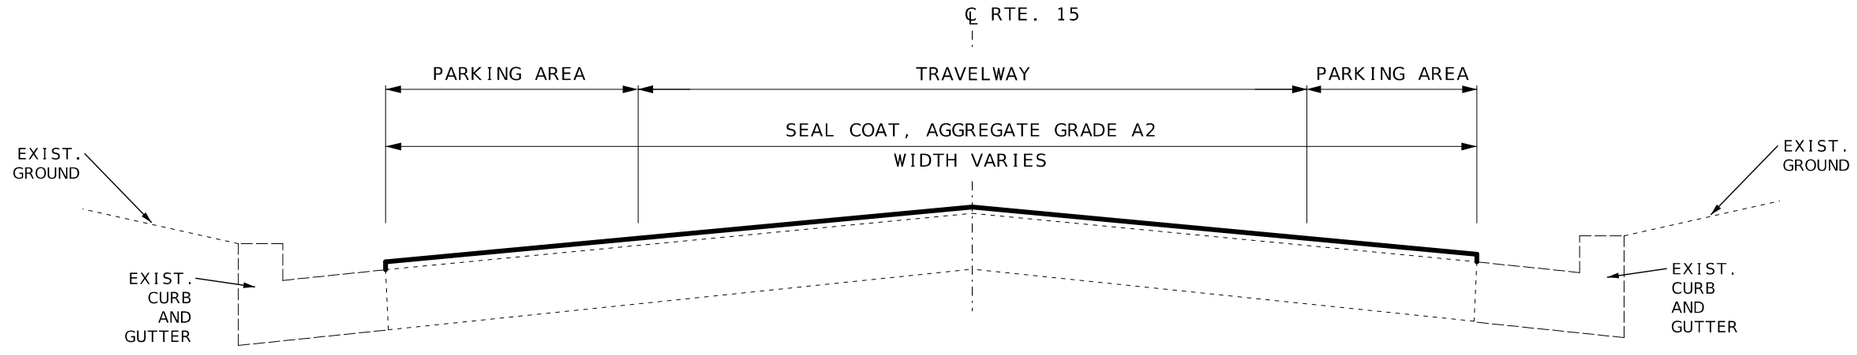

TYPICAL SECTION

LM 66.221 TO LM 66.271 (SHELBYVILLE) - 24' TRAVELWAY/PARKING AREA WIDTH VARIES

ESTIMATE FACTORS
PROVIDED FOR INFORMATION PURPOSES ONLY
AGGREGATE APPLICATION RATE 17 LBS/SY
BINDER APPLICATION RATE 0.28 GAL/SY

STATE OF MISSOURI
ZACHARY S. WALKER
NUMBER PE-2010000877
PROFESSIONAL ENGINEER
09/25/2026 10:54:20 AM
ZACHARY S. WALKER - CIVIL
MO-PE-2010000877

DATE PREPARED
9/24/2026

ROUTE	STATE
15	MO
DISTRICT	SHEET NO.
NE	2

COUNTY
KNOX/SHELBY

JOB NO.
JNE0101

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION	DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

TYPICAL SECTION
SHEET 1 OF 1
NOT TO SCALE

CONSTRUCTION SIGNS

SIGN NO.	SIGN	SIZE INCHES	AREA (SQ.FT.)	QUANTITY	TOTAL AREA (SQ.FT.)	DESCRIPTION
1	G020-1	60 X 24	10.00	2	20.00	ROAD WORK NEXT 32 MILES
2	W020-1	48 X 48	16.00	4	64.00	ROAD WORK AHEAD
7	W020-4	48 X 48	16.00	6	96.00	ONE LANE ROAD AHEAD
8	W020-7a	48 X 48	16.00	4	64.00	FLAGGER (SYMBOL)
26	G020-2	48 X 24	8.00	2	16.00	END ROAD WORK
35	W08-12	48 X 48	16.00	32	512.00	NO CENTER LINE
53	G020-4	36 X 18	4.50	3	13.50	PILOT CAR FOLLOW ME
57	W08-7a	36 X 36	9.00	64	576.00	FRESH OIL/LOOSE GRAVEL
59	CONST-8	48 X 36	12.00	2	24.00	WORK ZONE NO PHONE ZONE
	G022-1	21 X 15	2.19	4	8.76	WET PAINT (ARROW PIVOTS)
SIDE ROAD PACKAGE - NON-STATE ROUTE - 9 TOTAL						
2	W020-1	48 X 48	16.00	9	144.00	ROAD WORK AHEAD
7	W020-4	48 X 48	16.00	9	144.00	ONE LANE ROAD AHEAD
8	W020-7a	48 X 48	16.00	9	144.00	FLAGGER (SYMBOL)
58	G020-4a	18 X 12	1.50	9	13.50	PILOT CAR IN USE WAIT & FOLLOW
SIDE ROAD PACKAGE - STATE ROUTE - 11 TOTAL						
2	W020-1	48 X 48	16.00	11	176.00	ROAD WORK AHEAD
7	W020-4	48 X 48	16.00	11	176.00	ONE LANE ROAD AHEAD
8	W020-7a	48 X 48	16.00	11	176.00	FLAGGER (SYMBOL)
58	G020-4a	42 X 30	8.75	11	96.25	PILOT CAR IN USE WAIT & FOLLOW
COMMERCIAL AND PRIVATE ENTRANCES						
60	G020-4A	24X18	3.00	23	69.00	PILOT CAR IN USE WAIT & FOLLOW
			CONSTRUCTION SIGNS TOTAL		2534	FOR INFORMATIONAL PURPOSES ONLY
			CHANNELIZERS		100	FOR INFORMATIONAL PURPOSES ONLY

NOTES:

ALL TEMPORARY TRAFFIC CONTROL ITEMS ARE INCLUDED IN PAY ITEM 616-99.01, MISC. LUMP SUM TEMPORARY TRAFFIC CONTROL UNLESS OTHERWISE NOTED.

MOBILE OPERATION TMA'S ARE CONSIDERED INCIDENTAL TO CONSTRUCTION.

QUANTITIES SHOWN ARE AN ESTIMATE ONLY AND ARE SUBJECT TO CHANGE BASED ON FIELD CONDITIONS.

REFER TO STD. PLAN 616.20 FOR TEMPORARY TRAFFIC CONTROL PLANS.
REFER TO STD. PLAN 616.10 FOR SIGN AND SIGN MOUNTING REQUIREMENTS.

LUMP SUM TEMPORARY TRAFFIC CONTROL

ITEM NO.	UNIT	DESCRIPTION
616-99.01	1 LUMP SUM	MISC. LUMP SUM TEMPORARY TRAFFIC CONTROL

ITEM NO.	QTY.	DESCRIPTION
616-1098A	2	CHANGEABLE MESSAGE SIGN WITHOUT COMMUNICATION INTERFACE, CONTRACTOR FUNRNISHED/RETAINED

MOBILIZATION

1 LUMP SUM

SEAL COAT QUANTITIES

LOG MILE	LOG MILE	LOCATION	LENGTH (FT)	WIDTH (FT)	SEAL COAT AGGREGATE, GRADE A2 (SY)	EMULSIFIED ASPHALT, SEAL COAT (GAL)	REMARKS
34.241	34.295	RTE. 15	285.12	28	887.0	248.4	EDINA
34.295	34.535	RTE. 15	1267.20	32	4,505.6	1,261.6	EDINA
34.535	34.837	RTE. 15	1594.56	30	5,315.2	1,488.3	-
34.837	34.927	RTE. 15	475.20	-	-	-	EXCEPTION BR. NO. H0770
34.927	35.522	RTE. 15	3141.60	28	9,773.9	2,736.7	-
35.522	35.552	RTE. 15	158.40	24	422.4	118.3	SEAL OVER BR. NO. H0771
35.552	38.023	RTE. 15	13046.88	28	40,590.3	11,365.3	
38.023	38.032	RTE. 15	47.52	22	116.2	32.5	SEAL OVER BR. NO. H0125
38.032	41.659	RTE. 15	19150.56	28	59,579.5	16,682.3	
41.659	41.770	RTE. 15	586.08	38	2,474.6	692.9	-
41.770	41.786	RTE. 15	84.48	-	-	-	EXCEPTION BR. NO. A4501
41.786	41.854	RTE. 15	359.04	38	1,515.9	424.5	-
41.854	51.579	RTE. 15	51348.00	28	159,749.3	44,729.8	-
51.579	51.596	RTE. 15	89.76	26	259.3	72.6	PLEVNA
51.596	51.620	RTE. 15	126.72	32	450.6	126.2	PLEVNA
51.620	51.808	RTE. 15	992.64	38	4,191.1	1,173.5	PLEVNA
51.808	60.814	RTE. 15	47551.68	28	147,938.6	41,422.8	-
60.814	61.263	RTE. 15	2370.72	24	6,321.9	1,770.1	BETHEL
61.263	61.287	RTE. 15	126.72	-	-	-	EXCEPTION BR. NO. H0588
61.287	65.811	RTE. 15	23886.72	28	74,314.2	20,808.0	-
65.811	66.271	RTE. 15	2428.80	24	6,476.8	1,813.5	SHELBYVILLE
66.221	66.271	RTE. 15	264.00	VAR.	1,173.0	328.4	PARKING AREAS - SEE SPECIAL SHEET
				SUBTOTAL	526,055.4	147,295.7	
				TOTAL	526,056	147,296	


FACTOR USED FOR EMULSIFIED ASPHALT = 0.28 GALLONS/S.Y.



WO8-7a

57

NOTE: FRESH OIL/LOOSE GRAVEL SIGN SHALL BE PLACED BEGINNING AT THE START OF THE PROJECT AND AT ONE MILE INTERVALS. SIGNS SHOULD ALSO BE INSTALLED WITHIN 150 FT. AFTER THE INTERSECTION OF A STATE ROUTE. ADDITIONAL SIGNS MAY BE INSTALLED WITHIN 150 FT. AFTER OTHER INTERSECTIONS AS DIRECTED BY ENGINEER.



DATE PREPARED
9/24/2026

ROUTE	STATE
15	MO
DISTRICT	SHEET NO.
NE	3

COUNTY
KNOX/SHELBY

JOB NO.
JNE0101

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION

DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

QUANTITY SHEET
1 OF 4

PAVEMENT MARKINGS

LOG MILE	LOG MILE	LOCATION	CLASS 1 PAVEMENT MARKING PAINT (18-MIL, TYPE P BEADS) 4" YELLOW INTERMITTENT CENTERLINE (LF)	4" YELLOW SOLID/INTERMITTENT CENTERLINE (LF)	4" YELLOW DOUBLE SOLID CENTERLINE (LF)	4" WHITE SOLID EDGELINE (LF)	REMARKS
34.241	34.279	RTE 15	-	-	401	-	-
34.279	34.444	RTE 15	-	1089	-	-	SBL INTERMITTENT / NBL SOLID CENTERLINE
34.444	34.531	RTE 15	120	-	-	-	-
34.531	35.901	RTE 15	1,810	-	-	14,467	-
34.531	34.532	RTE 15	-	-	-	-5	-
35.123	35.157	RTE 15	-	-	-	-180	EDGELINE EXCEPTION
35.210	35.228	RTE 15	-	-	-	-95	EDGELINE EXCEPTION
35.901	36.043	RTE 15	-	937	-	1,500	SBL SOLID / NBL INTERMITTENT CENTERLINE
36.043	36.217	RTE 15	-	1148	-	1,837	SBL INTERMITTENT / NBL SOLID CENTERLINE
36.217	36.431	RTE 15	-	1412	-	2,260	SBL SOLID / NBL INTERMITTENT CENTERLINE
36.431	36.667	RTE 15	-	-	2492	2,492	-
36.667	36.838	RTE 15	-	1129	-	1,806	SBL INTERMITTENT / NBL SOLID CENTERLINE
36.838	37.051	RTE 15	290	-	-	2,249	-
37.051	37.237	RTE 15	-	1228	-	1,964	SBL SOLID / NBL INTERMITTENT CENTERLINE
37.237	37.358	RTE 15	-	799	-	1,278	SBL INTERMITTENT / NBL SOLID CENTERLINE
37.358	37.426	RTE 15	90	-	-	718	-
37.426	37.612	RTE 15	-	1228	-	1,964	SBL SOLID / NBL INTERMITTENT CENTERLINE
37.612	37.635	RTE 15	-	-	243	243	-
37.635	37.807	RTE 15	-	1135	-	1,816	SBL INTERMITTENT / NBL SOLID CENTERLINE
37.807	37.985	RTE 15	240	-	-	1,880	-
37.985	38.190	RTE 15	-	1353	-	2,165	SBL SOLID / NBL INTERMITTENT CENTERLINE
38.190	38.363	RTE 15	-	1142	-	1,827	SBL INTERMITTENT / NBL SOLID CENTERLINE
38.363	38.565	RTE 15	-	1333	-	2,133	SBL SOLID / NBL INTERMITTENT CENTERLINE
38.565	38.738	RTE 15	-	-	1827	1,827	-
38.738	38.892	RTE 15	-	1016	-	1,626	SBL INTERMITTENT / NBL SOLID CENTERLINE
38.892	39.067	RTE 15	-	1155	-	1,848	SBL SOLID / NBL INTERMITTENT CENTERLINE
39.067	39.218	RTE 15	-	997	-	1,595	SBL INTERMITTENT / NBL SOLID CENTERLINE
39.218	40.007	RTE 15	1,050	-	-	8,332	-
40.007	40.178	RTE 15	-	1129	-	1,806	SBL SOLID / NBL INTERMITTENT CENTERLINE
40.149	40.167	RTE 15	-	-	-	-95	EDGELINE EXCEPTION
40.178	40.327	RTE 15	-	983	-	1,573	SBL INTERMITTENT / NBL SOLID CENTERLINE
40.327	40.447	RTE 15	-	792	-	1,806	SBL SOLID / NBL INTERMITTENT CENTERLINE
40.447	40.505	RTE 15	80	-	-	612	-
40.505	40.619	RTE 15	-	752	-	1,204	SBL INTERMITTENT / NBL SOLID CENTERLINE
40.619	40.714	RTE 15	130	-	-	1,003	-
40.714	40.892	RTE 15	-	1175	-	1,880	SBL SOLID / NBL INTERMITTENT CENTERLINE
40.892	41.319	RTE 15	-	-	4509	4,509	-
41.319	41.487	RTE 15	-	1109	-	1,774	SBL INTERMITTENT / NBL SOLID CENTERLINE
41.487	42.032	RTE 15	720	-	-	5,755	-
42.032	42.199	RTE 15	-	1102	-	1,764	SBL SOLID / NBL INTERMITTENT CENTERLINE
42.199	42.641	RTE 15	-	-	4668	4,668	-
42.641	42.763	RTE 15	-	805	-	1,288	SBL INTERMITTENT / NBL SOLID CENTERLINE
42.763	42.866	RTE 15	140	-	-	1,088	-
42.866	43.029	RTE 15	-	1076	-	1,721	SBL SOLID / NBL INTERMITTENT CENTERLINE
43.029	43.190	RTE 15	-	1063	-	1,700	SBL INTERMITTENT / NBL SOLID CENTERLINE
43.190	43.352	RTE 15	-	1069	-	1,711	SBL SOLID / NBL INTERMITTENT CENTERLINE
43.352	43.982	RTE 15	-	-	6653	6,653	-
43.982	44.097	RTE 15	-	759	-	1,214	SBL INTERMITTENT / NBL SOLID CENTERLINE
44.097	44.257	RTE 15	-	1056	-	1,690	SBL SOLID / NBL INTERMITTENT CENTERLINE
44.257	44.383	RTE 15	-	832	-	1,331	SBL INTERMITTENT / NBL SOLID CENTERLINE
44.383	44.467	RTE 15	-	554	-	887	SBL SOLID / NBL INTERMITTENT CENTERLINE
SHEET 1:		SUBTOTAL	4,670	31,357	20,793	105,089	

STATE OF MISSOURI
ZACHARY S. WALKER
NUMBER PE-2010000877
PROFESSIONAL ENGINEER
09/25/2026 10:55:28 AM
ZACHARY S. WALKER - CIVIL
MO-PE-2010000877

DATE PREPARED
9/24/2026

ROUTE	STATE
15	MO
DISTRICT	SHEET NO.
NE	3

COUNTY
KNOX/SHELBY

JOB NO.
JNE0101

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

QUANTITY SHEET
2 OF 4

PAVEMENT MARKINGS

LOG MILE	LOG MILE	LOCATION	CLASS 1 PAVEMENT MARKING PAINT (18-MIL, TYPE P BEADS) (CONT.) 4" YELLOW INTERMITTENT CENTERLINE (LF)	4" YELLOW SOLID/INTERMITTENT CENTERLINE (LF)	4" YELLOW DOUBLE SOLID CENTERLINE (LF)	4" WHITE SOLID EDGELINE (LF)	REMARKS
44.467	44.518	RTE 15	70	-	-	539	-
44.518	44.590	RTE 15	-	475	-	760	SBL INTERMITTENT / NBL SOLID CENTERLINE
44.590	44.738	RTE 15	-	977	-	1,563	SBL SOLID / NBL INTERMITTENT CENTERLINE
44.724	44.764	RTE 15	-	-	-	-211	EDGELINE EXCEPTION
44.738	45.224	RTE 15	-	-	5132	5,132	-
44.858	44.892	RTE 15	-	-	-	-180	EDGELINE EXCEPTION
45.224	45.401	RTE 15	-	1168	-	1,869	SBL INTERMITTENT / NBL SOLID CENTERLINE
45.401	46.695	RTE 15	1,710	-	-	13,665	-
46.695	46.842	RTE 15	-	970	-	1,552	SBL SOLID / NBL INTERMITTENT CENTERLINE
46.842	48.320	RTE 15	-	-	15608	15,608	-
46.842	46.857	RTE 15	-	-	-	-79	EDGELINE EXCEPTION
48.320	48.490	RTE 15	-	1122	-	1,795	SBL INTERMITTENT / NBL SOLID CENTERLINE
48.490	48.581	RTE 15	130	-	-	961	-
48.581	48.722	RTE 15	-	931	-	1,489	SBL SOLID / NBL INTERMITTENT CENTERLINE
48.722	49.278	RTE 15	-	-	5871	5,871	-
49.278	49.480	RTE 15	-	1333	-	2,133	SBL INTERMITTENT / NBL SOLID CENTERLINE
49.480	49.932	RTE 15	600	-	-	4,773	-
49.932	50.040	RTE 15	-	713	-	1,140	SBL SOLID / NBL INTERMITTENT CENTERLINE
50.040	50.113	RTE 15	100	-	-	771	-
50.113	50.201	RTE 15	-	581	-	929	SBL INTERMITTENT / NBL SOLID CENTERLINE
50.201	50.343	RTE 15	-	937	-	1,500	SBL SOLID / NBL INTERMITTENT CENTERLINE
50.517	50.549	RTE 15	-	-	-	-169	EDGELINE EXCEPTION
50.343	50.860	RTE 15	-	-	5460	5,460	-
50.860	51.034	RTE 15	-	1148	-	1,837	SBL INTERMITTENT / NBL SOLID CENTERLINE
51.034	51.216	RTE 15	-	1201	-	1,922	SBL SOLID / NBL INTERMITTENT CENTERLINE
51.216	51.560	RTE 15	-	-	3633	3,633	-
51.560	51.744	RTE 15	-	1214	-	1,943	SBL INTERMITTENT / NBL SOLID CENTERLINE
51.667	51.683	RTE 15	-	-	-	-84	EDGELINE EXCEPTION
51.744	51.940	RTE 15	-	1294	-	2,070	SBL SOLID / NBL INTERMITTENT CENTERLINE
51.940	52.104	RTE 15	-	1082	-	1,732	SBL INTERMITTENT / NBL SOLID CENTERLINE
52.104	52.308	RTE 15	-	1346	-	2,154	SBL SOLID / NBL INTERMITTENT CENTERLINE
52.308	53.177	RTE 15	-	-	9177	9,177	-
53.177	53.326	RTE 15	-	983	-	1,573	SBL INTERMITTENT / NBL SOLID CENTERLINE
53.326	53.520	RTE 15	-	1280	-	2,049	SBL SOLID / NBL INTERMITTENT CENTERLINE
53.520	53.662	RTE 15	-	-	1500	1,500	-
53.662	53.771	RTE 15	-	719	-	1,151	SBL INTERMITTENT / NBL SOLID CENTERLINE
53.771	53.834	RTE 15	-	416	-	665	SBL SOLID / NBL INTERMITTENT CENTERLINE
53.834	53.899	RTE 15	90	-	-	686	-
53.899	54.000	RTE 15	-	667	-	1,067	SBL INTERMITTENT / NBL SOLID CENTERLINE
54.000	54.179	RTE 15	-	1181	-	1,890	SBL SOLID / NBL INTERMITTENT CENTERLINE
54.179	54.396	RTE 15	-	-	2292	2,292	-
54.396	54.618	RTE 15	-	1465	-	2,344	SBL INTERMITTENT / NBL SOLID CENTERLINE
54.618	55.167	RTE 15	730	-	-	5,797	-
55.167	55.347	RTE 15	-	1188	-	1,901	SBL SOLID / NBL INTERMITTENT CENTERLINE
55.347	55.439	RTE 15	-	-	972	972	-
55.439	55.675	RTE 15	-	1558	-	2,492	SBL INTERMITTENT / NBL SOLID CENTERLINE
55.675	55.864	RTE 15	-	1247	-	1,996	SBL SOLID / NBL INTERMITTENT CENTERLINE
55.864	55.918	RTE 15	-	-	570	570	-
55.918	56.132	RTE 15	-	1412	-	2,260	SBL INTERMITTENT / NBL SOLID CENTERLINE
56.132	56.242	RTE 15	-	726	-	1,162	SBL SOLID / NBL INTERMITTENT CENTERLINE
56.242	56.374	RTE 15	180	-	-	1,394	-
56.374	56.430	RTE 15	-	370	-	591	SBL INTERMITTENT / NBL SOLID CENTERLINE
56.430	56.562	RTE 15	-	871	-	1,394	SBL SOLID / NBL INTERMITTENT CENTERLINE
56.562	56.610	RTE 15	70	-	-	507	-
56.610	56.706	RTE 15	-	634	-	1,014	SBL INTERMITTENT / NBL SOLID CENTERLINE
56.706	57.068	RTE 15	-	2389	-	3,823	SBL SOLID / NBL INTERMITTENT CENTERLINE
57.068	57.220	RTE 15	-	-	1605	1,605	-
57.220	57.394	RTE 15	-	1148	-	1,837	SBL INTERMITTENT / NBL SOLID CENTERLINE
57.394	58.328	RTE 15	1,240	-	-	9,863	-
58.328	58.506	RTE 15	-	1175	-	1,880	SBL SOLID / NBL INTERMITTENT CENTERLINE
58.506	58.649	RTE 15	-	-	1510	1,510	-
SHEET 2:		SUBTOTAL	4,920	35,921	53,330	149,040	

STATE OF MISSOURI
ZACHARY S. WALKER
NUMBER PE-2010000877
PROFESSIONAL ENGINEER
09/25/2026 10:55:55 AM
ZACHARY S. WALKER - CIVIL
MO-PE-2010000877

DATE PREPARED
9/24/2026

ROUTE	STATE
15	MO

DISTRICT	SHEET NO.
NE	3

COUNTY
KNOX/SHELBY

JOB NO.
JNE0101

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION	DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

QUANTITY SHEET
3 OF 4

PAVEMENT MARKINGS

LOG MILE	LOG MILE	LOCATION	CLASS 1 PAVEMENT MARKING PAINT (18-MIL, TYPE P BEADS) (CONT.) 4" YELLOW INTERMITTENT CENTERLINE (LF)	4" YELLOW SOLID/INTERMITTENT CENTERLINE (LF)	4" YELLOW DOUBLE SOLID CENTERLINE (LF)	4" WHITE SOLID EDGELINE (LF)	REMARKS
58.555	58.587	RTE 15	-	-	-	-169	EDGELINE EXCEPTION
58.649	58.810	RTE 15	-	1063	-	1,700	SBL INTERMITTENT / NBL SOLID CENTERLINE
58.810	59.075	RTE 15	350	-	-	2,798	-
59.075	59.168	RTE 15	-	614	-	982	SBL SOLID / NBL INTERMITTENT CENTERLINE
59.168	59.268	RTE 15	140	-	-	1,056	-
59.268	59.329	RTE 15	-	403	-	644	SBL INTERMITTENT / NBL SOLID CENTERLINE
59.329	60.440	RTE 15	1,470	-	-	11,732	-
60.440	60.553	RTE 15	-	746	-	1,193	SBL SOLID / NBL INTERMITTENT CENTERLINE
60.553	60.633	RTE 15	110	-	-	845	-
60.633	60.723	RTE 15	-	594	-	950	SBL INTERMITTENT / NBL SOLID CENTERLINE
60.723	60.814	RTE 15	-	601	-	961	SBL SOLID / NBL INTERMITTENT CENTERLINE
60.799	60.814	RTE 15	-	-	-	-79	EDGELINE EXCEPTION
60.814	60.848	RTE 15	-	224	-	359	SBL SOLID / NBL INTERMITTENT CENTERLINE
60.848	61.008	RTE 15	-	1056	-	1,690	SBL INTERMITTENT / NBL SOLID CENTERLINE
61.008	61.312	RTE 15	410	-	-		-
61.299	61.312	RTE 15	-	-	-	69	-
61.312	61.522	RTE 15	280	-	-	2,218	-
61.522	61.627	RTE 15	-	693	-	1,109	SBL SOLID / NBL INTERMITTENT CENTERLINE
61.627	61.691	RTE 15	90	-	-	676	-
61.627	61.659	RTE 15	-	-	-	-169	EDGELINE EXCEPTION
61.691	61.773	RTE 15	-	541	-	866	SBL INTERMITTENT / NBL SOLID CENTERLINE
61.773	61.929	RTE 15	-	1030	-	1,647	SBL SOLID / NBL INTERMITTENT CENTERLINE
61.929	62.086	RTE 15	-	1036	-	1,658	SBL INTERMITTENT / NBL SOLID CENTERLINE
62.086	62.230	RTE 15	-	950	-	1,521	SBL SOLID / NBL INTERMITTENT CENTERLINE
62.230	62.277	RTE 15	-	-	496	496	-
62.277	62.449	RTE 15	-	1135	-	1,816	SBL INTERMITTENT / NBL SOLID CENTERLINE
62.449	62.624	RTE 15	-	1155	-	1,848	SBL SOLID / NBL INTERMITTENT CENTERLINE
62.624	62.797	RTE 15	-	-	1827	1,827	-
62.797	62.960	RTE 15	-	1076	-	1,721	SBL INTERMITTENT / NBL SOLID CENTERLINE
62.960	63.106	RTE 15	-	964	-	1,542	SBL SOLID / NBL INTERMITTENT CENTERLINE
63.106	63.270	RTE 15	-	1082	-	1,732	SBL INTERMITTENT / NBL SOLID CENTERLINE
62.797	62.828	RTE 15	-	-	-	-164	EDGELINE EXCEPTION
63.270	63.609	RTE 15	450	-	-	3,580	-
63.609	63.772	RTE 15	-	1076	-	1,721	SBL SOLID / NBL INTERMITTENT CENTERLINE
63.772	63.932	RTE 15	-	1056	-	1,690	SBL INTERMITTENT / NBL SOLID CENTERLINE
63.782	63.803	RTE 15	-	-	-	-111	EDGELINE EXCEPTION
63.932	64.296	RTE 15	490	-	-	3,844	-
64.296	64.409	RTE 15	-	746	-	1,193	SBL SOLID / NBL INTERMITTENT CENTERLINE
64.409	64.476	RTE 15	90	-	-	708	-
64.476	64.588	RTE 15	-	739	-	1,183	SBL INTERMITTENT / NBL SOLID CENTERLINE
64.588	64.683	RTE 15	130	-	-	1,003	-
64.683	64.836	RTE 15	-	1010	-	1,616	SBL SOLID / NBL INTERMITTENT CENTERLINE
64.836	64.927	RTE 15	-	-	961	961	-
64.927	65.099	RTE 15	-	1135	-	1,816	SBL INTERMITTENT / NBL SOLID CENTERLINE
65.099	65.204	RTE 15	140	-	-	1,109	-
65.204	65.319	RTE 15	-	759	-	1,214	SBL SOLID / NBL INTERMITTENT CENTERLINE
65.319	65.372	RTE 15	70	-	-	560	-
65.372	65.424	RTE 15	-	343	-	549	SBL INTERMITTENT / NBL SOLID CENTERLINE
65.424	65.484	RTE 15	-	-	634	634	-
65.484	65.591	RTE 15	-	706	-	1,130	SBL SOLID / NBL INTERMITTENT CENTERLINE
65.591	65.658	RTE 15	-	-	708	708	-
65.658	65.821	RTE 15	-	1076	-	1,721	SBL INTERMITTENT / NBL SOLID CENTERLINE
65.810	65.821	RTE 15	-	-	-	-58	EDGELINE EXCEPTION
65.821	65.851	RTE 15	-	198	-	-	SBL INTERMITTENT / NBL SOLID CENTERLINE
65.851	66.207	RTE 15	470	-	-	-	-
66.207	66.265	RTE 15	-	-	612	-	-
	SHEET 3:	SUBTOTAL	4,690	23,807	5,238	71,846	
	SHEET 1:	SUBTOTAL	4,670	31,357	20,793	105,089	
	SHEET 2:	SUBTOTAL	4,920	35,921	53,330	149,040	
		SUBTOTAL	14,280	91,085	79,361	325,975	
		TOTAL		184,726		325,975	

LOG MILES ARE APPROXIMATE - MATCH EXISTING STRIPING

STATE OF MISSOURI
ZACHARY S. WALKER
NUMBER PE-2010000877
PROFESSIONAL ENGINEER
09/25/2026 10:56:21 AM
ZACHARY S. WALKER - CIVIL
MO-PE-2010000877

DATE PREPARED
9/24/2026

ROUTE	STATE
15	MO

DISTRICT	SHEET NO.
NE	3

COUNTY
KNOX/SHELBY

JOB NO.
JNE0101

CONTRACT ID.


PROJECT NO.

BRIDGE NO.

DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

CITY OF SHELBYVILLE

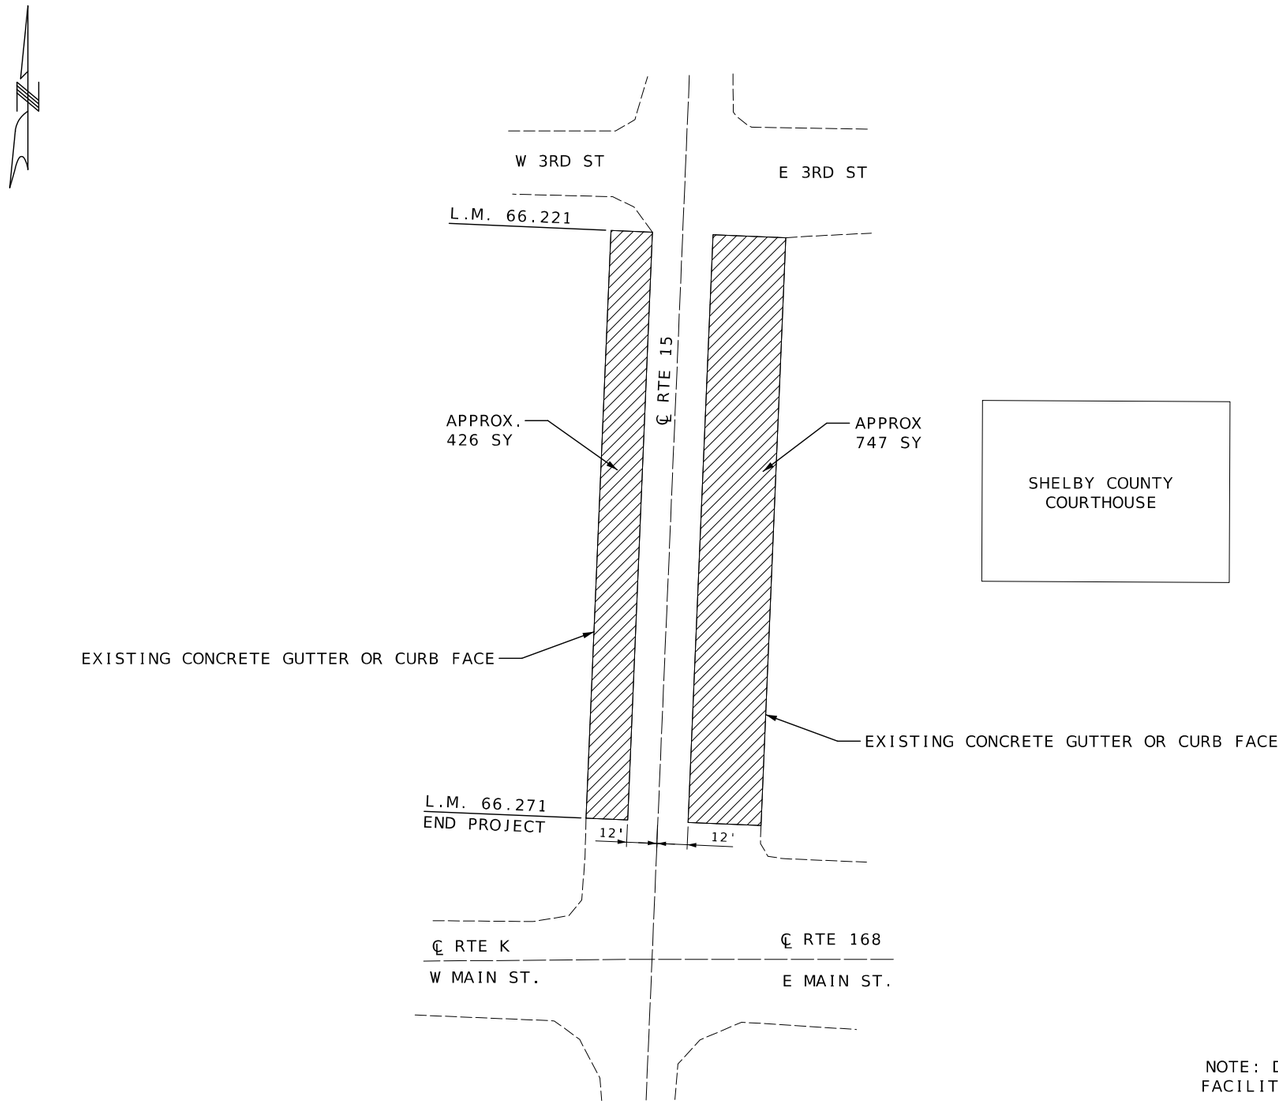

NOTE: DND EXISTING ADA FACILITIES OR CROSSWALK

SEAL COAT PARKING AREAS


STATE OF MISSOURI
ZACHARY S. WALKER
NUMBER PE-2010000877
PROFESSIONAL ENGINEER
09/25/2026 10:57:00 AM
ZACHARY S. WALKER - CIVIL
MO-PE-2010000877

DATE PREPARED	
9/25/2026	
ROUTE	STATE
15	MO
DISTRICT	SHEET NO.
NE	4
COUNTY	
KNOX / SHELBY	
JOB NO.	
JNE0101	
CONTRACT ID.	
PROJECT NO.	
BRIDGE NO.	

DESCRIPTION	DATE


MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

SPECIAL SHEETS
SHEET 1 OF 3
NOT TO SCALE

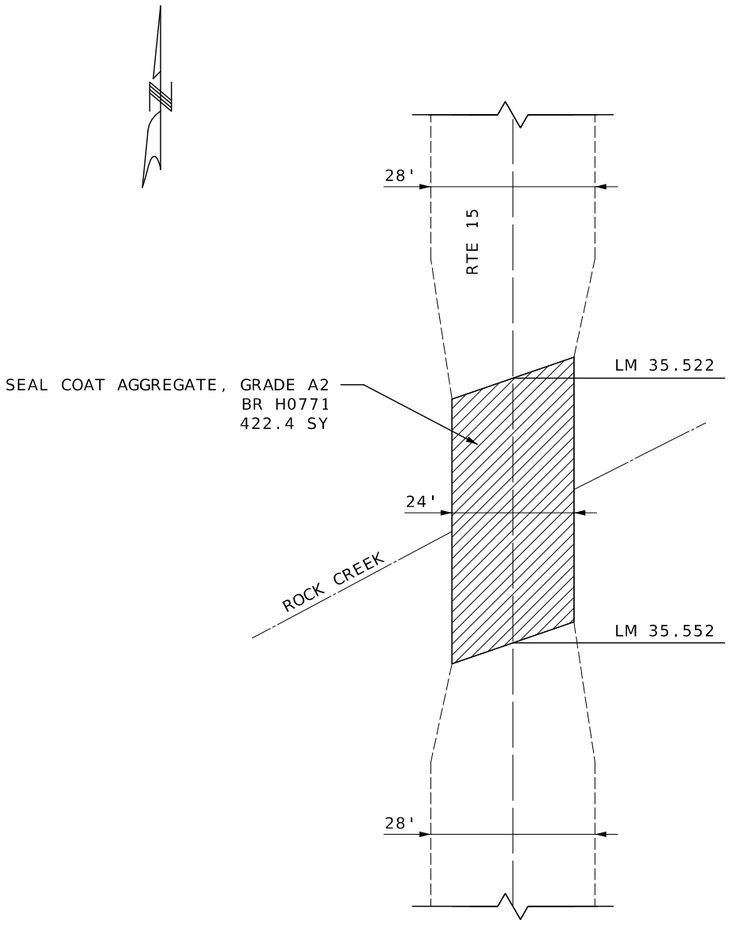

PLAN VIEW

BR H0771: LM 35.522 TO LM 35.552

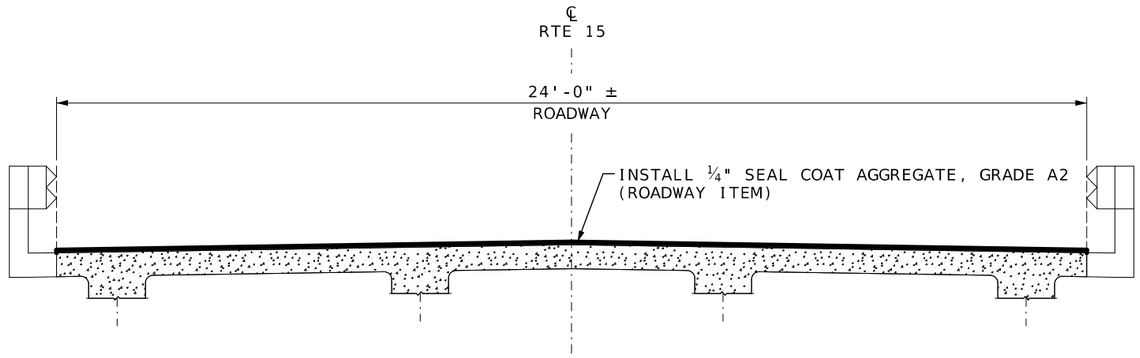

TYPICAL SECTION

BR H0771: LM 35.522 TO LM 35.552

REPAIRS TO BRIDGE:
RTE 15 OVER ROCK CREEK
BEGINNING LM 35.522 TO END LM 35.552

STATE OF MISSOURI
ZACHARY S. WALKER
NUMBER PE-2010000877
PROFESSIONAL ENGINEER
09/25/2026 10:57:40 AM
ZACHARY S. WALKER - CIVIL
MO-PE-2010000877

DATE PREPARED
9/24/2026

ROUTE	STATE
15	MO
DISTRICT	SHEET NO.
NE	5

COUNTY
KNOX/SHELBY

JOB NO.
JNE0101

CONTRACT ID.

PROJECT NO.


BRIDGE NO.
H0771

DESCRIPTION | DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION


105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

SPECIAL SHEET
SHEET 2 OF 3
NOT TO SCALE

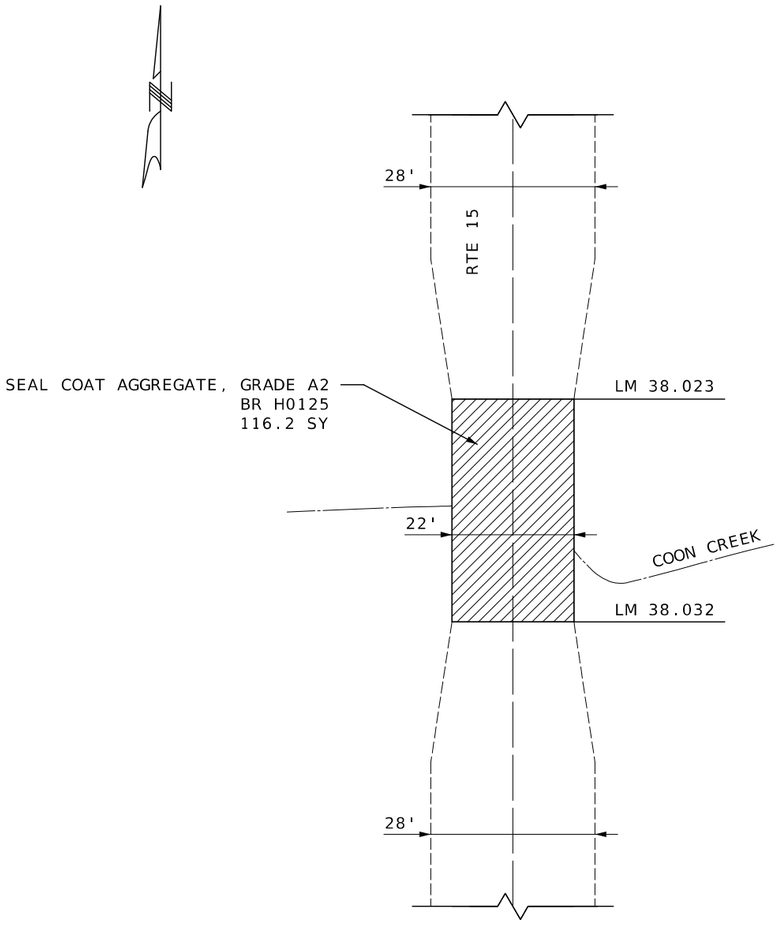

PLAN VIEW

BR H0125: LM 38.023 TO LM 38.032

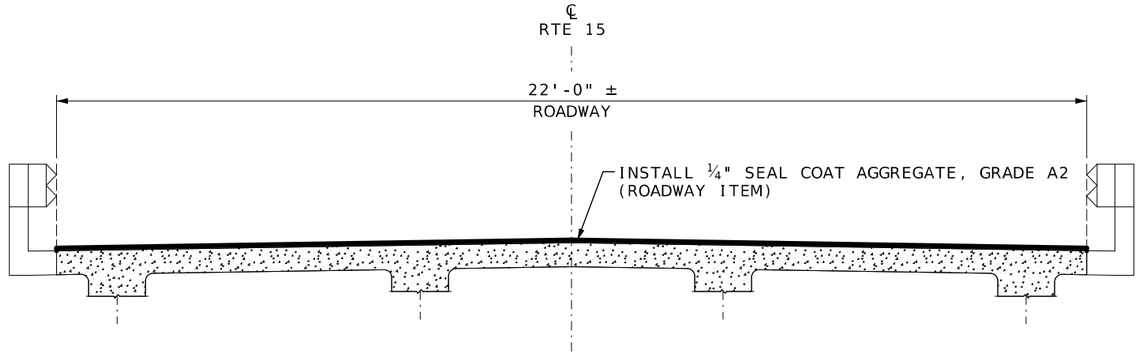

TYPICAL SECTION

BR H0125: LM 38.023 TO LM 38.032

REPAIRS TO BRIDGE:
RTE 15 OVER COON CREEK
BEGINNING LM 38.023 TO END LM 38.032

STATE OF MISSOURI
ZACHARY S. WALKER
NUMBER PE-2010000877
PROFESSIONAL ENGINEER
09/25/2026 10:58:17 AM
ZACHARY S. WALKER - CIVIL
MO-PE-2010000877

DATE PREPARED
9/24/2026

ROUTE	STATE
15	MO
DISTRICT	SHEET NO.
NE	6

COUNTY
KNOX / SHELBY

JOB NO.
JNE0101

CONTRACT ID.

PROJECT NO.

BRIDGE NO.
H0125

DESCRIPTION	DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

SPECIAL SHEET
SHEET 3 OF 3
NOT TO SCALE