
Job No.: J6I3572
Route: I-170
County: St. Louis

JOB SPECIAL PROVISIONS TABLE OF CONTENTS (ROADWAY)

(Job Special Provisions shall prevail over General Special Provisions whenever in conflict therewith.)

A.	General - Federal JSP-09-02M	1
B.	Contract Liquidated Damages JSP- 13-01E	1
C.	Work Zone Traffic Management JSP-02-06N	2
D.	Emergency Provisions and Incident Management JSP-90-11A	6
E.	Project Contact for Contractor/Bidder Questions JSP-96-05A	7
F.	Utilities JSP-93-26F	7
G.	Union Pacific Railroad Requirements	10
H.	Protection of Missouri Eastern Railroad Facilities and Traffic	20
I.	Optional Pavements JSP 06-06H	31
J.	Lump Sum Temporary Traffic Control JSP-22-01B	32
K.	High-Tension Guard Cable Barrier JSP 24-03	33
L.	Vegetative Barrier Pavement JSP-24-04B	35
M.	Clean Water Act Requirements	35
N.	Restrictions for Migratory Birds NJSP-16-06A	36
O.	Temporary Long-Term Rumble Strips JSP-13-04C	37
P.	Liquidated Damages Specified JSP-93-28A	38
Q.	Truck Mounted Attenuator (TMA) for Stationary Activities JSP-23-04	38
R.	Slurry and Residue Control JSP-06-05B	39
S.	Pavement Marking Removals	40
T.	Traffic Signal Maintenance and Programming	40
U.	Removal and Delivery of Existing Signs JSP-12-01C	46
V.	Concrete Washout	47
W.	Quality Management NJSP-15-22	47
X.	Miscellaneous Construction Requirements	52
Y.	Underpass LED Luminaire (Wallpack) and Conduit on Structure	54
Z.	Disposition of Existing Lighting Equipment	55
AA.	Overhead Sign Installation	55
BB.	Optional Temporary Pavement Marking Paint	56
CC.	Order of Work	57
DD.	Survey	59
EE.	ADA Compliant Moveable Barricade	59
FF.	Welding of Grates on Drop Inlets	60
GG.	Winterization	60
HH.	MoDOT ITS Assets Relocation	61
II.	MoDOT ITS Assets Within Project Limits	63
JJ.	Cooperation with Other Projects	64
KK.	Temporary Suspended Walkways	64
LL.	Sound Wall Repairs	65
MM.	Temporary MoDOT ITS Assets Relocation - Bridge	66
NN.	Supplemental Revisions JSP-18-01NN	68

Job No.: J6I3572
Route: I-170
County: St. Louis

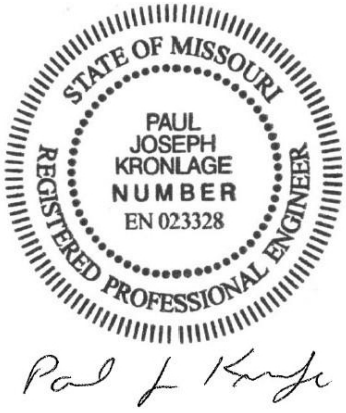

11/05/2026 8:49:03 AM
Paul J. Kronlage - Civil
MO PE - 023328

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
105 W. CAPITOL AVE.
JEFFERSON CITY, MO 65102
Phone 1-888-275-6636

EFK Moen, LLC
1355 North Highway Drive
Suite 200
St. Louis, MO. 63026

Certificate of Authority: 001578
Consultant Phone:314-394-3100

If a seal is present on this sheet, JSP's have been electronically sealed and dated.

JOB NUMBER: J6I3572
ST. LOUIS COUNTY, MO
DATE PREPARED: 11/02/2026

ADDENDUM DATE:

Only the following items of the Job Special Provisions (Roadway) are authenticated by this seal: All

Job No.: J6I3572
Route: I-170
County: St. Louis

JOB
SPECIAL PROVISION

A. General - Federal JSP-09-02M

1.0 Description. The Federal Government is participating in the cost of construction of this project. All applicable Federal laws, and the regulations made pursuant to such laws, shall be observed by the contractor, and the work will be subject to the inspection of the appropriate Federal Agency in the same manner as provided in Sec 105.10 of the Missouri Standard Specifications for Highway Construction with all revisions applicable to this bid and contract.

1.1 This contract requires payment of the prevailing hourly rate of wages for each craft or type of work required to execute the contract as determined by the Missouri Department of Labor and Industrial Relations and requires adherence to a schedule of minimum wages as determined by the United States Department of Labor. For work performed anywhere on this project, the contractor and the contractor's subcontractors shall pay the higher of these two applicable wage rates. State Wage Rates, Information on the Required Federal Aid Provisions, and the current Federal Wage Rates are available on the Missouri Department of Transportation web page at www.modot.org under "Doing Business with MoDOT", "Contractor Resources". Effective Wage Rates will be posted 10 days prior to the applicable bid opening. These supplemental bidding documents have important legal consequences. It shall be conclusively presumed that they are in the bidder's possession, and they have been reviewed and used by the bidder in the preparation of any bid submitted on this project.

1.2 The following documents are available on the Missouri Department of Transportation web page at www.modot.org under "Doing Business with MoDOT"; "Standards and Specifications". The effective version shall be determined by the letting date of the project.

General Provisions & Supplemental Specifications

Supplemental Plans to July 2026 Missouri Standard Plans
For Highway Construction

These supplemental bidding documents contain all current revisions to the published versions and have important legal consequences. It shall be conclusively presumed that they are in the bidder's possession, and they have been reviewed and used by the bidder in the preparation of any bid submitted on this project.

B. Contract Liquidated Damages JSP- 13-01E

1.0 Description. Liquidated Damages for failure or delay in completing the work on time for this contract shall be in accordance with Sec 108.8. The liquidated damages include separate amounts for road user costs and contract administrative costs incurred by the Commission.

2.0 Period of Performance. Prosecution of work is expected to begin on the date specified below in accordance with Sec 108.2. Regardless of when the work is begun on this contract, all work on all projects shall be completed on or before the date specified below. Completion by this date shall be in accordance with the requirements of Sec 108.7.1.

Notice to Proceed: March 1, 2027
Contract Completion Date: December 1, 2028

2.1 Calendar Days. Completion of the project is required as specified herein. The count of calendar days will begin on the date the contractor starts any construction operations on the project.

Project	Calendar Days	Daily Road User Cost
J6I3572	N/A	$11,400

3.0 Liquidated Damages for Contract Administrative Costs. Should the contractor fail to complete the work on or before the contract completion date specified in Section 2.0, or within the number of calendar days specified in Section 2.1, whichever occurs first, the contractor will be charged contract administrative liquidated damages in accordance with Sec 108.8 in the amount of **$2,000** per calendar day for each calendar day, or partial day thereof, that the work is not fully completed. For projects in combination, these damages will be charged in full for failure to complete one or more projects within the specified contract completion date or calendar days.

4.0 Liquidated Damages for Road User Costs. Should the contractor fail to complete the work on or before the contract completion date specified in Section 2.0, or within the number of calendar days specified in Section 2.1, whichever occurs first, the contractor will be charged road user costs in accordance with Sec 108.8 in the amount specified in Section 2.1 for each calendar day, or partial day thereof, that the work is not fully completed. These damages are in addition to the contract administrative damages and any other damages as specified elsewhere in this contract.

5.0 Liquidated Damages for Winter Months. Delete Sec 108.8.1.3 (a)

Liquidated damages for failure to complete the work on time shall not be waived from December 15 to March 15, both dates inclusive.

C. Work Zone Traffic Management JSP-02-06N

1.0 Description. Work zone traffic management shall be in accordance with applicable portions of Division 100 and Division 600 of the Standard Specifications, and specifically as follows.

1.1 Maintaining Work Zones and Work Zone Reviews. The Work Zone Specialist (WZS) shall maintain work zones in accordance with Sec 616.3.3 and as further stated herein. The WZS shall coordinate and implement any changes approved by the engineer. The WZS shall ensure all traffic control devices are maintained in accordance with Sec 616, the work zone is operated within the hours specified by the engineer, and will not deviate from the specified hours without prior approval of the engineer. The WZS is responsible to manage work zone delay in accordance with these project provisions. When requested by the engineer, the WZS shall submit a weekly report that includes a review of work zone operations for the week. The report shall identify any problems encountered and corrective actions taken. Work zones are subject to unannounced inspections by the engineer and other departmental staff to corroborate the validity of the WZS's review and may require immediate corrective measures and/or additional work zone monitoring.

1.2 Work Zone Deficiencies. Failure to make corrections on time may result in the engineer suspending work. The suspension will be non-excusable and non-compensable regardless if road user costs are being charged for closures.

2.0 Traffic Management Schedule.

2.1 Traffic management schedules shall be submitted to the engineer for review prior to the start of work and prior to any revisions to the traffic management schedule. The traffic management schedule shall include the proposed traffic control measures, the hours traffic control will be in place, and work hours.

2.2 The traffic management schedule shall conform to the limitations specified in Sec 616 regarding lane closures, traffic shifts, road closures and other width, height and weight restrictions.

2.3 The engineer shall be notified as soon as practical of any postponement due to weather, material or other circumstances.

2.4 In order to ensure minimal traffic interference, the contractor shall schedule lane closures for the absolute minimum amount of time required to complete the work. Lanes shall not be closed until material is available for continuous construction and the contractor is prepared to diligently pursue the work until the closed lane is opened to traffic.

2.5 Traffic Congestion. The contractor shall, upon approval of the engineer, take proactive measures to reduce traffic congestion in the work zone. The contractor shall immediately implement appropriate mitigation strategies whenever traffic congestion reaches an excess of **15 minutes** to prevent congestion from escalating beyond this delay threshold. If disruption of the traffic flow occurs and traffic is backed up in queues equal to or greater than the delay time threshold listed above, then the contractor shall immediately review the construction operations which contributed directly to disruption of the traffic flow and make adjustments to the operations to prevent the queues from reoccurring. Traffic delays may be monitored by physical presence on site or by utilizing real-time travel data through the work zone that generate text and/or email notifications where available. The engineer monitoring the work zone may also notify the contractor of delays that require prompt mitigation. The contractor may work with the engineer to determine what other alternative solutions or time periods would be acceptable. When a Work Zone Analysis Spreadsheet is provided, the contractor will find it in the electronic deliverables on MoDOT's Online Plans Room. The contractor may refer to the Work Zone Analysis Spreadsheet for detailed information on traffic delays.

2.5.1 Traffic Safety.

2.5.1.1 Recurring Congestion. Where traffic queues routinely extend to within 1000 feet of the ROAD WORK AHEAD, or similar, sign on a divided highway or to within 500 feet of the ROAD WORK AHEAD, or similar, sign on an undivided highway, the contractor shall extend the advance warning area, as approved by the engineer.

2.5.1.2 Non-Recurring Congestion. When traffic queues extend to within 1000 feet of the ROAD WORK AHEAD, or similar, sign on a divided highway or to within 500 feet of the ROAD WORK AHEAD, or similar, sign on an undivided highway infrequently, the contractor shall deploy a means of providing advance warning of the traffic congestion, as approved by the engineer. The warning location shall be no less than 1000 feet and no more than 0.5 mile in advance of the end of the traffic queue on divided highways and no less than 500 feet and no more than 0.5 mile in advance of the end of the traffic queue on undivided highways.

2.6 Transportation Management Plan. The contractor Work Zone Specialist (WZS) shall review the Transportation Management Plan (TMP), found as an electronic deliverable on MoDOT's Online Plans Room and discuss the TMP with the engineer during the preconstruction conference. Throughout the construction project, the WZS is responsible for updating any changes or modifications to the TMP and getting those changes approved by the engineer a minimum of two weeks in advance of implementation. The WZS shall participate in the post construction conference and provide recommendations on how future TMPs can be improved.

2.7 Traffic Management Center (TMC) Coordination. The Work Zone Specialist (WZS) or their designee shall contact by phone the MoDOT Traffic Management Center (KC Scout TMC at #816-347-2250 or Gateway Guide TMC at #314-275-1513) within five minutes of a lane or ramp closure beginning and within five minutes of a lane or ramp closure being removed. The WZS shall make this phone call 24 hours a day, 365 days of the year since the MoDOT Traffic Management Centers are always staffed.

3.0 Work Hour Restrictions.

3.1 Except for emergency work, as determined by the engineer, and long term lane closures required by project phasing, all lanes shall be scheduled to be open to traffic during the five major holiday periods shown below, from 12:00 noon on the last working day preceding the holiday until 6:00 a.m. on the first working day subsequent to the holiday unless otherwise approved by the engineer.

Memorial Day
Labor Day
Thanksgiving
Christmas
New Year's Day

3.1.1 Independence Day. The lane restrictions specified in Section 3.1 shall also apply to Independence Day, except that the restricted periods shall be as follows:

When Independence Day falls on:	The Holiday is Observed on:	Halt Lane Closures beginning at:	Allow Lane Closures to resume at:
Sunday	Monday	Noon on Friday	6:00 a.m. on Tuesday
Monday	Monday	Noon on Friday	6:00 a.m. on Tuesday
Tuesday	Tuesday	Noon on Monday	6:00 a.m. on Wednesday
Wednesday	Wednesday	Noon on Tuesday	6:00 a.m. on Thursday
Thursday	Thursday	Noon on Wednesday	6:00 a.m. on Friday
Friday	Friday	Noon on Thursday	6:00 a.m. on Monday
Saturday	Friday	Noon on Thursday	6:00 a.m. on Monday

3.2 The contractor shall not perform any construction operation on the roadway, roadbed or active lanes, including the hauling of material within the project limits, during restricted periods, holiday periods or other special events specified in the contract documents.

3.3 The contractor shall be aware that traffic volume data indicates construction operations on the roadbed between the following hours will likely result in traffic queues greater than 15 minutes. Based on this, the contractor's operations will be restricted accordingly unless it can be successfully demonstrated the operations can be performed without a 15 minute queue in traffic.

It shall be the responsibility of the engineer to determine if the above work hours may be modified. Working hours for evenings, weekends and holidays will be determined by the engineer. Allowable nighttime lane closures are as follows:

I-170 Southbound:

Mon.-Thurs.	1 Lane Closed:	8 p.m. – 5 a.m.	2 Lanes Closed:	10 p.m.– 5 a.m.
Friday	1 Lane Closed:	9 p.m. – 7 a.m.	2 Lanes Closed:	10 p.m.– 7 a.m.`
Saturday	1 Lane Closed:	9 p.m. – 8 a.m.	2 Lanes Closed:	10 p.m.– 6 a.m.
Sunday	1 Lane Closed:	7 p.m. – 5 a.m.	2 Lanes Closed:	9 p.m.– 5 a.m.

I-170 Northbound:

Mon.-Thurs.	1 Lane Closed:	7 p.m.– 5 a.m.	2 Lanes Closed:	10 p.m.– 5 a.m.
Friday	1 Lane Closed:	8 p.m.– 7 a.m.	2 Lanes Closed:	10 p.m.– 7 a.m.
Saturday	1 Lane Closed:	7 p.m.– 8 a.m.	2 Lanes Closed:	9 p.m.– 8 a.m.
Sunday	1 Lane Closed:	7 p.m.– 5 a.m.	2 Lanes Closed:	9 p.m.– 5 a.m.

When the mainline is reduced to two through lanes in each direction from north of Route D to south of Route 340, the contractor will be allowed an additional lane closure during the 2 Lanes Closed times listed above.

The contractor shall not be allowed to work on Route D or Woodson Road during the following times:

Route D (Page Ave.):

9:00 a.m. - 6:00 p.m. Monday through Friday

Woodson Road

7:00 a.m. - 9:00 a.m., and 4:00 p.m.- 6:00 p.m. Monday through Friday

3.4 Any work requiring a reduction in the number of through lanes of traffic shall be completed during nighttime hours. Nighttime hours shall be considered to be 8:00 p.m. to 6:00 a.m. for this project.

3.5 The contractor shall not alter the start time, ending time, or a reduction in the number of through lanes of traffic or ramp closures without advance notification and approval by the engineer. The only work zone operation approved to begin 30 minutes prior to a reduction in through traffic lanes or ramp closures is the installation of traffic control signs. Should lane closures be placed or remain in place, prior to the approved starting time or after the approved ending time, the Commission, the traveling public, and state and local police and governmental authorities will be damaged in various ways, including but not limited to, increased construction administration cost, potential liability, traffic and traffic flow regulation cost, traffic congestion and motorist delays, with a resulting cost to the traveling public. These damages are not easily computed or quantified. Therefore, the contractor will be charged with liquidated damages specified in the amount of **$1000 per 15 minute increment** for each 15 minutes that the temporary lane closures are in place and not open to traffic in excess of the limitation as specified elsewhere in this special provision. It shall be the responsibility of the engineer to determine the quantity of unapproved closure time.

3.5.1 The said liquidated damages specified will be assessed regardless if it would otherwise be charged as liquidated damages under the Missouri Standard Specification for Highway Construction, as amended elsewhere in this contract.

4.0 Detours and Lane Closures.

4.1 When a changeable message sign (CMS) is provided, the contractor shall use the CMS to notify motorists of future traffic disruption and possible traffic delays one week before traffic is shifted to a detour or prior to lane closures. The CMS shall be installed at a location as approved or directed by the engineer. If a CMS with Communication Interface is required, then the CMS shall be capable of communication prior to installation on right of way. All messages planned for use in the work zone shall be approved and authorized by the engineer or its designee prior to deployment. When permanent dynamic message signs (DMS) owned and operated by MoDOT are located near the project, they may also be used to provide warning and information for the work zone. Permanent DMS shall be operated by the TMC, and any messages planned for use on DMS shall be approved and authorized by the TMC at least 72 hours in advance of the work.

4.2 At least one lane of traffic in each direction shall be maintained at all times except for brief intervals of time required when the movement of the contractor's equipment will seriously hinder the safe movement of traffic. Periods during which the contractor will be allowed to interrupt traffic will be designated by the engineer.

5.0 Basis of Payment. No direct payment will be made to the contractor to recover the cost of equipment, labor, materials, or time required to fulfill the above provisions, unless specified elsewhere in the contract document. All authorized changes in the traffic control plan shall be provided for as specified in Sec 616.

D. Emergency Provisions and Incident Management JSP-90-11A

1.0 The contractor shall have communication equipment on the construction site or immediate access to other communication systems to request assistance from law enforcement or other emergency agencies for incident management. In case of traffic accidents or the need for law enforcement to direct or restore traffic flow through the job site, the contractor shall notify law enforcement or other emergency agencies immediately as needed. The area engineer's office shall also be notified when the contractor requests emergency assistance.

2.0 In addition to the 911 emergency telephone number for ambulance, fire or law enforcement services, the following agencies may also be notified for accident or emergency situation within the project limits.

Missouri Highway Patrol: 636-537-7000		
St. Louis County Police: 314-231-1212		
MoDOT Transportation Management Center: 314-275-1500		
City of Overland	City of University City	City of Olivette
Fire: 314-428-1128	Fire: 314-505-8469	Fire: 314-993-0408
Police: 314-428-1212	Police: 314-725-2211	Police: 314-993-3610

2.1 This list is not all inclusive. Notification of the need for wrecker or tow truck services will remain the responsibility of the appropriate law enforcement agency.

2.2 The contractor shall notify law enforcement and emergency agencies before the start of construction to request their cooperation and to provide coordination of services when emergencies arise during the construction at the project site. When the contractor completes this notification with law enforcement and emergency agencies, a report shall be furnished to the engineer on the status of incident management.

3.0 No direct pay will be made to the contractor to recover the cost of the communication equipment, labor, materials or time required to fulfill the above provisions.

E. Project Contact for Contractor/Bidder Questions JSP-96-05A

1.0 All questions concerning this project during the bidding process shall be forwarded to the project contact listed below.

Paul Kronlage, Project Contact
St. Louis District
1590 Woodlake Drive
Chesterfield, MO 63017

Telephone Number: 314-394-3102
Email: Paul.Kronlage@modot.mo.gov

1.1 All questions concerning the bid document preparation can be directed to the Central Office – Design as listed below.

Telephone Number: (573) 751-2876
Email: BCS@modot.mo.gov

2.0 Upon award and execution of the contract, the successful bidder/contractor shall forward all questions and coordinate the work with the engineer listed below:

Robert Gummersheimer, Resident Engineer
St. Louis District
1590 Woodlake Drive
Chesterfield, MO 63017

Telephone Number: 314-620-8564
Email: Robert.Gummersheimer@modot.mo.gov

F. Utilities JSP-93-26F

1.0 For informational purposes only, the following is a list of names, addresses, and telephone numbers of the known utility companies in the area of the construction work for this improvement:

Utility Name	Known Required Adjustment	Type
Ameren Missouri Ryan Bain Telephone: 314.569.8268 Email: RBain@ameren.com	None	Electric
AT&T Distribution Cheryl Gissler Telephone: 636.479-0055 Email: CB1969@att.com	None	Communications
Lumen Richard Obremski Phone: (314) 378-9931 - Cell Email: Richard.Obremski@lumen.com	Yes	Communication
MoDOT Traffic Division Telephone: 314.275.1500	Yes	ITS, Signals & Lighting
Metropolitan Sewer District Thomas Boehm Telephone: 314.335-2046 Email: tcboeh@stlmsd.com	None	Sewer
Spire Energy Brian Langenbacher Telephone: 314.768.7767 Email: brian.langenbacher@spireenergy.com	None	Gas
Missouri American Water Company Dave Pruitt Telephone: 314.992.2396 Email: dave.pruitt@amwater.com	None	Water

1.1 The existence and approximate location of utility facilities known to exist, as shown on the plans, are based upon the best information available to the Commission at this time. This information is provided by the Commission "as-is" and the Commission expressly disclaims any representation or warranty as to the completeness, accuracy, or suitability of the information for any use. Reliance upon this information is done at the risk and peril of the user, and the Commission shall not be liable for any damages that may arise from any error in the information. It is, therefore, the responsibility of the contractor to verify the above listing information indicating existence, location and status of any facility. Such verification includes direct contact with the listed utilities.

2.0 Project Specific Provisions: The Contractor shall be aware there are numerous utilities present along the Woodson Road and Page Avenue. The locations listed below are not to be considered all inclusive.

3.0 Ameren Missouri has existing facilities in proximity to the project limits and no conflicts are anticipated. Overhead wires overhang the bridges at Page Avenue, the UP Railroad, and Woodson Road. Due to summer constraints, these lines will not be allowed to be de-energized. At the contractors request to Ameren, the low wires may be covered. The contractor shall make this request to Ameren at least 14 calendar days prior to the start of demolition and construction. These wire covers typically last 90 days or less, so several request may be required as determined by the contractor's preferred method of construction and schedule.

The lowest wire over the Page Avenue bridge provides less than 17 feet of vertical clearance. The lowest wire over the UP railroad bridge provides less than 35 feet of vertical clearance. The lowest wire over the Woodson Road bridge provides less than 20 feet of vertical clearance. All of these clearances will vary based on weather and temperature. The contractor shall determine whether these wires shall be covered based on the preferred method of demolition, construction and schedule. The contractor shall also note that Ameren has proximity safety requirements for equipment around and near their lines, which can vary based on the different types of Ameren facilities.

4.0 AT&T-Distribution has existing facilities along Woodson in proximity to the project limits and no conflicts are anticipated.

5.0 MSD has existing facilities under I-170 at Woodson Road in proximity to the project limits and no conflicts are anticipated.

6.0 Spire has existing facilities under I-170 at Woodson Road in proximity to the project limits and no conflicts are anticipated.

7.0 Lumen's has existing fiber located along the east and west side of I-170 right of way throughout the entire project limits. Their cable and conduit is also attached to the I-170 northbound Bridge A2809 over the Union Pacific Railroad. This is the only anticipated Lumen conflict. Lumen will have this line moved to the outside girder of Bridge A2809 by April 1, 2027. The contractor shall exercise extreme care to protect and not damage this line or line supports while removing the existing deck and installing the new deck. When the new deck is complete, the contractor shall coordinate with the Lumen contractor to have their facility relocated to the outside of the bridge safety barrier. Then the contractor may proceed with painting the girders of bridge A2809.

8.0 Missouri American Water Company's has existing facilities under I-170 at Woodson Road in the proximity to the project limits and no conflicts are anticipated

9.0 MoDOT's Traffic Division has existing facilities in project limits:

9.1 MoDOT maintains traffic signals at the Page Ave. interchange adjacent to the project limits, and highway lighting & ITS along the I-170 corridor. These facilities will be used in place by this project.

9.2 MoDOT has existing ITS fiber located along the I-170 right of way throughout the entire project limits. Fiber optic lines are attached to the I-170 southbound bridges over Page Avenue and the UP Railroad. The conduit will be temporarily relocated as indicated in other job special provisions and reattached to the new bridge barrier. The ITS facilities shall be relocated and reinstalled as part of this project.

9.3 MoDOT has existing lighting along both sides of I-170 right of way between Page Ave. and Olive Blvd. Two luminaries, one northbound and one southbound shall be removed as part of this project as shown on the plans. These two lights are at the end of the electrical circuits. The contractor shall remove the cable-conduit, pull boxes, and disconnect the cable conduit to its source, which may be the next pull box or luminaire.

G. Union Pacific Railroad Requirements

1.0 Introduction.

1.1 These Railroad Requirements set forth terms and conditions agreed upon between the Union Pacific Railroad Company (Railroad) and the Missouri Highways and Transportation Commission (Commission), under which the Railroad will allow the Commission's contractors to enter in and upon the Railroad's real property, right of way, tracks and other facilities (Railroad's Property) to perform the contractor's work relating to this project.

1.2 To report an emergency on the Railroad, call: (833) 261-7790.

1.3 The project location is at Lackland Subdivision Railroad Milepost 10.49 designated as USDOT Crossing # 596314T in St Louis MO. **Current FRA data shows 1 train movement per day and 0 passenger trains.**

1.4 Definitions of terms set forth in the current edition of the Missouri Standard Specifications for Highway Construction shall be applicable to those terms as used in these Railroad Requirements.

2.0 Authority of Railroad Representative and Engineer.

2.1 The authorized representative of the Railroad, herein called "Railroad Representative", shall have final authority in all matters affecting the safe maintenance and operation of railroad traffic including the adequacy of the foundations and structures supporting the railroad tracks.

2.1.1 The Railroad designates the following individual as the Railroad Representative for this project. Except as otherwise provided in these Railroad Requirements, the contractor shall address all notices concerning this project to the Railroad Representative, as follows:

Chris Duran
Public Projects
Telephone: Direct - (479)440-0390
E-mail: cduran@benesch.com

2.1.2 The Railroad, or the individual identified above, may designate a different individual to act as the Railroad Representative for this project, and may change the address information stated above, by giving written notice of the changes to the contractor and to the Engineer, as provided in these Railroad Requirements.

2.2 The authorized representative of the Commission (Engineer) shall have authority over all other matters as prescribed herein and in the project specifications.

3.0 Contractor's Indemnity Obligations to the Railroad.

3.1 The contractor agrees to indemnify, defend and hold harmless the Railroad from and against any injury or death of persons whomsoever, or from any loss or damage to the Railroad's Property, caused by acts or omissions of the contractor in performing work on this project, whether on, over, under or in the vicinity of the Railroad's Property. In the event the contractor shall fail to restore the Railroad's Property immediately to a condition acceptable to the Railroad when any such loss or damage to the Railroad's Property is called to the contractor's attention by the Railroad, then the Railroad may perform such corrective work at the cost of the contractor. The Railroad shall have the right to bring an action directly against the contractor to recover any loss or damage sustained by the Railroad by reason of the contractor's breach of agreements contained in these Railroad Requirements. In addition to such remedies of the Railroad, the Commission will withhold from final payment due to the contractor the amount reasonably necessary to reimburse the Railroad for such loss or damage or for performing such work. The term "loss or damage" as used herein shall include, but not be limited to, the erosion and silting of, water damage to, and the accidental or intentional placing or dropping of objects on the Railroad's Property.

4.0 Notice of Starting Work.

4.1 The contractor shall not commence any work on the Railroad's right of way until contractor has complied with the following conditions (no particular order):

4.1.1 At least thirty (30) days in advance of the date the contractor proposes to begin work on the Railroad's Property, the contractor has given written notice of the contractor's proposed start date and time to the Railroad Representative, and Railroad's Manager of Track Maintenance (see paragraph 12.2.3 below), with a copy to the Engineer.

4.1.2 The Commission has obtained written approval from the Railroad's Representative for the contractor's insurance coverage as required by Section 17 of these Railroad Requirements, and authorization for the contractor to begin work on the Railroad's Property.

4.1.3 The contractor has determined whether fiber optic cable systems are buried on the Railroad's Property. If fiber optic cable systems are buried on the Railroad's Property, then the contractor has contacted the Railroad at the 24 hour number, 800-336-9193, has contacted the telecommunications company involved, has arranged for a cable locator, and has made arrangements for relocation or other protection of the fiber optic cable system on the Railroad's Property.

4.1.4 Union Pacific Property Access Training must have been completed by each person on UPRR right of way. A valid copy of certification must be with the individual anytime they are on the job site. For guidance on completing the training, visit the website provided:
https://www.up.com/aboutup/community/safety/erailsafe/up-pat/index.htm

4.2 Right of Entry. At least thirty (30) days in advance of the date the contractor proposes to begin work on the Railroad's Property, the contractor shall enter into a Contractor's Right of Entry Agreement (CROE) with Railroad prior to working on Railroad property. For general information on the CROE and Contractor Endorsement visit www.up.com/ce-terms . Submit the following information to the Railroad Representative:

a. MoDOT manager contact information
b. Contractor contact information
c. Site location (include address, DOT#)

d. Site map
e. Brief description of scope of work
f. Proposed schedule for work on UP right of way

4.2.1 After reviewing the information, the Railroad Representative will send all of the information to UP Real Estate for processing. UP Real Estate will draft the CROE agreement and send it to the contractor for signature. The signed contract and administrative fee must then be returned to UP Real Estate.

4.2.2 Administrative Fee. Upon the execution and delivery of this CROE agreement, Contractor shall pay the Railroad Two Thousand Two hundred Dollars ($2,200) as reimbursement for clerical, administrative and handling expenses in connection with the processing of this CROE agreement.

4.2.3 If applicable to the project, the contractor must submit a demolition and falsework plan as well as means and methods to the Railroad for review and approval. These plans can be submitted along with the Right of Entry application; however, the Right of Entry will not be approved until the demolition and falsework plan is approved by the Railroad.

5.0 Interference with Railroad's Operations.

5.1 The Railroad's right of way is located within the limits of this project. The contractor shall take care to ensure that it will not drop any debris or material on the Railroad's Property.

5.2 The contractor shall arrange and conduct all of the contractor's work so that it causes no interference with the Railroad's operations, including train, signal, telephone, telegraphic services, damage to the Railroad's Property, poles, wires and other facilities of tenants on the Railroad's Property. Whenever the contractor's work may directly affect the operations or safety of trains, the contractor shall submit a written description of the method of doing such work to the Railroad Representative for approval, but such approval shall not relieve the contractor from liability resulting from the contractor's work. Any work to be performed by the contractor that requires flagging service shall be deferred by the contractor until the flagging services are available at the job site.

5.3 Whenever the contractor's work upon the Railroad's Property will unavoidably cause an impediment to the Railroad's operations, such as requiring the use of runaround tracks or reduced train speed, the contractor should schedule and conduct these operations so that this impediment is reduced to the absolute minimum.

5.4 If conditions arising from, or in connection with the work require immediate and unusual provisions to protect the Railroad's operations and property, the contractor shall make such provisions. If in the judgment of the Railroad Representative, or the Engineer if the Railroad Representative is absent, such provision is insufficient, then the Railroad Representative or Engineer may require or provide such provisions as he/she deems necessary. In any event, the contractor shall make such provisions at the contractor's expense, and without cost to the Railroad or the Commission.

6.0 Track Clearances.

6.1 During construction, the contractor shall maintain not less than the minimum track clearances as shown on the project plans. However, before undertaking any work within the Railroad's Property and before placing any obstruction over any track, the contractor shall:

6.1.1 Notify the Railroad Representative and the Railroad's Manager of Track Maintenance at least ten (10) days in advance of the proposed work.

6.1.2 Receive assurance from the Railroad's Manager of Track Maintenance that arrangements have been made for flagging service as may be necessary.

6.1.3. Receive permission from the Railroad Representative to proceed with the work, as provided in section 4.0.

6.1.4. Confirm that the Engineer has received copies of the contractor's notice to the Railroad, and of the Railroads' response.

6.1.5 Note that temporary Work Zone traffic control must not circumvent the active warning devices at this location.

6.1.6 Temporary traffic control must comply with MUTCD standards. Any time work is within 25' of the track, the potential to foul the track exists or a pilot car is used traversing the crossing will require a Railroad flag person to be present. Traffic control must be returned to normal operations through the crossing area before releasing the Railroad's flag person.

7.0 Construction Procedures.

7.1. General. The contractor's work on the Railroad's property shall be performed in accordance with these Railroad Requirements and shall be subject to the Railroad's inspection and review. The contractor shall submit plans that shall be signed, sealed, and stamped in accordance with the laws relating to Architects and Professional Engineers, Chapter 327, RSMo, for the demolition of any structure over Railroad right of way, and for temporary shoring and falsework that may affect the Railroad's facilities or traffic.

7.2 Excavation. The contractor shall maintain the subgrade of an operated track with the beam edge at least 12 feet from centerline of track and not more than 26 inches below top of rail, unless the existing section fails to meet this specification, in which case the contractor shall maintain the existing section.

8.0 Maintenance of Railroad Facilities. Within the project limits, the contractor shall maintain Railroad's Property, including all ditches and drainage structures, free of silt or other obstructions that may result from contractor's operations. The contractor shall promptly repair eroded areas within the Railroad's Property and repair any other damage to the Railroad's Property or the Railroad's tenants. The contractor shall perform all such maintenance and repair of damages due to the contractor's operations at the contractor's expense.

9.0 Storage of Materials and Equipment.

9.1 The contractor shall obtain permission from the Railroad Representative before storing any materials or equipment anywhere on Railroad's Property. The Railroad will not ordinarily permit storage within twenty-five feet (25') from the centerline of any track, or within three hundred feet (300') from any grade crossing. The Railroad will not be liable for damage to such material and equipment from any cause, and the Railroad Representative may move such material and equipment or require the contractor to move it, at the contractor's expense.

9.2 The contractor shall not leave unattended any grading or construction machinery parked upon Railroad's Property, unless it is effectively immobilized so that unauthorized persons cannot move such machinery.

10.0 Cleanup. Upon completion of the work, the contractor shall remove from within the limits of the Railroad's Property all machinery, equipment, surplus materials, falsework, rubbish or temporary buildings of the contractor's and shall leave Railroad's Property in a neat condition satisfactory to the Railroad Representative.

11.0 Damages. The Railroad shall not assume liability for any damages to the contractor, contractor's work, employees, servants, equipment and materials caused by the Railroad's traffic. However, the preceding sentence shall not exempt the Railroad from liability for any loss, damage or injury proximately caused by the Railroad's intentional misconduct or sole or gross negligence. The contractor shall directly reimburse the Railroad for any cost the Railroad reasonably incurs for repairing damages to the Railroad's Property or to property of the Railroad's tenants, caused by or resulting from the operations of the contractor relating to this project.

12.0 Flagging Services.

12.1 When Flagging is Required. The Railroad has sole authority to determine the need for flagging to protect the Railroad's operations. Whenever the Railroad requires flagging services with reference to any of the contractor's work on this project, the contractor shall not perform any such work until all required flaggers are present at the job site.

12.1.1 In general, the Railroad may require flagging services whenever the contractor's personnel or equipment are, or are likely to be, working on the Railroad's Property, or across, over, adjacent to, or under a track, or when such work has disturbed or is likely to disturb a railroad structure or the railroad roadbed or surface and alignment of any track to such extent that the movement of trains must be controlled by flagging, to prevent unreasonable risks of accidental hazard to the Railroad's operations or personnel.

12.1.2 Normally, the Railroad will assign one flagger to a project; but in some cases, more than one may be necessary, such as yard limits where the Railroad may assign up to three flaggers. However, if the contractor works within distances that violate instructions given by the Railroad Representative, or performs work upon or adjacent to Railroad's Property that has not been scheduled with the Railroad Representative, the Railroad may require flagging services full time until the project is completed.

12.1.3 If flagging is determined to be required by the Manager of Track Maintenance (MTM), and the MTM advises that third party flagging is to be used, then third-party flagging must be used. If flagging is determined to be required by the MTM and the MTM advises that an agreement employee flagging is to be used, then an agreement flagger will be put up for bid (and scheduled accordingly).

UPRR Third Party Flagging Policy Link
https://www.up.com/real_estate/third-party-flagging/index.htm

12.2 Scheduling and Notification of Flagging Services.

12.2.1 The contractor shall arrange with the Railroad all flagging services required by the Railroad to accomplish the contractor's work on this project.

12.2.2 Before the contractor begins work on the Railroad's Property, the contractor shall furnish to the Railroad Representative and the Engineer a schedule for all work required to complete the contractor's portion of the project within the Railroad's Property, and shall arrange for a job site meeting between the contractor, the Engineer, and the Railroad Representative. Until the contractor has provided its work schedule and met on-site with the Railroad Representative and the Engineer, the Railroad may withhold all flagging services from the contractor's proposed job site.

12.2.3 Before the contractor first begins any work upon or adjacent to the Railroad's Property, the contractor shall give not less than thirty (30) days advance notice to the Railroad, and to the Engineer, of its intent to begin such work. The contractor shall address all notices relating to flagging as instructed in the fully executed CROE agreement.

12.2.4 The Railroad usually assigns one flagger to work at the job site on a continuous basis until the contractor no longer needs flagging services. The contractor shall not call for flagging services on a spot basis. The Railroad's assigned flagger shall notify the Engineer when flagging services have begun and ended. The flagger shall give these notices immediately upon arrival at the job site on the first day, and before departing from the job site on the last day of each separate period when the Railroad provides flagging services, or as soon as possible thereafter. The Engineer shall document these notifications in the project records.

12.2.5 After the contractor has begun work that requires flagging services, the contractor shall give not less than ten (10) day's advance written notice to the Railroad before discontinuing flagging services and terminating the obligation to pay for flagging services. The contractor shall simultaneously provide a copy of this notice to the Engineer. If the contractor's work on or adjacent to the Railroad's Property is suspended at any time, or for any reason, then before the contractor resumes any work on or adjacent to the Railroad's Property, the contractor shall give advance, written notice to the Railroad and to the Engineer of its intent to resume such work. This notice shall provide sufficient details of the contractor's proposed work to enable the Railroad Representative to determine whether flagging services will be required before the contractor resumes its work on or adjacent to the Railroad's Property. The contractor shall give this required notice at least three (3) working days before it intends to resume such work; however. The Railroad may take up to thirty (30) days after the contractor has given this notice before resuming flagging services at the job site. The requirements of this paragraph 12.2.5 shall not apply if the suspension and resumption of the contractor's work were previously scheduled with the Railroad pursuant to paragraph 12.2.2 of these Railroad Requirements, or the suspension was caused by an emergency as provided in paragraph 12.2.6 of these Railroad Requirements.

12.2.6 If, after the Railroad has assigned a flagger to the project site in accordance with section 12.0, any emergency requires the flagger's presence elsewhere, then the contractor shall suspend work on the Railroad's Property until the flagger is again available. Any additional costs to the contractor resulting from such delay shall be borne by the contractor and not by the Railroad.

12.3 Payment for Flagging Services.

12.3.1 The Commission will pay the Railroad directly for the cost of flagging services associated with this project by deducting the amount from the Commission's payments to the contractor. If a third-party flagger is used, the contractor will pay the flagger directly but must notify the MoDOT Engineer of such payments for flagging.

12.3.2 The estimated cost of flagging services is approximately $1,600 per day, based on an 8-hour workday and a 40-hour work week. The Railroad shall charge not more than its actual cost of providing these flagging services, which includes the base pay for the flagger or flaggers who actually performed the required flagging services, the Railroad's reasonable overhead costs, and the reasonable costs actually incurred for the flagger's travel expenses, meals and lodging if required. The Railroad may charge a maximum of one hour of travel time each way per day per flagger, for travel to and from the job site. A flagger's work in excess of 8 hours per day or 40 hours per week, but not more than 12 hours per day, will result in overtime pay at 1.5 times that employee's regular hourly rate. A flagger's work in excess of 12 hours per day will result in overtime pay at 2.0 times that employee's regular hourly rate. If a flagger performs required flagging services on a holiday, then the overtime pay rate shall be 2.5 times that employee's regular hourly rate. The Commission or contractor also shall reimburse the Railroad for its actual expenses reasonably incurred in preparing and handling invoices to the Commission or contractor for the cost of these flagging services. The Railroad's charges to the Commission or contractor shall comply with applicable provisions of the current FAPG issued by the FHWA.

12.3.3 The Railroad shall submit progress invoices to the Engineer during the time the Railroad requires flagging services. The Railroad shall submit its final invoice for flagging services to the Engineer within one hundred eighty (180) days after the contractor has notified the Railroad and the Commission that all its work over the Railroad's Property is complete, in accordance with section 18.0 below. If the Commission does not receive the Railroad's final flagging invoice within this time period, then the Railroad shall obtain payment directly from the contractor.

12.3.4 If a dispute arises between the Railroad, the Commission and the contractor concerning the amount charged for flagging service, then the Commission may deduct the full amount of the Railroad's invoice from the contractor's payment until the dispute is resolved.

12.4 Flagging Complaints. The contractor and the Railroad shall attempt to resolve any complaints concerning flagging services in a timely manner. If the contractor disputes the need for a flagger, the contractor shall notify the Railroad Representative and the Engineer. The contractor shall confirm any verbal complaints in writing within five (5) working days, by sending a copy to the Railroad Representative and to the Engineer.

13.0 Temporary Construction Grade Crossing.

13.1 When the contractor has no reasonable alternate method of transporting construction materials and personnel across the Railroad's track, the contractor shall make all necessary arrangements with the Railroad for the installation, maintenance, and removal of one temporary grade crossing for a construction haul road. The contractor shall bear all costs incidental to such crossings, including flagging, whether services are performed by contractor's own forces or by the Railroad's personnel. The contractor shall execute the Railroad's standard Road Crossing Agreement covering terms and conditions for the temporary crossing.

13.2 Neither the contractor nor the Railroad shall construct any crossing for use by the contractor for transporting materials or equipment across the tracks of the Railroad until the Railroad Representative specifically authorizes the installation, maintenance, necessary watching and flagging thereof and removal, which shall be done at the contractor's expense.

14.0 Work for the Benefit of the Contractors. The project plans show all temporary or permanent changes in wire lines or other facilities that are necessary to complete the project, or these changes will be covered by appropriate plan revisions approved by the Commission and

the Railroad. If the contractor desires any further changes, the contractor shall make separate arrangements with the Railroad for those changes, at the contractor's expense.

15.0 Cooperation and Delays. The contractor shall arrange a schedule with the Railroad for accomplishing staged construction involving work by the Railroad or tenants of the Railroad. In arranging a schedule, the contractor shall request information from the Railroad, and the Railroad shall promptly provide information concerning the minimum lead time required for assembling crews and materials. The contractor shall schedule adequate time for those activities. The contractor shall not make any claim against the Railroad for hindrance or delay on account of railway traffic for:

15.1 Any work the Railroad performs.

15.2 Other delay incident to or necessary for the safe maintenance of railway traffic.

15.3 Any delays due to compliance with these Railroad Requirements.

16.0 Trainman's Walkways. The contractor shall maintain along the outer side of each exterior track of multiple operated tracks, and on each side of single operated track, an unobstructed continuous space suitable for trainman's use in walking along trains, extending to a line not less than 12 feet from the centerline of the track. Before the close of each workday, the contractor shall remove all temporary impediments to walkways and track drainage encroachments or obstructions that were allowed during work hours when flagging services were available. Whenever the contractor excavates or maintains any excavation near the walkway, the contractor shall install a handrail with 12 feet minimum clearance from the centerline of the track.

17.0 Insurance.

17.1 General Insurance Provisions. The contractor shall, at its sole cost and expense, procure and continuously maintain in force during this project, the insurance coverage required under this section 17 until the contractor has completed all project work on the Railroad's Property, has removed all equipment and materials from the Railroad's Property, and has cleaned and restored the Railroad's Property to the satisfaction of the Engineer and the Railroad Representative. The amount of work to be performed upon, over or under the Railroad's Property is estimated to be one percent (1%) of the contractor's total bid for the project.

17.2 Commercial General Liability Insurance. The contractor shall maintain commercial general liability ("CGL") insurance with a limit of not less than $5,000,000 for each occurrence and an aggregate limit of not less than $10,000,000. CGL insurance must be written on ISO occurrence form CG 00 01 12 04 (or a substitute form providing equivalent coverage). The policy must contain the following endorsement, which must be stated on the certificate of insurance: **"**Contractual Liability Railroad's" ISO form CG 24 17 10 01 (or a substitute form providing equivalent coverage) showing "Union Pacific Railroad Company Property" as the Designated Job Site.

17.3 Business Automobile Coverage Insurance. The contractor shall maintain business auto coverage written on ISO form CA 00 01 (or a substitute form providing equivalent liability coverage) with a combined single limit of not less than $5,000,000 for each accident. The policy must contain the following endorsements, which must be stated on the certificate of insurance: "Coverage For Certain Operations In Connection With Railroad's" ISO form CA 20 70 10 01 (or a substitute form providing equivalent coverage) showing "Union Pacific Property" as the

Designated Job Site; and Motor Carrier Act Endorsement - Hazardous Materials Clean Up (MCS-90) if required by law.

17.4 Alternate Liability Insurance Limits. Instead of the minimum limits of insurance coverage described above in subsections 17.2 and 17.3, Railroad will accept CGL insurance limits of at least $2,000,000 for each occurrence or claim and an aggregate limit of at least $2,000,000, and will accept Business Automobile Insurance containing a combined single limit of at least $2,000,000 per occurrence or claim, if the contractor will secure Railroad Protective Liability Insurance coverage with a combined single limit of $5,000,000 per occurrence and an aggregate limit of $10,000,000. The contractor's election to maintain these alternate liability insurance limits shall not affect the applicability of any other terms and conditions set forth in these Railroad Requirements.

17.5 Workers' Compensation and Employers' Liability Insurance. The contractor shall maintain workers' compensation insurance coverage, with not less than the minimum statutory liability required under the workers' compensation laws of the State of Missouri. The contractor shall maintain Employers' Liability (Part B) insurance coverage with limits of at least $500,000 for each accident, a $500,000 disease policy limit, and $500,000 for each employee. If the contractor is self-insured, then the contractor shall provide evidence of state approval and excess workers' compensation coverage, which must include coverage for liability arising out of the U. S. Longshoremen's and Harbor Workers' Act, the Jones Act, and the Outer Continental Shelf Land Act, if applicable. The policy must contain the following endorsement, which must be stated on the certificate of insurance: "Alternate Employer Endorsement" ISO form WC 00 03 01 A (or a substitute form providing equivalent coverage) showing the Railroad in the schedule as the alternate employer (or a substitute form providing equivalent coverage).

17.6 Railroad Protective Liability Insurance. The contractor must maintain Railroad Protective Liability insurance written on ISO occurrence form CG 00 35 12 04 (or a substitute form providing equivalent coverage) on behalf of the Railroad as named insured, with a limit of not less than $2,000,000 per occurrence and an aggregate limit of $6,000,000. Before commencing any work on the Railroad's Property, the contractor shall submit the original insurance policy to the Railroad, or may submit a binder stating that the required Railroad Protective Liability policy is in place until the contractor delivers the original policy to the Railroad. The contractor shall cause the Railroad Protective Liability Insurance policy to include a description of the named insured, the work, and the job site, as follows:

17.6.1 Named Insured: Union Pacific Railroad Company.

17.6.2 Description and Designation:
Bridge redeck MER (owned by UPRR).
St Louis County Route I-170
Job No. J6I3572
USDOT # 596314T MP 10.49 Lackland Subdivision - Missouri & Eastern Railroad.

17.7 Umbrella or Excess Insurance. If the contractor utilizes umbrella or excess insurance policies, these policies must "follow form" and afford no less coverage than the primary policy.

17.8 Pollution Liability Insurance. The contractor shall maintain pollution liability insurance coverage, which must be written on ISO form Pollution Liability Coverage Form Designated Sites CG 00 39 12 04 (or a substitute form providing equivalent liability coverage), with limits of at least $5,000,000 per occurrence and an aggregate limit of $10,000,000. If the scope of work as defined

in this Project includes the disposal of any hazardous or non-hazardous materials from the job site, the contractor must furnish to the Railroad evidence of pollution legal liability insurance maintained by the disposal site operator for losses arising from the insured facility accepting the materials, with coverage in minimum amounts of $1,000,000 per loss, and an annual aggregate of $2,000,000.

17.9 Other Insurance Requirements.

17.9.1. Each policy required above (except workers' compensation and employers' liability) must include the Railroad as “Additional Insured” using ISO Additional Insured Endorsements CG 20 26, and CA 20 48 (or substitute forms providing equivalent coverage). The coverage provided to the Railroad as an additional insured shall, to the extent provided under ISO Additional Insured Endorsement CG 20 26 and CA 20 48, provide coverage for the Railroad’s negligence whether sole or partial, active or passive.

17.9.2 Where allowable by law, the punitive damage exclusion shall be deleted, and the deletion shall be indicated on the certificate of insurance.

17.9.3 The contractor waives all rights of recovery, and its insurers also waive all rights of subrogation of damages against the Railroad and its agents, officers, directors and employees, except that these waivers shall not apply to punitive damages, nor to any loss, damage or injury proximately caused by the Railroad’s intentional misconduct or sole or gross negligence. The certificate of insurance shall acknowledge these waivers.

17.9.4 Prior to commencing any work on the Railroad's Property, the contractor shall furnish the Railroad with one or more certificates of insurance, executed by a duly authorized representative of each insurer, showing compliance with the insurance requirements set forth in this Section 17.0.

17.9.5 The contractor shall only obtain insurance policies written by a reputable insurance company acceptable to the Railroad, or which currently has a Best's Insurance Guide Rating of A– and Class VII or better, and which is authorized to do business in the State of Missouri.

17.9.6 The fact that insurance is obtained by the contractor or by the Railroad on behalf of the contractor will not be deemed to release or diminish the liability of the contractor, including, without limitation, liability under the indemnity provisions contained in Section 3.0 of these Railroad Requirements. Damages recoverable by the Railroad from the contractor or any third party will not be limited by the amount of the required insurance coverage, except to the extent of any payments the Railroad has received pursuant to that insurance coverage obtained and paid for by the contractor.

17.10 Evidence of Insurance. The contractor shall provide evidence of insurance as required above to the addresses shown below, for review by the Commission and transmittal to the Railroad.

Railroad
Real Estate
Union Pacific Railroad Company
1400 Douglas St., MS 1690
Omaha, NE 68179-1690

Commission
Ms. Brandi Baldwin
State Construction and Materials Engineer
Missouri Department of Transportation
P.O. Box 270
Jefferson City, MO 65102

17.11 Except as otherwise specifically provided in these Railroad Requirements, the Railroad will not accept binders as evidence of insurance, and the contractor shall provide the Railroad with the original insurance policy.

17.12 Insurance Required of Subcontractors. If any part of the work is sublet, the contractor shall maintain and provide evidence of similar insurance, in the same amounts as required of the prime contractor, to cover the subcontractor's operations. The Railroad will accept endorsements to the prime contractor's policies specifically naming subcontractors and describing the subcontractor's operations, for this purpose.

17.13 Cancellation of Insurance. The contractor and its insurers shall not cancel any of the required insurance coverage, except by permission of the Commission and the Railroad, or after thirty (30) days' written notice to the Commission and the Railroad at the addresses shown in subsection 17.10.

18.0 Completion of Work on Railroad's Property. The contractor shall notify Engineer and Railroad's Representative when the contractor has completed its work on Railroad's Property. Additionally, upon completion of the project, notify Leo Craig at lcraig@olsson.com along with photos of work completed on UP right of way.

19.0 Failure to Comply. If the contractor violates or fails to comply with any of the requirements of these Railroad Requirements, then the Railroad Engineer may require that the contractor vacate the Railroad's property and the Engineer may withhold all monies due to the contractor until the contractor has remedied the situation to the satisfaction of the Railroad Engineer and the Engineer.

20.0 Payment for Cost of Compliance. The contractor is not entitled to any separate payment for any extra cost it may incur on account of compliance with these Railroad Requirements. The contractor shall include all such costs in the contract unit price for items properly authorized in the contract.

H. Protection of Missouri Eastern Railroad Facilities and Traffic

1.0 Introduction.

1.1 These Railroad Requirements set forth terms and conditions agreed upon between the Missouri Eastern Railroad Company (Railroad) and the Missouri Highways and Transportation Commission (Commission), under which the Railroad will allow the Commission's contractors to enter in and upon the Railroad's real property, right of way, tracks and other facilities (Railroad's Property) to perform the contractor's work relating to this project.

1.2 To report an emergency on the Railroad, call: (833) 261-7790.

1.3 The project location is at Lackland Subdivision Railroad Milepost 10.49 designated as USDOT Crossing # 596314T in St Louis MO. **Current FRA data shows 1 train movement per day and 0 passenger trains.**

1.4 Definitions of terms set forth in the current edition of the Missouri Standard Specifications for Highway Construction shall be applicable to those terms as used in these Railroad Requirements.

2.0 Authority of Railroad Engineer and State Engineer.

2.1 The authorized representative of the Missouri Eastern Railroad, herein called "Railroad Engineer," shall have final authority in all matters affecting the safe maintenance and operation of railroad traffic.

2.2 The authorized representative of the Missouri Highways and Transportation Commission, herein called "Engineer", shall have authority over all other matters as prescribed herein and in the project specifications.

2.3 The right of way of the Missouri Eastern Railroad, herein called "Railroad," is located within the limits of this project and care shall be taken to ensure that no debris or material is dropped on the Railroad's property.

3.0 Right of Entry. The contractor shall not commence any work upon, over nor under the Railroad's right of way until contractor has obtained a Right of Entry Permit (found at https://imgonline.net/assets/application-roe.pdf) and complied with the following conditions:

3.1 At least 5 working days in advance of the date the contractor proposes to begin work upon, over or under the Railroad's right of way, the contractor shall notify the Railroad Engineer (listed below) by e-mail or written notice to the address below with a copy to the Engineer.

Darl Farris
President
1027 South Main Street Suite 403
Joplin, MO 64801
dfarris@jag-transport.com
(636) 779-3063

3.2 Contractor shall obtain an Executed Right of Entry Permit by mail or e-mail from the Railroad Engineer to begin work upon, over or under the Railroad's right of way, such authorization will include an outline of specific conditions with which the contractor shall comply.

4.0 Insurance. The amount of work to be performed upon, over or under Railroad's right of way is estimated to be one percent of the contractor's total bid for the project. Contractor shall secure railroad protective liability insurance naming only the Railroad as the insured with a combined single limit of $2,000,000 per occurrence with a $6,000,000 aggregate, and this insurance shall conform to all the requirements as specified by Sec 107.13.4 of the Missouri Standard Specifications for Highway Construction.

5.0 Job Briefing. Contactor will contact the Railroad Engineer, Darl Farris, by phone (contact number above) at least 3 working days before beginning work upon, over or under the Railroad's right of way to make arrangements for a job briefing.

5.1 Railroad Engineer will arrange a meeting with the contractor's representative and a Railroad Employee each day work is scheduled to be performed upon, over or under the Railroad's right of way. A job briefing shall be held, usually at the job site and usually in the morning, to discuss the contractor's work to be performed that day and to discuss the relevant railroad operations. The meeting shall be held before any work is done within 25 feet of the centerline of any track. If any train movements are scheduled for that day, the

train moves will be made under the direct supervision of the Railroad Engineer or a Railroad Representative after the contractor has cleared the work site. Flagging services typically provided by the Railroad may not be required depending on the Railroad's schedule of operations.

6.0 Reimbursement of Flagging Costs. The Commission may reimburse the Railroad directly for the cost of flagging services associated with the highway project if flagging services are provided. Flagging costs will be deducted from the contractor's payments from the Commission. If the contractor pays the flagger directly, the contractor must notify the MoDOT Engineer of such payments for flagging.

7.0 Payment for Cost of Compliance. No separate payment will be made for any extra cost incurred on account of compliance with this special provision. All such cost shall be included in contract unit price for other items included in the contract.

8.0 No Payment by Railroad pursuant to this JSP. Railroad will not be responsible for paying the contractor for any work performed under this special provision.

9.0 The Contractor must adhere to all other policies, procedures and insurance coverage not specifically mentioned in these special provisions. These can be found in the Contractor Occupancy/Access Agreement included below, which includes exhibits A-D.

CONTRACTOR OCCUPANCY/ACCESS AGREEMENT

This Agreement (hereinafter "Agreement") made this **<Day>th day** of **<Month> <Year>** by and between **Missouri Eastern Railroad, LLC,** its successors, assigns or affiliated companies (hereinafter "Railroad"), whose address is 1027 South Main Street Suite 403, Joplin, MO 64801 and **<Contractor>** (hereinafter referred to as "Company"), whose address is <Contractor Address>.

WITNESSETH:

1 Upon payment of a **one-time fee of Two Thousand U.S. Dollars ($2,000)** and compliance with the provisions herein contained, Railroad hereby permits Company to enter the property of Railroad, at **Mile Post 26.4, in Chesterfield, St. Louis County Route I-64,** for purpose of sealing the eastbound and westbound bridge decks (hereinafter referred to as "Work"), over the **grade-separated crossing in the MER ROW,** (hereinafter "Structure"). Said permit is granted for a period not to extend beyond **sixty (60) days from the date of execution of this Agreement by** Railroad. Provided, however, this permit may be canceled by Railroad at any time Company is deemed by Railroad not to be in compliance with any of the terms herein.

2. The term "Contractor" shall be used to identify the party that will perform the Work as described in Section 1, whether or not Contractor is signatory to **MER-<ContractNumber>A**. If Contractor is other than **<Contractor>,** Contractor warrants to Railroad that Contractor (hereinafter termed "Third Party"), has entered into a "Contract" with **<Contractor>** covering the Work to be performed in connection with Structure at said locations.

3. As additional consideration, Company agrees to reimburse Railroad for all cost and expense incurred by Railroad in connection with the Work. Such costs and expenses shall include, but are not limited to, furnishing of inspectors, watchmen and flagmen as Railroad deems necessary to protect its property, tracks, engines, trains and cars and the operation thereof,

the installation and removal of any necessary falsework beneath the tracks of Railroad and the restoration of Railroad property. No vehicular crossing over Railroad's tracks shall be installed or used by Company without prior written permission of Railroad.

4. Company shall give Railroad at least five (5) days' notice in advance of any work done upon or adjacent to Railroad property under this Agreement. Company shall notify Railroad **President** by calling (636) 779-3063, in advance of the start of the Work, give the General Manager notification of the date said Work is completed, and also the date the Contractor's work is accepted by Third Party. Upon completion of the Work, Company shall promptly remove from Railroad property all tools, equipment and materials placed thereon by Company and Company's agents. Company shall restore Railroad property to the same state and condition as when Company entered thereon and shall leave said property in a clean and presentable condition. Company, after completion of construction or termination of work, at its sole cost, hereby agrees to restore in a good and workman like manner all property disturbed by Company use or construction or maintenance activities from the date of execution of this document. Said restoration shall include, but not be limited to, any and all harm, damage or injury done to Railroad property and/or to any other public or private property by acts or occurrences subject to Federal, State or local environmental enforcement or regulatory jurisdiction, and shall include necessary and appropriate testing and cleanup.

5. Company's work shall be performed in accordance with plans and specifications approved by Railroad and in such manner and at such times as shall not endanger or interfere with the safe operation of the tracks and other facilities of Railroad at said location. No materials, tools or equipment shall be stored within ten (10) feet of the centerline of any track. The regulations of Railroad and the instructions of its representatives shall be complied with relating to the proper manner of protecting the tracks, pipelines, wire lines, signals and all other property at said location, the traffic moving on such tracks and the removal of tools, equipment and materials. Provided, no bailment shall be created by the storage of any materials, tools or equipment on Railroad property.

6. Before said Work, Company shall, at its sole cost and expense, obtain all necessary authority from any public authorities having jurisdiction in the premises, and shall thereafter observe and comply with the requirements of such public authority or authorities and all applicable laws and regulations. Company shall secure written approval by Railroad of plans and/or specifications submitted to Railroad prior to the commencement of any Work.

7. The Structure shall be installed at the sole risk, cost and expense of Company, in accordance with American Railway Engineering Association Specifications or other Industry Standard Specifications as may apply or be appropriate for the use intended. Said specifications are incorporated herein and made a part hereof by reference. Approval of plans or completed work by Railroad's designated representative shall not, in itself, be considered acknowledgment that said project is in conformity with said standards.

8. COMPANY AGREES TO DEFEND, INDEMNIFY AND HOLD HARMLESS RAILROAD, ITS OFFICERS, AGENTS, AND EMPLOYEES FROM AND AGAINST ANY AND ALL CLAIMS, DEMANDS, LOSSES, DAMAGES, CAUSES OF ACTION, SUITS, AND LIABILITIES OF EVERY KIND (INCLUDING REASONABLE ATTORNEYS' FEES, COURT COSTS, AND OTHER EXPENSES RELATED THERETO) FOR INJURY TO OR DEATH OF A PERSON OR FOR LOSS OF OR DAMAGE TO ANY PROPERTY, ARISING OUT OF OR IN CONNECTION WITH ANY WORK DONE, ACTION TAKEN OR PERMITTED BY COMPANY,

ITS SUBCONTRACTORS, AGENTS OR EMPLOYEES UNDER THIS CONTRACT.

LICENSEE HEREBY ASSUMES, AND SHALL AT ALL TIMES HEREAFTER RELEASE, INDEMNIFY, DEFEND AND SAVE RAILROAD HARMLESS FROM AND AGAINST ANY AND ALL LIABILITY, LOSS, CLAIM, SUIT, DAMAGE, CHARGE OR EXPENSE WHICH RAILROAD MAY SUFFER, SUSTAIN, INCUR OR IN ANY WAY BE SUBJECTED TO, ON ACCOUNT OF DEATH OF OR INJURY TO ANY PERSON (INCLUDING OFFICERS, AGENTS, EMPLOYEES OR INVITEES OF RAILROAD), AND FOR DAMAGE TO OR LOSS OF OR DESTRUCTION OF ANY PROPERTY WHATSOEVER, ARISING OUT OF, RESULTING FROM, OR IN ANY WAY CONNECTED WITH THE PRESENCE, EXISTENCE, OPERATIONS, OR USE, OF WIRELINE, EXCEPT TO THE EXTENT PROVEN TO HAVE BEEN CAUSED BY THE FAULT, OR NEGLIGENCE OF RAILROAD. HOWEVER, DURING ANY PERIOD OF ACTUAL CONSTRUCTION, REPAIR, MAINTENANCE, REPLACEMENT OR REMOVAL OF WIRELINE, WHEREIN AGENTS OR PERSONNEL OF LICENSEE ARE ON THE RAILROAD RIGHT-OF-WAY, LICENSEE'S LIABILITY HEREUNDER SHALL BE ABSOLUTE, IRRESPECTIVE OF ANY FAULT OR NEGLIGENCE OF RAILROAD.

9. Should Railroad bring suit to compel performance of or to recover for breach of any covenant or condition contained herein, Company shall pay to Railroad reasonable attorneys' fees in addition to the amount of judgment and costs.

10. Prior to the performance of any work upon or adjacent to Railroad's property under this Agreement:

    (a) Company shall furnish Railroad, at Company expense, a certified copy of a public liability and property damage liability insurance policy issued in the name of Company covering the contractual liability assumed by Company under Section 8 hereof. The form, substance and limits of said insurance policy shall be subject to the approval of Railroad and shall be in compliance with the provisions contained in the insert marked Exhibit "A", hereto attached and made a part hereof.

    (b) Company shall furnish Railroad, at Company expense, a certificate of Workers Compensation coverage, including Federal Employee Liability Act coverage if applicable, for its workers and subcontractors in accordance with the requirements of the State or States in which said work is to be performed.

    (c) Company shall furnish a policy of Railroad Protective coverage in the amount of Two million and no/100 dollars ($2,000,000.00) per occurrence, Six million and no/100 dollars ($6,000,000.00) aggregate with named insured as outlined in COMPANY OCCUPANCY/ACCESS AGREEMENT, Exhibit "A". WARNING: ONLY A POLICY OF RAILROAD PROTECTIVE INSURANCE WHICH SPECIFICALLY NAMES **Missouri Eastern Railroad, LLC** AS THE INSURED PARTIES IS ACCEPTABLE AND A COPY OF SAID POLICY MUST BE RECEIVED PRIOR TO THIS PERMIT BEING APPROVED ON BEHALF OF RAILROAD.

    Company shall keep said insurance in full force and effect until all work to be performed upon or adjacent to Railroad property under said contract is completed to the satisfaction of and accepted by Third Party and thereafter until Company has fulfilled the provisions of this agreement with respect to the removal of tools, equipment and materials from Railroad property. Said policy shall name Railroad as additional insured.

11. The permission herein given shall not be assigned by Company without the prior written consent of Railroad, except in the case of subcontractors who shall be deemed agents of Company, subject to the terms of this Agreement. Railroad Requirements for Company working on Railroad Right-of-Way are attached as Company OCCUPANCY/ACCESS AGREEMENT, Exhibit "B" and made a part hereof. Failure to comply with all of said requirements shall be grounds for cancellation of this Agreement at the sole option of Railroad.

12. CONSTRUCTION PROVISIONS: In relation to Railroad's track and Railroad operations:

    a. Company warrants it will place no bore pit closer than 25 feet from the end of the ties of the nearest track, as measured at right angles from said track; that all of the lines to be installed under Railroad's track shall be a minimum of five feet six inches below the base of the rail; that carrier pipe(s) and/or wire lines shall be encased in Steel Casing Pipe in accordance with the attached Company OCCUPANCY/ACCESS AGREEMENT, Exhibit "D" casing criteria attached hereto; and that casing shall extend a minimum of 25 feet from the center line of the outside track on each side of said crossing, measured at a right angle to said track.

    b. Company shall be solely liable for location and protection of any subgrade railroad signal wires or other railroad facilities, which may be impacted by Company Work. If same shall be damaged by said Work, Contractor shall, at its own expense, immediately cause said damage to be corrected. Contractor shall be solely liable to Railroad for any and all costs resulting for any interruption of train service resulting from Company Work.

    c. Said provisions shall prevail over any lesser provision or standard set out for occupancy of adjoining or underlying lands.

THIS AGREEMENT IS hereby declared to be binding upon the parties hereto.

IN WITNESS WHEREOF, the undersigned have hereunto set their hand and seals this _____ day of _____ **20___**.

Railroad

Missouri Eastern Railroad, LLC

By: **Anthony Cox**
Senior Vp

Signed: _____

Company

<Contractor>

By: _____

Job No.: J6I3572
Route: I-170
County: St. Louis

Its: _____

Signed: _____

EXHIBIT A

The coverage afforded hereunder shall include the liability assumed by the named insured under the following indemnification provisions contained in an agreement in writing between the named insured and **Missouri Eastern Railroad, LLC**, covering work to be performed upon or adjacent to its property.

Company AGREES TO DEFEND, INDEMNIFY AND HOLD HARMLESS Railroad, ITS OFFICERS, AGENTS, AND EMPLOYEES FROM AND AGAINST ANY AND ALL CLAIMS, DEMANDS, LOSSES, DAMAGES, CAUSES OF ACTION, SUITS, AND LIABILITIES OF EVERY KIND (INCLUDING REASONABLE ATTORNEYS' FEES, COURT COSTS, AND OTHER EXPENSES RELATED THERETO) FOR INJURY TO OR DEATH OF A PERSON OR FOR LOSS OF OR DAMAGE TO ANY PROPERTY, ARISING OUT OF OR IN CONNECTION WITH ANY Work DONE, ACTION TAKEN OR PERMITTED BY Company, ITS SUBCONTRACTORS, AGENTS OR EMPLOYEES UNDER THIS CONTRACT.

IT IS THE EXPRESS INTENTION OF THE PARTIES HERETO, BOTH Company AND Railroad, THAT THE INDEMNITY PROVIDED FOR IN THIS PARAGRAPH INDEMNIFIES Railroad FOR ITS OWN NEGLIGENCE, WHETHER THAT NEGLIGENCE IS ACTIVE OR PASSIVE, OR IS THE SOLE OR A CONCURRING CAUSE OF THE INJURY, DEATH OR DAMAGE; PROVIDED THAT SAID INDEMNITY SHALL NOT PROTECT Railroad FROM LIABILITY FOR DEATH, INJURY OR DAMAGE ARISING SOLELY OUT OF THE CRIMINAL ACTIONS OF Railroad, ITS OFFICERS, AGENTS AND EMPLOYEES. IT IS STIPULATED BY THE PARTIES THAT Railroad OWES NO DUTY TO Company, ITS CLIENT, OR THEIR DIRECTORS, OFFICERS, EMPLOYEES AGENTS OR INVITEES TO PROVIDE A REASONABLY SAFE WORK PLACE AND THAT ALL PARTIES ENTERING ONTO Railroad PROPERTY DO SO AT THEIR SOLE RISK. "

The policy or policies shall provide coverage in amount of not less than Two Million Dollars ($2,000,000) combined single limit for all damages arising out of bodily injury to or death of persons and for loss of or damage to property.

The policy or policies, where applicable and available, shall contain Insurance Services Office Standard Endorsement CG 2417.

No cancellation of this policy or modification of the coverage afforded under this endorsement shall be effective until ten (10) days' notice thereof has been given to: Missouri Eastern Railroad, LLC, C/O IMGRail, 1629 Race Track Rd. Suite 206, St. John's, FL 32259, E-mail contact@imgonline.net

The policy as required in section 10(a) of the Agreement shall name Railroad as an additional insured.

The policy as required in section 10(b) shall name Railroad and affiliates as listed below as additional insured with respect to F.E.L.A. coverage, and/or if applicable under the laws of the State in which the work is performed.

The policy as required in section 10(c) shall name **Missouri Eastern Railroad, LLC** as insured.

Railroad requires each Insurance Carrier providing coverage must be an Admitted Company in the State for which this Agreement is written and has an A.M. Best rating of "A" or better and a financial class rating of 10 or better.

EXHIBIT B

Requirements for Contractors working on Railroad Right-of-Way:

A. In order to protect Railroad's investment in its right-of-way and for the safety of persons coming onto Railroad property, Railroad has established certain requirements. The following constitute minimum requirements for all persons coming on or near Railroad right-of-way. Company is encouraged to develop their own safety rules that meet or exceed the following requirements. Company will not be allowed to occupy or work on Railroad right-of-way prior to signing and dating this Agreement and returning it to the Railroad contact person noted herein.

B. All permits and agreements must be in effect, required payments made and insurance certificates received and approved prior to Company entering Railroad right-of-way. Insurance must remain in effect during the entire project.

C. Any dewatering utilizing drains or ditches on Railroad property must be approved by Railroad.

D. Company must have approved "Construction Plans" prior to commencing work on a project. No changes will be made to "Construction Plans" without approval by all parties involved. Approved revised plans will be furnished to all parties prior to implementation of changes.

E. Company will incur all costs for track work, including flagging, etc., made necessary due to the Work.

F. Pursuant to Federal Regulation, flagging protection is always required when equipment crosses or is working within 25 feet of center of any live track. When deemed necessary by Railroad, a flagman may be required at all times while working on Railroad right-of-way.

G. Crossing of any Railroad tracks must be done at approved locations and must be over full depth timbers, rubber, etc. Any equipment with steel wheels, lugs or tracks must not cross steel rails without aid of rubber tires or other approved protection.

H. If temporary construction crossings are necessary, they must be covered by a Private Roadway and Crossing Agreement and must be barricaded when not in use. A Private Roadway and Crossing Agreement is prepared by Railroad under the same general terms as this

Agreement.

I. Company must furnish details on how Company will perform work that may affect existing drainage and/or possible fouling of track ballast as well as removal of overhead bridges/structures. (Structures and bridge spans over tracks must be removed intact).

J. Absolutely no piling of construction materials or any other material, including dirt, sand, etc., within 15 feet of center on any secondary track (25 feet of Main Line and siding tracks) or on property of Railroad not covered by an existing Construction Easement, permit, lease or agreement. A 10' clear area on both sides of a main track must remain unobstructed at all times to allow for stopped train inspection.

K. **(a)** All bore pits must be a minimum of 25 feet from the nearest outside rail of any track, measured at a 90 degree angle to said track and all under track bores shall be no less than six feet below the bottom of the ties.

(b) No construction will be allowed within 15 feet of center of any track unless authorized by Railroad and as shown on plans approved by Railroad. This includes any excavation, slope encroachment and driving of sheet piles.

L. No vehicles or machines shall remain unattended within 15 feet of a secondary track or within 25 feet of a Main Line track.

M. Should Company in any way interfere with Railroad operations or damage property during construction operations over Railroad's tracks and right-of-way, Company, upon demand by Railroad to Company and/or Client, shall immediately stop work on Railroad's right-of-way for a period of not less than 48 hours to allow Railroad to investigate. Any necessary repairs shall be made by Railroad at Company's sole cost and expense. No work will proceed until authorized by Railroad.

N. Company's safety rules, including rules regarding personal Safety Equipment, must not conflict with Railroad safety policies or rules.

O. Articles included in any agreement with Railroad, which complement this document or exceed its contents, include Company OCCUPANCY/ACCESS AGREEMENT, Exhibit "C".

Company's Acknowledgement: Work Site Location

Company_____ Address:_____

By: _____ Town: _____

Title: _____ State:_____

Date: _____ Project No. _____

Railroad Contact Person:

Darl Farris **President**

Name Title

1027 South Main Street Suite 403 **Joplin, MO 64801**

Job No.: J6I3572
Route: I-170
County: St. Louis

Missouri Eastern Railroad

(636) 779-3063
Telephone Number

(801) 393-7733
Fax Number

DFarris@jag-transport.com
Email

EXHIBIT "C"

Statement of Conditions when Flagmen, Protective Services and Devices or other appropriate personnel will be furnished by Railroad at sole expense of Company:

A. Railroad flagmen will be required for, but not limited to, the following conditions:

1. When, in the sole opinion of Railroad, protection is necessary to safeguard Railroad's trains, engines, facilities and property.

2. When work is performed, in any way, over, under, or in close proximity to tracks or any Railroad facilities.

3. When work in any way interferes with the operation of trains at usual speeds or threatens, damages, or endangers track or Railroad facilities.

4. When any hazard is presented Railroad communications, signal, electrical, or other facilities due to persons, material, equipment, or blasting in the vicinity.

5. When and where material is being hauled across tracks. Provided, however, special clearance must be obtained from Railroad before moving heavy or cumbersome objects and equipment which might result in making the track impassable for any period of time.

B. Protective Services and Devices, Other Specialized Personnel shall be provided when, in the sole opinion of Railroad, such are necessary in addition to flagging.

COST OF FLAGGING AND OTHER PROTECTIVE SERVICES AND DEVICES

A. Flagging

1. Shall be billed a minimum of **actual cost (please verify rates with the Railroad office)** per day plus any expenses incurred for each flagman required, for each day, or for any portion thereof, for up to eight hours in one shift Monday through Friday, excepting holidays recognized by Railroad in its personnel policy manual.

2. Time worked in excess of eight hours in one shift Monday through Friday, or worked in any amount on Saturday, Sunday and on holidays recognized by Railroad in its personnel policy manual, shall be billed at the rate of **actual cost (please verify rates with the Railroad office)** per eight-hour day, per flagman required, for each day or portion thereof worked.

B. Communications Linemen, Signalmen, Protective Services and Devices

All services required shall be billed at Railroad's contracted rate with service provider plus a 20 percent Railroad administrative fee.

EXHIBIT "D"

MINIMUM WALL THICKNESS FOR CASING PIPES UNDER Railroad TRACKS

1. STEEL CASING PIPE (A.R.E.A. SPEC. 1964)

NOMINAL DIAMETER (Inches)	NOMINAL WALL THICKNESS (Inches)	
	PROTECTED	NOT PROTECTED*
Under 14	0.188	0.188
14 and 16	0. 219	0.281 (9/32)
18	0.250	0.312
20	0.281	0.344
22	0.312	0.375
24	0.344	0.406
26	0.375	0.438
28 and 30	0.406	0.469
32	0.438	0.500
34 and 36	0.469	0.531
38, 40 and 42	0.500	0.562

Steel Pipe to have minimum yield strength of 35,000 psi.

* When casing is installed without benefit of a protective coating and said casing is not cathode protected, the wall thickness shall be increased to the nearest standard size which is a minimum of 0.063 inches greater than the thickness shown for protected pipe except for diameters under 12.75 inch.

2. CONCRETE PIPE

All diameters of concrete pipe under main tracks shall be specified, as A.S.T.M. C-76 (Latest Revision) Table V. Concrete pipe under siding and yard tracks may be Table IV. (Either Wall "B" or "C" is acceptable.

3. CORRUGATED METAL PIPE

Table shows permissible minimum and maximum height of cover for both riveted and helical pipe.

NOMINAL DIAMETER (Inches)	16 GAGE	14 GAGE	12 GAGE
12	4-53 (ft)		4-80 (ft)

15	4-42	4-64	
18	4-34	4-53	
21	4-28	4-45	4-79 (ft)
24	5-23	4-40	4-70
30		4-31	4-56
36		5-23	4-46
42		4-49	4-78

Payment for Cost of Compliance. The contractor is not entitled to any separate payment for any extra cost it may incur on account of compliance with these Railroad Requirements. The contractor shall include all such costs in the contract unit price for items properly authorized in the contract.

I. Optional Pavements JSP 06-06H

1.0 Description. This work shall consist of a pavement composed of either Portland cement concrete or asphaltic concrete constructed on a prepared subgrade. This work shall be performed in accordance with the standard specifications and as shown on the plans or established by the engineer.

2.0 The quantities shown reflect the total square yards of pavement surface designated for each pavement type as computed and shown on the plans.

2.1 No additional payment will be made for asphaltic concrete mix quantities to construct the required 1:1 slope along the edge of the pavement, or for tack applied between lifts of asphalt.

2.2 No additional payment will be made for aggregate base quantities outside the limits of the final surface area as computed and shown on the plans. When A2 shoulders are specified, payment for aggregate base will be as shown on the plans.

2.3 The grading shown on the plans was designed for the thicker pavement option. For projects with grading in the contract, there will be no adjustment of the earthwork quantities due to adjusting the roadway subgrade for optional pavements.

2.4 The contractor shall comply with Sections 401 through 403 for the asphalt option and Sections 501 and 502 for the concrete option.

2.5 Pavement options composed of Portland cement concrete shall have contrast pavement marking for intermittent markings (skips), dotted lines, and solid intersection lane lines. The pavement markings shall be in accordance with Section 620. No additional payment will be made for the contrast pavement markings.

2.6 The median pavement to be replaced north of the UP Railroad bridge as shown on the plans shall utilize the concrete option only due to the need to dowel new median barrier to the pavement.

3.0 Method of Measurement. The quantities of concrete pavement will be measured in accordance with Section 502.14. The quantities of asphaltic concrete pavement will be measured in accordance with Section 403.22.

4.0 Basis of Payment. The accepted quantity of the chosen option will be paid for at the contract unit bid price for Item 401-99.05, Optional Pavement, per square yard.

4.1 For projects with previously graded roadbeds, any additional quantities required to bring the roadway subgrade to the proper elevation will be considered completely covered by the pay item for Subgrading and Shouldering.

4.2 Price Adjustment for Fuel. If the contractor accepts the option for fuel adjustment in the bid proposal, a fuel adjustment will be applied in accordance with Sec 109.14 for the type of pavement constructed.

J. Lump Sum Temporary Traffic Control JSP-22-01B

1.0 Delete Sec 616.11 and insert the following:

616.11 Method of Measurement. Measurement for relocation of post-mounted signs will be made to the nearest square foot of sign area only for the signs designated for payment on the plans. All other sign relocations shall be incidental. Measurement for construction signs will be made to the nearest square foot of sign area. Measurement will be made per each for each of the temporary traffic control items provided in the contract.

616.11.1 Lump Sum Temporary Traffic Control. No measurement will be made for temporary traffic control items grouped and designated to be paid per lump sum. The list of lump sum items provided in the plans or contract is considered an approximation and may be subject to change based on field conditions. This is not a complete list and may exclude quantities for duplicate work zone packages used in simultaneous operations. The contractor shall provide all traffic control devices required to execute the provided traffic control plans for each applicable operation, stage, or phase. No measurement will be made for any additional signs or devices needed except for changes in the traffic control plan directed by the engineer.

2.0 Delete Sec 616.12 and insert the following:

616.12 Basis of Payment. All temporary traffic control devices authorized for installation by the engineer will be paid for at the contract unit price for each of the pay items included in the contract. Whether the devices are paid individually, or per lump sum, no direct payment will be made for the following:

(a) Incidental items necessary to complete the work, unless specifically provided as a pay item in the contract.

(b) Installing, operating, maintaining, cleaning, repairing, removing, or replacing traffic control devices.

(c) Covering and uncovering existing signs and other traffic control devices.

(d) Relocating temporary traffic control devices, including permanent traffic control devices temporarily relocated, unless specifically included as a pay item in the contract.

(e) Worker apparel.

(f) Flaggers, AFADs, PFDs, pilot vehicles, and appurtenances at flagging stations.

(g) Furnishing, installing, operating, maintaining, and removing construction-related vehicle and equipment lighting.

(h) Construction and removal of temporary equipment crossovers, including restoring pre-existing crossovers.

(i) Provide and maintaining work zone lighting and work area lighting.

616.12.1 Lump Sum Temporary Traffic Control. Traffic control items grouped together in the contract or plans for lump sum payment shall be paid incrementally per Sec 616.12.1.1. Alternately, upon request from the contractor, the engineer will consider a modified payment schedule that more accurately reflects completion of traffic control work. No payment will be made for any additional signs or devices needed except for changes in the traffic control plan directed by the engineer. Additional items directed by the engineer will be paid for in accordance with Sec 109.4. No adjustment to the price will be made for overruns or underruns of other work or for added work that is completed within existing work zones.

616.12.1.1 Partial payments. For purposes of determining partial payments, the original contract amount will be the total dollar value of all original contract line items less the price for Lump Sum Temporary Traffic Control (LSTTC). If the contract includes multiple projects, this determination will be made for each project. Partial payments will be made as follows:

(a) The first payment will be made when five (5) percent of the original contract amount is earned. The payment will be 50 percent of the price for LSTTC, or five (5) percent of the original contract amount, whichever is less.

(b) The second payment will be made when 50 percent of the original contract amount is earned. The payment will be 25 percent of the price for LSTTC, or 2.5 percent of the original contract amount, whichever is less.

(c) The third payment will be made when 75 percent of the original contract amount is earned. The payment will be 20 percent of the price for LSTTC, or two (2) percent of the original contract amount, whichever is less.

(d) Payment for the remaining balance due for LSTTC will be made when the contract has been accepted for maintenance or earlier as approved by the engineer.

616.12.1.2 Temporary traffic control will be paid for at the contract lump sum price for Item:

Item No.	Unit	Description
616-99.01	Lump Sum	Lump Sum Temporary Traffic Control

K. High-Tension Guard Cable Barrier JSP 24-03

1.0 Description. This work shall consist of all labor, equipment, and materials to remove, install, repair, and replace a guard cable barrier system including all hardware and appurtenances as shown on the plans or as directed by the engineer. The cable barrier system shall function in accordance with the requirements of MASH 2016 or NCHRP 350, Test Level 3, and be approved

by the Federal Highway Administration. Test Level 3 acceptable products, for use as a cable barrier system, are included in the list of pre-qualified products displayed on MoDOT's website. Acceptable products shall include galvanized high-tension wire ropes and anchorages.

2.0 Construction Requirements. Line posts shall be provided and installed in accordance with the manufacturer's shop drawings and shall be placed plumb. All posts in final position shall be free from any distortion, burring, or other damage. Spacing of the posts shall not exceed 20 feet.

2.1 Anchor Assemblies. An anchor assembly, as specified in the manufacturer's shop drawings, shall be constructed at each end of a cable barrier run. The anchor assembly shall function in accordance with the requirements of MASH 2016 or NCHRP 350, Test Level 3, and be approved by the Federal Highway Administration. Anchors shall be constructed on firm, stable, undisturbed soil to the minimum dimension shown on the shop drawings. Anchor bolts and anchor post slip bases shall be firmly held in position at the top by templates during concrete replacement. Backfill shall be thoroughly compacted with mechanical tampers with care taken to prevent damage to the finished concrete. Backfill shall be brought up level with the finished grade line.

2.2 Cable. The galvanized wire rope shall be ¾ inch pre-stretched 3 x 7 construction as approved by the Federal Highway Administration during the system's acceptance testing. Threaded terminals (wedge or swaged type) shall be furnished. Swaged terminals may be shop-swaged or field-swaged. Threaded terminals shall be right hand (RH) or left hand (LH) threaded M 24 x 3 pitch to ANSI B 1.13 M. The body of the threaded terminal shall provide a minimum of 5.9 inches of wire rope penetration depth. Threaded terminals shall be galvanized after threading to ASTM A 151. Turnbuckle or rigging screws shall be of the size and shape shown in the manufacturer's shop drawings. Rigging screws shall be of a solid or closed body type with two inspection holes to determine threaded rope terminal penetration. Rigging screws shall be galvanized to ASTM A 153 after threading.

2.3 Cable Tensioning. The cable height above ground shall be in accordance with the manufacturer's shop drawings. The cable shall be tensioned immediately after initial installation. Tension shall be rechecked and adjusted, if necessary, three to five days after initial tensioning on cable system sections with lengths greater than 2500 feet. A tension log form shall be completed showing: the time, date, location, ambient temperature and final tension reading, signed by the person performing the tensioning, and furnished to the engineer upon completion of the work. This form shall also include the system manufacturer's recommended tension chart.

2.4 Delineators. Delineator spacing and reflector colors shall be in accordance with Sec 606.50.2.

3.0 Method of Measurement. Measurement of the cable barrier will be made from center of line posts, totaled to the nearest linear foot.

3.1 Anchor Assemblies. Measurement of anchor assemblies will be made per each.

4.0 Basis of Payment. The accepted quantities of cable barrier, anchor assemblies and cable barrier to guardrail interfaces will be paid for at the contract unit price for 606-99.03, High Tension Guard Cable (per linear foot), 606-99.02 HTGC Anchor Assembly (per each) and 606-99.02 Cable to Guardrail Transition (per each). Any anchor assembly required for cable to guardrail transition shall be considered included in the contract unit price for cable to guardrail transition. No direct payment will be made for delineators or setting post in rock.

L. Vegetative Barrier Pavement JSP-24-04B

1.0 Description. This work shall consist of constructing an asphalt pavement strip at a compacted thickness of 3 inches and width (6 feet minimum) as specified in the contract plans. Placement shall be in accordance with Division 400.

1.1 Material may need to be added in some locations to provide a stable and uniform subgrade prior to paving at the thickness specified. Prior to paving, the area shall be prepared and compacted with 3 passes of a 10-ton roller or by another method as approved by the engineer.

1.2 Soil sterilant shall be applied to the compacted surface as specified by the manufacturer's requirements and as approved by the engineer.

1.3 A commercial mix meeting the requirements of Sec 401.5.3 may be used in lieu of Plant Mix Bituminous Pavement.

1.4 Slopes shall be blended into the existing slope beyond the limits of the vegetative barrier.

2.0 Method of Measurement. Vegetative barrier pavement will be measured in square yards as constructed.

3.0 Basis of Payment. Vegetative barrier pavement, compaction, soil sterilant, and all other labor and materials will be paid for at the contract unit price for 401-99.05, Vegetative Barrier 3 in. Depth, per square yard. Preparation of paving areas will be paid at the contract unit price for 207-10.00, Linear Grading, Class I, per station. Slope repairs after construction of pavement will be paid at the contract unit price for 215-20.00A, Shaping Slopes, Class II, per 100 feet.

M. Clean Water Act Requirements

1.0 Description. The Contractor shall be aware that any work within streams, wetlands, or special aquatic sites requires a Section 404 permit from the Corps of Engineers.

2.0 The project meets the conditions of the following listed permits with no pre-construction notification to the Corps of Engineers:

Section 404 Nationwide Permit 3 (Maintenance Projects)

3.0 The Contractor shall abide by all general conditions of Section 404 and 401 Permits, and specific conditions of the following listed Nationwide Permit found in the General Provisions and Supplemental Specifications to the current Missouri Standard Specifications for Highway Construction referenced in this contract.

Section 404 Nationwide Permit 3 (Maintenance Projects)

3.1 If there are any changes to the scope or limits to the project, the Contractor must notify the Engineer who will then notify the MoDOT Environmental Section to verify that the project still meets permit conditions.

3.2 No additional time will be added to the contract for the contractor to obtain any permits.

4.0 Basis of Payment. There will be no direct payment for compliance with this provision.

N. Restrictions for Migratory Birds NJSP-16-06A

1.0 Description. Swallows or other bird species protected by the Migratory Bird Treaty Act may be nesting under the bridge or bridges that will be repaired under this contract.

2.0 Restrictions. To comply with the Migratory Bird Treaty Act, nests of protected species cannot be disturbed when active (eggs or young are present). Generally, nests are active between April 1 and July 31, but active nests can be present outside of these dates.

3.0 Avoidance Measures. The contractor shall not disturb active nests or destroy adults, eggs or young birds. In an effort to comply with the Migratory Bird Treaty Act, the contractor operations will be limited to the options established in the following sections.

3.1 Inactive or Partially Constructed Nests. If nests are present and MoDOT determines that the nests are inactive or partially constructed, the contractor may remove the nests provided that the colony's inactive or partially constructed nests are completely removed by March 15 and the contractor maintains a nest free condition until the bridge work is complete. Dry removal methods shall be used when practicable. If dry removal is not practicable, hydro cleaning may be used if approved by the Engineer and only if water is free of blasting grit, chemicals, or detergents, and applied using pressure less than 5,000 PSI. Clean water such as that from municipal water treatment plants or wells shall be used. Use of source water from Waters of the State (i.e., streams or lakes), is allowable, if the appropriate methods to prevent the possible spread of invasive aquatic species are implemented.

3.2 Water and Equipment Used for Hydro cleaning. Aquatic invasives such as zebra mussels and some algae species have infested several bodies of water in the United States and can be transported by vessels (barges, boats, tugs, tankers, etc.) and equipment (tanks, tubing, pumps, etc.) that have been used in areas that contain these invasive species. If equipment is not properly inspected and treated to prevent the spread of invasives, these species can be introduced into areas not currently known to have a population. These invasive species are detrimental to existing ecosystems and can outcompete native species. To assist in preventing the introduction and spread of aquatic invasive species through MoDOT projects in Missouri streams and lakes, the following precautions shall be followed.

3.2.1 Use of Water from Streams, Lakes or Ponds. Contractors shall not use water for nest removal from streams, lakes or ponds, unless they have implemented appropriate methods to prevent the possible spread of invasive aquatic species. Water sources from municipal water treatment plants or wells may be used without following these measures provided the equipment to be used has not previously contained waters from streams, lakes or ponds. If the equipment has previously contained waters from other streams or lakes, the following measures must be implemented prior to use.

3.2.1.1 Equipment Washing. Prior to the use or re-use of equipment following any use with water from streams, lakes or ponds, all equipment shall be washed and rinsed thoroughly with hard spray (power wash) and hot (minimum 120° F) water, for at least one minute.

3.2.1.2 Equipment Treating or Drying. Equipment shall be treated or dried in one of the following manners.

3.2.1.2.1 Equipment interior and/or other surfaces shall be treated with a 10% bleach solution to kill any aquatic nuisance species. This solution must also be run through all intake lines and hoses, to sterilize interior components. When chlorine treatment is used, all chlorine runoff from equipment washing must be collected and properly treated and/or disposed of in accordance with Sec 806.

3.2.1.2.2 Equipment interior and/or other surfaces shall be treated with 140º F water for a minimum of 10 seconds contact on all surfaces. 140 º F water must also be run through all intake lines and hoses, to purge any standing water.

3.2.1.2.3 Equipment shall be flushed of all non-municipal water, and dried thoroughly, in the sun before using in or transporting between streams and lakes. Dry times will depend on the season the equipment is being used. Equipment must dry a minimum of 7 days for June-September, 18 days for March-May; 18 days for October-November, and 30 days for December-February. The drying method should be reserved as a last resort option.

3.2.2 Prior to use of equipment, contractors shall provide the MoDOT inspector written documentation of the equipment's geographic origin (including the water body it was last used in), as well as defining the specified treatment method used to adequately ensure protection against invasive species. The written documentation will include a statement indicating the contractor is aware of these provisions and will also treat the equipment appropriately after completion of the project.

3.3 Active Nests. The contractor may work on the bridge if active nests are present, as long as the work does not impact or disturb the birds and/or nests. At a minimum, work shall not be performed within 10 feet of an active nest; however, the contractor is responsible for ensuring their activities do not impact the nests, eggs, or young.

4.0 Additional Responsibilities. If active bird nests remain after all reasonable avoidance measures have been taken, or if bird nests are observed during project construction, the contractor shall notify the Resident Engineer and contact the MoDOT Environmental Section (573-526-4778) to determine if there are other allowable options.

O. Temporary Long-Term Rumble Strips JSP-13-04C

1.0 Description. The work shall include furnishing, installing, maintaining and removing long-term rumble strips, as shown in the plans, or as designated by the engineer.

2.0 Material.

2.1 The long-term rumble strips shall be 10 feet to 12 feet in length, fabricated from a polymer material, and be orange in color.

2.2 The long-term rumble strips shall have a minimum width of 4 inches, but no greater than 6 inches. The long-term rumble strips shall have a minimum thickness of 0.25 inch, but no greater than 0.50 inch.

2.3 The long-term rumble strips shall have a pre-applied adhesive backing for securing to the asphalt or concrete roadway surface.

3.0 Construction. Long-term rumble strips layout and spacing shall be in accordance with the plans or as approved by the engineer. The long-term rumble strips shall be installed and removed in accordance with manufacturer's recommendation. The contractor shall monitor and repair, and maintain if necessary the long-term rumble strips until removed.

3.1 Each set shall consist of five individual strips spaced ten to twelve feet on center.

3.2 The long-term rumble strips removal process shall not damage the roadway surface. If any damage occurs to the pavement during the removal of long-term rumble strips, the contractor shall replace or repair the damaged pavement at no cost to the Commission.

4.0 Method of Measurement. Measurement of long-term rumble strips will be per each complete set of five strips.

5.0 Basis of Payment. The accepted quantity of Temporary Long-Term Rumble Strips sets will be paid for at the contract unit price for 616-20.02, Temporary Long-Term Rumble Strips, per each set. The long-term rumble strips unit bid price shall include the cost of all labor, equipment and materials to install, maintain, and remove the rumble strips.

P. Liquidated Damages Specified JSP-93-28A

1.0 Description. If the northbound bridge decks and associated roadway work are not complete and northbound traffic shifted to the northbound lanes and open to traffic on or before **November 19, 2027**, the Commission, the traveling public, and state and local police and governmental authorities will be damaged in various ways, including but not limited to, increased construction administration cost, potential liability, traffic and traffic flow regulation cost, traffic congestion and motorist delay, with its resulting cost to the traveling public. These damages are not reasonably capable of being computed or quantified. Therefore, the contractor will be charged with liquidated damages specified in the amount of $7500 per calendar day, or partial calendar day thereof, that the northbound bridge decks and associated roadway work are not complete and northbound traffic shifted to the northbound lanes is not complete and open to traffic in excess of the limitation as specified elsewhere in this special provision. It shall be the responsibility of the engineer to determine the quantity of excess closure time.

1.1 The said liquidated damages specified will be assessed regardless of whether it would otherwise be charged as liquidated damages under the Missouri Standard Specification for Highway Construction, as amended elsewhere in this contract.

Q. Truck Mounted Attenuator (TMA) for Stationary Activities JSP-23-04

1.0 Description. Provide and maintain Truck Mounted Attenuators (TMAs) in accordance with Sec 612 and as specified herein.

2.0 Construction Requirements. TMAs shall be used for the work activities indicated in the plans or specified herein.

2.1 Lane Closures on 2-Lane or 4-Lane Highways:

(a) Any left, right, or center lane closures for any 2-lane or 4 lane highway affected by this project.

2.2 Shoulder Closures on 2-Lane or 4-Lane Highways:

(a) Any shoulder closures for any 2-lane or 4 lane highway affected by this project.

2.3 Lighting Equipment Installation

(a) Any lane or shoulder closure required for any lighting equipment removal and installation.

2.4 Permanent and Temporary Signing and Truss Installation

(b) Any lane or shoulder closure required for any temporary or permanent signing removal and installation for overhead signs and trusses.

2.5 Bridge Rehabilitation

(c) Any lane or shoulder closure required for any bridge rehabilitation, bridge painting, or other work under or on top of the bridges requiring a lane closure.

3.0 Method of Measurement. No measurement will be made for TMAs.

4.0 Basis of Payment. Delete Sec 612.5.1 and substitute with the following:

612.5.1 No payment will be made for TMAs used in mobile operations or for any TMAs designated as optional.

612.5.1.1 Payment for TMAs required for stationary work activities will be paid for at the contract unit price for 612-30.01, Truck Mounted Attenuator (TMA), per lump sum. The lump sum payment includes all work activities that require a TMA, regardless of the number of deployments, relocations, or length of time utilized. No payment will be made for repair or replacement of damaged TMAs.

R. Slurry and Residue Control JSP-06-05B

1.1 Description. This work covers the requirements for controlling residue or slurry produced by milling, grinding, planing, grooving or other methods of surface treatments on new or existing PCCP and bridge decks in addition to Sec 622.

2.0 Construction Requirements. The following shall be considered the minimum requirements for performing this work within the project limits.

2.1 The contractor shall submit to the engineer for approval in writing prior to the pre-construction meeting, the best management practices (BMP's) to be used to protect the environment, including the method of disposal of the residue whether on right of way or off-site.

2.2 When slurry is dispersed on the right of way, BMP's shall be installed to keep slurry or residue from entering paved ditches or structures discharging within the areas restricted by Sec 622.303.8.6, from entering any waterways or from leaving the right of way.

2.3 Upon approval of the contractor's BMP and residue disposal plan and prior to the contractor beginning surface treatment operations, the engineer will identify slurry or residue "no discharge zones".

2.4 Operations may be suspended by the engineer during periods of rainfall or during freezing temperatures.

3.0 Basis of Payment. No direct payment for slurry or residue control requirements for BMP's will be made. Compliance with this specification along with the cost of all materials, labor, and equipment necessary for the surface treatment work shall be included in and completely covered by the contract unit price for each of the items of work for surface treatment included in contract.

S. Pavement Marking Removals

1.0 Description. Pavement marking removal shall be in accordance with Section 620.50 and specifically as follows.

2.0 Construction Requirements. Removal of all pavement marking within the projects limits shall be as shown on the plans or as approved by the engineer. Pavement marking shall be completely removed to the satisfaction of the engineer with minimal damage to the pavement. The contractor shall use an approved **water blasting method** to remove the pavement marking on all concrete surfaces. No more than five percent (5%) of the existing marking shall remain. The pavement surface shall not be left scarred with an image that might mislead traffic. Any excess damage or scarring of the pavement shall be repaired at the contractor's expense. It shall be the contractor's responsibility to determine what type of material needs to be removed.

3.0 Method of Measurement. The contractor shall be advised that the first sentence within Section 620.50.3.2 shall be removed and replaced with the following: If the width of the lane marking stripe to be removed is either 4-inches or 6-inches in width, no additional pay factor, based upon 4-inches, shall be included or paid removals unless the striping width is greater than 6-inches. Final measurement will not be made except for authorized changes during construction or where appreciable errors are found in the contract quantity. The revision or correction will be computed and added to or deducted from the contract quantity.

4.0 Basis of Payment. The accepted quantity of pavement marking removal including all labor, equipment, and material necessary to remove the existing marking will be paid for at the contract unit price for the following pay item:

Item Number	Description	Unit
620-70.01	Pavement Marking Removal	LF

T. Traffic Signal Maintenance and Programming

1.0 Description. Traffic signal maintenance and programming for this project shall be in accordance with Section 902 of the Standard Specifications, and specifically as follows.

2.0 Contractor Maintenance Responsibilities.

2.1 Traffic Signal Maintenance. Once any part of an existing traffic signal within the limits of this project has otherwise been modified and/or adjusted by the contractor or the contractor begins work at an intersection with traffic signals already in operation, then the contractor shall be solely responsible for that traffic signal's maintenance. All traffic signal maintenance shall be the responsibility of the contractor as specified in 902.2 and 902.3, until the Commission accepts the traffic signal for maintenance or as directed by the Engineer. Traffic signals to be accepted for maintenance by the contractor are listed in the schedule below:

Commission's Traffic Signals to be Maintained by the Contractor:

- Route 115 (Natural Bridge Rd.) @ I-170 Interchange and Ramps (2 signals)
- Route D (Page Ave.) @ I-170 Interchange and Ramps (2 signals) *
- Route D (Page Ave.) @ Woodson/McKnight Road (1 signal)
- Route 340 (Olive Blvd.) @ I-170 Interchange and Ramps (1 Single Point Interchange signal)
- Route 340 (Olive Blvd.) @ the Market at Olive intersection (1 signal)
- Route 340 (Olive Blvd.) @ Woodson Road (1 signal)
- Route 340 (Olive Blvd.) @ Price Rd. and Hilltop Dr. (2 signals)
- Delmar Blvd @ I-170 Interchange Ramps (2 Signals)
- McKnight Road @ I-170 Northbound On ramp (1 Signal)

* When the southbound on ramp is closed, and/or the northbound off ramp is closed, the controller shall be programmed to skip the westbound Page Ave left to southbound I-170 phase, and/or the northbound I-170 off-ramp left to westbound Page Avenue phase, and the phases reinstated when the ramps are opened.

2.2 Traffic Signal Controller Programming. If the contractor modifies and/or adjusts an existing traffic signal controller's programming or makes any roadway changes to reduce the traffic capacity through a signalized intersection within the limits of a project or utilizes a project defined detour that utilizes the traffic signals within the below schedule, the contractor shall be solely responsible for those traffic signal controller programs. All controller programming shall be the responsibility of the contractor as specified in 902.2 or until final acceptance of the project or until released from the responsibility by the Engineer. Traffic signal controller programs to be administered by the contractor are listed in the schedule below:

Traffic Signal Controller Programs to be Administered by the Contractor:

- Route 115 (Natural Bridge Rd.) @ I-170 Interchange and Ramps (2 signals)
- Route D (Page Ave.) @ I-170 Interchange and Ramps (2 signals)*
- Route D (Page Ave.) @ Woodson Road (1 signal)
- Route 340 (Olive Blvd.) @ I-170 Interchange and Ramps (1 Single Point Interchange signal)
- Route 340 (Olive Blvd.) @ the Market/Costco at Olive intersection (1 signal)
- Route 340 (Olive Blvd.) @ Woodson/McKnight Road (1 signal)
- Route 340 (Olive Blvd.) @ Price Rd. and Hilltop Dr. (2 signals)
- Delmar Blvd @ I-170 Interchange Ramps (2 Signals)
- McKnight Road @ I-170 Northbound On ramp (1 Signal)

* When the southbound on ramp is closed, and/or the northbound off ramp is closed, the controller shall be programmed to skip the westbound Page Ave left to southbound I-170 phase, and/or the northbound I-170 off-ramp left to westbound Page Avenue phase, and the phases reinstated when the ramps are opened.

2.3 Contractor's Traffic Engineer. If traffic signals are listed in the schedule outlined in section 2.2, the contractor shall have an experienced traffic Engineer with a Professional Engineer's (PE) license in Missouri as well as a Professional Traffic Operations Engineer (PTOE) certification (hereafter referred to as "contractor's traffic Engineer") with the noted experience outlined to section 3.0. MoDOT shall approve the traffic Engineer prior to them being hired.

2.4 Traffic Signal Complaints The contractor shall respond to malfunction complaints or traffic signal timing complaints for those locations detailed in section 2.1 and/or section 2.2 of this provision and as specified in Section 902.21.1. Response time shall be 1 hour for complaints received by the contractor between 6:00 a.m. and 6:00 p.m. on non-holiday weekdays, and 2 hours for all other times. For cases due to travel times or other extenuating circumstances additional time may be acceptable within reason but must be approved by a Commission Traffic Operations Engineers. These timeframes will replace the '24 hour' response time in Section 105.14 for any traffic signal-related incidents, where the entire cost of the work, if performed by MoDOT personnel or a third party, will be computed as described in Section 108.9 and deducted from the payments due the contractor.

2.5 Traffic Signal Contacts. The contractor must supply to the Engineer and to the Commission's Transportation Management Center (TMC) a contact name and phone number who will be responsible for receiving traffic signal timing complaints for the Engineer. These complaints may be forwarded directly to the contractor by someone other than the Engineer's representative and will not relieve the contractor from properly responding based on the response times of this provision. The contractor shall respond to the Engineer and its representative within 12 hours of the complaint and its remedy. The contractor shall submit to the Engineer's representative a weekly report of complaints received, and remedies performed throughout the duration of the project.

2.6 Existing Traffic Signal Controller Programming. The contractor shall request an electronic report from the Engineer on the existing phasing and timing of each traffic signal, which may be the contractor's responsibility to program. The contractor shall give the Engineer 2 weeks' notice to supply the electronic report. The Engineer's representative shall be available to the contractor before any changes are made to a traffic signal or controller to answer any questions about the report. In lieu of the report, the contractor's traffic Engineer may obtain this information from the appropriate agency's central traffic signal control system.

2.7 Traffic Mitigation Plan. The contractor shall notify the Engineer 2 weeks prior to the date of any work impacting the Commission's traffic signals as described in Section 2.1 and/or 2.2. The contractor shall meet with the Engineer's representatives to discuss their traffic mitigation plan at least 1 week before the date of the first impacts and as needed between construction stages. The traffic mitigation plan should at a minimum include:

- Proposed Timing Plan changes and any models
- Anticipated locations of concern
- A map in electronic format displaying the locations and names of the traffic signals and owning agency as detailed in sections 2.1 and/or section 2.2.

- Other traffic mitigation efforts

2.8 Notification of Changes to Traffic Signal System. The contractor shall notify the Engineer or representative of the changes no later than 1 working day after changes are programmed if unable to provide advance notice as specified in 902.2.

3.0 Contractor's Traffic Engineer Qualifications.

3.1 Credentials. The contractor shall have an experienced traffic Engineer with a Professional Engineer's (PE) license in Missouri as well as a Professional Traffic Operations Engineer (PTOE) certification.

3.2 Experience. Any proposed contractor traffic Engineer shall be able to demonstrate personal successful previous experience in the following tasks:

3.2.1 Response. The contractor's traffic Engineer shall have the ability to be on site within 1 hour of being requested.

3.2.2 Corridor Management. Time/space diagram manipulation to successfully adjust offsets and splits for rapidly changing traffic demands.

3.2.3 Controller Programming. Ability to program by hand and by software NTCIP compatible controllers.

3.2.4 Intersection Programming. Implementation of adjusted and/or new timing plans because of changing traffic demand.

3.2.5 Traffic Signal Software. Use and understanding of all traffic signal controllers and central traffic signal control systems utilized by the Commission.

3.3 Proposed Traffic Engineers. The contractor shall submit the names(s) of proposed traffic engineer(s) and the name(s) of all other personnel on their proposed staff along with detailed experience in all tasks outlined in Paragraph 3.2 above. The Engineer reserves the right to reject any contractor traffic engineer, before the start of work, who does not have sufficient experience or, at any point during the project, which does not satisfy the requirements set forth within this Job Special Provision. A list of potential traffic engineers shall be submitted for review to the Project Manager and the Commission's Traffic Engineers prior to bid.

4.0 Contractor's Traffic Engineer Responsibilities.

4.1 VPN Access. The approved contractor's traffic Engineer and any staff assigned to manage the traffic signals during the project are encouraged to apply for VPN (Virtual Private Network) access with the Engineer once the project is awarded. If approved, the Engineer will assign a unique IP address to the contractor's traffic Engineer, which will allow for remote access to the Commission's central traffic signal control systems as appropriate and the ability to interface with the noted traffic signals on this project.

4.2 Traffic Signal Timing Complaints. The contractor's traffic Engineer shall respond to any traffic signal timing complaints regarding signals outlined in section 2.2 of this provision.

4.3 Traffic Signal Coordination. The contractor's traffic Engineer shall be solely responsible for maintaining the coordination at any affected traffic signal to the satisfaction of the Commission's Traffic Operations Engineers or representative until completion of work as set forth in section 2.2 of this provision. Maintenance of coordination may include the synchronization of the affected controller's internal time clocks to the second using an atomic clock, or other means approved by the Commissions Traffic Operations Engineers. If time clock synchronization is used, the contractor shall verify all affected controllers are synchronized at least 1 time per week with a report to the Engineer or representative. This report will be in the form of a documentation record as spelled out in the Work Zone Traffic Management Plan.

4.4 Traffic Signal Controller Programming. The contractor's traffic Engineer shall be responsible for implementing traffic signal controller programming at each intersection listed in section 2.2 for any of the following scenarios:

- Intersection Impact
- Construction Stage Traffic Switch
- Response to Customer Concern
- New Intersection Turn-On (along with any subsequent revisions)
- Final completion of improvements

As otherwise directed by the Engineer or the Commission's Traffic Operations Engineers Proposed timing plans should be submitted to the Commission's Traffic Operations Engineers for review prior to field implementation.

4.5 Central Traffic Signal Control System Setup. If a traffic signal cabinet is reconfigured, the contractor's traffic Engineer shall archive the existing controller programming in the Commission's central traffic signal control system. If the signal controller type is changed, the contractor's traffic Engineer shall archive the existing controller programming and convert any new controllers to the proper controller interface type in the Commission's central traffic signal control system. If only signal timing adjustments are made, all database versions shall be clearly labeled and saved separately from the default version, and the final timing program shall be uploaded into the Commission's central traffic signal control system and set as the default database. In addition, the contractor's traffic Engineer shall update any intersection diagrams (i.e., XPL) whose intersection controls were modified during construction.

4.6 Controller Program Test Period. The intersection program shall operate properly with no faults or malfunctions for a period of 15 consecutive days as a condition of being accepted for maintenance by the Commission. Any programming faults shall be corrected by the contractor's traffic Engineer per the response protocols of this provision and the 15 days will start over.

4.7 Cabinet Photos. The contractor's traffic Engineer shall obtain cabinet photos of any new or modified traffic signal cabinet affected by the project. The photos shall be captured of the following perspectives and delivered in the .jpg format electronically and via thumb drive to the Commission's Traffic Operations Engineers.

- Power Meter 1 – Away from power meter with meter centered
- Power Meter 2 – Close up with power meter number
- Cabinet 1 – Away with cabinet centered and door closed
- Cabinet 2 – Close up of entire cabinet with door opened
- Cabinet 3 – Close up of center cabinet interior
- Cabinet 4 – Close up of left cabinet interior

- Cabinet 5 – Close up of right cabinet interior
- Cabinet 6 – Close up of back panel
- Cabinet 7 – Close up of switch
- Cabinet 8 – Close up of wall interconnect center

4.8 RRFB/PHB Timing. The contractor's traffic Engineer shall calculate the duration of flash time for any new or modified RRFB's (rectangular rapid flashing beacons) affected by the project. The contactor's traffic engineer shall be responsible for calculating phase intervals and programming traffic signal controllers for new/modified PHB's (pedestrian hybrid beacons) affected by the project.

4.9 Detection. The contractor's traffic Engineer shall assist the contractor in setting up detection as per plan and/or SL District Traffic Signal Detection System JSP. The contractor's traffic Engineer shall verify that all detectors work properly and that each detector input into the traffic signal controller is programmed regarding its intended use. The contractor's traffic Engineer is responsible for optimizing the detector operation by utilizing various detector settings in the traffic signal controller.

4.10 Signal Performance Measures. The contractor's traffic Engineer shall setup traffic signal controllers on the Commission's advanced traffic signal performance measures module unless directed otherwise by the Commission's Traffic Operations Engineers. This includes any work on the Commission's advanced traffic signal performance measures module, traffic signal controller(s), and video detection processor(s). The contractor's traffic Engineer shall provide proof of each traffic signal setup in the module to the Commission's Traffic Operations Engineers. The contractor's traffic Engineer shall setup any traffic signal detectors as system detectors in the Commission's central traffic signal control system.

4.11 Preemption Controller Programming. If preemption is to be provided at a traffic signal, the contractor's traffic Engineer shall program the preemption settings in the traffic signal controller per MoDOT EPG guidelines and at the direction of the Commission's Traffic Operations Engineers. The contractor's traffic Engineer shall test the preempt settings at the traffic signal cabinet to verify proper operation.

5.0 Post Project Report. The contractor shall submit to the Engineer a post project report, four to six weeks after the final traffic signal adjustments have been completed. The report shall include at a minimum an observation report, summary of timing changes and locations, summary of complaints, and any other pertinent information regarding the contractor's efforts for managing these traffic signal corridors in one electronic document.

6.0 Deliverables. All deliverables mentioned in this provision shall be submitted to the Engineer in a timely manner to the satisfaction of the Engineer prior to receiving full compensation for this work. All deliverables must be submitted to the Engineer via USB.

- Experience submittal
- Preliminary Traffic Mitigation Plan
- Notification of Detour Implementation
- Time Base Reports, As Needed
- Complaint Resolutions
- Audible pedestrian signal voice message files
- Traffic Signal Database versions (in PDF format)
- Traffic signal photos

- Notification of Restoration to Normal Operations
- Post Project Report

7.0 Construction Requirements. Construction requirements shall conform to Sections 902, 1061 and 1092.

8.0 Method of Measurement. Method of measurement shall conform to Section 902.

9.0 Basis of Payment. Payment will be considered full compensation for all contractor services, installation, and labor to complete the described work:

Item No.	Unit	Description
902-99.01	Lump Sum	Misc. Traffic Signal Maintenance and Programming

U. Removal and Delivery of Existing Signs JSP-12-01C

1.0 Description. All Commission-owned signs removed from the project shall be disassembled, stored, transported, and disposed of as specified herein. Sign supports, structures and hardware removed from the project shall become the property of the contractor.

2.0 Disassembly and Delivery.

2.1 All Commission-owned signs, (excluding abandoned billboard signs), designated for removal in the plans, or any other signs designated by the engineer, shall be removed from the sign supports and structures, disassembled, stored, transported, and delivered by the contractor to the recycling center for destruction.

2.2 The contractor shall coordinate and make arrangements with the recycling center for delivery of the signs. Sign panels shall be disassembled and/or cut into sizes as required by the recycling center.

2.3 The contractor shall provide the engineer with a "Sign Delivery Certification" attesting to completion of delivery of all existing sign material from the project to the recycler. In addition, the contractor shall provide to the engineer a final "Sign Certification of Destruction" from the recycler that documents the total pounds of scrap sign material received from the project and attests that all such material will not be re-purposed and will be destroyed in a recycling process. The contractor can locate the required certification statements from the Missouri Department of Transportation website:

https://www.modot.org/forms-contractor-use

2.4 Funds received from the disposal of the signs from the recycling center shall be retained by the contractor.

3.0 Basis of Payment. All costs associated with removing, disassembling and/or cutting, storing, transporting, and disposing of signs shall be considered as completely covered by the contract unit price for 202-20.10, Removal of Improvements, per lump sum.

V. Concrete Washout

1.0 Description. Concrete washout BMPs shall be established in designated areas for this project if concrete production or delivery is occurring. Washout BMPs can be non-leaking plastic or clay/bentonite lined pits, a straw bale enclosure lined with plastic, a storage tank or prefabricated BMP or other structure approved by the engineer or inspector, and located at least 20 feet from the edge of any driving lane pavement. Designated washout areas should be located at least 50 feet away from storm drains, ditches, streams or other water bodies. Washouts should be monitored like other BMPs to ensure there are no leaks and that they are operating effectively. They should be cleaned out when they reach 75% of their design capacity. Care should be taken to ensure these structures do not overflow during storm events. Upon completion of concrete washout on the project, the engineer or inspector should ensure proper disposal of washout materials. Washout liquids can be allowed to evaporate or be pumped out and properly disposed of. They cannot be discharged into storm drains, ditches, streams or other bodies of water. Dried concrete can be broken up and used as clean fill on the project, recycled or properly disposed of by other means.

2.0 Basis of Payment. No direct payment will be made to the contractor for installing, maintaining, and removing concrete washout facilities or for properly disposing of materials. The cost of complying with this requirement shall be completely covered in the contract unit price of the concrete pay items included in the contract.

W. Quality Management NJSP-15-22

1.0 Quality Management. The contractor shall provide Quality Management as specified herein to ensure the project work and materials meets or exceeds all contract requirements.

1.1 The contractor shall provide Quality Control (QC) of the work and material, as specified herein, to ensure all work and material is in compliance with contract requirements. QC staff shall perform and document all inspection and testing. The QC inspectors and testers may be employed by the contractor, sub-contractor, or a qualified professional service provided by the contractor.

1.2 The engineer will provide Quality Assurance (QA) inspection. The role of QA is to verify the performance of QC and provide confidence that the product will satisfy given requirements for quality.

1.3 The contractor shall designate a person to serve as the project Quality Manager (QM). The QM shall be knowledgeable of standard testing and inspection procedures for highway and bridge construction, including a thorough understanding of the Missouri Standard Specifications. The QM shall be responsible for the implementation and execution of the Quality Management Plan and shall oversee all QC responsibilities, including all sub-contract work. The QM shall be the primary point of contact for all quality related issues and responsibilities, and shall ensure qualified QC technicians and inspectors are assigned to all work activities. The QM should be separate from the manager of the work activities to effectively manage a QC program.

1.4 Any QC personnel determined in sole discretion of the engineer to be incompetent, derelict in their duties, or dishonest, shall at a minimum be removed from the project. Further investigation will follow with a stop work notification to be issued until the contractor submits a corrective action report that meets the approval of the engineer.

2.0 Quality Management Plan. The contractor shall develop, implement and maintain a Quality Management Plan (QMP) that will ensure the project quality meets or exceeds all contract requirements, and provides a record for acceptance of the work and material. A sample QMP, which shows minimum requirements, is provided on the MoDOT website at: www.modot.org/quality.

2.1 The QMP shall address all QC inspection and testing requirements of the work as described herein. A draft QMP shall be submitted to the Resident Engineer for review at least two weeks prior to the pre-construction conference. An approved QMP is required at least two weeks prior to the start of work, unless otherwise allowed by the engineer. Physical work on the project shall not begin prior to approval of the QMP by the engineer.

2.2 The approved QMP shall be considered a contract document and any revisions to the QMP will require approval from the engineer.

2.3 The following items shall be included in the Quality Management Plan:

a) Organizational structure of the contractor's project management, production staff, and QC staff, specific to this project.

b) Name, qualifications and job duties of the Quality Manager.

c) A list of all certified QC testers who will perform QC duties on the project, including sub-contract work, and the tests in which they are certified.

d) A list of all QC inspectors who will perform QC inspection duties on the project, including sub-contract work, and the areas of inspection that they will be assigned.

e) A procedure for verifying documentation is accurate and complete as outlined in Section 3.

f) A procedure describing QC Inspections as outlined in Section 4.

g) A procedure describing QC Testing, as outlined in Section 5, including a job specific Inspection and Test Plan (ITP).

h) A procedure describing Material Receiving as outlined in Section 6.

i) A list of Hold Points that are not included in the checklist forms, as outlined in Section 8.

j) A procedure for documenting and resolving Non-Conforming work as outlined in Section 9.

k) A procedure for tracking and documenting revisions to the QMP.

l) A list of any approved changes to the Standard Specifications or ITP, including a reference to the corresponding change order.

m) Format for the Weekly Schedule and Work Plans as outlined in Section 10, including a list of activities that will require pre-activity meetings.

3.0 Project Documentation. The contractor shall establish a Document Control Procedure for producing and uploading the required Quality Management documents to a MoDOT-provided server. The document management software used by MoDOT is Microsoft SharePoint®. Contractors do not need to purchase Microsoft SharePoint®, however, it is recommended that new users acquire some basic training to better understand how to use this software. MoDOT does not provide the software training, but there are several online vendors who do. Contractors are required to use Microsoft Excel® and Microsoft Word® with some documents.

3.1 The contractor shall utilize the file structure and file naming convention provided by MoDOT. A sample file structure is available on the MoDOT website.

3.2 Documents (standard forms, reports, and checklists) referenced throughout this provision are considered the minimum documentation required. They shall be obtained from MoDOT at the following web address: www.modot.org/quality. The documents provided by MoDOT are required to be used in the original format, unless otherwise approved by the engineer. Any alteration to these forms shall be approved by the engineer.

3.3 Timely submittal of the required documents to the MoDOT document storage location is essential to ensure payment can be processed for the completed work. Submittal of the documents is required within 12 hours of the work shift that the work was performed, or on a document-specific schedule approved by the engineer and included in the QMP.

3.4 The contractor shall establish a verification procedure that ensures all required documents are submitted to the engineer within the specified time, and prior to the end of each pay period for the work that was completed during that period. Payment will not be made for work that does not include all required documents. Minimum documents that might be required prior to payment include: Test Reports, Inspection Checklists, Materials Receiving Reports, and Daily Inspection Reports.

3.5 The contractor shall perform an audit at project closeout to ensure the final collection of documents is accurate and complete.

4.0 Quality Control Inspections. The QMP shall identify a procedure for performing QC inspections. QC inspections shall be performed for all project activities to ensure the work is in compliance with the contract, plans and specifications.

4.1 The QM shall identify the QC inspectors assigned to each work activity. The QC inspectors shall inspect the work to ensure the work is completed in accordance with the plans and specifications, and shall document the inspection by completing the required inspection checklists, forms, and reports provided by MoDOT. Depending on the type of work, the checklists may be necessary daily, or they may follow a progressive work process. The frequency of each checklist shall be stated in the QMP. The contractor may propose alternate versions of checklists that are more specific to the work.

4.2 A Daily Inspection Report (DIR) is required to document pertinent activity on the project each day. This report shall include a detailed diary that describes the work performed as well as observations made by the inspection staff regarding quality control. The report shall include other items such as weather conditions, location of work, installed quantities, tests performed, and a list of all subcontractors that performed work on that date. The report shall include the full name

of the responsible person who filled out the report and shall be digitally signed by an authorized contractor representative.

4.3 External fabrication of materials does not require further QC inspection if the product is currently under MoDOT inspection or an approved QC/QA program. QC inspection and testing required in the production of concrete for the project shall be the responsibility of the contractor.

4.4 The contractor shall measure, and document on the DIR, the quantity for all items of work that require measurement. Any calculations necessary to support the measurement shall be included with the documentation. The engineer will verify the measurements prior to final payment.

5.0 Quality Control Testing. The QMP shall identify a procedure for QC testing. The contractor shall perform testing of the work at the frequency specified in the Inspection and Test Plan (ITP).

5.1 MoDOT will provide a standard ITP and the contractor shall modify it to include only the items of work in the contract, including adding any Job Special Provision items. The standard ITP is available on the MoDOT website at www.modot.org/quality. The contractor shall not change the specifications, testing procedures, or the testing frequencies, from the standard ITP without approval by the engineer and issuance of a change order.

5.2 Test results shall be recorded on the standard test reports provided by the engineer, or in a format approved by the engineer. Any test data shall be immediately provided to the engineer upon request at any time, including prior to the submission of the test report.

5.3 The contractor shall ensure that all personnel who perform sampling and/or testing are certified by the MoDOT Technician Certification Program or a certification program that has been approved by MoDOT for the sampling and testing they perform.

5.4 If necessary, an independent third party will be used to resolve any significant discrepancies between QC and QA test results. All dispute resolution testing shall be performed by a laboratory that is accredited in the AASHTO Accreditation Program in the area of the test performed. The contractor shall be responsible for the cost to employ the third party laboratory if the third party test verifies that the QA test was accurate. The Commission shall be responsible for the cost if the third party test verifies that the QC test was accurate.

6.0 Material Receiving. The QMP shall identify a procedure for performing material receiving. Standard material receiving forms will be provided by the engineer.

6.1 The procedure shall address inspections for all material delivered to the site (excluding testable material such as concrete, asphalt, aggregate, etc.) for general condition of the material at the time it is delivered. The material receiving procedure shall record markings and accompanying documentation indicating the material is MoDOT accepted material (MoDOT-OK Stamp, PAL tags, material certifications, etc.).

6.2 All required material documentation must be present at the time of delivery. If the material is not MoDOT accepted, the contractor shall notify the engineer immediately and shall not incorporate the material into the work.

7.0 Quality Assurance. The engineer will perform Quality Assurance inspection and testing (QA) to verify the performance of QC inspection and testing. The frequency of the QA testing will

be as shown in the ITP, but may be more frequent at the discretion of the engineer. The engineer will record the results of the QA testing and inspection and will inform the contractor of any known discrepancies.

7.1 QA is responsible for verifying the accuracy of the final quantity of all pay items in the contract. This includes taking measurements on items that require measurement and other items that are found to have appreciable errors.

7.2 QA inspection and test results shall not be used as a substitute for QC inspection and testing.

7.3 QA will be available for Hold Point inspections at the times planned in the Weekly Schedule. The inspections may be re-scheduled as needed, but a minimum 24-hour advance notification from the contractor is required unless otherwise approved by the engineer.

8.0 Hold Points. Hold Points are events that require approval by the engineer prior to continuation of work. Hold Points occur at definable stages of work when the succeeding work depends on a QA review of the preceding work before work can continue.

8.1 A list of minimum Hold Points will be provided by the engineer and shall be included in the QMP. The engineer may make changes to the Hold Point list at any time.

8.2 Prior to all Hold Point inspections, QC shall provide the engineer with the Daily Inspection Reports, Inspection Checklists, Test Reports, and Material Receiving Reports for the work performed leading up to the Hold Point. If the engineer identifies any corrective actions needed during a Hold Point inspection, the corrections shall be completed prior to continuing work. The engineer may require a new Hold Point to be scheduled if the corrections require a follow-up inspection.

9.0 Non-Conformance Reporting. Non-conformance reports shall be issued by the contractor for work that does not meet the contract requirements. Non-conforming work includes work, testing, materials and processes that do not meet contract requirements. The contractor shall establish a procedure for identifying and resolving non-conforming work as well as tracking the status of the reports.

9.1 Contractor QC staff or production staff should identify non-conforming work and document the details on the Non-Conformance Report form provided by MoDOT. QA staff may also initiate a non-conformance report.

9.2 In-progress work that does not meet the contract requirements may not require a non-conformance report if production staff is aware of the issue and corrects the problem during production. QC or QA may issue a non-conformance report for in-progress work when documentation of the deficiency is considered beneficial to the project record.

9.3 The contractor shall propose a resolution to the non-conforming work. Acceptance of a resolution by the engineer is required before closure of the non-conformance report.

9.4 For recurring non-conformance work of the same or similar nature, a written Corrective Action Request will be issued by QC or QA. The contractor shall then establish a procedure for tracking the corrective action from issuance of the request to implementation of the solution. Approval from the engineer is required prior to implementation of the proposed corrective action. The contractor shall notify the engineer after the approved corrective action has been implemented.

10.0 Work Planning and Scheduling. The contractor shall include Quality Management in all aspects of the work planning and scheduling. This shall include providing a Weekly Schedule, a Work Plan for each work activity, and holding pre-activity meetings for each new activity.

10.1 A Weekly Schedule shall be provided to the engineer each week that outlines the planned project activities for the following two-week period. This schedule shall include all planned work, identification of all new activities, traffic control events, and requested Hold Point inspections for the period. Planned quantity of materials, along with delivery dates should also be included in the schedule.

10.2 A Work Plan shall be submitted to the engineer at least one week prior to the pre-activity meeting. The Work Plan shall include the following: a safety plan, list of materials to be used, work sequence, defined responsibilities for QC testing and inspection personnel, and stages of work that will require Hold Point inspections.

10.3 A pre-activity meeting is required prior to the start of each new activity. The purpose of this meeting is to discuss details of the Work Plan and schedule, including all safety precautions. Those present at the meeting shall include: the production supervisor for the activity, the Quality Manager, QC inspection and testing staff, and QA. The Quality Manager will review the defined responsibilities for QC testing and inspection personnel and will address any quality issues with the production staff. Attendees may join the meeting in person or by phone or video conference.

11.0 Basis of Payment. Payment for all costs associated with developing, implementing and maintaining the Quality Management Plan, providing Quality Control inspection and testing, and all other costs associated with this provision, will be considered included in the unit price of each contract item. No direct pay will be made for this provision.

X. Miscellaneous Construction Requirements

The Contractor shall be required to provide the following project coordination efforts and miscellaneous project requirements for the successful completion of this project:

1. Saw cuts for pavement and sidewalks shall be a minimum of 6 inches.

2. No direct pay will be made for any clearing or grubbing required to construct this project.

3. New rumble strips constructed in new optional pavement shall be paid for under pay item for Concrete Rumble Strips, regardless of the pavement type selected for the optional pavement.

4. Linear Grading, Class 1 is provided to grade for the Vegetative Barrier Base. Additional grading required to construct the 4 inch Type 5 aggregate base under the vegetative barrier base shall be included in the cost of the Linear Grading Class 1.

5. A new overhead sign is being placed on the existing truss for the northbound exit gore sign at Route D (Page Ave.). The existing truss has a catwalk and catwalk mounted luminaire. This catwalk and catwalk mounted luminaire shall be removed by cutting the 6 inch aluminum I-beam support. The remaining 6 inch aluminum I-Beams may be used to support the new sign, which will be taller than the existing sign. The contractor shall remove sections of the 6 inch aluminum I-beam as needed to mount the new sign vertically centered on the existing truss, and providing

a minimum 17 feet-6 inch clearance to the highest point on the pavement under the truss. Additional I-beams may be required if the existing I-beams are not adequate to mount the new sign and exit panel. All removed material shall become the property of the contractor and removed off of the right of way.

6. When constructing optional pavement adjacent to guardrail, the contractor shall use the guardrail in place. Any damage to the existing guardrail shall be repaired at the contractor's expense, and as approved by the engineer.

7. In areas where the existing concrete pavement has been overlaid with asphalt, the contractor shall be required to determine the actual edge of concrete before performing saw cuts or other pavement removals. Methods used to determine the actual edge of concrete shall be approved by the engineer. The contractor shall determine where the exiting concrete edge is at least at 100 foot intervals along the optional pavement areas.

At the gores of the two off ramps to Page Avenue from I-170, and on the off end of the bridge at Page Avenue, escape taper pavement may have been constructed. Through these two areas, the contractor shall determine the edge at a minimum of 50 foot intervals. If this escape concrete is in place, it shall be used in place for traffic to drive on for the proposed staged construction, and the optional pavement and base may be underrun.

8. Access to the triple box culvert, Bridge A8208, may be either by Woodson Road in areas indicated on the plans, or from I-170. If accessing from I-170, the contractor shall construct the box culvert repairs when all traffic has been shifted to the north bound lanes.

Any existing improvements damaged due the contractors activities when accessing the triple box shall be repaired in like condition at the contractor's expense, as directed by the engineer. This includes, but is not limited to sidewalks, guardrail, curbing, fencing, shoulder or driving pavements, utilities, slope protection, lighting facilities, ITS facilities, drainage or sewer culverts, inlets, etc. No direct pay shall be made for restoration of existing improvements, temporary erosion control devices, site restoration, or permanent seeding and mulching required due to the contractors preferred method of access to this triple box.

9. When constructing median pavement as shown on the plans just north of the UP railroad bridge, the concrete option shall be constructed in order to dowel new concrete median barrier to the new concrete median pavement as shown on the plans.

10. The contractor will be required to cover overhead signs as indicated on the plans as approved by the engineer. The contractor will also be required to install special CLOSED panels on existing overhead signs as indicated on the plans. These CLOSED signs shall be attached to the overhead signs in a manner approved by the engineer, and that will not damage the existing signs, or sign mount brackets. The signs will be installed prior to the closure of the northbound Page Ave. (Route D) exit. Existing overhead signs damaged due to the contractor's activities will be repaired at the contractor's expense as approved by the engineer.

11. Existing grates for median inlets for southbound I-170 at approximate Stations 373+60 and 376+30 will be removed to install the asphalt wedge required for the temporary crossover. After the grates are removed and stored off site by the contractor, these inlets shall be covered with a steel plate(s) approximately 4'x2' that will sit on the bearing plate of the existing inlet. This steel plate shall not deflect more than 1/4 inch under the dead load and live load of traffic. Asphalt shall be installed over the steel plate, then the asphalt wedge for the crossover placed above these

two inlets. When the temporary cross over asphalt is removed, the asphalt or other approved material above these steel plates shall also be removed, the steel plates removed, the bearing plates cleaned, and the grate bolts repaired to their original condition as needed, as directed by the engineer, and existing slotted grates installed to their original condition and location. No direct pay will be made for this work, the steel plates, or material place above the plates, or the removal of the plates, asphalt and cleaning of the bearing plates and grate bolts and nuts.

12. Concrete median barriers to be constructed shall vary in width and the barrier stepped depending on locations as shown in the plans. Payment for varying barrier widths and stepped barrier shall be included in the cost of new Type A and Type C barrier pay items.

13. All coldmilling to remove the asphalt wedge shall be paid for under pay item 622-10.01, Coldmilling Bituminous Pavement for Removal of Surfacing (3 inches thick or less), regardless of the thickness of the wedge. The contractor shall remove the asphalt as close to the original concrete as possible. No more than 1/4 inch of asphalt shall be left on the pavement before opening to traffic.

14. Linear Grading Class 2 is provided for grading for the optional pavement. This will include removing up to 15 inches of asphalt from the existing asphalt shoulders. Shoulder core depths are available in the Electronic Deliverables file.

15. The contractor shall construct Concrete Traffic Barrier Type D on Moment Slab as shown in the plans. The reinforcing as shown in the Standard Plans for this Type D Barrier Moment slab shall extend into the concrete approach pavement.

16. Payment for compliance with the above requirements will be considered completely covered by the items provided for in the contract.

Y. Underpass LED Luminaire (Wallpack) and Conduit on Structure

1.0 Description. This work shall consist of furnishing and installing LED Underpass (Wallpack) Luminaires as indicated in the plans.

2.0 Material Specifications. Underpass luminaires are 59-watt Light Emitting Diode (LED) units with integral ballasts for wall mounting outdoors. The luminaires (black in color) shall consist of a pre-wired unit for wall mounting, with raintight cast aluminum housing, cast aluminum door with integral cast guard, polycarbonate refractor, and asymmetric light fitting. The door shall have a stainless-steel hinge along the bottom, stainless steel latches at the top and non-ferrous metal or stainless-steel safety chains.

2.1 Underpass LED luminaires shall not be equipped with a Photo Control Receptacle or Adjustable Output.

2.2 Underpass LED luminaires shall have a terminal block for easy installation of a two wire Line/neutral circuit.

3.0 Conduit, 2 IN. External on Structure. For improved security, all exposed lighting conduit on structures shall be rigid metal conduit.

4.0 Construction Requirements. Provisions shall be made to attach the wallpack units and conduit on structure directly to the bridge bent columns and caps with non-ferrous metal or stainless-steel hardware.

4.0 Basis of Payment. Payment for furnishing and installing underpass luminaries and metal conduits on structure shall include all materials, equipment, tools, labor, and work incidental thereto, and shall be considered completely covered by the contract unit price for:

Item Number	Item Name	Units
901-99.02	Underpass LED Luminaire (Wallpack)	Each
901-45.02	Conduit, 2 IN. Rigid, External on Structure	Linear Foot

Z. Disposition of Existing Lighting Equipment

1.0 Description. All poles, wallpacks and luminaires noted in the plans shall be removed by the contractor.

2.0 Lighting Equipment. All lighting equipment devices are to be transported to the Commission's maintenance lot located at 2309a Barrett Station Road, Ballwin, Missouri 63021. The contractor shall notify the Commission's representative 24 hours prior to each delivery by calling:

Mr. Dusty Henson, Urban Traffic Supervisor
Temporarily Handling Lighting and Locates
Cell: (636) 591-8749

Mr. Tony Rogers, Lighting Supervisor
Cell: (314) 348-9481

4.0 The contractor shall exercise reasonable care in the handling of the equipment during removal and transportation. Should any of the equipment be damaged by the contractor's negligence, it shall be replaced at the contractor's expense. The contractor shall dispose of any other equipment. Delivery shall be within 2 working days of removal. All items returned shall be tagged with the date removed, project number and location/intersection.

5.0 Basis of Payment. Payment for removal, handling and transportation of all equipment specified shall be considered completely covered by the contract unit price for "Removal of Improvements" per lump sum.

AA. Overhead Sign Installation

1.0 Description. Installation of structural steel overhead cantilever sign installation shall be in accordance with Section 903 and specifically as follows.

2.0 Construction Requirements. This work shall consist of erecting all post, structural steel and incidental hardware associated with the overhead signs as shown on the plans.

2.1 Before ordering the fabrication of the new trusses, MoDOT ITS and Lumen facilities shall be located in the field by the contractor to confirm location and determine if conflicts exist. If conflicts

do exist, the contractor shall provide the conflict information to the engineer to determine if truss redesigns are necessary. Overruns or underruns may be required if new designs are required.

3.0 Basis of Payment. The accepted quantity of overhead sign Installation, including all labor, equipment, and material necessary to install all sign posts, tubular steel, structural steel, anchor bolts, and associated hardware necessary to erect the trusses and attach the sign panels, complete-in place, will be paid for at the contract unit price under the following pay items:

Item Number	Unit	Description
903-99.02	Each	Misc. 30 Ft. Cantilever Truss, Sign No. 1
903-99.02	Each	Misc. 30 Ft. Cantilever Truss, Sign No. 4
903-99.02	Each	Misc. 30 Ft. Cantilever Truss, Sign No. 5

BB. Optional Temporary Pavement Marking Paint

1.0 Description. This provision provides the contractor with the option to either complete all Permanent Pavement Marking Paint (PPMP) prior to the time limits specified herein or to apply Temporary Pavement Marking Paint (TPMP) in accordance with Sec 620.10.2 (4 in. width) in all locations shown on the plans as PPMP and delay application of the PPMP until the spring of 2030, as allowed herein. PPMP is defined as Class 1 Pavement Marking Paint and Class 2 Pavement Marking Paint and does not include Sec 620.20.3 Durable Pavement Markings.

1.1 No application of PPMP shall occur between October 1, 2028 and March 1, 2029, both dates inclusive, except as stated herein. When the contractor has begun application of PPMP prior to October 1, 2028, and weather limitations stated in Sec 620.20.2.4 can be met, the contractor may complete the PPMP within the first seven (7) calendar days of October. If all (100%) of the PPMP is not completed on or before October 7, 2028, all previously applied PPMP, including any painted markings applied prior to October 1, shall be considered TPMP, and the contractor shall complete the remaining marking with TPMP, and then re-apply PPMP in all planned locations after March 1, 2029. All PPMP shall be completed prior to June 1, 2029. No additional payment will be made for PPMP that is later determined to be TPMP due to the contractor's failure to complete the PPMP within the time specified.

1.2 Use of TPMP Prior to October 1. The contractor has the option to apply TPMP in lieu of PPMP prior to October 1, 2028, even when there is sufficient time to complete the PPMP prior to October 1, 2028. For example, the contractor may choose to use TPMP as a base coat for the PPMP on open-graded surfaces in order to achieve higher retroreflectivity readings on the surface coat as compared to a single application.

1.2.1 The contractor has the option of using TPMP in lieu of Temporary Raised Pavement Markers if applied each day that existing markings are obliterated.

2.0 Construction Requirements. TPMP shall be accurately placed in the final planned location and shall be completely covered by the final application of PPMP. Any failure to comply with this requirement shall be corrected by removal of the misplaced pavement markings at the contractor's expense and without marring of the pavement surface.

2.1 Prior to application of the PPMP on TPMP, TPMP shall be fully cured in accordance with the manufacturer's recommendation, or for a period of 12 hours, whichever is greater.

3.0 Weather Limitations. All weather limitations specified in Sec 620 for PPMP and TPMP shall apply. Cold Weather Pavement Marking Paint, in accordance with Sec 620.10.6, shall be used for TPMP when specified weather limitations do not allow the use of waterborne paint. No additional payment will be made for the use of Cold Weather Pavement Marking Paint as TPMP. Cold Weather Pavement Marking Paint is not an allowable substitute for PPMP and shall subsequently be covered with PPMP.

4.0 Time Exception. If application of PPMP is to be delayed to the spring of 2029, the contractor shall submit a request to the engineer for a time exception and shall provide a revised work schedule that shows the planned completion of the PPMP. 4.1 Upon receipt of the time exception request in Section 4.0, the engineer will list "Application of Permanent Pavement Marking Paint" as an exception on the Semi-Final Inspection form, thus granting an exception to the count of contract time thru June 1, 2029, solely for the purpose of delaying application of PPMP. This time exception shall not apply to any time needed to complete any other work items. Liquidated Damages, as specified elsewhere in this contract, shall remain in effect for all other work items not completed by the contract time limits, as specified elsewhere in this contract, and for PPMP not completed by June 1, 2029.

5.0 Method of Measurement. No final measurement will be made for TPMP.

6.0 Basis of Payment. Full payment for TPMP will be made at the contract lump sum price even when PPMP is completed prior to the time limitation and TPMP is not used or only partially used.

6.1 If a $0 bid is entered for TPMP, no payment will be made should TPMP become necessary.

Item Number	Description	Unit
602-99.01	Temporary Pavement Marking Paint	LS

CC. Order of Work

A. The following order of work is suggested for this project for shifting traffic to the existing southbound lanes:

1. Close one southbound lane and construct optional pavement as needed along the southbound lanes of I-170. The contractor shall construct the southbound optional pavement within 10 calendar days.

2. Clean out pipes as needed and adjust and secure the existing grates during overnight working hours.

3. Replace concrete traffic barrier around truss footings at locations shown on the plans. Each 40 foot section of barrier shall be removed and reconstructed during overnight working hours before opening to traffic.

4. Close the northbound and southbound left lane, place temporary barrier and remove median barrier and pavement at three locations shown on the plans. Construct the asphalt wedge in the southbound lane as shown on the plans.

5. Install detour signs as shown on the plans, close the southbound on-ramp at Route D and restripe the southbound lanes, shift southbound traffic and place barrier as shown on the plans.

6. Shift northbound traffic to the southbound lanes as shown on the plans and redeck the northbound bridges.

While the northbound lanes are shifted to the existing southbound lanes, the contractor will construct the following in addition to the bridge work required during this stage:

1. Construct the northbound optional pavement as shown on the plans.

2. Clean out pipes as needed and adjust and secure the existing grates shown on the plans.

3. Remove the rumble strips in the northbound lanes and replace with Class A pavement in concrete sections, and cold milling and resurfacing in the asphalt sections.

After the northbound lanes are shifted to the existing southbound lanes, the contractor may be required to remove the Union Pacific Railroad deck after removing the Woodson Road overpass deck, and after removing the Page Avenue overpass deck, to allow Lumen time to relocate their facilities off of the east end of the Union Pacific bridge deck.

Pavement marking quantities have been provided to restore the lanes during the winter months between 2027 and 2028. The asphalt wedge shall remain in place and traffic shifted to the shoulder for the southbound lanes. The southbound on ramp will be opened during this time as well. The contractor shall work with the engineer to determine the timeframe when this ramp will be open in order to inform the public when it will be opened in late 2027, and when it will be closed in early 2028. See the WINTERIZATION roadway job special provision for handling barrier openings and other considerations.

Cover or remove all detour signs during winterization.

B. The following order of work is suggested for this project for shifting traffic to the existing southbound lanes:

1. It is assumed that the grates and all optional pavement are constructed during the 2027 construction season while all traffic was diverted to the existing southbound lanes.

2. Close the northbound left lane, restripe and shift northbound traffic to the location shown on the plans, and place new temporary barrier.

3. Shift southbound traffic into the northbound lanes as shown on the plans and redeck the southbound bridges.

4. Provide Class A pavement repairs and cold milling to remove the rumble strips in the southbound lanes.

5. Install new lighting wallpacks and associated conduit after bridge columns and caps are painted.

C. Work that can be done anytime during the 2027 or 2028 construction seasons:

1. High tension guard cable installation. Lanes closures for this work will only be allowed during off peaks hours as indicated elsewhere in the roadway job special provisions. Both left shoulders shall be closed with channelizers at 50 foot spacing during all phases of this construction. Anchors shall be constructed first to allow proper curing and strengthening prior to removal of the existing low tension anchors and cables.

2. Work on Bridge A2808, the triple box culvert under I-170.

3. Lighting, if done after the bridge columns and caps are painted.

4. Soundwall repairs.

5. Median construction under the Midland Blvd and Lackland Road bridges. The contractor shall only be allowed 14 calendar days for this work, which will close one (1) northbound and one (1) southbound lane on I-170. The contractor shall work continuously in this area until all work is complete and the left lanes open to traffic.

No direct pay will be made for work required by the contractor to comply with this special provision.

DD. Survey

Actual field surveys have been conducted for the high-tension guard cable installations. Reference Points and coordinates are available for this part of the project.

As-built plans and aerial photography were used for the bridge and box culvert rehabilitation plans. The contractor shall use existing improvements to establish existing alignments, proposed cross over alignments, and pavement marking layouts. Stationing shown for improvements may not be exact, and shall be modified as needed to construct the intent of the plans, as approved by the engineer.

The contractor shall survey the crossovers prior to construction and tie the work 300 feet back of and ahead of the cross over curve data provided in the plans. This proposed layout shall be submitted to the engineer for review and approval at least 14 calendar days prior to start of construction of the crossovers and work associated with the crossovers, such as barrier removals, grate inlet work and asphalt wedges.

No direct pay will be made for work required by the contractor to comply with this special provision.

EE. ADA Compliant Moveable Barricade

1.0 Description. The work shall consist of providing moveable barricades to satisfy the requirements of the pedestrian traffic control plans as shown in the bidding documents. The contractor will be responsible for moving the pedestrian barricades to coincide with their planned order of work.

2.0 Construction Requirements. The contractor shall use a moveable barricade that meets the requirements as established by the ADA. The pedestrian barricades shall be of self-supporting type having a minimum length of 6 feet per unit. The face of the barricade shall not extend into

adjacent sidewalk considered open for pedestrian use. The contractor will be responsible for setting and maintaining the pedestrian barricades until all the proposed improvements have been constructed.

3.0 Method of Measurement. Measurement for ADA Compliant Moveable Barricade will be made per each for each 6 feet (min.) unit provided.

4.0 Basis of Payment. Payment for all work necessary to fulfill the requirements noted above will be considered completely covered in the contract unit price for Pay Item No. 616-99.01 Lump Sum Temporary Traffic Control, per lump sum. No direct payment will be made for any necessary relocation of the ADA Compliant Moveable Barricade.

FF. Welding of Grates on Drop Inlets

1.0 Description. This work shall consist of modifying the existing drop inlet grates along the inside and outside shoulders of I-170. The grates shall be adjusted to grade to be flush with the pavement by a method as approved by the engineer. The grates shall be fixed to the frames of the inlet in a manner that allows traffic to traverse the inlet without the probability of the grate separating from the frame during traffic. Welds shall be removed and the grates shall be restored to their original location prior to completion of project.

2.0 Construction Requirements. All work including method and materials required to attach the grates to the frames shall be approved by the engineer prior to work being performed.

3.0 Method of Measurement. Final measurement will be made per each inlet.

4.0 Basis of Payment. Payment will be made for compliance with this provision including all labor, equipment, and material necessary at the contract unit price for the following pay item number 614-99.02, Welding of Grates on Drop Inlets, per each.

GG. Winterization

1.0 Description. Following completion of Stage 1 the temporary traffic control must be removed and 3 travel lanes in each direction must be restored.

2.0 Construction Requirements. Gaps in the center median barrier may remain in place if protected with Temporary Concrete Traffic Barrier (TCTB) special care shall be taken to cover blunt ends of existing barrier in the approaching direction. If desired the contractor can protect blunt end by overlapping concrete barrier so blunt end of the existing is protected and blunt end of the TCTB is in the same direction as traffic. Southbound edge lines and lane lines are to be restored and shifted around the cross over asphalt wedge as shown in the plan. Striping removal and striping are covered under the appropriate bid items within this contract. All other work associated will be considered incidental work.

3.0 Materials. All material shall be in accordance with Division 1000, Material Details.

4.0 Basis of Payment. All labor, equipment, and material costs to complete the described work not shown separately under other pay items shall be considered incidental to pay item number 616-99.01, Winterization, per lump sum.

HH. MoDOT ITS Assets Relocation

1.0 Description. The work consists of relocating existing MoDOT Intelligent Transportation System (ITS) facilities (conduit, cable, and/or pull boxes) that may be in conflict with this project construction sections as noted in the plans or in case of conflict with other MoDOT facilities.

2.0 Materials. The materials used for relocating MoDOT ITS facilities shall be per MoDOT Approved Product List (APL) and meet all MoDOT Specifications. If the material is not in the APL, the contractor shall submit material specification documents to the Engineer and the MoDOT ITS group (via an email in advance to SLITS@modot.mo.gov) for review and approval.

3.0 Construction Requirements. The Contractor shall be aware there are numerous utilities present along the route in this contract. Utility locates were not performed during the design phase of the project; therefore, the extent of conflicts with utilities are unknown.

3.1 The contractor shall exercise reasonable care relocating MoDOT ITS Assets. Damage to any MoDOT facilities within the area of work caused by the contractor will be deemed by the Engineer as either “non-emergency” or “emergency” upon notification of the damages. Repair to damages will be performed as follows:

- **a)** Non-Emergency: Contractor will have 4 hours to propose a repair plan to the Engineer for a complete repair within 3 business days.
- **b)** Emergency: Upon notification of the damage, Contractor must immediately submit a repair plan to the Engineer which will take no more than 4 hours to respond on-site and complete repairs within 48 hours of notification of damage.
- **c)** In either case, if the proposed plan is unacceptable for any reason to MoDOT, repairs will be made by MoDOT with all costs billed to the Contractor.

3.2 The ITS In-Ground Facilities located within the project limits are a crucial part of the traffic operation system for this area. It is imperative that the downtime be kept to a minimum when replacing, removing, or modifying any existing ITS In-Ground Facilities.

3.3 Prior to any in-ground work, the Contractor shall request for utility locates by contacting Missouri One Call (1-800 DIG-RITE or mo1call.com) for any in-ground installation locations as per plans. If there are any conflicts with MoDOT ITS Assets, the Contractor is responsible for relocation to the satisfaction of the Engineer prior to any in-ground work.

3.4 In the case of a conduit conflict, the Contractor shall trench an area beyond the in-ground work limits, install one or two conduits (must be the same quality as the existing conduit) using Split Duct Method, relocate the existing cables into the new conduit, and seal the conduit joints per manufacturer specifications.

3.5 The Contractor shall coordinate this work with the MoDOT ITS group and have the Engineer’s approval prior to performing this task.

3.6 The contractor shall perform a fiber testing (see below requirements) before and after relocating MoDOT fiber cables at the nearest Node Cabinet at each site as shown on the plans and submit that report to the SLITS Group for review and approval.

3.6.01 Test Procedure. For each fiber link, follow this procedure:

(a) If the link includes fiber installed by others, use an optical loss test set to measure and record the optical loss over that portion of the link before it is spliced to new fiber.

(b) Calculate the maximum allowable loss for the completed link, both at 1310 nm and at 1550 nm. Use the following formula:

Maximum link loss = Measured loss over portion installed by others
+ (Fiber length in km) x (0.35 for 1310 nm and 0.25 for 1550 nm)
+ (Number of fusion splices) x (0.05)
+ (Number of mechanical splices [for temp. connection]) x (0.3)
+ (Number of connections) x (0.5)

Provide this calculation to the engineer along with the test results.

(c) Calibrate an optical loss test set and provide evidence satisfactory to the engineer that the set produces accurate results at both wavelengths. This can be a demonstration that the set correctly measures the loss of a test fiber whose loss is known.

(d) Use the test set to measure the loss of the link under test. Record the result at both 1310 nm and 1550 nm. Arrange for the engineer or his representative to witness these tests.

(e) If the measured loss exceeds the calculated maximum, use an optical time domain reflectometer and other test equipment to troubleshoot the link. Take whatever corrective action is required, including cable replacement, to achieve a loss less than the calculated maximum.

3.6.02 Test Result Documentation. Prepare a diagram showing all of the links tested in this project. For the portions installed in this project, show the equipment cabinets, splices, and pigtails. On each line representing a link, show the maximum allowable loss and the actual loss. The actual loss shall be the one measured after all corrective actions have been taken. Submit 5 copies of this diagram to the engineer, along with the calculations for the maximum allowable loss. Submit the diagrams and calculations in an electronic format acceptable to the engineer.

3.6.03 Documentation. Provide the engineer mark-ups of the plans, neat and legible, illustrating as-built versions of the splice and connection diagrams that are contained in the plans.

3.6.04 Certifications. The fiber optic cable shall be factory certified to meet the requirements in this specification. In addition, the manufacturer shall certify that the fiber optic cable has a life expectancy of 20 years.

3.7 The Contractor shall trench an area beyond the in-ground work limits, install one or two conduits (must be the same quality as the existing conduit) using Split Duct Method, relocate the existing cables into the new conduit, and seal the conduit joints per manufacturer specifications.

3.8 Upon completion of this work, the Contractor shall contact the MoDOT ITS group (via email at slits@modot.mo.gov to verify that all existing MoDOT ITS devices are online and request inspection of this work. Acceptance of this work shall be the sole judgment of the Engineer and the MoDOT ITS group's engineer.

3.9 The contractor shall restore those areas disturbed by this work or installation according to specifications herein.

4.0 Basis of Payment. Payment for "MoDOT ITS Assets Relocation" shall be paid as Linear Feet and shall include the trenching, conduit installation, conduit coupling, pull boxes, sealing materials, cable relocation, needed fiber testing, restoration of all disturbed area, all labor and work incidental thereto, and shall be considered to be completely covered by the contract unit price for the following pay item:

Item No.	Unit	Description
910-99.03	Linear Feet	MoDOT ITS Assets Relocation

II. MoDOT ITS Assets Within Project Limits

1.0 Description. MoDOT owned fiber optic cable and conduit, critical MoDOT power supplies and power cables, and pull boxes for fiber and power cables and other above and underground ITS (Intelligent Transportation System) facilities including but not limited to wireless radio communication and communication switches are present within the limits of this project. Damage or interruption of these items can cause extensive outages to the MoDOT network.

2.0 Construction Requirements. The contractor shall exercise reasonable care while completing work near these facilities and shall take steps necessary to protect these facilities from damage for all items that are not specifically identified as being removed and/or relocated in the plans. Should any of the existing wiring or conduit be damaged by the contractor, it shall be replaced at the contractor's expense and the system in full operation within **4** hours of when the damage occurred. If it is mutually agreed upon between the Commission and the Contractor that the repairs will require more than **4** hours to complete, a mutually agreed upon time for repairs to be complete will be determined.

2.1 The contactor shall not modify any existing network or electrical connections within equipment cabinets, unless coordinated with MoDOT ITS staff. Existing connections include, but are not limited to, fiber jumpers, CAT5(e) cables, power supplies, and power strips. The connection to specific fiber and copper ports on network equipment shall also not be modified, unless coordinated with MoDOT ITS staff, as the network equipment has been configured specifically for each equipment cabinet. Significant network outages and unnecessary troubleshooting to investigate outages can occur, even with minor changes to existing connections within the cabinet.

3.0 Liquidated Damages. In the event of damage, if the system is not repaired and in full operation within **4** hours of the damage occurring, or within the timeframe agreed upon, the contractor will be charged with liquidated damage specified in the amount of $100.00 per hour for each full hour that the system is not fully operational. This damage will be assessed independently of the liquidated damages specified elsewhere in the contract.

3.1 The MoDOT Engineer will also have the option of issuing a work order for MoDOT's on-call ITS Maintenance contractor to make repairs, if it is the Engineer's opinion that the contractor creating the damage will not be able to make repairs in a timely manner. Contractor's reimbursement for MoDOT expense for this option shall be in addition to the liquidated damages.

4.0 Basis of Payment. No direct payment shall be made for compliance with this provision.

JJ. Cooperation with Other Projects

1.0 Description. The contractor shall coordinate traffic management between this project and any other projects on I-70 or I-170, and projects which affect I-70 and I-170, including future projects. Each Contractor shall conduct their work so as not to interfere with or hinder the progress or completion of the work being performed by other Contractors. In case of dispute, the Engineer shall be the referee and the Engineer's decision shall be final and binding on all.

2.0 Coordination. The Contractor shall coordinate work within the limits of the project with the following Missouri Department of Transportation projects:

- I-170 Structural Sign Replacements Project (Job No. J6I3650)
- I-170 Bridge Redecking, Replacement, and Rehabilitations (Job Nos. J6I3567 & J6I3634)
- Resurfacing, ADA work, Signing, on Route D (Job No. JSL0027)

This list of projects is not all inclusive. The contractor shall be aware that there may be other projects including, but not limited to, utility, private, MoDOT maintenance, Lambert Airport, permit, or other projects that may impact project construction or traffic control in the vicinity of this project. It shall be the responsibility of the contractor to determine what, if any, projects other than the ones listed above may impact this project and work to coordinate construction and traffic management efforts between this project and any other project involved.

4.0 Site Construction. The Contractor shall arrange the work and shall place and dispose of the materials being used so as not to interfere with the operations of the other contractor.

5.0 Basis of Payment. No direct payment will be made to the contractor to recover the cost of the equipment, labor, materials, or time required to for this coordination with other projects.

KK. Temporary Suspended Walkways

1.0 Description. The contractor may chose to utilize a temporary suspended walkway system in order to paint the bridges included in his contract. Any temporary suspended system shall be submitted to the Engineer for review and approval, and the system shall be signed and sealed by a Professional Engineer registered in the state of Missouri. This suspending walkway shall not be allowed when shoulders are less than 1'-6" with live traffic adjacent to it.

2.0 Vertical Clearance Requirements. The contractor shall only be allowed to utilize a temporary suspended walkway system that shall maintain a minimum of 16'-6" of vertical clearance above any shoulder or pavement elevation over which the system is installed. The contractor shall submit a plan for any bridge when using a temporary suspended walkway, and the plan shall be submitted for review at least 7 calendar days prior to its use. The Engineer shall approve the plan before it is installed on any bridge. The Contractor shall field verify vertical clearances over each lane where the system will be installed.

3.0 System Installation, Maintenance, Removal. If the contractor installs a temporary suspended walkway on a bridge, it shall be done in such a manner that it will not damage the bridge in any way, or overload the bridge deck or safety barriers. Any damage done to any part

of any bridge due to the contractor's activities shall be repaired in kind at the contractor's expense, and as approved by the Engineer.

3.1 If the system requires hardware connections that extend beyond the front face of the bridge safety barrier adjacent to live traffic, Trim Line Channelizers shall be placed along the bridge shoulder at 25-foot spacings along the length of the system hardware on the bridge, and a minimum of 200 feet prior to the first hardware connection.

3.2 Existing Vertical Clearances. The contractor shall verify in writing to the engineer, all minimum Vertical Clearances prior to installing walkways, as approved by the engineer. This shall be a point of discussion during the pre-activity meetings for each work area in the contract.

The contractor shall be responsible for coordinating work with the appropriate railroad companies to confirm existing clearances, and their requirements for clearances over their tracks during bridge painting for Bridge A2809. Written approvals from the railroad shall be provided to the engineer at least 14 calendar days prior to installing the suspended walkway system.

4.0 Method of Measurement. Measurement will not be made for this work.

5.0 Basis of Payment. Cost for utilizing Temporary Suspended Walkways, or standard lane and shoulder closures to paint bridges, regardless of the number of set ups or installations on any bridge in this project shall be considered completely covered by LUMP SUM TEMPORARY TRAFFIC CONTROL, per lump sum, and shall include all labor, time, materials, and equipment required to install, maintain, and remove the temporary system or standard lane and shoulder closure.

Item No.	Unit	Description
616-99.01	Lump Sum	Misc. Lump Sum Temporary Traffic Control

LL. Sound Wall Repairs

1.0 Description. This work shall consist of furnishing all labor, materials, equipment, tools, traffic control, access equipment, incidentals, and supervision necessary to repair the existing sound wall at the locations shown in the plans or as directed by the engineer.

1.1 The repair work shall include, but not be limited to: verification of field dimensions; epoxy pressure injection of existing cracks; concrete repair of damaged areas; fabrication, galvanizing, furnishing and installation of steel repair plates and hardware; drilling of existing panels; removals and disposal; site restoration; and all incidental work necessary to complete the repair.

2.0 Materials

2.1 Structural steel plates shall conform to ASTM A709 Grade 36.

2.2 Galvanizing shall conform to Sec 1081 and ASTM A123.

2.3 Epoxy materials and concrete repair materials shall comply with Sec 704.

3.0 Construction Requirements

3.1 The contractor shall verify all field dimensions prior to fabrication.

3.2 Cracks shall be repaired by epoxy pressure injection. Concrete repairs shall be completed in accordance with Sec 704.

3.3 Steel repair plates shall be fabricated, galvanized after fabrication, and installed at the locations shown in the plans or directed by the engineer.

3.4 Plate and bolt locations may be adjusted in the field to fit existing panel corrugations and maintain the intended function of the repair.

3.5 The contractor shall protect adjacent facilities and repair any damage resulting from the work at no additional cost. Upon completion, the site shall be cleaned and restored.

4.0 Method of Measurement. No measurement will be made for Sound Wall Repair.

5.0 Basis of Payment. Payment for all work required to complete the repair will be made at the contract lump sum price for pay item 704-99.01, Sound Wall Repairs, per lump sum. The contract unit price shall be full compensation for furnishing all labor, materials, equipment, traffic control, erosion control device installation and removal, access equipment, epoxy injection, concrete repair, structural steel plates, galvanizing, bolts, drilling, removals, disposal, cleanup, and all incidental items necessary to complete the work.

MM. Temporary MoDOT ITS Assets Relocation - Bridge

1.0 Description. The work consist of temporary relocating existing MoDOT Intelligent Transportation System (ITS) facilities (conduit, cable, and/or pull boxes) that may be in conflict with this project bridge construction sections as noted in the plans.

2.0 Materials. The materials used for relocating MoDOT ITS facilities shall be per MoDOT Approved Product List (APL) and meet all MoDOT Specifications. If the material is not in the APL, the contractor shall submit material specification documents to the Engineer and the MoDOT ITS group via an email in advance to SLITS@modot.mo.gov for review and approval.

3.0 Construction Requirements. The Contractor shall be aware there are numerous utilities present along the route in this contract. Utility locates were not performed during the design phase of the project; therefore, the extent of conflicts with utilities are unknown.

3.1 At least 14 calendar days prior to construction, the Contractor shall submit a proposal to the engineer and MoDOT ITS staff for review and approval of a proposed method to temporarily detach the existing ITS conduit and fiber optic cables off of west side of the Route I-170 bridge over Route D (Page Ave.), Bridge #A3176; and the west side of the Route I-170 bridge over the Union Pacific Railroad (just south of the Route D Interchange), Bridge #A2809. The contractor shall be aware there are numerous utilities present along the route in this contract. Utility locates were not performed during the design phase of the project; therefore, the extent of conflicts with utilities are unknown.

3.2 The contractor shall exercise reasonable care relocating MoDOT ITS Assets. Damage to any MoDOT facilities within the area of work caused by the contractor will be deemed by the Engineer

as either “non-emergency” or “emergency” upon notification of the damages. Repair to damages will be performed as follows:

a) Non-Emergency: Contractor will have 4 hours to propose a repair plan to the Engineer for a complete repair within 3 business days.
b) Emergency: Upon notification of the damage, Contractor must immediately submit a repair plan to the Engineer which will take no more than 4 hours to respond on-site and complete repairs within 48 hours of notification of damage.
c) In either case, if the proposed plan is unacceptable for any reason to MoDOT, repairs will be made by MoDOT with all costs billed to the Contractor.

3.3 The ITS In-Ground Facilities located within the project limits are a crucial part of the traffic operation system for this area. It is imperative that the downtime be kept to a minimum when replacing, removing, or modifying any existing ITS In-Ground Facilities.

3.4 Prior to any in-ground work, the Contractor shall request for utility locates by contacting Missouri One Call (1-800 DIG-RITE or mo1call.com) for any in-ground installation locations as per plans. If there are any conflicts with MoDOT ITS Assets, the Contractor is responsible for relocation to the satisfaction of the Engineer prior to any in-ground work.

3.5 In the case of a conduit conflict, the Contractor shall trench an area beyond the in-ground work limits, install one or two conduits (must be the same quality as the existing conduit) using Split Duct Method, relocate the existing cables into the new conduit, and seal the conduit joints per manufacturer specifications.

3.6 The Contractor shall coordinate this work with the MoDOT ITS group and have the Engineer’s approval prior to performing this task.

3.7 The contractor shall perform a fiber testing (see below requirements) before and after relocating MoDOT fiber cables at the nearest Node Cabinet at each site as shown on the plans and submit that report to the SLITS Group for review and approval.

3.7.01 Test Procedure. For each fiber link, follow this procedure:

(a) If the link includes fiber installed by others, use an optical loss test set to measure and record the optical loss over that portion of the link before it is spliced to new fiber.

(b) Calculate the maximum allowable loss for the completed link, both at 1310 nm and at 1550 nm. Use the following formula:

Maximum link loss = Measured loss over portion installed by others
+ (Fiber length in km) x (0.35 for 1310 nm and 0.25 for 1550 nm)
+ (Number of fusion splices) x (0.05)
+ (Number of mechanical splices [for temp. connection]) x (0.3)
+ (Number of connections) x (0.5)
Provide this calculation to the engineer along with the test results.

(c) Calibrate an optical loss test set and provide evidence satisfactory to the engineer that the set produces accurate results at both wavelengths. This can be a demonstration that the set correctly measures the loss of a test fiber whose loss is known.

(d) Use the test set to measure the loss of the link under test. Record the result at both 1310 nm and 1550 nm. Arrange for the engineer or his representative to witness these tests.

(e) If the measured loss exceeds the calculated maximum, use an optical time domain reflectometer and other test equipment to troubleshoot the link. Take whatever corrective action is required, including cable replacement, to achieve a loss less than the calculated maximum.

3.7.02 Test Result Documentation. Prepare a diagram showing all of the links tested in this project. For the portions installed in this project, show the equipment cabinets, splices, and pigtails. On each line representing a link, show the maximum allowable loss and the actual loss. The actual loss shall be the one measured after all corrective actions have been taken. Submit 5 copies of this diagram to the engineer, along with the calculations for the maximum allowable loss. Submit the diagrams and calculations in an electronic format acceptable to the engineer.

3.7.03 Documentation. Provide the engineer mark-ups of the plans, neat and legible, illustrating as-built versions of the splice and connection diagrams that are contained in the plans.

3.7.04 Certifications. The fiber optic cable shall be factory certified to meet the requirements in this specification. In addition, the manufacturer shall certify that the fiber optic cable has a life expectancy of 20 years.

3.8 The Contractor shall trench an area beyond the in-ground work limits, install one or two conduits (must be the same quality as the existing conduit) using Split Duct Method, relocate the existing cables into the new conduit, and seal the conduit joints per manufacturer specifications.

3.9 Upon completion of this work, the Contractor shall contact the MoDOT ITS group (via email at slits@modot.mo.gov to verify that all existing MoDOT ITS devices are online and request inspection of this work. Acceptance of this work shall be the sole judgment of the Engineer and the MoDOT ITS group's engineer.

3.10 The contractor shall restore those areas disturbed by this work or installation according to specifications herein.

4.0 Basis of Payment. Payment for "MoDOT ITS Assets Relocation" shall be paid as Linear Feet and shall include the trenching, conduit installation, conduit coupling, pull boxes, sealing materials, cable relocation, needed fiber testing, restoration of all disturbed area, all labor and work incidental thereto, and shall be considered to be completely covered by the contract unit price for the following pay item:

Item No.	Unit	Description
910-99.03	Linear Feet	Temporary MoDOT ITS Assets Relocation - Bridge

NN. Supplemental Revisions JSP-18-01NN

- Compliance with 2 CFR 200.216 – Prohibition on Certain Telecommunications and Video Surveillance Services or Equipment.

The Missouri Highways and Transportation Commission shall not enter into a contract (or extend or renew a contract) using federal funds to procure or obtain equipment, services, or systems that

uses covered telecommunications equipment or services as substantial or as critical technology as part of any system where the video surveillance and telecommunications equipment was produced by Huawei Technologies Company, ZTE Corporation, Hytera Communications Corporation, Hangzhou Hikvision Digital Technology Company, or Dahua Technology Company (or any subsidiary or affiliate of such entities).

- Stormwater Compliance Requirements

1.0 Description. This provision requires the contractor to provide a Water Pollution Control Manager (WPCM) for any project that includes land disturbance on the project site and the total area of land disturbance, both on the project site, and all Off-site support areas, is one (1) acre or more. Regardless of the area of Off-site disturbance, if no land disturbance occurs on the project site, these provisions do not apply. When a WPCM is required, all sections within this provision shall be applicable, including assessment of specified Liquidated Damages for failure to correct Stormwater Deficiencies, as specified herein. This provision is in addition to any other stormwater, environmental, and land disturbance requirements specified elsewhere in the contract.

1.1 Definitions. The project site is defined as all areas designated on the plans, including temporary and permanent easements. The project site is equivalent to the "permitted site", as defined in MoDOT's State Operating Permit. An Off-site area is defined as any location off the project site the contractor utilizes for a dedicated project support function, such as, but not limited to, staging area, plant site, borrow area, or waste area.

1.2 Reporting of Off-Site Land Disturbance. If the project includes any planned land disturbance on the project site, prior to the start of work, the contractor shall submit a written report to the engineer that discloses all Off-site support areas where land disturbance is planned, the total acreage of anticipated land disturbance on those sites, and the land disturbance permit number(s). Upon request by the engineer, the contractor shall submit a copy of its land disturbance permit(s) for Off-site locations. Based on the total acreage of land disturbance, both on and Off-site, the engineer shall determine if these Stormwater Compliance Requirements shall apply. The contractor shall immediately report any changes to the planned area of Off-site land disturbance. The contractor is responsible for obtaining its own separate land disturbance permit for Off-site areas.

2.0 Water Pollution Control Manager (WPCM). The contractor shall designate a competent person to serve as the Water Pollution Control Manager (WPCM) for projects meeting the description in Section 1.0. The contractor shall ensure the WPCM completes all duties listed in Section 2.1.

2.1 Duties of the WPCM:

(a) Be familiar with the stormwater requirements including the current MoDOT State Operating Permit for construction stormwater discharges/land disturbance activities; MoDOT's statewide Stormwater Pollution Prevention Plan (SWPPP); the Corps of Engineers Section 404 Permit, when applicable; the project specific SWPPP, the Project's Erosion & Sediment Control Plan; all applicable special provisions, specifications, and standard drawings; and this provision;

(b) Successfully complete the MoDOT Stormwater Training Course within the last 4 years. The MoDOT Stormwater Training is a free online course available at MoDOT.org;

(c) Attend the Pre-Activity Meeting for Grading and Land Disturbance and all subsequent Weekly Meetings in which grading activities are discussed;

(d) Oversee and ensure all work is performed in accordance with the Project-specific SWPPP and all updates thereto, or as designated by the engineer;

(e) Review the project site for compliance with the Project SWPPP, as needed, from the start of any grading operations until final stabilization is achieved, and take necessary actions to correct any known deficiencies to prevent pollution of the waters of the state or adjacent property owners prior to the engineer's weekly inspections;

(f) Review and acknowledge receipt of each MoDOT Inspection Report (Land Disturbance Inspection Record) for the Project within forty-eight (48) hours of receiving the report and ensure that all Stormwater Deficiencies noted on the report are corrected as soon as possible, but no later than stated in Section 5.0.

3.0 Pre-Activity Meeting for Grading/Land Disturbance and Required Hold Point. A Pre-Activity meeting for grading/land disturbance shall be held prior to the start of any land disturbance operations. No land disturbance operations shall commence prior to the Pre-Activity meeting except work necessary to install perimeter controls and entrances. Discussion items at the pre-activity meeting shall include a review of the Project SWPPP, the planned order of grading operations, proposed areas of initial disturbance, identification of all necessary BMPs that shall be installed prior to commencement of grading operations, and any issues relating to compliance with the Stormwater requirements that could arise in the course of construction activity at the project.

3.1 Hold Point. Following the pre-activity meeting for grading/land disturbance and subsequent installation of the initial BMPs identified at the pre-activity meeting, a Hold Point shall occur prior to the start of any land disturbance operations to allow the engineer and WPCM the time needed to perform an on-site review of the installation of the BMPs to ensure compliance with the SWPPP is met. Land disturbance operations shall not begin until authorization is given by the engineer.

4.0 Inspection Reports. Weekly and post run-off inspections will be performed by the engineer and each Inspection Report (Land Disturbance Inspection Record) will be entered into a web-based Stormwater Compliance database. The WPCM will be granted access to this database and shall promptly review all reports, including any noted deficiencies, and shall acknowledge receipt of the report as required in Section 2.1 (f.).

5.0 Stormwater Deficiency Corrections. All stormwater deficiencies identified in the Inspection Report shall be corrected by the contractor within 7 days of the inspection date or any extended period granted by the engineer when weather or field conditions prohibit the corrective work. If the contractor does not initiate corrective measures within 5 calendar days of the inspection date or any extended period granted by the engineer, all work shall cease on the project except for work to correct these deficiencies, unless otherwise allowed by the engineer. All impact costs related to this halting of work, including, but not limited to stand-by time for equipment, shall be borne by the contractor. Work shall not resume until the engineer approves the corrective work.

5.1 Liquidated Damages. If the contractor fails to complete the correction of all Stormwater Deficiencies listed on the MoDOT Inspection Report within the specified time limit, the Commission will be damaged in various ways, including but not limited to, potential liability, required mitigation, environmental clean-up, fines, and penalties. These damages are not reasonably capable of being computed or quantified. Therefore, the contractor will be charged with liquidated damages specified in the amount of $2,000 per day for failure to correct one or more of the Stormwater Deficiencies listed on the Inspection Report within the specified time limit. In addition to the stipulated damages, the stoppage of work shall remain in effect until all corrections are complete.

6.0 Basis of Payment. No direct payment will be made for compliance with this provision.

- *Delete Sec 106.9, including all subsections and substitute the following:*

106.9 Buy America Requirements.
Buy America Requirements are waived if the total amount of Federal financial assistance applied to the project, through awards or subawards, is below $500,000.

106.9.1 Buy America Requirements for Iron or Steel Products.
The contractor's attention is directed to Title 23 CFR 635.410 *Buy America Requirements*. Where articles, materials or supplies that consist wholly or predominantly of iron or steel or a combination of both are to be permanently incorporated into the contract work, steel and iron material shall be manufactured, from the initial melting stage through the application of coatings, in the USA except for "minimal use" as described herein. Predominantly of iron or steel or a combination of both means that the cost of the iron and steel content exceeds 50 percent of the total cost of all its components. Under a general waiver from FHWA the use of pig iron and processed, pelletized, and reduced iron ore manufactured outside of the USA will be permitted in the domestic manufacturing process for steel or iron material.

106.9.1.1 Any sources other than the USA as defined will be considered foreign. The required domestic manufacturing process shall include formation of ingots and any subsequent process. Coatings shall include any surface finish that protects or adds value to the product.

106.9.1.2 "Minimal use" of foreign steel, iron or coating processes will be permitted, provided the cost of such products does not exceed 1/10 of one percent (0.1 percent) of the total contract cost or $2,500.00, whichever is greater. If foreign steel, iron, or coating processes are used, invoices to document the cost of the foreign portion, as delivered to the project, shall be provided and the engineer's written approval obtained prior to placing the material in any work.

106.9.1.3 Buy America requirements include a step certification for all fabrication processes of all steel or iron materials that are accepted per Sec 1000. The AASHTO Product Evaluation and Audit Solutions compliance program verifies that all steel and iron products fabrication processes conform to 23 CFR 635.410 Buy America Requirements and is an acceptable standard per 23 CFR 635.410(d). AASHTO Product Evaluation and Audit Solutions compliant suppliers will not be required to submit step certification documentation with the shipment for some selected steel and iron materials. The AASHTO Product Evaluation and Audit Solutions compliant supplier shall maintain the step certification documentation on file and shall provide this documentation to the engineer upon request.

106.9.1.3.1 Items designated as Category 1 will consist of steel girders, piling, and reinforcing steel installed on site. Category 1 items require supporting documentation prior to incorporation into the project showing all steps of manufacturing, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410 Buy America Requirements. This includes the Mill Test Report from the original producing steel mill and certifications documenting the manufacturing process for all subsequent fabrication, including coatings. The certification shall include language that certifies all steel and iron materials permanently incorporated in this project was procured and processed domestically and all manufacturing processes, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410.

106.9.1.3.2 Items designated as Category 2 will include all other steel or iron products not in Category 1 and permanently incorporated in the project. Category 2 items shall consist of, but not be limited to items such as fencing, guardrail, signing, lighting and signal supports. The prime contractor is required to submit a material of origin form certification prior to incorporation into the project from the fabricator for each item that the product is domestic. The Certificate of Materials Origin form (link to certificate form) from the fabricator must show all steps of manufacturing, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410 Buy America Requirements and be signed by a fabricator representative. The engineer reserves the right to request additional information and documentation to verify that all Buy America requirements have been satisfied. These documents shall be submitted upon request by the engineer and retained for a period of 3 years after the last reimbursement of the material.

106.9.1.3.3 Any minor miscellaneous steel or iron items that are not included in the materials specifications shall be certified by the prime contractor as being procured domestically. Examples of these items would be bolts for sign posts, anchorage inserts, etc. The certification shall read "I certify that all steel and iron materials permanently incorporated in this project during all manufacturing processes, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410 Buy America Requirements procured and processed domestically in accordance with CFR Title 23 Section 635.410 Buy America Requirements. Any foreign steel used was submitted and accepted under minor usage". The certification shall be signed by an authorized representative of the prime contractor.

106.9.1.4 When permitted in the contract, alternate bids may be submitted for foreign steel and iron products. The award of the contract when alternate bids are permitted will be based on the lowest total bid of the contract based on furnishing domestic steel or iron products or 125 percent of the lowest total bid based on furnishing foreign steel or iron products. If foreign steel or iron products are awarded in the contract, domestic steel or iron products may be used; however, payment will be at the contract unit price for foreign steel or iron products.

106.9.2 Buy America Requirements for Construction Materials other than iron or steel products.

Construction materials mean articles, materials, or supplies that consist of only one of the items listed. Minor additions of articles, materials, supplies, or binding agents to a construction material do not change the categorization of the construction material. Upon request by the engineer, the contractor shall submit a domestic certification for all construction materials listed that are incorporated into the project.

(a) Non-ferrous metals

(b) Plastic and Polymer-based products (including polyvinylchloride, composite building materials, and polymers used in fiber optic cables)
(c) Glass (including optic glass)
(d) Fiber optic cable (including drop cable)
(e) Optical fiber
(f) Lumber
(g) Engineered wood
(h) Drywall

106.9.3 Buy America Requirements for Manufactured Products.
Manufactured products mean articles, materials or supplies that have been processed into a specific form and shape, or combined with other articles, materials or supplies to create a product with different properties than the individual articles, materials or supplies. If an item is classified as an iron or steel product, an excluded material, or other product category as specified by law or in 2 CFR part 184, then it is not a manufactured product. However, an article, material or supply classified as a manufactured product may include components that are iron or steel products, excluded materials, or other product categories as specified by law or in 2 CFR part 184. Mixtures of excluded materials delivered to a work site without final form for incorporation into a project are not a manufactured product.

106.9.3.1 Produced in the United States, in the case of manufactured products, means:
(A) For projects obligated on or after October 1, 2025, the product was manufactured in the United States; and
(B) For projects obligated on or after October 1, 2026, the product was manufactured in the United States and the cost of the components of the manufactured product that are mined, produced, or manufactured in the United States is greater than 55 percent of the total cost of all components of the manufactured product.

106.9.3.2 (i) With respect to precast concrete products that are classified as manufactured products, components of precast concrete products that consist wholly or predominantly of iron or steel or a combination of both shall meet the requirements of paragraph (b) of this section. The cost of such components shall be included in the applicable calculation for purposes of determining whether the precast concrete product is produced in the United States.
(ii) With respect to intelligent transportation systems and other electronic hardware systems that are installed in the highway right of way or other real property and classified as manufactured products, the cabinets or other enclosures of such systems that consist wholly or predominantly of iron or steel or a combination of both shall meet the requirements of paragraph (b) of this section. The cost of cabinets or other enclosures shall be included in the applicable calculation for purposes of determining whether systems referred to in the preceding sentence are produced in the United States.

106.9.4 Waiver for De Minimis Costs for Manufactured and Construction Materials other than iron or steel products.
"The total value of the non-compliant products is no more than the lesser of $1,000,000 or 5% of total applicable costs for the project." The contractor shall submit to the engineer any non-domestic materials and their total material cost to the engineer. The contractor and the engineer will both track these totals to assure that the minimal usage allowance is not exceeded.

- Third-Party Test Waiver for Concrete Aggregate

1.0 Description. Third party tests may be allowed for determining the durability factor for concrete pavement and concrete masonry aggregate.

2.0 Material. All aggregate for concrete shall be in accordance with Sec 1005.

2.1 MoDOT personnel shall be present at the time of sampling at the quarry. The aggregate sample shall be placed in an approved tamper-evident container (provided by the quarry) for shipment to the third-party testing facility.

2.2 AASHTO T 161 Method B Resistance of Concrete to Rapid Freezing and Thawing, shall be used to determine the aggregate durability factor. All concrete beams for testing shall be 3-inch wide by 4-inch deep by 16-inch long or 3.5-inch wide by 4.5-inch deep by 16-inch long. All beams for testing shall receive a 35-day wet cure fully immersed in saturated lime water prior to initiating the testing process.

2.3 Concrete test beams shall be made using a MoDOT approved concrete pavement mix design.

3.0 Testing Facility Requirements. All third-party test facilities shall meet the requirements outlined in this provision.

3.1 The testing facility shall be AASHTO accredited.

3.1.1 For tests ran after January 1, 2025, accreditation documentation shall be on file with the Construction and Materials Division prior to any tests being performed.

3.1.2 Construction and Materials Division may consider tests completed prior to January 1, 2025, to be acceptable if all sections of this provision are met, with the exception of 3.1.1. Accreditation documentation shall be provided with the test results for tests completed prior to January 1, 2025. No tests completed prior to September 1, 2024, will be accepted.

3.2 The testing facility shall provide their testing process, list of equipment, equipment calibration documentation, and testing certifications or qualifications of technicians performing the AASHTO T 161 Procedure B tests. The testing facility shall provide details on their freezing and thawing apparatus including the time and temperature profile of their freeze-thaw chamber. The profile shall include the temperature set points throughout the entirety of the freeze-thaw cycle. The profile shall show the cycle time at which the apparatus drains/fills with water and the cycle time at which the apparatus begins cooling the specimens.

3.3 Results, no more than five years old, from the third-party test facility shall compare within ±2.0 percent of an independent test from another AASHTO accredited test facility or with MoDOT test records, in order to be approved for use (e.g. test facility results in a durability factor of 79, MoDOT's recent durability test factor is 81; this compared within +2 percent). The independent testing facility shall be in accordance with this provision. The comparison test can be from a different sample of the same ledge combination.

3.4 When there is a dispute between the third party durability test results and MoDOT durability test results, the MoDOT durability test result shall govern.

3.5 Test results shall be submitted to MoDOT's Construction and Materials division electronically for final approval. Test results shall include raw data for all measurements of relative dynamic modulus of elasticity and percent length change for each individual concrete specimen. Raw data

shall include initial measurements made at zero cycles and every subsequent measurement of concrete specimens. Raw data shall include the cycle count and date each measurement was taken. Test results shall also include properties of the concrete mixture as required by AASHTO T 161. This shall include the gradation of the coarse aggregate sample. If AASHTO T 152 is used to measure fresh air content, then the aggregate correction factor for the mix determined in accordance with AASHTO T 152 shall also be included.

4.0 Method of Measurement. There is no method of measurement for this provision. The testing requirements and number of specimens shall be in accordance with AASHTO T 161 Procedure B.

5.0 Basis of Payment. No direct payment will be made to the contractor or quarry to recover the cost of aggregate samples, sample shipments, testing equipment, labor to prepare samples or test samples, or developing the durability report.

- *Delete paragraph 15.0 of the General Provision Disadvantaged Business Enterprise (DBE) Program Requirements and substitute the following*:

15.0 Bidder's List Quote Summary. MoDOT is a recipient of federal funds and is required by 49 CFR 26.11 to provide data about its DBE program. All bidders who seek to work on federally assisted contracts must submit data about all DBE and non-DBEs in accordance with Sec 102.7.9. MoDOT will not compare the submitted Bidder's List Quote Summary to any other documents or submittals, pre or post award. All information will be used by MoDOT in accordance with 49 CFR 26.11 for reporting to USDOT and to aid in overall DBE goal setting**.**

- *Add Sec 102.7.9 to include the following:*

102.7.9 Bidder's List Quote Summary. Each bidder shall submit with each bid a summary of all subcontractors, material suppliers, and service providers (e.g. hauling) considered on federally funded projects pursuant to 49 CFR 26.11. The bidder will provide the firm's name, the corresponding North American Industry Classification System (NAICS) code(s) the firm(s) were considered for, and whether or not they were used in the bid. The information submitted should be the most complete information available at the time of bid. The information shall be disclosed on the Bidder's List Quote Summary form provided in the bidding documents and submitted in accordance with Sec 102.10. Failure to disclose this information may result in a bid being declared irregular.

- Revisions to General Conditions of the Contract for Missouri Standard Specifications for Highway Construction

Insert the following definitions into Sec 101.2:

Agent of Contractor. Subcontractors, its employees, assigns, and agents.

Agent of MoDOT. Any private contractors, subcontractors, engineers, or the employees thereof performing work in accordance with the plans and specifications approved by MoDOT.

Commencement of Work. Also defined as the start of construction operations/activities, this is the date the contractor, its employees, agents, and/or assigns first begins performing work pursuant to the terms of the contract, including the furnishing of labor, material, equipment, and other incidentals necessary or convenient to the successful completion of the project and the carrying out of duties and obligations imposed by the contract. For purposes of clarity, this date shall be deemed to occur on the date certified payroll activities on the project commence.

Exceptions. Work items identified by the engineer, as documented on the semi-final inspection, that are allowed to be completed after the contract completion date but prior to the item-specific completion date established by the engineer. Failure to complete any excepted work item by the item-specific completion date will result in assessment of contract liquidated damages. Designation of exceptions not mandated by the contract is at the sole discretion of the engineer.

Typical exceptions include:

(a) Seasonal items (e.g., sodding, overseeding, establishment of grass for soil stabilization, or tree/shrub plantings)
(b) Tasks that have contractually required or allowed delays (e.g., removal of sediment control devices, waiting periods for signal/lighting systems, pause for retroreflectivity evaluation of pavement markings)
(c) Other tasks in which the engineer determines it is in the best interest of the Commission to allow completion of such task to extend beyond the contract completion date, but within a designated period of time.

Delete Sec 105.10.7, including all subsections and substitute the following:

105.10.7 Final Inspection. Upon apparent completion of the entire project, the engineer will make a Final Inspection of the work to determine acceptance for maintenance in accordance with Sec 105.15.

Delete Sec 105.15, including all subsections and substitute the following:

105.15 Acceptance.

105.15.1 Partial Acceptance. At the discretion of the engineer, portions of the work within a project may be accepted for maintenance prior to the Final Inspection of all work for that project. When a portion of the work or a specific item is partially accepted, the contractor is relieved from maintenance on the identified portion of the work, but this is not the Final Inspection, as defined in Sec 105.15.2, and will not excuse the contractor from liability or responsibility to the Commission for work performed.

105.15.1.1 Acceptance of a Specific Item or Section of Work. Upon completion of any of the items or sections of work listed herein, the contractor may request the engineer's inspection of the work and partial acceptance. If the engineer finds the work to be complete and acceptable, including submittal by the contractor of all required documentation, partial acceptance will be made for that item or section. The following items, complete in place, as determined by the engineer, are eligible for consideration of partial acceptance:

(a) Any section 0.5 mile or more in length.
(b) Any section 0.5 mile or more in length in one direction of a divided highway.

(c) A complete bridge.
(d) An intersection traffic signal system. Partial acceptance may be made for signal equipment prior to the 30-day testing period though any required performance tests and/or guarantees shall remain applicable.
(e) Devices intended to be used for traffic safety and control. Acceptance of traffic safety devices is limited to guardrail, impact attenuation barriers, traffic signal items, signs, delineators, lighting, concrete barrier walls, concrete bridge parapet, bridge railing, guard cable, crash cushions and fence, which are permanently installed in their final position in accordance with the contract documents.

105.15.1.2 Semi-Final Inspection, Corrections and Exceptions. The contractor shall submit a written request for a semi-final inspection at least seven days prior to the anticipated completion of work, excluding exceptions. If the engineer postpones the inspection beyond the date the contractor completes all work, the period of postponement will be considered an excusable but non-compensable delay.

105.15.1.2.1 Immediately following the semi-final inspection, the engineer will provide the contractor with a list of any remaining items of work, corrections, and exceptions. The count of contract time will continue until all work and corrections are complete. If the engineer determines all work is complete, with no exceptions, the semi-final inspection will be considered the Final Inspection in accordance with Sec 105.15.2.

105.15.1.2.2 Work Complete Date. Upon verification by the engineer that all work, exclusive of exceptions, is complete, the engineer will declare partial acceptance and cease the count of contract time. The count of contract time will resume should the contractor fail to complete one or more exceptions by the required date.

105.15.2 Final Inspection and Acceptance for Maintenance. The contractor shall promptly notify the engineer when all work on a project, including exceptions, is complete. Upon Final Inspection by the engineer and verification that all work on a project is complete, a notice of acceptance for maintenance will be submitted to the contractor. Acceptance for maintenance excludes any items covered by item-specific performance bonds. Final Inspection shall occur not later than ten (10) business days after contractor's notification to the engineer that all corrections and exceptions have been completed. If the Final Inspection has not occurred within the ten (10) business-day time frame, all corrections and exceptions shall be deemed completed and MoDOT will be deemed to have accepted maintenance. If written acceptance for maintenance is not received within twenty (20) business days after the date of the Final Inspection, nor any objections sent to the Agent of MoDOT during this twenty (20) business-day period, the project and the work shall automatically be deemed accepted for maintenance.

105.15.2.1 Following the Final Inspection, the Agent of MoDOT will be relieved of any new or additional liability to third parties for personal injury, death or property damages which may be alleged to result from the design or construction of the work, unless additional work is performed by the Agent of MoDOT on the right of way after Final Inspection.

105.15.2.2 Nothing in these specifications shall be deemed to excuse the contractor of liability or responsibility for any personal injury, death or property damages which may have occurred during the time period from the Commencement of Work through the Final Inspection.

105.15.2.3 Acceptance of a project shall not be construed to relieve the contractor of full responsibility for making good any non-latent defect in work or material found on any section of work prior to final acceptance of the entire project, to alter in any manner the method of payment prescribed in the contract or to constitute a waiver of any claim the Commission might have against the contractor on the entire project.

105.15.2.4 Contracts with Multiple Projects. For contracts that include two or more projects, the contractor may request a separate final inspection and acceptance for maintenance as the work is completed on each project.

105.15.3 Final Acceptance and Payment. Following Final Inspection and acceptance for maintenance, the engineer will prepare the final tabulation of quantities in accordance with Sec 109.8. A final change order, if necessary, and the final tabulation of quantities will be submitted to the contractor for review. Upon receipt of the final tabulation of quantities, the contractor shall promptly submit to the engineer any remaining project documentation including, but not limited to, those listed in Sec 105.15.3.2.

105.15.3.1 A Final Acceptance report will be submitted to the contractor, and final payment will be made, no later than thirty days following concurrence on tabulation of quantities, receipt by the engineer of all project documentation, and verification by the engineer that all material incorporated into the work has been properly inspected. If the final tabulation of quantities determines the contractor was overpaid, the contractor, or in case of default, the surety, shall return the amount of overpayment to the Commission within thirty days of receiving notice of the overpayment from the engineer.

105.15.3.2 When required by the contract, project documentation shall consist of the following:

(a) Contractor's Affidavit Regarding Settlement of Claims (Form C-242)
(b) Final Change Order
(c) DBE Participation List and Final Verification
(d) Affidavit – Compliance with the Prevailing Wage Law

105.15.3.3 Final acceptance will not excuse the contractor's liability or responsibility to the Commission for any latent defects in the work or material incorporated into the work, or for claims relating to any work or material incorporated into the work, except as barred by Sections 537.600 and 537.610, RSMo.

Delete Sec 107.11, including all subsections, and substitute the following:

107.11 Responsibility for Claims for Damage or Injury. The contractor shall be responsible, to the extent imposed by applicable law, for injury, property damage, damage to the Work, or other loss caused by the negligent, wrongful, intentional, reckless, or contractually noncompliant acts or omissions of the contractor or an Agent of Contractor from Commencement of construction activities through Final Inspection and acceptance for maintenance.

107.11.1 The contractor shall not be responsible for damage relating to personal injury or death, arising from the design, condition, or maintenance of the project area prior to commencement of work and after Final Inspection and acceptance of the work, in accordance with Sec 101.2 and 105.15.2, unless any of the following conditions exist:

(a) The work is so defective that it creates an imminent danger to third parties;
(b) A defect in the work was concealed and not discoverable by a reasonable inspection by the Commission;
(c) The agent of MoDOT knew of the dangerous condition and did not disclose it to the Commission; or
(d) The plans or specifications followed were so imperfect or improper that the agent of MoDOT should have known the work to be done thereunder would result in an unsafe condition.

107.11.2 Neither the Commission nor the contractor, by execution of a contract, shall intend to or create a new or enlarge an existing cause of action in any third party. This provision shall not be interpreted to create any new liability that does not exist under the law, or to waive or extinguish any defense that either party to this contract or their respective agents and employees may have to an action or suit by a third party.

Delete Sec 107.12, including all subsections, and substitute the following:

107.12 Contractor's Responsibility for Work Damages to any portion of the work occurring after the date of Commencement of Work and before the work is deemed approved and accepted, caused by the action of the elements or from any other reason, shall be repaired or replaced at the contractor's expense. The contractor, at the contractor's option, may insure against any such damages. The Commission may, in its discretion, make such a payment, determined in accordance with Sec 109.4, for damage to the work due to unforeseeable causes beyond the control of, and without fault or negligence on the part of the contractor, unless the contractor has been reimbursed for such damages by the contractor's insurer. Prior to reimbursement, the contractor shall furnish documentary evidence of all efforts to recover such repair costs.

107.12.1 The contractor shall immediately give written notice to the engineer of any pedestrian, worker and/or vehicular accident that occurs in or near the work zone. The contractor may be directed by the engineer to repair permanent Commission facilities that have been damaged by events that are beyond the control of the contractor. Reimbursement will be provided by the Commission, determined in accordance with Sec 109.4, for the actual direct cost of labor, equipment and material, exclusive of overhead, indirect or consequential costs of profit. The Commission may elect to make such repairs in lieu of the contractor.

Delete Sections 107.13, 107.13.1, 107.13.2, 107.13.3, 107.13.3.4, 107.13.5, 107.13.6, 107.13.9, 107.13.10.4, 107.13.10.8, and substitute the following:

107.13 General Insurance Requirements. From the commencement of construction activities through the Final Inspection and acceptance for maintenance of the project by the engineer, the contractor shall procure and maintain at the contractor's expense, insurance for all damages and losses imposed by law and assumed under the contract, of the kinds and in the amounts specified in Secs 107.13.1 through 107.13.8.

107.13.1 Sovereign Immunity Limits for Missouri Public Entities. The contractor shall procure and maintain at least minimum insurance coverages to meet the sovereign immunity limits for Missouri public entities as calculated by the Missouri Department of Insurance and published annually in the Missouri Register pursuant to Section 537.610, RSMo for Sec 107.13.2 through 107.13.5, unless specified otherwise for each type of insurance coverage.

Each policy shall provide additional insured status for the Missouri Highways and Transportation Commission, its members, the Missouri Department of Transportation, and its employees up to Missouri's sovereign immunity limits. Provided, however, additional insured coverage applies only to liability caused in whole or in part by the acts or omissions of the named insured or those acting on its behalf and does not provide defense or indemnity for liability that Section 537.600, RSMo. places solely on MoDOT or another public entity. Each policy shall be endorsed to not waive sovereign immunity limits. The naming of the Commission, its members, MoDOT, and its employees as additional insureds under any insurance policy shall not be construed as a waiver of any sovereign, official, or other governmental immunity. The Commission, its members, MoDOT, and its employees reserve the right to assert any sovereign, official, or any other governmental immunities. Nothing in the Section shall be construed to enlarge the liability of the contractor beyond that imposed by applicable law, create a contractual duty to defend or indemnify prohibited by Section 537.600, RSMo, or require insurance coverage for liability that Section 537.600, RSMo places solely upon MoDOT. Insurance coverage and priority shall otherwise be determined in accordance with the applicable policies and endorsements.

107.13.2 Commercial General Liability Insurance. The contractor shall procure, and maintain during the term of the project, commercial general liability insurance with coverage at least as broad as Insurance Services Office (ISO) policy form CG 00 01. The general aggregate limit shall, by endorsement or otherwise, provide a designated aggregate limit solely for this project using ISO form CG 25 03 05 09 or an equivalent form. General liability policies shall be endorsed to add the Commission, its members, MoDOT, its employees, agents, and assigns as additional insureds (the "Additional Insureds") using Insurance Services Office forms CG 20 10 or the equivalent under such policy. For construction contracts, an endorsement providing completed operations coverage to the Additional Insureds, ISO form CG 20 37 or the equivalent, is also required. This form, CG 20 37, shall be endorsed on each subsequent commercial general liability policy issued to the contractor for three (3) years after final acceptance of the project. Should work on the project be discontinued, the commercial general liability insurance coverage shall remain in effect for three (3) years after the date of discontinuation, when applicable. Coverage shall not be reduced by insured versus insured exclusions or by explosion, collapse and underground (XCU) exclusions.

107.13.3 Commercial Automobile Liability Insurance. The contractor shall procure and maintain automobile liability coverage at least as broad as ISO policy form CA 00 01 covering owned, hired, and non-owned autos. The policy shall be endorsed to Commission, its members, MoDOT, and its employees, agents, and assigns as additional insureds (the "Additional Insureds").

107.13.4 Contractor's Pollution Liability (CPL) Insurance. The contractor shall procure and maintain contractor's pollution liability insurance for liability arising out of sudden, accidental, and gradual pollution and remediation. The policy shall have minimum limits of $1,000,000. The Commission, its members, MoDOT, and its employees, agents, and assigns shall be endorsed as additional insureds under such policy. The policy shall provide coverage for hauling of waste from the project site to the final disposal location including non-owned disposal sites. Completed operations coverage for pollution liability shall extend a minimum of three (3) years after final acceptance of the project. Contractor shall require any subcontractor that performs environmental remediation, hazardous material removal or related work including the transportation, disposal, or environmental engineering work, to provide contractor's pollution liability insurance with limits and scope of coverage appropriate

to the exposure. The Commission, its members, MoDOT, and its employees, agents, and assigns shall be endorsed as additional insured under such policy. The policy shall not contain a cross suits exclusion or other provisions that would eliminate additional insured claims against the contractor or subcontractor.

107.13.5 Aircraft Liability Insurance. If aircraft, including unmanned aircraft, will be used on the project, contractor shall provide, or cause to be provided, aircraft liability insurance protecting against claims for damages resulting from such use in all cases where any aircraft that is owned, leased or chartered by any Contractor-Related Entity used on the Project. The policy shall have minimum limits of $1,000,000 and the Commission, its members, MoDOT, and its employees, agents, and assigns shall be additional insureds on the policy by endorsement or policy provision. The use of any aircraft in performance of the Work, the aircraft crew, flight path and altitude, including landing of any aircraft on the Site or on any property owned by the Commission, MoDOT or other parties at interest, shall be subject to review and written acceptance by the Commission prior to any such usage. If any aircraft are leased or chartered with crew and/or pilot, evidence of non-owned aircraft liability insurance will be acceptable to meet these requirements but must be provided prior to use of the aircraft. For use of unmanned aircraft vehicles, the contractor may provide insurance either through an aircraft liability insurance policy, or by endorsement to the contractor's commercial general liability insurance policy and excess liability policies. Use of unmanned aircraft must comply with all state and federal rules and regulations, including FAA requirements.

107.13.6 Excess or Umbrella Liability Insurance. The contractor may satisfy the required limits for Secs 107.13.2 through 107.13.5 by use of excess or umbrella liability insurance policies in any combination that meets the contract limits requirements. Such policies shall include as additional insureds, the Commission, its members, MoDOT, and its employees, agents, and assigns.

107.13.9 Evidence of Insurance. Required evidence of insurance providing confirmation of compliance with these requirements shall consist of a certificate of insurance and any endorsements adding the Commission, MoDOT and its employees as additional insureds where specified. "Blanket" or "automatic" additional insured endorsements providing additional insured coverage "where required by contract," may be used, provided that such forms provide coverage at least as broad as provided by the specified endorsement forms required. The contractor and any subcontract work shall not commence under the contract until the contractor obtains the applicable insurance coverage required and receives approval for such insurance from the engineer. No later than five (5) business days prior to the Commencement of Work, all evidence of insurance for the prime contractor, including certificates of insurance and required endorsements, and notices shall be submitted electronically by the insurance agent to ContractorSupport@MoDOT.mo.gov. The aforementioned evidence of insurance shall also be submitted in the same manner no fewer than five (5) business days prior to the effective date of any change or renewal of insurance during the term of the project. All evidence of insurance for the prime contractor, including certificates of insurance and required endorsements, and notices shall be submitted electronically by the insurance agent to ContractorSupport@MoDOT.mo.gov. The contractor shall promptly furnish the engineer with a complete copy of its policy upon request. Failure to furnish evidence of proper insurance, or complete insurance policies when requested, may result in the suspension of work as provided in Sec 108, and may result in other claims or actions for breach of contract or otherwise, as may be recognized at law or in equity.

107.13.10.4 Primary and Non-contributory. For any claims related to this contract or insurance requirements herein identified, the contractor's insurance coverage shall be primary insurance with respect to the Commission, its members, MoDOT, and its employees, as the additional insureds. Any other insurance or self-insurance maintained by any of these parties shall be excess of the contractor's insurance and shall not contribute with the contractor's insurance, unless liability caused in whole or in part by the acts or omissions of the named insured or those acting on its behalf and does not provide defense or indemnity for liability that Section 537.600, RSMo places solely upon MoDOT or another public entity. Priority and allocation shall be governed by the applicable policies and endorsements. MoDOT may not unilaterally alter priority among the contractor's, any subcontractor's, or any additional insured's policies.

107.13.10.8 Timely Notice of Claims. Contractor shall give the engineer prompt and timely notice of claims made or suits instituted that arise out of or result from contractor's or agent of contractor's performance under this Agreement, and that involve or may involve coverage under any of the required liability policies. The Commission and MoDOT will provide timely notice to the contractor of any claims or lawsuits that it receives.

Delete Sec 107.14 and substitute the following:

107.14 Cooperation in Defense. The Agent of MoDOT and MoDOT shall reasonably cooperate in the defense of the other against potential third party claims. This cooperation includes providing reasonable access to relevant records, documents, and personnel. Nothing in this section creates a contractual duty to defend prohibited by RSMo 537.600(5).

Delete Sec 107.18 and substitute the following:

107.18 Basis of Payment. No direct payment will be made for compliance with Sec 107.

- Payment for Excess Piling

Delete Sec 702.6.3 and insert the following:

702.6.3 Pile Cut-Offs. No direct payment will be made for routine pile cut-offs, except as otherwise provided herein.

702.6.3.1 Excess Piling. If the total measured length of installed piling on a given structure, per item, is 85 percent or less of the plan quantity, the difference between plan quantity and installed quantity shall be deemed as excess piling. Reimbursement will be made for excess piling, as determined by the engineer. No reimbursement will be made for piling purchased in excess of plan quantity. The contractor shall provide the engineer with all paid invoices, which may be used to determine an equitable reimbursement. Shipping costs on the invoice will be included in the reimbursement payment, but no handling, overhead or profit will be included. All excess piling shall be removed from the project and retained by the contractor.

- *Delete Sec 102.18.1 and renumber existing Sec 102.18.2 through 102.18.5.4 including all subsections:*

102.18.1 Certification Regarding Disbarment, Eligibility, Indictments, Convictions or Civil Judgments. The president or authorized official of the bidder, under penalty of perjury under the laws of the USA, shall certify that, except as noted in the exceptions, the company or any person associated therewith in the capacity of owner, partner, director, officer, principal investor, project director, manager, auditor or any position involving the administration of federal funds:

(a) Is not currently under suspension, debarment, voluntary exclusion or determination of ineligibility by any federal agency.

(b) Has not been suspended, debarred, voluntarily excluded or determined ineligible by any federal agency within the past three years.

(c) Does not have a proposed debarment or suspension pending.

(d) Has not been indicted, convicted or had a civil judgment rendered against any of the listed parties by a court of competent jurisdiction in any matter involving fraud or official misconduct within the past three years.

102.18.1.1 If there are any exceptions, the bidder shall submit the exceptions on company letterhead, signed by the bidder and inserted inside the bid submitted.

102.18.1.2 Exceptions will not necessarily result in denial of award but will be considered in determining bidder responsibility.

102.18.1.3 For any exception noted, the bidder shall indicate to whom it applies, the initiating agency, and dates of action.

102.18.1.4 Providing false information may result in criminal prosecution or administrative sanctions.

102.18.2 Certification Regarding Anti-Collusion. In accordance with 23 USC 112, the bidder shall certify, under penalty of perjury, that the bidder has not, either directly or indirectly, entered into any agreement, participated in any collusion or otherwise taken any action in restraint of free competitive bidding in connection with this contract.

102.18.3 Certification Regarding Lobbying Activities. In accordance with 31 USC 1352, the bidder shall certify that:

(a) No federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any federal agency, a member of Congress, an officer or employee of Congress or an employee of a member of Congress in connection with the awarding of any federal contract, the making of any federal grant, the making of any federal loan, the entering into of any cooperative agreement and the extension, continuation, renewal, amendment or modification of any federal contract, grant, loan or cooperative agreement.

(b) If any funds other than federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any federal agency, a member of Congress, an officer or employee of Congress or an employee of a member of Congress in connection with this federal contract, grant, loan or cooperative agreement, the

bidder shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with the instructions.

102.18.3.1 This certification shall be a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification shall be a prerequisite for making or entering into this transaction imposed by 31 USC 1352. Any person who fails to file the required certification will be subject to a civil penalty of no less than $10,000 and no more than $100,000 for each such failure.

102.18.3.2 The bidder also agrees by submitting a bid that the bidder shall require that the language of this certification be included in all subcontracts that exceed $100,000, and that all such subrecipients shall certify and disclose any lobbying activities accordingly.

102.18.4 Certification Regarding Missouri Domestic Products Procurement Act. This certification will only apply to state-funded projects as noted on the cover of the Request for Bid. The bidder's attention is directed to Sections 34.350 through 34.359 RSMo 2000, which requires all manufactured goods or commodities used or supplied in the performance of the contract or any subcontract to be manufactured, assembled or produced in the USA. Sections 34.350 through 34.359 RSMo will not apply if the total bid is less than $1,000.00.

102.18.4.1 Section 34.355 RSMo requires the vendor or bidder to certify compliance with Section 34.353 RSMo and, if applicable, Section 34.359 RSMo at the time of bidding and prior to payment. Failure to comply with Section 34.353 RSMo during performance of the contract and to provide certification of compliance prior to payment will result in nonpayment for those goods or commodities.

102.18.4.2 The bidder shall certify that all the specified goods or products for which this bid was solicited are manufactured, assembled or produced in the USA. If there are any exceptions, the bidder shall submit a list of the exceptions on company letterhead, signed by the bidder and attached to the inside of the bid submitted. The list shall include the pay item number and the location where the item is manufactured. The bidder shall identify any of the exceptions in the list that are specified goods or products that are treated as manufactured, assembled or produced in the USA under an existing treaty, law, agreement or regulation of the USA regarding export/import restrictions and international trade.

102.18.4.3 The bidder shall notify the contact listed in the Request for Bid of any specified goods or products that cannot be manufactured, assembled or produced in the USA in sufficient quantities or in time to meet the contract specifications.

102.18.4.4 The bidder shall certify that the bid complies with all provisions of Section 34.350 *et seq* RSMo.

Delete Sec 106.10 and substitute the following:

106.10 Missouri Domestic Products Requirement. For state funded projects, as noted on the cover of the contract, material shall be in accordance with Sec 102.18.4.

- *Delete the Training Provision of the General Provisions and substitute the following*:

Training Provision

1.0 Description. This provision implements 23 CFR Part 230.111 and 23 CFR Part 230, Subpart A, Appendix B.

2.0 Purpose. The contractor shall provide on-the-job training aimed at developing full journeymen in the type of trade or job classification involved. Training and upgrading of minorities and women toward journeymen status is a primary objective of this Training Special Provision. Accordingly, the contractor shall make every effort to enroll minority trainees and women (e.g., by conducting systematic and direct recruitment through public and private sources likely to yield minority and women trainees) to the extent that such persons are available within a reasonable area of recruitment. The contractor will be responsible for demonstrating the steps that he has taken in pursuance thereof, prior to a determination as to whether the contractor is in compliance with this Training Special Provision. This training commitment is not intended, and shall not be used, to discriminate against any applicant for training, whether a member of a minority group or not.

2.1 In the event that a contractor subcontracts a portion of the contract work, he shall determine how many, if any, of the trainees are to be trained by the subcontractor, provided, however, that the contractor shall retain the primary responsibility for meeting the training requirements imposed by this special provision. The contractor shall also ensure that this training special provision is made applicable to such subcontract. Where feasible, 25 percent of apprentices or trainees in each occupation shall be in their first year of apprenticeship or training.

2.2 The number of trainees shall be distributed among the work classifications on the basis of the contractor's needs and the availability of journeymen in the various classifications within a reasonable area of recruitment. Prior to commencing construction, the contractor shall submit to MoDOT for approval the number of trainees to be trained in each selected classification and training program to be used. Furthermore, the contractor shall specify the starting time for training in each of the classifications. The contractor will be credited for each trainee employed by him on the contract work, who is currently enrolled or becomes enrolled in an approved program and will be reimbursed for such trainees as provided hereinafter.

3.0 Program Administration. All training goals, including the number of training hours, on federally funded projects are to be established by the Business Development and Compliance (BDC) Division with Federal Highway Administration (FHWA) oversight. The following guidelines will be utilized in selecting projects and determining the goal to be set:

a. Availability of minorities and women for training.
b. The potential for effective training.
c. Duration of the contract (number of working days).
d. Dollar value of the contract.
e. Total normal work force that the average bidder could be expected to use.
f. Geographical location.
g. Type of work.
h. The need for additional journeymen in the area.
i. The need to correct underutilization of minorities and females in specific trades.
j. A satisfactory ratio of trainees to journeymen expected to be on the contractor’s workforce during normal operations (considered to fall between 1:10 and 1:4).
k. Recognition of the suggested minimum goal for the State.

3.1 Trainee goals will be set in 1,000 increments or 1 slot (person) per 1,000 hours per project. For example, if the trainee goal on the project is 2,000 hours a maximum of 2 trainees will be approved for the project. In the event a trainee leaves the project for valid reasons the trainee shall be replaced as soon as possible. **No apprentice/trainee can be assigned less than 500 hours on a contract.** MoDOT will not assign training on contracts that will not support the 500 hours. **Providing less than 500 hours is not considered to be beneficial training nor helping to achieve journey-level status. Therefore, a trainee/apprentice, regardless of craft, must have been trained on the contract for at least 500 hours to be eligible for reimbursement.** Upon reaching the 500 hours, the contractor will be compensated as noted herein. FHWA and MoDOT will only approve training programs meeting the requirements of the Training Special Provisions (TSP). A program will be approved if it is reasonably calculated to meet the equal employment opportunity obligations of the contractor and to qualify the average trainee for journeyman status in the classification concerned by the end of the training period. Furthermore, apprenticeship programs registered with the U.S. Department of Labor, Bureau of Apprenticeship and Training, or with a State apprenticeship agency recognized by the Bureau and training programs approved but not necessarily sponsored by the Department of Labor, Manpower Administration, Bureau of Apprenticeship and Training will also be considered acceptable provided it is being administered in a manner consistent with the equal employment obligations of Federal-aid highway construction contracts.

3.2 No employee shall be employed as a trainee in any classification in which he has successfully completed a training course leading to journeyman status or in which he has been employed as a journeyman. The contractor should satisfy this requirement by including appropriate questions in the employee application or by other suitable means. Regardless of the method used the contractor's records should document the findings in each case.

3.3 The minimum length and type of training for each classification will be as established in the training program selected by the contractor and approved by MoDOT and the Federal Highway Administration. MoDOT and the Federal Highway Administration shall approve a program if it is reasonably calculated to meet the equal employment opportunity obligations of the contractor and to qualify the average trainee for journeyman status in the classification concerned by the end of the training period. Furthermore, apprenticeship programs registered with the U.S. Department of Labor, Bureau of Apprenticeship and Training, or with a State apprenticeship agency recognized by the Bureau and training programs approved but not necessarily sponsored by the U.S. Department of Labor, Manpower Administration, Bureau of Apprenticeship and Training shall also be considered acceptable provided it is being administered in a manner consistent with the equal employment obligations of Federal-aid highway construction contracts. Approval or acceptance of a training program shall be obtained from MoDOT prior to commencing work on the classification covered by the program.

4.0 Approval Process. Any trainee submitted to fulfill the OJT requirement must be in a registered training program. Acceptable training programs include:

a. BAT Programs – Apprenticeship programs approved by the U.S. Department of Labor, Bureau of Apprenticeship and Training.
b. Any other program, such as the Missouri Manpower Programs, which have been approved by FHWA and MoDOT.

4.1 Submittal of the TRAINEE NOTIFICATION – After the training plan has been approved, the Trainee Notification Form should be submitted within 30 days of the trainee commencing work on the project. It is the intention of these provisions that training is to be provided in the construction

crafts rather than clerk-typists or secretarial-type positions. Training is permissible in lower-level management positions such as office engineers, estimators, timekeepers, etc., where the training is oriented toward construction applications. Training in the laborer classification will be permitted only with the approval of the BDC Division. Some offsite training is permissible as long as the training is an integral part of an approved training program and does not comprise a significant part of the overall training. Reimbursement to the contractor for off-site training as indicated above may only be made when the contractor does one or more of the following and the trainees are concurrently employed on federal-aid projects:

Contributes to the cost of the training.
Provides the instruction to the trainee.
Pays the trainee's wages during the off-site training period.

5.0 Good Faith Efforts (GFE). In the event that the OJT goal is not met at the end of the project, the BDC Division will request a written narrative GFE and supporting documents and data to explain the goal shortfall. After submittal, the BDC Division will make a determination to approve or deny the GFE.

5.1 In the event the BDC Division denies the GFE submitted by the contractor, the contractor shall have the right to an Administrative Reconsideration Hearing. The request for an administrative reconsideration hearing must be made within seven (7) days of the receipt of the denial letter. The Administrative Reconsideration Committee may be constituted, as MoDOT deems appropriate and fair, provided that no committee member on the Reconsideration Committee shall have taken part in the original MoDOT determination that the contractor failed to meet the OJT contract goal and/or failed to make adequate GFE to do so.

5.2 If the Administrative Reconsideration Committee does not find the contractor met the OJT contract goal, and/or does not find that the contractor made adequate and sufficient GFE to do so, then The Administrative Reconsideration Committee will recommend that liquidated damages as outlined in the non-compliance sanctions section below be carried out. If the Administrative Reconsideration Committee does find that the contractor has met a GFE, then no liquidated damages will be assessed.

6.0 Economically Disadvantaged Verification. When a contractor submits a trainee who is economically disadvantaged the following information should be submitted with the trainee notification to verify this status:

The previous year's tax return verifying the individual's income is less than the federal poverty guidelines, or Verification of enrollment in any government issued entitlement programs.

7.0 Beneficial Training. MoDOT will ensure its contractors provide on-the-job training aimed at developing or contributing to full journey level status in the type of trade(s) involved. Training shall be consistent with the trainee/apprentice program. Training tasks will be consistent with the approved trade classification for the specific contract. The contractor shall furnish the trainee a copy of the program the contractor will follow in providing the training. The contractor shall provide each trainee and resident engineer documentation showing the type and length of training that will be completed including classroom and on-the-job hours. This includes providing information on the monthly trainee report and trainee notification as to the total working and classroom hours the trainee/apprentice has completed to date.

8.0 Training Reimbursement Process. Except as otherwise noted herein, the contractor will be reimbursed $10.00 per hour of training given an employee on this contract in accordance with an approved training program.

8.1 Reimbursement will be made at the end of the project, once all trainee hours have been submitted, as well as the trainee summary. The contractor will be reimbursed for hours each trainee has attained on the project, with the minimum hours for reimbursement eligibility being 500. Contractors will be reimbursed in instances where the OJT goal is met as well as if a GFE is made to meet the goal. Reimbursement will not be made if the OJT goal was not met, and the contractor did not make a GFE to meet the goal.

8.2 Training will not be reimbursed if the contractor fails to provide beneficial training. This includes only partially meeting the training goal on the project.

8.3 A request may be submitted to the BDC Division to increase the Training Hours assigned to a contract. Approval of such requests by the BDC Division will be granted on a case-by-case basis.

8.4 The contractor is eligible to be reimbursed the total OJT hours assigned to the project once those hours have been fulfilled. For any hours achieved beyond the goal, the contractor must request this additional reimbursement from the BDC Division, and, with concurrence from the resident engineer, the contractor is then eligible to receive reimbursement of hours achieved beyond the goal, either 25 percent of hours over the goal or 500, whichever is less. Outlined below are the maximum overrun reimbursements:

OJT Goal	Hours Achieved	Payable Hours
1,000	1,250	1,250
2,000	1,500	1,500
3,000+	1,501+	1,500

9.0 Monitoring. MoDOT will monitor contractors to ensure trainees and apprentices are receiving beneficial training in the type of trades submitted. Training shall be consistent with the training program or those OJT Programs the FHWA and MoDOT have approved.

9.1 It is normally expected that the trainee/apprentice will begin training on the project as soon as possible, utilizing the skills involved and remaining on the project as long as training opportunities exist in the work classifications or until the completion of the training program.

9.2 Project Office staff will periodically interview trainees to determine:

Whether apprentice/trainee is receiving training in designated craft
Workplace environment
If trainee/apprentice is experiencing problems on the job site
If the apprentice/trainee is being treated fairly

9.3 MoDOT monitors contracts with training through onsite visits, monthly training reports and construction reports. These reports are generated by the contractor and are to be disseminated to the Project Office. If there are problems, the BDC Division will contact the contractor to address the deficiencies.

9.4 Trainees will be paid at the rate set by the training program. The appropriate minimum journeyman's rate paid cannot be less than the amounts set out in the 23 CFR Subpart A, Appendix B. For example, at least 60 percent of the appropriate minimum journey person's rate specified in the contract for the first half of the training period, 75 percent for the third quarter of the training period and 90 percent for the last quarter of the training period. The appropriate rates approved by the Department of Labor or Transportation in connection with the existing programs shall apply to all apprentice or trainees being trained for the same classification who are covered by the Training Special Provision.

10.0 Reports. The contractor shall provide for the maintenance of records and furnish monthly reports documenting the contractor's performance under this provision. All trainee notifications must be submitted within 30 days of the trainee's start date. If a trainee has been previously approved by MoDOT, the contractor must still notify MoDOT of the name of the individual(s) and proposed craft the trainees will be trained in, as well as indicate which project the trainees will be working on. The trainee notifications or listing of the proposed trainees must be submitted via fax, mail or electronically to the BDC Division. If the contractor fails to submit the trainee notification or list of proposed trainees prior to the onset of the project, the contractor will be subject to the sanctions as outlined in this OJT TSP.

10.1 Monthly Trainee reports must be submitted following the last pay period of the month, no later than the 15th of the following month. Failure to submit the reports, hours completed during that month could result in hours not being credited. In the cases of voluntary trainee termination or when the trainee completes the hours specified in the program, the contractor must complete the trainee completion form within 30 days. The contractor's failure to submit the proper reports in a timely manner may result in the loss of reimbursement for the training hours for that month.

11.0 Non-Compliance Sanctions. Progress payments shall be withheld for failing to comply with all OJT Program requirements unless MoDOT accepts GFE.

11.1 If the training hours have not been obtained and a GFE has not been displayed upon project completion, the contractor will be assessed liquidated damages in the amount of $20.00 per hour for those hours not realized. For instance, if the project goal was 1,000 hours and only 450 hours were met, then liquidated damages would be assessed at 550 x $20.00 = $11,000.00.

11.2 If BDC Division approves a GFE, then liquidated damages will not be assessed. An approved GFE along with the minimum 500 training hours will result in reimbursement for the applicable hours.

11.3 If the contractor does not achieve the full OJT goal, they will not receive partial credit for hours completed under 500 per trainee. For instance, if the goal on the project was 1,000 hours and only 450 were convened, then no reimbursement will be given for any hours fulfilled. If the goal on the project is 2,000 hours and only 1,500 hours are completed and no GFE is demonstrated, the contractor will receive credit for the 1,500 hours and also be assessed liquidated damages in the amount of the 500 hours that were not met.

11.4 In the event the Contract exceeds the trainee goal on the project, the contractor must submit a request to BDC to obtain an extension of hours. The maximum number of hours beyond those enumerated in the contract cannot exceed 25 percent per 1,000 hours, with a maximum of 500 hours eligible for reimbursement beyond the goal. This extension is subject to the **advance** approval of the BDC Division, and concurrence from the resident engineer.

11.5 Failure to satisfactorily comply with the OJT requirements will also be reflected in the contractor's performance evaluation.