1 REVISED

Job No.: JSR0083
Route: F
County: GREENE

JOB SPECIAL PROVISIONS TABLE OF CONTENTS (ROADWAY)

(Job Special Provisions shall prevail over General Special Provisions whenever in conflict therewith.)

A.	General - Federal JSP-09-02M	1
B.	Contract Liquidated Damages JSP- 13-01E	1
C.	Work Zone Traffic Management JSP-02-06N	2
D.	Liquidated Damages Specified JSP-93-28A	5
E.	Emergency Provisions and Incident Management JSP-90-11A	6
F.	Project Contact for Contractor/Bidder Questions JSP-96-05A	6
G.	Supplemental Revisions JSP-18-01MM	7
H.	Utilities JSP-93-26F	24
I.	Optional Pavements JSP-06-06H	24
J.	Contractor Quality Control NJSP-15-42	25
K.	Restrictions for Migratory Birds NJSP-16-06A	27
L.	Optional Shoulder Rumble Strips	29
M.	Optional Centerline Rumble Strips	29
N.	Removal and Delivery of Existing Signs JSP-12-01C	30
O.	Contractor Retained Guardrail	30
P.	Tree Clearing Restriction JSP-07-05C	30
1 DELETED Q.	~~No In Stream Work~~	31
R.	Archaeological Site Protection	31
S.	Sensitive Streams or Waterbodies Near Project Area	32
T.	Clean Water Act Requirements	32
U.	Pavement Marking Log	33
V.	No Value Engineering Proposals for 2.5 Inch Perforated Square Steel Tube (PSST) Posts and Concrete Post Anchors for 2.5 Inch Perforated Square Steel Tube (PSST) Posts	33



THIS SHEET HAS BEEN SIGNED, SEALED AND DATED ELECTRONICALLY.

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
105 W. CAPITOL AVE.
JEFFERSON CITY, MO 65102
Phone 1-888-275-6636

Veenstra & Kimm, Inc.
A Kleinfelder Company
9788 N Ash Avenue
Kansas City, Mo. 64157
Certificate of Authority: 2002006347
Consultant Phone: 816-781-6182

If a seal is present on this sheet, JSP's have been electronically sealed and dated.

JOB NUMBER: JSR0083
GREENE COUNTY, MO
DATE PREPARED: 9/28/2026

ADDENDUM DATE:
R001_11/16/2026

Only the following items of the Job Special Provisions (Roadway) are authenticated by this seal: All

Job No.: JSR0083
Route: F
County: GREENE

JOB
SPECIAL PROVISION

A. General - Federal JSP-09-02M

1.0 Description. The Federal Government is participating in the cost of construction of this project. All applicable Federal laws, and the regulations made pursuant to such laws, shall be observed by the contractor, and the work will be subject to the inspection of the appropriate Federal Agency in the same manner as provided in Sec 105.10 of the Missouri Standard Specifications for Highway Construction with all revisions applicable to this bid and contract.

1.1 This contract requires payment of the prevailing hourly rate of wages for each craft or type of work required to execute the contract as determined by the Missouri Department of Labor and Industrial Relations and requires adherence to a schedule of minimum wages as determined by the United States Department of Labor. For work performed anywhere on this project, the contractor and the contractor's subcontractors shall pay the higher of these two applicable wage rates. State Wage Rates, Information on the Required Federal Aid Provisions, and the current Federal Wage Rates are available on the Missouri Department of Transportation web page at www.modot.org under "Doing Business with MoDOT", "Contractor Resources". Effective Wage Rates will be posted 10 days prior to the applicable bid opening. These supplemental bidding documents have important legal consequences. It shall be conclusively presumed that they are in the bidder's possession, and they have been reviewed and used by the bidder in the preparation of any bid submitted on this project.

1.2 The following documents are available on the Missouri Department of Transportation web page at www.modot.org under "Doing Business with MoDOT"; "Standards and Specifications". The effective version shall be determined by the letting date of the project.

General Provisions & Supplemental Specifications

Supplemental Plans to July 2026 Missouri Standard Plans
For Highway Construction

These supplemental bidding documents contain all current revisions to the published versions and have important legal consequences. It shall be conclusively presumed that they are in the bidder's possession, and they have been reviewed and used by the bidder in the preparation of any bid submitted on this project.

B. Contract Liquidated Damages JSP- 13-01E

1.0 Description. Liquidated Damages for failure or delay in completing the work on time for this contract shall be in accordance with Sec 108.8. The liquidated damages include separate amounts for road user costs and contract administrative costs incurred by the Commission.

2.0 Period of Performance. Prosecution of work is expected to begin on the date specified below in accordance with Sec 108.2. Regardless of when the work is begun on this contract, all work on all projects shall be completed on or before the date specified below. Completion by this date shall be in accordance with the requirements of Sec 108.7.1.

Notice to Proceed: January 19, 2027
Contract Completion Date: December 1,2027

2.1 Calendar Days and Completion Dates. Completion of the project is required as specified herein. The count of calendar days will begin on the date the contractor starts any construction operations on the project.

Project	Calendar Days	Daily Road User Cost
JSR0083	**175**	**$1800**
JSR0136	**80**	**$1800**

3.0 Liquidated Damages for Contract Administrative Costs. Should the contractor fail to complete the work on or before the contract completion date specified in Section 2.0, or within the number of calendar days specified in Section 2.1, whichever occurs first, the contractor will be charged contract administrative liquidated damages in accordance with Sec 108.8 in the amount of **$1500** per calendar day for each calendar day, or partial day thereof, that the work is not fully completed. For projects in combination, these damages will be charged in full for failure to complete one or more projects within the specified contract completion date or calendar days.

4.0 Liquidated Damages for Road User Costs. Should the contractor fail to complete the work on or before the contract completion date specified in Section 2.0, or within the number of calendar days specified in Section 2.1, whichever occurs first, the contractor will be charged road user costs in accordance with Sec 108.8 in the amount specified in Section 2.1 for each calendar day, or partial day thereof, that the work is not fully completed. These damages are in addition to the contract administrative damages and any other damages as specified elsewhere in this contract.

5.0 Liquidated Damages for Winter Months. Delete Sec 108.8.1.3 (a)

Liquidated damages for failure to complete the work on time shall not be waived from December 15 to March 15, both dates inclusive.

C. Work Zone Traffic Management JSP-02-06N

1.0 Description. Work zone traffic management shall be in accordance with applicable portions of Division 100 and Division 600 of the Standard Specifications, and specifically as follows.

1.1 Maintaining Work Zones and Work Zone Reviews. The Work Zone Specialist (WZS) shall maintain work zones in accordance with Sec 616.3.3 and as further stated herein. The WZS shall coordinate and implement any changes approved by the engineer. The WZS shall ensure all traffic control devices are maintained in accordance with Sec 616, the work zone is operated within the hours specified by the engineer and will not deviate from the specified hours without prior approval of the engineer. The WZS is responsible to manage work zone delay in accordance with these project provisions. When requested by the engineer, the WZS shall submit a weekly report that includes a review of work zone operations for the week. The report shall identify any problems encountered and corrective actions taken. Work zones are subject to unannounced inspections by the engineer and other departmental staff to corroborate the validity of the WZS's review and may require immediate corrective measures and/or additional work zone monitoring.

1.2 Work Zone Deficiencies. Failure to make corrections on time may result in the engineer suspending work. The suspension will be non-excusable and non-compensable regardless if road user costs are being charged for closures.

2.0 Traffic Management Schedule.

2.1 Traffic management schedules shall be submitted to the engineer for review prior to the start of work and prior to any revisions to the traffic management schedule. The traffic management schedule shall include the proposed traffic control measures, the hours traffic control will be in place, and work hours.

2.2 The traffic management schedule shall conform to the limitations specified in Sec 616 regarding lane closures, traffic shifts, road closures and other width, height and weight restrictions.

2.3 The engineer shall be notified as soon as practical of any postponement due to weather, material or other circumstances.

2.4 In order to ensure minimal traffic interference, the contractor shall schedule lane closures for the absolute minimum amount of time required to complete the work. Lanes shall not be closed until material is available for continuous construction and the contractor is prepared to diligently pursue the work until the closed lane is opened to traffic.

2.5 Traffic Congestion. The contractor shall, upon approval of the engineer, take proactive measures to reduce traffic congestion in the work zone. The contractor shall immediately implement appropriate mitigation strategies whenever traffic congestion reaches an excess of **15 minutes** to prevent congestion from escalating beyond this delay threshold. If disruption of the traffic flow occurs and traffic is backed up in queues equal to or greater than the delay time threshold listed above, then the contractor shall immediately review the construction operations which contributed directly to disruption of the traffic flow and make adjustments to the operations to prevent the queues from reoccurring. Traffic delays may be monitored by physical presence on site or by utilizing real-time travel data through the work zone that generate text and/or email notifications where available. The engineer monitoring the work zone may also notify the contractor of delays that require prompt mitigation. The contractor may work with the engineer to determine what other alternative solutions or time periods would be acceptable. When a Work Zone Analysis Spreadsheet is provided, the contractor will find it in the electronic deliverables on MoDOT's Online Plans Room. The contractor may refer to the Work Zone Analysis Spreadsheet for detailed information on traffic delays.

2.5.1 Traffic Safety.

2.5.1.1 Recurring Congestion. Where traffic queues routinely extend to within 1000 feet of the ROAD WORK AHEAD, or similar, sign on a divided highway or to within 500 feet of the ROAD WORK AHEAD, or similar, sign on an undivided highway, the contractor shall extend the advance warning area, as approved by the engineer.

2.5.1.2 Non-Recurring Congestion. When traffic queues extend to within 1000 feet of the ROAD WORK AHEAD, or similar, sign on a divided highway or to within 500 feet of the ROAD WORK AHEAD, or similar, sign on an undivided highway infrequently, the contractor shall deploy a

means of providing advance warning of the traffic congestion, as approved by the engineer. The warning location shall be no less than 1000 feet and no more than 0.5 mile in advance of the end of the traffic queue on divided highways and no less than 500 feet and no more than 0.5 mile in advance of the end of the traffic queue on undivided highways.

3.0 Work Hour Restrictions.

3.1 Except for emergency work, as determined by the engineer, and long term lane closures required by project phasing, all lanes shall be scheduled to be open to traffic during the five major holiday periods shown below, from 12:00 noon on the last working day preceding the holiday until 6:00 a.m. on the first working day subsequent to the holiday unless otherwise approved by the engineer.

Memorial Day
Labor Day
Thanksgiving
Christmas
New Year's Day

3.1.1 Independence Day. The lane restrictions specified in Section 3.1 shall also apply to Independence Day, except that the restricted periods shall be as follows:

When Independence Day falls on:	The Holiday is Observed on:	Halt Lane Closures beginning at:	Allow Lane Closures to resume at:
Sunday	Monday	Noon on Friday	6:00 a.m. on Tuesday
Monday	Monday	Noon on Friday	6:00 a.m. on Tuesday
Tuesday	Tuesday	Noon on Monday	6:00 a.m. on Wednesday
Wednesday	Wednesday	Noon on Tuesday	6:00 a.m. on Thursday
Thursday	Thursday	Noon on Wednesday	6:00 a.m. on Friday
Friday	Friday	Noon on Thursday	6:00 a.m. on Monday
Saturday	Friday	Noon on Thursday	6:00 a.m. on Monday

3.2 The contractor shall not perform any construction operation on the roadway, roadbed or active lanes, including the hauling of material within the project limits, during restricted periods, holiday periods or other special events specified in the contract documents.

3.3 The contractor shall not alter the start time, ending time, or a reduction in the number of through lanes of traffic or ramp closures without advance notification and approval by the engineer. The only work zone operation approved to begin 30 minutes prior to a reduction in through traffic lanes or ramp closures is the installation of traffic control signs. Should lane closures be placed or remain in place, prior to the approved starting time or after the approved ending time, the Commission, the traveling public, and state and local police and governmental authorities will be damaged in various ways, including but not limited to, increased construction administration cost, potential liability, traffic and traffic flow regulation cost, traffic congestion and motorist delays, with a resulting cost to the traveling public. These damages are not easily computed or quantified. Therefore, the contractor will be charged with liquidated damages specified in the amount of **$500 per 15 minute increment** for each 15 minutes that the temporary

lane closures are in place and not open to traffic in excess of the limitation as specified elsewhere in this special provision. It shall be the responsibility of the engineer to determine the quantity of unapproved closure time.

3.3.1 The said liquidated damages specified will be assessed regardless if it would otherwise be charged as liquidated damages under the Missouri Standard Specification for Highway Construction, as amended elsewhere in this contract.

4.0 Detours and Lane Closures.

4.1 When a changeable message sign (CMS) is provided, the contractor shall use the CMS to notify motorists of future traffic disruption and possible traffic delays one week before traffic is shifted to a detour or prior to lane closures. The CMS shall be installed at a location as approved or directed by the engineer. If a CMS with Communication Interface is required, then the CMS shall be capable of communication prior to installation on right of way. All messages planned for use in the work zone shall be approved and authorized by the engineer or its designer prior to deployment. When permanent dynamic message signs (DMS) owned and operated by MoDOT are located near the project, they may also be used to provide warning and information for the work zone. Permanent DMS shall be operated by the TMC, and any messages planned for use on DMS shall be approved and authorized by the TMC at least 72 hours in advance of the work.

4.2 At least one lane of traffic in each direction shall be maintained at all times except for brief intervals of time required when the movement of the contractor's equipment will seriously hinder the safe movement of traffic. Periods during which the contractor will be allowed to interrupt traffic will be designated by the engineer.

5.0 Basis of Payment. No direct payment will be made to the contractor to recover the cost of equipment, labor, materials, or time required to fulfill the above provisions, unless specified elsewhere in the contract document. All authorized changes in the traffic control plan shall be provided for as specified in Sec 616.

D. Liquidated Damages Specified JSP-93-28A

1.0 Description. If Job No. JSR0083 is not complete and open to traffic on or before the total number of calendar days noted within these specifications, the Commission, the traveling public, and state and local police and governmental authorities will be damaged in various ways, including but not limited to, increased construction administration cost, potential liability, traffic and traffic flow regulation cost, traffic congestion and motorist delay, with its resulting cost to the traveling public. These damages are not reasonably capable of being computed or quantified. Therefore, the contractor will be charged with liquidated damages specified in the amount of $1800 per day, thereof, that Job No. JSR0083 is not complete and open to traffic in excess of the limitation as specified elsewhere in this special provision. It shall be the responsibility of the engineer to determine the quantity of excess closure time.

1.1 The said liquidated damages specified will be assessed regardless of whether it would otherwise be charged as liquidated damages under the Missouri Standard Specification for Highway Construction, as amended elsewhere in this contract.

E. Emergency Provisions and Incident Management JSP-90-11A

1.0 The contractor shall have communication equipment on the construction site or immediate access to other communication systems to request assistance from law enforcement or other emergency agencies for incident management. In case of traffic accidents or the need for law enforcement to direct or restore traffic flow through the job site, the contractor shall notify law enforcement or other emergency agencies immediately as needed. The area engineer's office shall also be notified when the contractor requests emergency assistance.

2.0 In addition to the 911 emergency telephone number for ambulance, fire or law enforcement services, the following agencies may also be notified for accident or emergency situation within the project limits.

Accident or Emergency Situations	
Missouri Highway Patrol – Troop D	417-359-1500
MoDOT Customer Service	888-275-6636
Greene County Sheriff	417-868-4040
Emergency Numbers	
City of Ash Grove – Fire	417-466-8126
City of Ash Grove – Police	417-751-2333
MoDOT Incident Management Coordinator	417-864-1160
Land Line – Emergency	911
Cell Phone – Missouri Highway Patrol	*55

2.1 This list is not all inclusive. Notification of the need for wrecker or tow truck services will remain the responsibility of the appropriate law enforcement agency.

2.2 The contractor shall notify law enforcement and emergency agencies before the start of construction to request their cooperation and to provide coordination of services when emergencies arise during the construction at the project site. When the contractor completes this notification with law enforcement and emergency agencies, a report shall be furnished to the engineer on the status of incident management.

3.0 No direct pay will be made to the contractor to recover the cost of the communication equipment, labor, materials or time required to fulfill the above provisions.

F. Project Contact for Contractor/Bidder Questions JSP-96-05A

1.0 All questions concerning this project during the bidding process shall be forwarded to the project contact listed below.

Cameron Sooy, Project Contact
Southwest District
3025 E Kearney Street
Springfield, MO 65803

Telephone Number: 417-895-7612
Email: Cameron.Sooy@modot.mo.gov

1.1 All questions concerning the bid document preparation can be directed to the Central Office – Design as listed below.

Telephone Number: (573) 751-2876
Email: BCS@modot.mo.gov

2.0 Upon award and execution of the contract, the successful bidder/contractor shall forward all questions and coordinate the work with the engineer listed below:

Brad Gripka, Resident Engineer
Southwest District
3025 E Kearney Street
Springfield, MO 65803

Telephone Number: 417-895-6720
Email: Donald.Gripka@modot.mo.gov

G. Supplemental Revisions JSP-18-01MM

- Compliance with 2 CFR 200.216 – Prohibition on Certain Telecommunications and Video Surveillance Services or Equipment.

The Missouri Highways and Transportation Commission shall not enter into a contract (or extend or renew a contract) using federal funds to procure or obtain equipment, services, or systems that uses covered telecommunications equipment or services as substantial or as critical technology as part of any system where the video surveillance and telecommunications equipment was produced by Huawei Technologies Company, ZTE Corporation, Hytera Communications Corporation, Hangzhou Hikvision Digital Technology Company, or Dahua Technology Company (or any subsidiary or affiliate of such entities).

- Stormwater Compliance Requirements

1.0 Description. This provision requires the contractor to provide a Water Pollution Control Manager (WPCM) for any project that includes land disturbance on the project site and the total area of land disturbance, both on the project site, and all Off-site support areas, is one (1) acre or more. Regardless of the area of Off-site disturbance, if no land disturbance occurs on the project site, these provisions do not apply. When a WPCM is required, all sections within this provision shall be applicable, including assessment of specified Liquidated Damages for failure to correct Stormwater Deficiencies, as specified herein. This provision is in addition to any other

stormwater, environmental, and land disturbance requirements specified elsewhere in the contract.

1.1 Definitions. The project site is defined as all areas designated on the plans, including temporary and permanent easements. The project site is equivalent to the "permitted site", as defined in MoDOT's State Operating Permit. An Off-site area is defined as any location off the project site the contractor utilizes for a dedicated project support function, such as, but not limited to, staging area, plant site, borrow area, or waste area.

1.2 Reporting of Off-Site Land Disturbance. If the project includes any planned land disturbance on the project site, prior to the start of work, the contractor shall submit a written report to the engineer that discloses all Off-site support areas where land disturbance is planned, the total acreage of anticipated land disturbance on those sites, and the land disturbance permit number(s). Upon request by the engineer, the contractor shall submit a copy of its land disturbance permit(s) for Off-site locations. Based on the total acreage of land disturbance, both on and Off-site, the engineer shall determine if these Stormwater Compliance Requirements shall apply. The contractor shall immediately report any changes to the planned area of Off-site land disturbance. The contractor is responsible for obtaining its own separate land disturbance permit for Off-site areas.

2.0 Water Pollution Control Manager (WPCM). The contractor shall designate a competent person to serve as the Water Pollution Control Manager (WPCM) for projects meeting the description in Section 1.0. The contractor shall ensure the WPCM completes all duties listed in Section 2.1.

2.1 Duties of the WPCM:

(a) Be familiar with the stormwater requirements including the current MoDOT State Operating Permit for construction stormwater discharges/land disturbance activities; MoDOT's statewide Stormwater Pollution Prevention Plan (SWPPP); the Corps of Engineers Section 404 Permit, when applicable; the project specific SWPPP, the Project's Erosion & Sediment Control Plan; all applicable special provisions, specifications, and standard drawings; and this provision;

(b) Successfully complete the MoDOT Stormwater Training Course within the last 4 years. The MoDOT Stormwater Training is a free online course available at MoDOT.org;

(c) Attend the Pre-Activity Meeting for Grading and Land Disturbance and all subsequent Weekly Meetings in which grading activities are discussed;

(d) Oversee and ensure all work is performed in accordance with the Project-specific SWPPP and all updates thereto, or as designated by the engineer;

(e) Review the project site for compliance with the Project SWPPP, as needed, from the start of any grading operations until final stabilization is achieved, and take necessary actions to correct any known deficiencies to prevent pollution of the waters of the state or adjacent property owners prior to the engineer's weekly inspections;

(f) Review and acknowledge receipt of each MoDOT Inspection Report (Land Disturbance Inspection Record) for the Project within forty-eight (48) hours of receiving the report and

ensure that all Stormwater Deficiencies noted on the report are corrected as soon as possible, but no later than stated in Section 5.0.

3.0 Pre-Activity Meeting for Grading/Land Disturbance and Required Hold Point. A Pre-Activity meeting for grading/land disturbance shall be held prior to the start of any land disturbance operations. No land disturbance operations shall commence prior to the Pre-Activity meeting except work necessary to install perimeter controls and entrances. Discussion items at the pre-activity meeting shall include a review of the Project SWPPP, the planned order of grading operations, proposed areas of initial disturbance, identification of all necessary BMPs that shall be installed prior to commencement of grading operations, and any issues relating to compliance with the Stormwater requirements that could arise in the course of construction activity at the project.

3.1 Hold Point. Following the pre-activity meeting for grading/land disturbance and subsequent installation of the initial BMPs identified at the pre-activity meeting, a Hold Point shall occur prior to the start of any land disturbance operations to allow the engineer and WPCM the time needed to perform an on-site review of the installation of the BMPs to ensure compliance with the SWPPP is met. Land disturbance operations shall not begin until authorization is given by the engineer.

4.0 Inspection Reports. Weekly and post run-off inspections will be performed by the engineer and each Inspection Report (Land Disturbance Inspection Record) will be entered into a web-based Stormwater Compliance database. The WPCM will be granted access to this database and shall promptly review all reports, including any noted deficiencies, and shall acknowledge receipt of the report as required in Section 2.1 (f.).

5.0 Stormwater Deficiency Corrections. All stormwater deficiencies identified in the Inspection Report shall be corrected by the contractor within 7 days of the inspection date or any extended period granted by the engineer when weather or field conditions prohibit the corrective work. If the contractor does not initiate corrective measures within 5 calendar days of the inspection date or any extended period granted by the engineer, all work shall cease on the project except for work to correct these deficiencies, unless otherwise allowed by the engineer. All impact costs related to this halting of work, including, but not limited to stand-by time for equipment, shall be borne by the contractor. Work shall not resume until the engineer approves the corrective work.

5.1 Liquidated Damages. If the contractor fails to complete the correction of all Stormwater Deficiencies listed on the MoDOT Inspection Report within the specified time limit, the Commission will be damaged in various ways, including but not limited to, potential liability, required mitigation, environmental clean-up, fines, and penalties. These damages are not reasonably capable of being computed or quantified. Therefore, the contractor will be charged with liquidated damages specified in the amount of $2,000 per day for failure to correct one or more of the Stormwater Deficiencies listed on the Inspection Report within the specified time limit. In addition to the stipulated damages, the stoppage of work shall remain in effect until all corrections are complete.

6.0 Basis of Payment. No direct payment will be made for compliance with this provision.

- ***Delete Sec 106.9, including all subsections and substitute the following:***

106.9 Buy America Requirements.

Buy America Requirements are waived if the total amount of Federal financial assistance applied to the project, through awards or subawards, is below $500,000.

106.9.1 Buy America Requirements for Iron or Steel Products.
The contractor's attention is directed to Title 23 CFR 635.410 *Buy America Requirements*. Where articles, materials or supplies that consist wholly or predominantly of iron or steel or a combination of both are to be permanently incorporated into the contract work, steel and iron material shall be manufactured, from the initial melting stage through the application of coatings, in the USA except for "minimal use" as described herein. Predominantly of iron or steel or a combination of both means that the cost of the iron and steel content exceeds 50 percent of the total cost of all its components. Under a general waiver from FHWA the use of pig iron and processed, pelletized, and reduced iron ore manufactured outside of the USA will be permitted in the domestic manufacturing process for steel or iron material.

106.9.1.1 Any sources other than the USA as defined will be considered foreign. The required domestic manufacturing process shall include formation of ingots and any subsequent process. Coatings shall include any surface finish that protects or adds value to the product.

106.9.1.2 "Minimal use" of foreign steel, iron or coating processes will be permitted, provided the cost of such products does not exceed 1/10 of one percent (0.1 percent) of the total contract cost or $2,500.00, whichever is greater. If foreign steel, iron, or coating processes are used, invoices to document the cost of the foreign portion, as delivered to the project, shall be provided and the engineer's written approval obtained prior to placing the material in any work.

106.9.1.3 Buy America requirements include a step certification for all fabrication processes of all steel or iron materials that are accepted per Sec 1000. The AASHTO Product Evaluation and Audit Solutions compliance program verifies that all steel and iron products fabrication processes conform to 23 CFR 635.410 Buy America Requirements and is an acceptable standard per 23 CFR 635.410(d). AASHTO Product Evaluation and Audit Solutions compliant suppliers will not be required to submit step certification documentation with the shipment for some selected steel and iron materials. The AASHTO Product Evaluation and Audit Solutions compliant supplier shall maintain the step certification documentation on file and shall provide this documentation to the engineer upon request.

106.9.1.3.1 Items designated as Category 1 will consist of steel girders, piling, and reinforcing steel installed on site. Category 1 items require supporting documentation prior to incorporation into the project showing all steps of manufacturing, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410 Buy America Requirements. This includes the Mill Test Report from the original producing steel mill and certifications documenting the manufacturing process for all subsequent fabrication, including coatings. The certification shall include language that certifies all steel and iron materials permanently incorporated in this project was procured and processed domestically and all manufacturing processes, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410.

106.9.1.3.2 Items designated as Category 2 will include all other steel or iron products not in Category 1 and permanently incorporated in the project. Category 2 items shall consist of, but not be limited to items such as fencing, guardrail, signing, lighting and signal supports. The prime contractor is required to submit a material of origin form certification prior to incorporation into the project from the fabricator for each item that the product is domestic. The Certificate of Materials

Origin form (link to certificate form) from the fabricator must show all steps of manufacturing, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410 Buy America Requirements and be signed by a fabricator representative. The engineer reserves the right to request additional information and documentation to verify that all Buy America requirements have been satisfied. These documents shall be submitted upon request by the engineer and retained for a period of 3 years after the last reimbursement of the material.

106.9.1.3.3 Any minor miscellaneous steel or iron items that are not included in the materials specifications shall be certified by the prime contractor as being procured domestically. Examples of these items would be bolts for sign posts, anchorage inserts, etc. The certification shall read "I certify that all steel and iron materials permanently incorporated in this project during all manufacturing processes, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410 Buy America Requirements procured and processed domestically in accordance with CFR Title 23 Section 635.410 Buy America Requirements. Any foreign steel used was submitted and accepted under minor usage". The certification shall be signed by an authorized representative of the prime contractor.

106.9.1.4 When permitted in the contract, alternate bids may be submitted for foreign steel and iron products. The award of the contract when alternate bids are permitted will be based on the lowest total bid of the contract based on furnishing domestic steel or iron products or 125 percent of the lowest total bid based on furnishing foreign steel or iron products. If foreign steel or iron products are awarded in the contract, domestic steel or iron products may be used; however, payment will be at the contract unit price for foreign steel or iron products.

106.9.2 Buy America Requirements for Construction Materials other than iron or steel products.

Construction materials mean articles, materials, or supplies that consist of only one of the items listed. Minor additions of articles, materials, supplies, or binding agents to a construction material do not change the categorization of the construction material. Upon request by the engineer, the contractor shall submit a domestic certification for all construction materials listed that are incorporated into the project.

(a) Non-ferrous metals
(b) Plastic and Polymer-based products (including polyvinylchloride, composite building materials, and polymers used in fiber optic cables)
(c) Glass (including optic glass)
(d) Fiber optic cable (including drop cable)
(e) Optical fiber
(f) Lumber
(g) Engineered wood
(h) Drywall

106.9.3 Buy America Requirements for Manufactured Products.

Manufactured products mean articles, materials or supplies that have been processed into a specific form and shape, or combined with other articles, materials or supplies to create a product with different properties than the individual articles, materials or supplies. If an item is classified as an iron or steel product, an excluded material, or other product category as specified by law or in 2 CFR part 184, then it is not a manufactured product. However, an article, material or supply classified as a manufactured product may include components that are iron or steel products,

excluded materials, or other product categories as specified by law or in 2 CFR part 184. Mixtures of excluded materials delivered to a work site without final form for incorporation into a project are not a manufactured product.

106.9.3.1 Produced in the United States, in the case of manufactured products, means:
(A) For projects obligated on or after October 1, 2025, the product was manufactured in the United States; and
(B) For projects obligated on or after October 1, 2026, the product was manufactured in the United States and the cost of the components of the manufactured product that are mined, produced, or manufactured in the United States is greater than 55 percent of the total cost of all components of the manufactured product.

106.9.3.2 (i) With respect to precast concrete products that are classified as manufactured products, components of precast concrete products that consist wholly or predominantly of iron or steel or a combination of both shall meet the requirements of paragraph (b) of this section. The cost of such components shall be included in the applicable calculation for purposes of determining whether the precast concrete product is produced in the United States.
(ii) With respect to intelligent transportation systems and other electronic hardware systems that are installed in the highway right of way or other real property and classified as manufactured products, the cabinets or other enclosures of such systems that consist wholly or predominantly of iron or steel or a combination of both shall meet the requirements of paragraph (b) of this section. The cost of cabinets or other enclosures shall be included in the applicable calculation for purposes of determining whether systems referred to in the preceding sentence are produced in the United States.

106.9.4 Waiver for De Minimis Costs for Manufactured and Construction Materials other than iron or steel products.
"The total value of the non-compliant products is no more than the lesser of $1,000,000 or 5% of total applicable costs for the project." The contractor shall submit to the engineer any non-domestic materials and their total material cost to the engineer. The contractor and the engineer will both track these totals to assure that the minimal usage allowance is not exceeded.

- Third-Party Test Waiver for Concrete Aggregate

1.0 Description. Third party tests may be allowed for determining the durability factor for concrete pavement and concrete masonry aggregate.

2.0 Material. All aggregate for concrete shall be in accordance with Sec 1005.

2.1 MoDOT personnel shall be present at the time of sampling at the quarry. The aggregate sample shall be placed in an approved tamper-evident container (provided by the quarry) for shipment to the third-party testing facility.

2.2 AASHTO T 161 Method B Resistance of Concrete to Rapid Freezing and Thawing, shall be used to determine the aggregate durability factor. All concrete beams for testing shall be 3-inch wide by 4-inch deep by 16-inch long or 3.5-inch wide by 4.5-inch deep by 16-inch long. All beams for testing shall receive a 35-day wet cure fully immersed in saturated lime water prior to initiating the testing process.

2.3 Concrete test beams shall be made using a MoDOT approved concrete pavement mix design.

3.0 Testing Facility Requirements. All third-party test facilities shall meet the requirements outlined in this provision.

3.1 The testing facility shall be AASHTO accredited.

3.1.1 For tests ran after January 1, 2025, accreditation documentation shall be on file with the Construction and Materials Division prior to any tests being performed.

3.1.2 Construction and Materials Division may consider tests completed prior to January 1, 2025, to be acceptable if all sections of this provision are met, with the exception of 3.1.1. Accreditation documentation shall be provided with the test results for tests completed prior to January 1, 2025. No tests completed prior to September 1, 2024, will be accepted.

3.2 The testing facility shall provide their testing process, list of equipment, equipment calibration documentation, and testing certifications or qualifications of technicians performing the AASHTO T 161 Procedure B tests. The testing facility shall provide details on their freezing and thawing apparatus including the time and temperature profile of their freeze-thaw chamber. The profile shall include the temperature set points throughout the entirety of the freeze-thaw cycle. The profile shall show the cycle time at which the apparatus drains/fills with water and the cycle time at which the apparatus begins cooling the specimens.

3.3 Results, no more than five years old, from the third-party test facility shall compare within ±2.0 percent of an independent test from another AASHTO accredited test facility or with MoDOT test records, in order to be approved for use (e.g. test facility results in a durability factor of 79, MoDOT's recent durability test factor is 81; this compared within +2 percent). The independent testing facility shall be in accordance with this provision. The comparison test can be from a different sample of the same ledge combination.

3.4 When there is a dispute between the third party durability test results and MoDOT durability test results, the MoDOT durability test result shall govern.

3.5 Test results shall be submitted to MoDOT's Construction and Materials division electronically for final approval. Test results shall include raw data for all measurements of relative dynamic modulus of elasticity and percent length change for each individual concrete specimen. Raw data shall include initial measurements made at zero cycles and every subsequent measurement of concrete specimens. Raw data shall include the cycle count and date each measurement was taken. Test results shall also include properties of the concrete mixture as required by AASHTO T 161. This shall include the gradation of the coarse aggregate sample. If AASHTO T 152 is used to measure fresh air content, then the aggregate correction factor for the mix determined in accordance with AASHTO T 152 shall also be included.

4.0 Method of Measurement. There is no method of measurement for this provision. The testing requirements and number of specimens shall be in accordance with AASHTO T 161 Procedure B.

5.0 Basis of Payment. No direct payment will be made to the contractor or quarry to recover the cost of aggregate samples, sample shipments, testing equipment, labor to prepare samples or test samples, or developing the durability report.

- *Delete paragraph 15.0 of the General Provision Disadvantaged Business Enterprise (DBE) Program Requirements and substitute the following*:

15.0 Bidder's List Quote Summary. MoDOT is a recipient of federal funds and is required by 49 CFR 26.11 to provide data about its DBE program. All bidders who seek to work on federally assisted contracts must submit data about all DBE and non-DBEs in accordance with Sec 102.7.9. MoDOT will not compare the submitted Bidder's List Quote Summary to any other documents or submittals, pre or post award. All information will be used by MoDOT in accordance with 49 CFR 26.11 for reporting to USDOT and to aid in overall DBE goal setting**.**

- *Add Sec 102.7.9 to include the following:*

102.7.9 Bidder's List Quote Summary. Each bidder shall submit with each bid a summary of all subcontractors, material suppliers, and service providers (e.g. hauling) considered on federally funded projects pursuant to 49 CFR 26.11. The bidder will provide the firm's name, the corresponding North American Industry Classification System (NAICS) code(s) the firm(s) were considered for, and whether or not they were used in the bid. The information submitted should be the most complete information available at the time of bid. The information shall be disclosed on the Bidder's List Quote Summary form provided in the bidding documents and submitted in accordance with Sec 102.10. Failure to disclose this information may result in a bid being declared irregular.

- Revisions to General Conditions of the Contract for Missouri Standard Specifications for Highway Construction

Insert the following definitions into Sec 101.2:

Agent of Contractor. Subcontractors, its employees, assigns, and agents.

Agent of MoDOT. Any private contractors, subcontractors, engineers, or the employees thereof performing work in accordance with the plans and specifications approved by MoDOT.

Commencement of Work. Also defined as the start of construction operations/activities, this is the date the contractor, its employees, agents, and/or assigns first begins performing work pursuant to the terms of the contract, including the furnishing of labor, material, equipment, and other incidentals necessary or convenient to the successful completion of the project and the carrying out of duties and obligations imposed by the contract. For purposes of clarity, this date shall be deemed to occur on the date certified payroll activities on the project commence.

Exceptions. Work items identified by the engineer, as documented on the semi-final inspection, that are allowed to be completed after the contract completion date but prior to the item-specific completion date established by the engineer. Failure to complete any excepted work item by the item-specific completion date will result in assessment of contract

liquidated damages. Designation of exceptions not mandated by the contract is at the sole discretion of the engineer.

Typical exceptions include:

(a) Seasonal items (e.g., sodding, overseeding, establishment of grass for soil stabilization, or tree/shrub plantings)
(b) Tasks that have contractually required or allowed delays (e.g., removal of sediment control devices, waiting periods for signal/lighting systems, pause for retroreflectivity evaluation of pavement markings)
(c) Other tasks in which the engineer determines it is in the best interest of the Commission to allow completion of such task to extend beyond the contract completion date, but within a designated period of time.

Delete Sec 105.10.7, including all subsections and substitute the following:

105.10.7 Final Inspection. Upon apparent completion of the entire project, the engineer will make a Final Inspection of the work to determine acceptance for maintenance in accordance with Sec 105.15.

Delete Sec 105.15, including all subsections and substitute the following:

105.15 Acceptance.

105.15.1 Partial Acceptance. At the discretion of the engineer, portions of the work within a project may be accepted for maintenance prior to the Final Inspection of all work for that project. When a portion of the work or a specific item is partially accepted, the contractor is relieved from maintenance on the identified portion of the work, but this is not the Final Inspection, as defined in Sec 105.15.2, and will not excuse the contractor from liability or responsibility to the Commission for work performed.

105.15.1.1 Acceptance of a Specific Item or Section of Work. Upon completion of any of the items or sections of work listed herein, the contractor may request the engineer's inspection of the work and partial acceptance. If the engineer finds the work to be complete and acceptable, including submittal by the contractor of all required documentation, partial acceptance will be made for that item or section. The following items, complete in place, as determined by the engineer, are eligible for consideration of partial acceptance:

(a) Any section 0.5 mile or more in length.
(b) Any section 0.5 mile or more in length in one direction of a divided highway.
(c) A complete bridge.
(d) An intersection traffic signal system. Partial acceptance may be made for signal equipment prior to the 30-day testing period though any required performance tests and/or guarantees shall remain applicable.
(e) Devices intended to be used for traffic safety and control. Acceptance of traffic safety devices is limited to guardrail, impact attenuation barriers, traffic signal items, signs, delineators, lighting, concrete barrier walls, concrete bridge parapet, bridge railing, guard cable, crash cushions and fence, which are permanently installed in their final position in accordance with the contract documents.

105.15.1.2 Semi-Final Inspection, Corrections and Exceptions. The contractor shall submit a written request for a semi-final inspection at least seven days prior to the anticipated completion of work, excluding exceptions. If the engineer postpones the inspection beyond the date the contractor completes all work, the period of postponement will be considered an excusable but non-compensable delay.

105.15.1.2.1 Immediately following the semi-final inspection, the engineer will provide the contractor with a list of any remaining items of work, corrections, and exceptions. The count of contract time will continue until all work and corrections are complete. If the engineer determines all work is complete, with no exceptions, the semi-final inspection will be considered the Final Inspection in accordance with Sec 105.15.2.

105.15.1.2.2 Work Complete Date. Upon verification by the engineer that all work, exclusive of exceptions, is complete, the engineer will declare partial acceptance and cease the count of contract time. The count of contract time will resume should the contractor fail to complete one or more exceptions by the required date.

105.15.2 Final Inspection and Acceptance for Maintenance. The contractor shall promptly notify the engineer when all work on a project, including exceptions, is complete. Upon Final Inspection by the engineer and verification that all work on a project is complete, a notice of acceptance for maintenance will be submitted to the contractor. Acceptance for maintenance excludes any items covered by item-specific performance bonds. Final Inspection shall occur not later than ten (10) business days after contractor's notification to the engineer that all corrections and exceptions have been completed. If the Final Inspection has not occurred within the ten (10) business-day time frame, all corrections and exceptions shall be deemed completed and MoDOT will be deemed to have accepted maintenance. If written acceptance for maintenance is not received within twenty (20) business days after the date of the Final Inspection, nor any objections sent to the Agent of MoDOT during this twenty (20) business-day period, the project and the work shall automatically be deemed accepted for maintenance.

105.15.2.1 Following the Final Inspection, the Agent of MoDOT will be relieved of any new or additional liability to third parties for personal injury, death or property damages which may be alleged to result from the design or construction of the work, unless additional work is performed by the Agent of MoDOT on the right of way after Final Inspection.

105.15.2.2 Nothing in these specifications shall be deemed to excuse the contractor of liability or responsibility for any personal injury, death or property damages which may have occurred during the time period from the Commencement of Work through the Final Inspection.

105.15.2.3 Acceptance of a project shall not be construed to relieve the contractor of full responsibility for making good any non-latent defect in work or material found on any section of work prior to final acceptance of the entire project, to alter in any manner the method of payment prescribed in the contract or to constitute a waiver of any claim the Commission might have against the contractor on the entire project.

105.15.2.4 Contracts with Multiple Projects. For contracts that include two or more projects, the contractor may request a separate final inspection and acceptance for maintenance as the work is completed on each project.

105.15.3 Final Acceptance and Payment. Following Final Inspection and acceptance for maintenance, the engineer will prepare the final tabulation of quantities in accordance with Sec 109.8. A final change order, if necessary, and the final tabulation of quantities will be submitted to the contractor for review. Upon receipt of the final tabulation of quantities, the contractor shall promptly submit to the engineer any remaining project documentation including, but not limited to, those listed in Sec 105.15.3.2.

105.15.3.1 A Final Acceptance report will be submitted to the contractor, and final payment will be made, no later than thirty days following concurrence on tabulation of quantities, receipt by the engineer of all project documentation, and verification by the engineer that all material incorporated into the work has been properly inspected. If the final tabulation of quantities determines the contractor was overpaid, the contractor, or in case of default, the surety, shall return the amount of overpayment to the Commission within thirty days of receiving notice of the overpayment from the engineer.

105.15.3.2 When required by the contract, project documentation shall consist of the following:

(a) Contractor's Affidavit Regarding Settlement of Claims (Form C-242)
(b) Final Change Order
(c) DBE Participation List and Final Verification
(d) Affidavit – Compliance with the Prevailing Wage Law

105.15.3.3 Final acceptance will not excuse the contractor's liability or responsibility to the Commission for any latent defects in the work or material incorporated into the work, or for claims relating to any work or material incorporated into the work, except as barred by Sections 537.600 and 537.610, RSMo.

Delete Sec 107.11, including all subsections, and substitute the following:

107.11 Responsibility for Claims for Damage or Injury. The contractor shall be responsible, to the extent imposed by applicable law, for injury, property damage, damage to the Work, or other loss caused by the negligent, wrongful, intentional, reckless, or contractually noncompliant acts or omissions of the contractor or an Agent of Contractor from Commencement of construction activities through Final Inspection and acceptance for maintenance.

107.11.1 The contractor shall not be responsible for damage relating to personal injury or death, arising from the design, condition, or maintenance of the project area prior to commencement of work and after Final Inspection and acceptance of the work, in accordance with Sec 101.2 and 105.15.2, unless any of the following conditions exist:

(a) The work is so defective that it creates an imminent danger to third parties;
(b) A defect in the work was concealed and not discoverable by a reasonable inspection by the Commission;
(c) The agent of MoDOT knew of the dangerous condition and did not disclose it to the Commission; or

(d) The plans or specifications followed were so imperfect or improper that the agent of MoDOT should have known the work to be done thereunder would result in an unsafe condition.

107.11.2 Neither the Commission nor the contractor, by execution of a contract, shall intend to or create a new or enlarge an existing cause of action in any third party. This provision shall not be interpreted to create any new liability that does not exist under the law, or to waive or extinguish any defense that either party to this contract or their respective agents and employees may have to an action or suit by a third party.

Delete Sec 107.12, including all subsections, and substitute the following:

107.12 Contractor's Responsibility for Work Damages to any portion of the work occurring after the date of Commencement of Work and before the work is deemed approved and accepted, caused by the action of the elements or from any other reason, shall be repaired or replaced at the contractor's expense. The contractor, at the contractor's option, may insure against any such damages. The Commission may, in its discretion, make such a payment, determined in accordance with Sec 109.4, for damage to the work due to unforeseeable causes beyond the control of, and without fault or negligence on the part of the contractor, unless the contractor has been reimbursed for such damages by the contractor's insurer. Prior to reimbursement, the contractor shall furnish documentary evidence of all efforts to recover such repair costs.

107.12.1 The contractor shall immediately give written notice to the engineer of any pedestrian, worker and/or vehicular accident that occurs in or near the work zone. The contractor may be directed by the engineer to repair permanent Commission facilities that have been damaged by events that are beyond the control of the contractor. Reimbursement will be provided by the Commission, determined in accordance with Sec 109.4, for the actual direct cost of labor, equipment and material, exclusive of overhead, indirect or consequential costs of profit. The Commission may elect to make such repairs in lieu of the contractor.

Delete Sections 107.13, 107.13.1, 107.13.2, 107.13.3, 107.13.3.4, 107.13.5, 107.13.6, 107.13.9, 107.13.10.4, 107.13.10.8, and substitute the following:

107.13 General Insurance Requirements. From the commencement of construction activities through the Final Inspection and acceptance for maintenance of the project by the engineer, the contractor shall procure and maintain at the contractor's expense, insurance for all damages and losses imposed by law and assumed under the contract, of the kinds and in the amounts specified in Secs 107.13.1 through 107.13.8.

107.13.1 Sovereign Immunity Limits for Missouri Public Entities. The contractor shall procure and maintain at least minimum insurance coverages to meet the sovereign immunity limits for Missouri public entities as calculated by the Missouri Department of Insurance and published annually in the Missouri Register pursuant to Section 537.610, RSMo for Sec 107.13.2 through 107.13.5, unless specified otherwise for each type of insurance coverage. Each policy shall provide additional insured status for the Missouri Highways and Transportation Commission, its members, the Missouri Department of Transportation, and its employees up to Missouri's sovereign immunity limits. Provided, however, additional insured coverage applies only to liability caused in whole or in part by the acts or omissions of the named insured or those acting on its behalf and does not provide defense or indemnity

for liability that Section 537.600, RSMo. places solely on MoDOT or another public entity. Each policy shall be endorsed to not waive sovereign immunity limits. The naming of the Commission, its members, MoDOT, and its employees as additional insureds under any insurance policy shall not be construed as a waiver of any sovereign, official, or other governmental immunity. The Commission, its members, MoDOT, and its employees reserve the right to assert any sovereign, official, or any other governmental immunities. Nothing in the Section shall be construed to enlarge the liability of the contractor beyond that imposed by applicable law, create a contractual duty to defend or indemnify prohibited by Section 537.600, RSMo, or require insurance coverage for liability that Section 537.600, RSMo places solely upon MoDOT. Insurance coverage and priority shall otherwise be determined in accordance with the applicable policies and endorsements.

107.13.2 Commercial General Liability Insurance. The contractor shall procure, and maintain during the term of the project, commercial general liability insurance with coverage at least as broad as Insurance Services Office (ISO) policy form CG 00 01. The general aggregate limit shall, by endorsement or otherwise, provide a designated aggregate limit solely for this project using ISO form CG 25 03 05 09 or an equivalent form. General liability policies shall be endorsed to add the Commission, its members, MoDOT, its employees, agents, and assigns as additional insureds (the "Additional Insureds") using Insurance Services Office forms CG 20 10 or the equivalent under such policy. For construction contracts, an endorsement providing completed operations coverage to the Additional Insureds, ISO form CG 20 37 or the equivalent, is also required. This form, CG 20 37, shall be endorsed on each subsequent commercial general liability policy issued to the contractor for three (3) years after final acceptance of the project. Should work on the project be discontinued, the commercial general liability insurance coverage shall remain in effect for three (3) years after the date of discontinuation, when applicable. Coverage shall not be reduced by insured versus insured exclusions or by explosion, collapse and underground (XCU) exclusions.

107.13.3 Commercial Automobile Liability Insurance. The contractor shall procure and maintain automobile liability coverage at least as broad as ISO policy form CA 00 01 covering owned, hired, and non-owned autos. The policy shall be endorsed to Commission, its members, MoDOT, and its employees, agents, and assigns as additional insureds (the "Additional Insureds").

107.13.4 Contractor's Pollution Liability (CPL) Insurance. The contractor shall procure and maintain contractor's pollution liability insurance for liability arising out of sudden, accidental, and gradual pollution and remediation. The policy shall have minimum limits of $1,000,000. The Commission, its members, MoDOT, and its employees, agents, and assigns shall be endorsed as additional insureds under such policy. The policy shall provide coverage for hauling of waste from the project site to the final disposal location including non-owned disposal sites. Completed operations coverage for pollution liability shall extend a minimum of three (3) years after final acceptance of the project. Contractor shall require any subcontractor that performs environmental remediation, hazardous material removal or related work including the transportation, disposal, or environmental engineering work, to provide contractor's pollution liability insurance with limits and scope of coverage appropriate to the exposure. The Commission, its members, MoDOT, and its employees, agents, and assigns shall be endorsed as additional insured under such policy. The policy shall not contain a cross suits exclusion or other provisions that would eliminate additional insured claims against the contractor or subcontractor.

107.13.5 Aircraft Liability Insurance. If aircraft, including unmanned aircraft, will be used on the project, contractor shall provide, or cause to be provided, aircraft liability insurance protecting against claims for damages resulting from such use in all cases where any aircraft that is owned, leased or chartered by any Contractor-Related Entity used on the Project. The policy shall have minimum limits of $1,000,000 and the Commission, its members, MoDOT, and its employees, agents, and assigns shall be additional insureds on the policy by endorsement or policy provision. The use of any aircraft in performance of the Work, the aircraft crew, flight path and altitude, including landing of any aircraft on the Site or on any property owned by the Commission, MoDOT or other parties at interest, shall be subject to review and written acceptance by the Commission prior to any such usage. If any aircraft are leased or chartered with crew and/or pilot, evidence of non-owned aircraft liability insurance will be acceptable to meet these requirements but must be provided prior to use of the aircraft. For use of unmanned aircraft vehicles, the contractor may provide insurance either through an aircraft liability insurance policy, or by endorsement to the contractor's commercial general liability insurance policy and excess liability policies. Use of unmanned aircraft must comply with all state and federal rules and regulations, including FAA requirements.

107.13.6 Excess or Umbrella Liability Insurance. The contractor may satisfy the required limits for Secs 107.13.2 through 107.13.5 by use of excess or umbrella liability insurance policies in any combination that meets the contract limits requirements. Such policies shall include as additional insureds, the Commission, its members, MoDOT, and its employees, agents, and assigns.

107.13.9 Evidence of Insurance. Required evidence of insurance providing confirmation of compliance with these requirements shall consist of a certificate of insurance and any endorsements adding the Commission, MoDOT and its employees as additional insureds where specified. "Blanket" or "automatic" additional insured endorsements providing additional insured coverage "where required by contract," may be used, provided that such forms provide coverage at least as broad as provided by the specified endorsement forms required. The contractor and any subcontract work shall not commence under the contract until the contractor obtains the applicable insurance coverage required and receives approval for such insurance from the engineer. No later than five (5) business days prior to the Commencement of Work, all evidence of insurance for the prime contractor, including certificates of insurance and required endorsements, and notices shall be submitted electronically by the insurance agent to ContractorSupport@MoDOT.mo.gov. The aforementioned evidence of insurance shall also be submitted in the same manner no fewer than five (5) business days prior to the effective date of any change or renewal of insurance during the term of the project. All evidence of insurance for the prime contractor, including certificates of insurance and required endorsements, and notices shall be submitted electronically by the insurance agent to ContractorSupport@MoDOT.mo.gov. The contractor shall promptly furnish the engineer with a complete copy of its policy upon request. Failure to furnish evidence of proper insurance, or complete insurance policies when requested, may result in the suspension of work as provided in Sec 108, and may result in other claims or actions for breach of contract or otherwise, as may be recognized at law or in equity.

107.13.10.4 Primary and Non-contributory. For any claims related to this contract or insurance requirements herein identified, the contractor's insurance coverage shall be

primary insurance with respect to the Commission, its members, MoDOT, and its employees, as the additional insureds. Any other insurance or self-insurance maintained by any of these parties shall be excess of the contractor's insurance and shall not contribute with the contractor's insurance, unless liability caused in whole or in part by the acts or omissions of the named insured or those acting on its behalf and does not provide defense or indemnity for liability that Section 537.600, RSMo places solely upon MoDOT or another public entity. Priority and allocation shall be governed by the applicable policies and endorsements. MoDOT may not unilaterally alter priority among the contractor's, any subcontractor's, or any additional insured's policies.

107.13.10.8 Timely Notice of Claims. Contractor shall give the engineer prompt and timely notice of claims made or suits instituted that arise out of or result from contractor's or agent of contractor's performance under this Agreement, and that involve or may involve coverage under any of the required liability policies. The Commission and MoDOT will provide timely notice to the contractor of any claims or lawsuits that it receives.

Delete Sec 107.14 and substitute the following:

107.14 Cooperation in Defense. The Agent of MoDOT and MoDOT shall reasonably cooperate in the defense of the other against potential third party claims. This cooperation includes providing reasonable access to relevant records, documents, and personnel. Nothing in this section creates a contractual duty to defend prohibited by RSMo 537.600(5).

Delete Sec 107.18 and substitute the following:

107.18 Basis of Payment. No direct payment will be made for compliance with Sec 107.

- Payment for Excess Piling

Delete Sec 702.6.3 and insert the following:

702.6.3 Pile Cut-Offs. No direct payment will be made for routine pile cut-offs, except as otherwise provided herein.

702.6.3.1 Excess Piling. If the total measured length of installed piling on a given structure, per item, is 85 percent or less of the plan quantity, the difference between plan quantity and installed quantity shall be deemed as excess piling. Reimbursement will be made for excess piling, as determined by the engineer. No reimbursement will be made for piling purchased in excess of plan quantity. The contractor shall provide the engineer with all paid invoices, which may be used to determine an equitable reimbursement. Shipping costs on the invoice will be included in the reimbursement payment, but no handling, overhead or profit will be included. All excess piling shall be removed from the project and retained by the contractor.

- *Delete Sec 102.18.1 and renumber existing Sec 102.18.2 through 102.18.5.4 including all subsections:*

102.18.1 Certification Regarding Disbarment, Eligibility, Indictments, Convictions or Civil Judgments. The president or authorized official of the bidder, under penalty of perjury

under the laws of the USA, shall certify that, except as noted in the exceptions, the company or any person associated therewith in the capacity of owner, partner, director, officer, principal investor, project director, manager, auditor or any position involving the administration of federal funds:

(a) Is not currently under suspension, debarment, voluntary exclusion or determination of ineligibility by any federal agency.

(b) Has not been suspended, debarred, voluntarily excluded or determined ineligible by any federal agency within the past three years.

(c) Does not have a proposed debarment or suspension pending.

(d) Has not been indicted, convicted or had a civil judgment rendered against any of the listed parties by a court of competent jurisdiction in any matter involving fraud or official misconduct within the past three years.

102.18.1.1 If there are any exceptions, the bidder shall submit the exceptions on company letterhead, signed by the bidder and inserted inside the bid submitted.

102.18.1.2 Exceptions will not necessarily result in denial of award but will be considered in determining bidder responsibility.

102.18.1.3 For any exception noted, the bidder shall indicate to whom it applies, the initiating agency, and dates of action.

102.18.1.4 Providing false information may result in criminal prosecution or administrative sanctions.

102.18.2 Certification Regarding Anti-Collusion. In accordance with 23 USC 112, the bidder shall certify, under penalty of perjury, that the bidder has not, either directly or indirectly, entered into any agreement, participated in any collusion or otherwise taken any action in restraint of free competitive bidding in connection with this contract.

102.18.3 Certification Regarding Lobbying Activities. In accordance with 31 USC 1352, the bidder shall certify that:

(a) No federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any federal agency, a member of Congress, an officer or employee of Congress or an employee of a member of Congress in connection with the awarding of any federal contract, the making of any federal grant, the making of any federal loan, the entering into of any cooperative agreement and the extension, continuation, renewal, amendment or modification of any federal contract, grant, loan or cooperative agreement.

(b) If any funds other than federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any federal agency, a member of Congress, an officer or employee of Congress or an employee of a member of Congress in connection with this federal contract, grant, loan or cooperative agreement, the

bidder shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with the instructions.

102.18.3.1 This certification shall be a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification shall be a prerequisite for making or entering into this transaction imposed by 31 USC 1352. Any person who fails to file the required certification will be subject to a civil penalty of no less than $10,000 and no more than $100,000 for each such failure.

102.18.3.2 The bidder also agrees by submitting a bid that the bidder shall require that the language of this certification be included in all subcontracts that exceed $100,000, and that all such subrecipients shall certify and disclose any lobbying activities accordingly.

102.18.4 Certification Regarding Missouri Domestic Products Procurement Act. This certification will only apply to state-funded projects as noted on the cover of the Request for Bid. The bidder's attention is directed to Sections 34.350 through 34.359 RSMo 2000, which requires all manufactured goods or commodities used or supplied in the performance of the contract or any subcontract to be manufactured, assembled or produced in the USA. Sections 34.350 through 34.359 RSMo will not apply if the total bid is less than $1,000.00.

102.18.4.1 Section 34.355 RSMo requires the vendor or bidder to certify compliance with Section 34.353 RSMo and, if applicable, Section 34.359 RSMo at the time of bidding and prior to payment. Failure to comply with Section 34.353 RSMo during performance of the contract and to provide certification of compliance prior to payment will result in nonpayment for those goods or commodities.

102.18.4.2 The bidder shall certify that all the specified goods or products for which this bid was solicited are manufactured, assembled or produced in the USA. If there are any exceptions, the bidder shall submit a list of the exceptions on company letterhead, signed by the bidder and attached to the inside of the bid submitted. The list shall include the pay item number and the location where the item is manufactured. The bidder shall identify any of the exceptions in the list that are specified goods or products that are treated as manufactured, assembled or produced in the USA under an existing treaty, law, agreement or regulation of the USA regarding export/import restrictions and international trade.

102.18.4.3 The bidder shall notify the contact listed in the Request for Bid of any specified goods or products that cannot be manufactured, assembled or produced in the USA in sufficient quantities or in time to meet the contract specifications.

102.18.4.4 The bidder shall certify that the bid complies with all provisions of Section 34.350 *et seq* RSMo.

Delete Sec 106.10 and substitute the following:

106.10 Missouri Domestic Products Requirement. For state funded projects, as noted on the cover of the contract, material shall be in accordance with Sec 102.18.4.

H. Utilities JSP-93-26F

1.0 For informational purposes only, the following is a list of names, addresses, and telephone numbers of the known utility companies in the area of construction work for this improvement:

Utility Name	**Known Required Adjustment**	**Type**
Electric Ozark Electric CO-OP Alex Witmer P.O. Box 420 10943 Hwy 39 Mt. Vernon, MO 65712 Phone: (417) 466-8380 Email: awitmer@ozarkelectric.com	Yes	Electric
AT&T John Penner 600 E. St. Louis St. Springfield, MO 65806 Phone: (417) 353-8877 Email: jp1392@att.com	None	Telephone

1.1 The existence and approximate location of utility facilities known to exist, as shown on the plans, are based upon the best information available to the Commission at this time. This information is provided by the Commission "as-is" and the Commission expressly disclaims any representation or warranty as to the completeness, accuracy, or suitability of the information for any use. Reliance upon this information is done at the risk and peril of the user, and the Commission shall not be liable for any damage that may arise from any error in the information. It is, therefore, the responsibility of the contractor to verify the above listing information indicating the existence, location and status of any facility. Such verification includes direct contact with the listed utilities.

2.0 Project Specific Provisions: Ozark Electric has proposed a relocation of the utility poles located within the project vicinity. The relocation will be due west to a location within two feet of the proposed right of way and will not require an easement.

I. Optional Pavements JSP-06-06H

1.0 Description. This work shall consist of a pavement composed of either Portland cement concrete or asphaltic concrete constructed on a prepared subgrade. This work shall be performed in accordance with the standard specifications and as shown on the plans or established by the engineer.

2.0 The quantities shown reflect the total square yards of pavement surface designated for each pavement type as computed and shown on the plans.

2.1 No additional payment will be made for asphaltic concrete mix quantities to construct the required 1:1 slope along the edge of the pavement, or for tack applied between lifts of asphalt.

2.2 No additional payment will be made for aggregate base quantities outside the limits of the final surface area as computed and shown on the plans. When A2 shoulders are specified, payment for aggregate base will be as shown on the plans.

2.3 The grading shown on the plans was designed for the thicker (asphalt) pavement option. For projects with grading in the contract, there will be no adjustment of the earthwork quantities due to adjusting the roadway subgrade for optional pavements.

2.4 The contractor shall comply with Sections 401 through 403 for the asphalt option and Sections 501 and 502 for the concrete option.

2.5 Pavement options composed of Portland cement concrete shall have contrast pavement marking for intermittent markings (skips), dotted lines, and solid intersection lane lines. The pavement markings shall be in accordance with Section 620. No additional payment will be made for the contrast pavement markings.

3.0 Method of Measurement. The quantities of concrete pavement will be measured in accordance with Section 502.14. The quantities of asphaltic concrete pavement will be measured in accordance with Section 403.22.

4.0 Basis of Payment. The accepted quantity of the chosen option will be paid for at the contract unit bid price for Item 4019905, Optional Pavement, per square yard.

4.1 Price Adjustment for Fuel. If the contractor accepts the option for fuel adjustment in the bid proposal, a fuel adjustment will be applied in accordance with Sec 109.14 for the type of pavement constructed.

J. Contractor Quality Control NJSP-15-42

1.0 The contractor shall perform Quality Control (QC) testing in accordance with the specifications and as specified herein. The contractor shall submit a Quality Control Plan (QC Plan) to the engineer for approval that includes all items listed in Section 2.0, prior to beginning work.

2.0 Quality Control Plan.

(a) The name and contact information of the person in responsible charge of the QC testing.
(b) A list of the QC technicians who will perform testing on the project, including the fields in which they are certified to perform testing.
(c) A proposed independent third party testing firm for dispute resolution, including all contact information.
(d) A list of Hold Points, when specified by the engineer.

(e) The MoDOT Standard Inspection and Testing Plan (ITP). This shall be the version that is posted at the time of bid on the MoDOT website (www.modot.org/quality).

3.0 Quality Control Testing and Reporting. Testing shall be performed per the test method and frequency specified in the ITP. All personnel who perform sampling or testing shall be certified in the MoDOT Technician Certification Program for each test that they perform.

3.1 Reporting of Test Results. All QC test reports shall be submitted as soon as practical, but no later than the day following the test. Test data shall be immediately provided to the engineer upon request at any time, including prior to the submission of the test report. No payment will be made for the work performed until acceptable QC test results have been received by the engineer and confirmed by QA test results.

3.1.1 Test results shall be reported on electronic forms provided by MoDOT. Forms and Contractor Reporting Excel2Oracle Reports (CRE2O) can be found on the MoDOT website. All required forms, reports and material certifications shall be uploaded to a Microsoft SharePoint® site provided by MoDOT, and organized in the file structure established by MoDOT.

3.2 Non-Conformance Reporting. A Non-Conformance Report (NCR) shall be submitted by the contractor when the contractor proposes to incorporate material into the work that does not meet the testing requirements or for any work that does not comply with the contract terms or specifications.

3.2.1 Non-Conformance Reporting shall be submitted electronically on the Non-Conformance Report form provided on the MoDOT Website. The NCR shall be uploaded to the MoDOT SharePoint® site and an email notification sent to the engineer.

3.2.2 The contractor shall propose a resolution to the non-conforming material or work. Acceptance of a resolution by the engineer is required before closure of the non-conformance report.

4.0 Work Planning and Scheduling.

4.1 Two-week Schedule. Each week, the contractor shall submit to the engineer a schedule that outlines the planned project activities for the following two-week period. The two-week schedule shall detail all work and traffic control events planned for that period and any Hold Points specified by the engineer.

4.2 Weekly Meeting. When work is active, the contractor shall hold a weekly project meeting with the engineer to review the planned activities for the following week and to resolve any outstanding issues. Attendees shall include the engineer, the contractor superintendent or project manager and any foreman leading major activities. This meeting may be waived when, in the opinion of the engineer, a meeting is not necessary. Attendees may join the meeting in person, by phone or video conference.

4.3 Pre-Activity Meeting. A pre-activity meeting is required in advance of the start of each new activity, except when waived by the engineer. The purpose of this meeting is to review construction details of the new activity. At a minimum, the discussion topics shall include: safety precautions, QC testing, traffic impacts, and any required Hold Points. Attendees shall include

the engineer, the contractor superintendent and the foreman who will be leading the new activity. Pre-activity meetings may be held in conjunction with the weekly project meeting.

4.4 Hold Points. Hold Points are events that require approval by the engineer prior to continuation of work. Hold Points occur at definable stages of work when, in the opinion of the engineer, a review of the preceding work is necessary before continuation to the next stage.

4.4.1 A list of typical Hold Point events is available on the MoDOT website. Use of the Hold Point process will only be required for the project-specific list of Hold Points, if any, that the engineer submits to the contractor in advance of the work. The engineer may make changes to the Hold Point list at any time.

4.4.2 Prior to all Hold Point inspections, the contractor shall verify the work has been completed in accordance with the contract and specifications. If the engineer identifies any corrective actions needed during a Hold Point inspection, the corrections shall be completed prior to continuing work. The engineer may require a new Hold Point to be scheduled if the corrections require a follow-up inspection. Re-scheduling of Hold Points require a minimum 24-hour advance notification from the contractor unless otherwise allowed by the engineer.

5.0 Quality Assurance Testing and Inspection. MoDOT will perform quality assurance testing and inspection of the work, except as specified herein. The contractor shall utilize the inspection checklists provided in the ITP as a guide to minimize findings by MoDOT inspection staff. Submittal of completed checklists is not required, except as specified in 5.1.

5.1 Inspection and testing required in the production of concrete for the project shall be the responsibility of the contractor. Submittal of the 501 Concrete Plant Checklist is required.

6.0 Basis of Payment. No direct payment will be made for compliance with this provision.

K. Restrictions for Migratory Birds NJSP-16-06A

1.0 Description. Swallows or other bird species protected by the Migratory Bird Treaty Act may be nesting under the bridge or bridges that will be repaired under this contract.

2.0 Restrictions. To comply with the Migratory Bird Treaty Act, nests of protected species cannot be disturbed when active (eggs or young are present). Generally, nests are active between April 1 and July 31, but active nests can be present outside of these dates.

3.0 Avoidance Measures. The contractor shall not disturb active nests or destroy adults, eggs or young birds. In an effort to comply with the Migratory Bird Treaty Act, the contractor operations will be limited to the options established in the following sections.

3.1 Inactive or Partially Constructed Nests. If nests are present and MoDOT determines that the nests are inactive or partially constructed, the contractor may remove the nests provided that the colony's inactive or partially constructed nests are completely removed by March 15 and the contractor maintains a nest free condition until the bridge work is complete. Dry removal methods shall be used when practicable. If dry removal is not practicable, hydro cleaning may be used if approved by the Engineer and only if water is free of blasting grit, chemicals, or detergents, and applied using pressure less than 5,000 PSI. Clean water such as that from municipal water

treatment plants or wells shall be used. Use of source water from Waters of the State (i.e., streams or lakes), is allowable, if the appropriate methods to prevent the possible spread of invasive aquatic species are implemented.

3.2 Water and Equipment Used for Hydro cleaning. Aquatic invasives such as zebra mussels and some algae species have infested several bodies of water in the United States and can be transported by vessels (barges, boats, tugs, tankers, etc.) and equipment (tanks, tubing, pumps, etc.) that have been used in areas that contain these invasive species. If equipment is not properly inspected and treated to prevent the spread of invasives, these species can be introduced into areas not currently known to have a population. These invasive species are detrimental to existing ecosystems and can outcompete native species. To assist in preventing the introduction and spread of aquatic invasive species through MoDOT projects in Missouri streams and lakes, the following precautions shall be followed.

3.2.1 Use of Water from Streams, Lakes or Ponds. Contractors shall not use water for nest removal from streams, lakes or ponds, unless they have implemented appropriate methods to prevent the possible spread of invasive aquatic species. Water sources from municipal water treatment plants or wells may be used without following these measures provided the equipment to be used has not previously contained waters from streams, lakes or ponds. If the equipment has previously contained waters from other streams or lakes, the following measures must be implemented prior to use.

3.2.1.1 Equipment Washing. Prior to the use or re-use of equipment following any use with water from streams, lakes or ponds, all equipment shall be washed and rinsed thoroughly with hard spray (power wash) and hot (minimum 120^{o} F) water, for at least one minute.

3.2.1.2 Equipment Treating or Drying. Equipment shall be treated or dried in one of the following manners.

3.2.1.2.1 Equipment interior and/or other surfaces shall be treated with a 10% bleach solution to kill any aquatic nuisance species. This solution must also be run through all intake lines and hoses, to sterilize interior components. When chlorine treatment is used, all chlorine runoff from equipment washing must be collected and properly treated and/or disposed of in accordance with Sec 806.

3.2.1.2.2 Equipment interior and/or other surfaces shall be treated with 140º F water for a minimum of 10 seconds contact on all surfaces. 140 º F water must also be run through all intake lines and hoses, to purge any standing water.

3.2.1.2.3 Equipment shall be flushed of all non-municipal water, and dried thoroughly, in the sun before using in or transporting between streams and lakes. Dry times will depend on the season the equipment is being used. Equipment must dry a minimum of 7 days for June-September, 18 days for March-May; 18 days for October-November, and 30 days for December-February. The drying method should be reserved as a last resort option.

3.2.2 Prior to use of equipment, contractors shall provide the MoDOT inspector written documentation of the equipment's geographic origin (including the water body it was last used in), as well as defining the specified treatment method used to adequately ensure protection against invasive species. The written documentation will include a statement indicating the

contractor is aware of these provisions and will also treat the equipment appropriately after completion of the project.

3.3 Active Nests. The contractor may work on the bridge if active nests are present, as long as the work does not impact or disturb the birds and/or nests. At a minimum, work shall not be performed within 10 feet of an active nest; however, the contractor is responsible for ensuring their activities do not impact the nests, eggs, or young.

4.0 Additional Responsibilities. If active bird nests remain after all reasonable avoidance measures have been taken, or if bird nests are observed during project construction, the contractor shall notify the Resident Engineer and contact the MoDOT Environmental Section (573-526-4778) to determine if there are other allowable options.

L. Optional Shoulder Rumble Strips

1.0 Description. This work shall consist of edgeline rumble strips for optional pavement. This work shall be performed in accordance with the standard specifications and as shown on the plans or established by the engineer

2.0 The quantities shown reflect the total number of linear feet expressed in stations of edgeline rumble strip as computed and shown on the plans.

2.1 No additional payment will be made regardless of pavement type.

3.0 Method of Measurement. Measurement shall be made per station as shown on the plans.

4.0 Basis of Payment. All expenses incurred by the contractor by reason of their compliance with this provision shall be considered as completely covered by the contract unit price for Item No. 6269909, “Misc. Optional Shoulder Rumble Strip”, per station.

M. Optional Centerline Rumble Strips

1.0 Description. This work shall consist of centerline rumble strips for optional pavement. This work shall be performed in accordance with the standard specifications and as shown on the plans or established by the engineer

2.0 The quantities shown reflect the total number of linear feet expressed in stations of centerline rumble strip as computed and shown on the plans.

2.1 No additional payment will be made regardless of pavement type.

3.0 Method of Measurement. Measurement shall be made per station as shown on the plans.

4.0 Basis of Payment. All expenses incurred by the contractor by reason of their compliance with this provision shall be considered as completely covered by the contract unit price for Item No. 6269909, “Misc. Optional Centerline Rumble Strip”, per station.

N. Removal and Delivery of Existing Signs JSP-12-01C

1.0 Description. All Commission-owned signs removed from the project shall be disassembled, stored, transported, and disposed of as specified herein. Sign supports, structures and hardware removed from the project shall become the property of the contractor.

2.0 Disassembly and Delivery.

2.1 All Commission-owned signs, (excluding abandoned billboard signs), designated for removal in the plans, or any other signs designated by the Engineer, shall be removed from the sign supports and structures, disassembled, stored, transported, and delivered by the contractor to the recycling center for destruction.

2.2 The contractor shall coordinate and make arrangements with the recycling center for delivery of the signs. Sign panels shall be disassembled and/or cut into sizes as required by the recycling center.

2.3 The contractor shall provide the Engineer with a "Sign Delivery Certification" attesting to completion of delivery of all existing sign material from the project to the recycler. In addition, the contractor shall provide to the Engineer a final "Sign Certification of Destruction" from the recycler that documents the total pounds of scrap sign material received from the project and attests that all such material will not be re-purposed and will be destroyed in a recycling process. The contractor can locate the required certification statements from the Missouri Department of Transportation website:

https://www.modot.org/forms-contractor-use

2.4 Funds received from the disposal of the signs from the recycling center shall be retained by the Contractor.

3.0 Basis of Payment. All costs associated with removing, disassembling and/or cutting, storing, transporting, and disposing of signs shall be considered as completely covered by the contract unit price for Item No. 2022010, "Removal of Improvements", per lump sum.

O. Contractor Retained Guardrail

1.0 Description. All guardrail removed from this project shall become the property of the Contractor and shall be disposed of in accordance with Sec 202.

1.1 Holes left in the ground after removal of existing guardrail posts shall be backfilled in accordance with Sec 202.3.4.

2.0 Basis of Payment. All costs incurred for complying with this provision shall be considered completely covered by the contract unit price for Item No. 2022010, "Removal of Improvements", per lump sum.

P. Tree Clearing Restriction JSP-07-05C

1.0 Description. The project is within the known range of the federally endangered Indiana bat, northern long-eared bat, and proposed endangered tricolored bat. These bats are known to roost in trees with suitable habitat characteristics during summer months.

1.1 MoDOT has determined that suitable trees for one or more of these bat species exist within the project area.

1.2 To avoid negative impacts to these bat species, removal of any trees/limbs greater than three (3) inches in diameter shall only occur between October 16 and March 31.

2.0 Basis of Payment. No direct pay shall be provided for any labor, equipment, time, or materials necessary to complete this work.

1 DELETED

~~Q. No In Stream Work~~

~~**1.0** The Contractor shall be aware that any work within streams and wetlands require a Section 404 permit from the Corps of Engineers.~~

~~**1.1** The Contractor shall also be aware that areas outside of right of way may be jurisdictional wetlands that cannot be impacted without a permit from the Corps.~~

~~**2.0** The Contractor shall not construct workpads or temporary crossings to carry out work. If the Contractor determines that work in the stream is necessary, it shall be the responsibility of the contractor to obtain the proper permits from the Corps of Engineers and the US Fish and Wildlife Service. Any permit obtained shall be provided to MoDOT prior to beginning in stream operations.~~

~~**2.1** No additional time will be added to the contract for the contractor to obtain any permits.~~

~~**3.0** There will be no direct payment for compliance with this special provision.~~

R. Archaeological Site Protection

1.0 Description. The contractor is hereby notified that an archaeological site is being preserved in place within MoDOT Right of Way (ROW) for this project (JSR0083). Due to the location of the site this JSP is being written to keep this project in compliance with Section 106 of the National Historic Preservation Act (NHPA) (54 U.S.C. 306108). The site is in the northwest quadrant of the project due west of county road 114. This JSP is to protect the site from any inadvertent activity within the site area during construction. The location of the site in right-of-way is between Sta. 39+25 to Sta. 40+25 RT. The contractor is notified that the archaeological site extends out from the MoDOT right-of-way to the west for an unknown distance. The area outside of ROW also should remain undisturbed during construction.

2.0 Restrictions and Exceptions. The contractor shall use extreme care in this area by prohibiting construction operations between Sta. 39+25 RT to Sta. 40+25 RT in the location marked “DND” on the plans.

2.1 In order to clearly define the “DND” an orange construction fence shall be erected by the contractor at the cost of the contractor within MoDOT ROW.

2.2 The contractor needs to notify the MoDOT Historic Preservation Manager ten (10) working days prior to erecting the fence and a MoDOT archaeologist will meet with the contractor on site to assure the proper location of the fence.

2.3 The engineer shall be notified of any exceptions to these provisions. The exceptions will be reviewed and mutually agreed to by the engineer, contractor, and MoDOT archaeologist prior to the continuance of any work.

3.0 Basis of Payment. Payment for labor, equipment, time, or materials necessary to meet the requirements of this provision shall be considered included in the pay items for Geosynthetic Reinforcement Geogrid and Furnishing and Placing Type 1 Rock Ditch Liner. The contractor shall have no claim, or basis for any claim or suit whatsoever, resulting from compliance with this provision. No time extensions will be granted due to the contractor’s failure to comply with this provision.

S. Sensitive Streams or Waterbodies Near Project Area

1.0 Description. The project crosses, or is in the vicinity of, a sensitive stream or watershed. Waterbodies within and near the project area may serve as habitat for federal and state listed sensitive species. To avoid any negative impacts to these species and their habitats, water quality shall be protected from construction impacts.

1.1 The contractor shall prevent any debris and materials from construction activities from entering streams and other waterbodies. If debris or materials do enter waterbodies, and if deemed necessary by the engineer or MoDOT’s environmental personnel, it shall be removed as directed by the engineer at the contractor's expense.

2.0 Basis of Payment. No direct payment will be made for any expense incurred by the contractor by reason of compliance with the specific requirements of the provision, including any delay, inconvenience, or extra work except for those items for which payment is included in the contract.

T. Clean Water Act Requirements

1.0 Description. The Contractor shall be aware that any work within streams, wetlands, or special aquatic sites requires a Section 404 permit from the Corps of Engineers.

2.0 The project meets the conditions of the following listed permits with no pre-construction notification to the Corps of Engineers:

Section 404 Nationwide Permit 14 (Linear Transportation Projects)

3.0 The Contractor shall abide by all general conditions of Section 404 and 401 Permits, and specific conditions of the following listed Nationwide Permit found in the General Provisions and

Supplemental Specifications to the current Missouri Standard Specifications for Highway Construction referenced in this contract.

Section 404 Nationwide Permit 14 (Linear Transportation Projects)

3.1 If there are any changes to the scope or limits to the project, the Contractor must notify the Engineer who will then notify the MoDOT Environmental Section to verify that the project still meets permit conditions.

3.2 No additional time will be added to the contract for the contractor to obtain any permits.

4.0 Basis of Payment. There will be no direct payment for compliance with this provision.

U. Pavement Marking Log

1.0 Description. This work shall consist of the Contractor documenting the location of all existing pavement markings prior to coldmilling or resurfacing and installing new pavement markings to match the scheme that was in place prior to the project.

2.0 Construction Requirements. Prior to the start of resurfacing work, the Contractor shall document the color, type, and location of the existing pavement markings, including any change in pavement marking (e.g., solid yellow to intermittent yellow on the centerline) and no passing zones. The Contractor shall submit the method of documentation to the Engineer for approval prior to recording the existing pavement marking information.

2.1 The existing pavement marking documentation provided by the Contractor shall include the location of existing pavement markings by either station or log mile. The Engineer shall reserve the right to make adjustments to the final pavement marking locations. The Engineer will provide the Contractor with any adjusted locations. Under no circumstances shall the Contractor make adjustments to the location of permanent pavement markings without the Engineer's approval.

2.2 All permanent pavement markings shall be installed in accordance with Sec 620.

3.0. Temporary Pavement Marking. The Contractor shall provide temporary pavement marking in accordance with Sec 620 and Standard Plan 620.10. No compensation will be made to the Contractor for temporary pavement marking.

4.0 Method of Measurement. Measurement will be made in accordance with Sec 620.

5.0 Basis of Payment. No direct compensation will be made to the Contractor for compliance with this provision. All costs associated with the equipment, labor, materials, and time necessary to fulfill the requirements of this provision shall be considered completely covered by the pavement marking (Sec 620) line items in the contract.

V. No Value Engineering Proposals for 2.5 Inch Perforated Square Steel Tube (PSST) Posts and Concrete Post Anchors for 2.5 Inch Perforated Square Steel Tube (PSST) Posts

This project will require 2.5 In. Perforated Square Steel Tube (PSST) Posts and Concrete Post Anchors for 2.5 In. Perforated Square Steel Tube (PSST) Posts as specified in the plans. No Contractor initiated Value Engineering Change Proposals (VECPs) or Practical Design Value Engineering Change Proposals (PDVECPs) will be accepted for any part of installing existing signs or new signs on new Perforated Square Steel Tube (PSST) Posts and Concrete Post Anchors different than the 2.5 Inch Perforated Square Steel Tube (PSST) Posts and Concrete Post Anchor for 2.5 Inch Perforated Square Steel Tube (PSST) Posts that is required.


Job No.: JSR0136
Route: 160
County: Greene

JOB SPECIAL PROVISIONS TABLE OF CONTENTS (ROADWAY)

(Job Special Provisions shall prevail over General Special Provisions whenever in conflict therewith.)

A.	General - Federal JSP-09-02M	1
B.	Contract Liquidated Damages JSP- 13-01E	1
C.	Work Zone Traffic Management JSP-02-06N	2
D.	Emergency Provisions and Incident Management JSP-90-11A	5
E.	Project Contact for Contractor/Bidder Questions JSP-96-05A	5
F.	Supplemental Revisions JSP-18-01MM	6
G.	Utilities JSP-93-26F	22
H.	Right-of-Way Clearance – Delayed Possession	24
I.	Liquidated Damages Specified JSP-93-28A	24
J.	Contractor Quality Control NJSP-15-42	24
K.	Optional Pavements JSP 06-06H	26
L.	Seeding and Mulching Requirements JSP-25-03	27
M.	Contractor Furnished Surveying and Staking - SW	28
N.	Property Owner Notification	28
O.	Pavement Marking Log	28
P.	Permanent Pavement Marking - SW	29
Q.	No Value Engineering Proposals for 2.5 Inch Perforated Square Steel Tube (PSST) Posts and Concrete Post Anchors for 2.5 Inch Perforated Square Steel Tube (PSST) Posts	30
R.	Site Sanitary Sewerage Systems	30
S.	Sanitary Sewer Relocation	34
T.	Manholes and Covers	34

Job No.: JSR0136
Route: 160
County: Greene

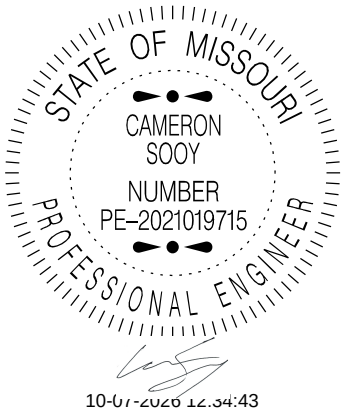

10-07-2026 12:34:43
CAMERON SOOY - CIVIL
MO-PE-2021019715

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
105 W. CAPITOL AVE.
JEFFERSON CITY, MO 65102
Phone 1-888-275-6636

If a seal is present on this sheet, JSP's have been electronically sealed and dated.

JOB NUMBER: JSR0136
GREENE COUNTY, MO
DATE PREPARED: 10/07/2026

ADDENDUM DATE:

Only the following items of the Job Special Provisions (Roadway) are authenticated by this seal: A-Q



THIS SHEET HAS BEEN SIGNED, SEALED AND DATED ELECTRONICALLY.

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
105 W. CAPITOL AVE.
JEFFERSON CITY, MO 65102
Phone 1-888-275-6636

Veenstra & Kimm, Inc.
A Kleinfelder Company
9788 N Ash Avenue
Kansas City, Mo. 64157
Certificate of Authority: 2002006347
Consultant Phone: 816-781-6182

If a seal is present on this sheet, JSP's have been electronically sealed and dated.

JOB NUMBER: JSR0136
GREENE COUNTY, MO
DATE PREPARED: 10/07/2026

ADDENDUM DATE:

Only the following items of the Job Special Provisions (Roadway) are authenticated by this seal: R-T

Job No.: JSR0136
Route: 160
County: Greene

JOB
SPECIAL PROVISION

A. General - Federal JSP-09-02M

1.0 Description. The Federal Government is participating in the cost of construction of this project. All applicable Federal laws, and the regulations made pursuant to such laws, shall be observed by the contractor, and the work will be subject to the inspection of the appropriate Federal Agency in the same manner as provided in Sec 105.10 of the Missouri Standard Specifications for Highway Construction with all revisions applicable to this bid and contract.

1.1 This contract requires payment of the prevailing hourly rate of wages for each craft or type of work required to execute the contract as determined by the Missouri Department of Labor and Industrial Relations and requires adherence to a schedule of minimum wages as determined by the United States Department of Labor. For work performed anywhere on this project, the contractor and the contractor's subcontractors shall pay the higher of these two applicable wage rates. State Wage Rates, Information on the Required Federal Aid Provisions, and the current Federal Wage Rates are available on the Missouri Department of Transportation web page at www.modot.org under "Doing Business with MoDOT", "Contractor Resources". Effective Wage Rates will be posted 10 days prior to the applicable bid opening. These supplemental bidding documents have important legal consequences. It shall be conclusively presumed that they are in the bidder's possession, and they have been reviewed and used by the bidder in the preparation of any bid submitted on this project.

1.2 The following documents are available on the Missouri Department of Transportation web page at www.modot.org under "Doing Business with MoDOT"; "Standards and Specifications". The effective version shall be determined by the letting date of the project.

General Provisions & Supplemental Specifications

Supplemental Plans to July 2026 Missouri Standard Plans
For Highway Construction

These supplemental bidding documents contain all current revisions to the published versions and have important legal consequences. It shall be conclusively presumed that they are in the bidder's possession, and they have been reviewed and used by the bidder in the preparation of any bid submitted on this project.

B. Contract Liquidated Damages JSP- 13-01E

1.0 Description. Liquidated Damages for failure or delay in completing the work on time for this contract shall be in accordance with Sec 108.8. The liquidated damages include separate amounts for road user costs and contract administrative costs incurred by the Commission.

2.0 Period of Performance. Prosecution of work is expected to begin on the date specified below in accordance with Sec 108.2. Regardless of when the work is begun on this contract, all work on all projects shall be completed on or before the date specified below. Completion by this date shall be in accordance with the requirements of Sec 108.7.1.

Notice to Proceed: January 19, 2027
Contract Completion Date: December 1, 2027

2.1 Calendar Days. Completion of the project is required as specified herein. The count of calendar days will begin on the date the contractor starts any construction operations on the project.

Project	Calendar Days	Daily Road User Cost
JSR0136	80	$1,800
JSR0083	175	$1,800

3.0 Liquidated Damages for Contract Administrative Costs. Should the contractor fail to complete the work on or before the contract completion date specified in Section 2.0, or within the number of calendar days specified in Section 2.1, whichever occurs first, the contractor will be charged contract administrative liquidated damages in accordance with Sec 108.8 in the amount of **$1500** per calendar day for each calendar day, or partial day thereof, that the work is not fully completed. For projects in combination, these damages will be charged in full for failure to complete one or more projects within the specified contract completion date or calendar days.

4.0 Liquidated Damages for Road User Costs. Should the contractor fail to complete the work on or before the contract completion date specified in Section 2.0, or within the number of calendar days specified in Section 2.1, whichever occurs first, the contractor will be charged road user costs in accordance with Sec 108.8 in the amount specified in Section 2.1 for each calendar day, or partial day thereof, that the work is not fully completed. These damages are in addition to the contract administrative damages and any other damages as specified elsewhere in this contract.

5.0 Liquidated Damages for Winter Months. Delete Sec 108.8.1.3 (a)

Liquidated damages for failure to complete the work on time shall not be waived from December 15 to March 15, both dates inclusive.

C. Work Zone Traffic Management JSP-02-06N

1.0 Description. Work zone traffic management shall be in accordance with applicable portions of Division 100 and Division 600 of the Standard Specifications, and specifically as follows.

1.1 Maintaining Work Zones and Work Zone Reviews. The Work Zone Specialist (WZS) shall maintain work zones in accordance with Sec 616.3.3 and as further stated herein. The WZS shall coordinate and implement any changes approved by the engineer. The WZS shall ensure all traffic control devices are maintained in accordance with Sec 616, the work zone is operated within the hours specified by the engineer, and will not deviate from the specified hours without prior approval of the engineer. The WZS is responsible to manage work zone delay in accordance with these project provisions. When requested by the engineer, the WZS shall submit a weekly report that includes a review of work zone operations for the week. The report shall identify any problems encountered and corrective actions taken. Work zones are subject to unannounced inspections by the engineer and other departmental staff to corroborate the validity of the WZS's review and may require immediate corrective measures and/or additional work zone monitoring.

1.2 Work Zone Deficiencies. Failure to make corrections on time may result in the engineer suspending work. The suspension will be non-excusable and non-compensable regardless if road user costs are being charged for closures.

2.0 Traffic Management Schedule.

2.1 Traffic management schedules shall be submitted to the engineer for review prior to the start of work and prior to any revisions to the traffic management schedule. The traffic management schedule shall include the proposed traffic control measures, the hours traffic control will be in place, and work hours.

2.2 The traffic management schedule shall conform to the limitations specified in Sec 616 regarding lane closures, traffic shifts, road closures and other width, height and weight restrictions.

2.3 The engineer shall be notified as soon as practical of any postponement due to weather, material or other circumstances.

2.4 In order to ensure minimal traffic interference, the contractor shall schedule lane closures for the absolute minimum amount of time required to complete the work. Lanes shall not be closed until material is available for continuous construction and the contractor is prepared to diligently pursue the work until the closed lane is opened to traffic.

2.5 Traffic Congestion. The contractor shall, upon approval of the engineer, take proactive measures to reduce traffic congestion in the work zone. The contractor shall immediately implement appropriate mitigation strategies whenever traffic congestion reaches an excess of 10 minutes to prevent congestion from escalating to 15 minute or above threshold. If disruption of the traffic flow occurs and traffic is backed up in queues of 15 minute delays or longer, then the contractor shall immediately review the construction operations which contributed directly to disruption of the traffic flow and make adjustments to the operations to prevent the queues from reoccurring. Traffic delays may be monitored by physical presence on site or by utilizing real-time travel data through the work zone that generate text and/or email notifications where available. The engineer monitoring the work zone may also notify the contractor of delays that require prompt mitigation. The contractor may work with the engineer to determine what other alternative solutions or time periods would be acceptable.

2.5.1 Traffic Safety.

2.5.1.1 Recurring Congestion. Where traffic queues routinely extend to within 1000 feet of the ROAD WORK AHEAD, or similar, sign on a divided highway or to within 500 feet of the ROAD WORK AHEAD, or similar, sign on an undivided highway, the contractor shall extend the advance warning area, as approved by the engineer.

2.5.1.2 Non-Recurring Congestion. When traffic queues extend to within 1000 feet of the ROAD WORK AHEAD, or similar, sign on a divided highway or to within 500 feet of the ROAD WORK AHEAD, or similar, sign on an undivided highway infrequently, the contractor shall deploy a means of providing advance warning of the traffic congestion, as approved by the engineer. The warning location shall be no less than 1000 feet and no more than 0.5 mile in advance of the end of the traffic queue on divided highways and no less than 500 feet and no more than 0.5 mile in advance of the end of the traffic queue on undivided highways.

3.0 Work Hour Restrictions.

3.1 Except for emergency work, as determined by the engineer, and long term lane closures required by project phasing, all lanes shall be scheduled to be open to traffic during the five major holiday periods shown below, from 12:00 noon on the last working day preceding the holiday until 6:00 a.m. on the first working day subsequent to the holiday unless otherwise approved by the engineer.

Memorial Day
Labor Day
Thanksgiving
Christmas
New Year's Day

3.1.1 Independence Day. The lane restrictions specified in Section 3.1 shall also apply to Independence Day, except that the restricted periods shall be as follows:

When Independence Day falls on:	The Holiday is Observed on:	Halt Lane Closures beginning at:	Allow Lane Closures to resume at:
Sunday	Monday	Noon on Friday	6:00 a.m. on Tuesday
Monday	Monday	Noon on Friday	6:00 a.m. on Tuesday
Tuesday	Tuesday	Noon on Monday	6:00 a.m. on Wednesday
Wednesday	Wednesday	Noon on Tuesday	6:00 a.m. on Thursday
Thursday	Thursday	Noon on Wednesday	6:00 a.m. on Friday
Friday	Friday	Noon on Thursday	6:00 a.m. on Monday
Saturday	Friday	Noon on Thursday	6:00 a.m. on Monday

3.2 The contractor shall not perform any construction operation on the roadway, roadbed or active lanes, including the hauling of material within the project limits, during restricted periods, holiday periods or other special events specified in the contract documents.

4.0 Detours and Lane Closures.

4.1 When a changeable message sign (CMS) is provided, the contractor shall use the CMS to notify motorists of future traffic disruption and possible traffic delays one week before traffic is shifted to a detour or prior to lane closures. The CMS shall be installed at a location as approved or directed by the engineer. If a CMS with Communication Interface is required, then the CMS shall be capable of communication prior to installation on right of way. All messages planned for use in the work zone shall be approved and authorized by the engineer or its designee prior to deployment. When permanent dynamic message signs (DMS) owned and operated by MoDOT are located near the project, they may also be used to provide warning and information for the work zone. Permanent DMS shall be operated by the TMC, and any messages planned for use on DMS shall be approved and authorized by the TMC at least 72 hours in advance of the work.

5.0 Basis of Payment. No direct payment will be made to the contractor to recover the cost of equipment, labor, materials, or time required to fulfill the above provisions, unless specified elsewhere in the contract document. All authorized changes in the traffic control plan shall be provided for as specified in Sec 616.

D. Emergency Provisions and Incident Management JSP-90-11A

1.0 The contractor shall have communication equipment on the construction site or immediate access to other communication systems to request assistance from law enforcement or other emergency agencies for incident management. In case of traffic accidents or the need for law enforcement to direct or restore traffic flow through the job site, the contractor shall notify law enforcement or other emergency agencies immediately as needed. The area engineer's office shall also be notified when the contractor requests emergency assistance.

2.0 In addition to the 911 emergency telephone number for ambulance, fire or law enforcement services, the following agencies may also be notified for accident or emergency situation within the project limits.

Missouri Highway Patrol – Troop D: 417-895-6868
MoDOT Customer Service: 417-895-7600
Greene County Sheriff: 417-868-4040 Greene County Office of Emergency Management: 417-869-6040
City of Ash Grove Police: (417) 751-2333 Public Works: (417) 751-2333 Fire Protection District: (417) 466-8126

Emergency Only Numbers
911 *55 cell phone – Missouri Highway Patrol 417-864-1160 – MoDOT Incident Management Coordinator

2.1 This list is not all inclusive. Notification of the need for wrecker or tow truck services will remain the responsibility of the appropriate law enforcement agency.

2.2 The contractor shall notify law enforcement and emergency agencies before the start of construction to request their cooperation and to provide coordination of services when emergencies arise during the construction at the project site. When the contractor completes this notification with law enforcement and emergency agencies, a report shall be furnished to the engineer on the status of incident management.

3.0 No direct pay will be made to the contractor to recover the cost of the communication equipment, labor, materials or time required to fulfill the above provisions.

E. Project Contact for Contractor/Bidder Questions JSP-96-05A

1.0 All questions concerning this project during the bidding process shall be forwarded to the project contact listed below.

Cameron Sooy, Project Contact
Southwest District
3025 East Kearney

Springfield, MO 65803

Telephone Number: 417-895-7612
Email: Cameron.Sooy@modot.mo.gov

1.1 All questions concerning the bid document preparation can be directed to the Central Office – Design as listed below.

Telephone Number: (573) 751-2876
Email: BCS@modot.mo.gov

2.0 Upon award and execution of the contract, the successful bidder/contractor shall forward all questions and coordinate the work with the engineer listed below:

Brad Gripka, Resident Engineer
Southwest District
2549 North Mayfair
Springfield, MO 65803

Telephone Number: 417-895-6720
Email: Donald.Gripka@modot.mo.gov

F. Supplemental Revisions JSP-18-01MM

- Compliance with 2 CFR 200.216 – Prohibition on Certain Telecommunications and Video Surveillance Services or Equipment.

The Missouri Highways and Transportation Commission shall not enter into a contract (or extend or renew a contract) using federal funds to procure or obtain equipment, services, or systems that uses covered telecommunications equipment or services as substantial or as critical technology as part of any system where the video surveillance and telecommunications equipment was produced by Huawei Technologies Company, ZTE Corporation, Hytera Communications Corporation, Hangzhou Hikvision Digital Technology Company, or Dahua Technology Company (or any subsidiary or affiliate of such entities).

- Stormwater Compliance Requirements

1.0 Description. This provision requires the contractor to provide a Water Pollution Control Manager (WPCM) for any project that includes land disturbance on the project site and the total area of land disturbance, both on the project site, and all Off-site support areas, is one (1) acre or more. Regardless of the area of Off-site disturbance, if no land disturbance occurs on the project site, these provisions do not apply. When a WPCM is required, all sections within this provision shall be applicable, including assessment of specified Liquidated Damages for failure to correct Stormwater Deficiencies, as specified herein. This provision is in addition to any other stormwater, environmental, and land disturbance requirements specified elsewhere in the contract.

1.1 Definitions. The project site is defined as all areas designated on the plans, including temporary and permanent easements. The project site is equivalent to the "permitted site", as defined in MoDOT's State Operating Permit. An Off-site area is defined as any location off the project site the contractor utilizes for a dedicated project support function, such as, but not limited to, staging area, plant site, borrow area, or waste area.

1.2 Reporting of Off-Site Land Disturbance. If the project includes any planned land disturbance on the project site, prior to the start of work, the contractor shall submit a written report to the engineer that discloses all Off-site support areas where land disturbance is planned, the total acreage of anticipated land disturbance on those sites, and the land disturbance permit number(s). Upon request by the engineer, the contractor shall submit a copy of its land disturbance permit(s) for Off-site locations. Based on the total acreage of land disturbance, both on and Off-site, the engineer shall determine if these Stormwater Compliance Requirements shall apply. The contractor shall immediately report any changes to the planned area of Off-site land disturbance. The contractor is responsible for obtaining its own separate land disturbance permit for Off-site areas.

2.0 Water Pollution Control Manager (WPCM). The contractor shall designate a competent person to serve as the Water Pollution Control Manager (WPCM) for projects meeting the description in Section 1.0. The contractor shall ensure the WPCM completes all duties listed in Section 2.1.

2.1 Duties of the WPCM:

(a) Be familiar with the stormwater requirements including the current MoDOT State Operating Permit for construction stormwater discharges/land disturbance activities; MoDOT's statewide Stormwater Pollution Prevention Plan (SWPPP); the Corps of Engineers Section 404 Permit, when applicable; the project specific SWPPP, the Project's Erosion & Sediment Control Plan; all applicable special provisions, specifications, and standard drawings; and this provision;

(b) Successfully complete the MoDOT Stormwater Training Course within the last 4 years. The MoDOT Stormwater Training is a free online course available at MoDOT.org;

(c) Attend the Pre-Activity Meeting for Grading and Land Disturbance and all subsequent Weekly Meetings in which grading activities are discussed;

(d) Oversee and ensure all work is performed in accordance with the Project-specific SWPPP and all updates thereto, or as designated by the engineer;

(e) Review the project site for compliance with the Project SWPPP, as needed, from the start of any grading operations until final stabilization is achieved, and take necessary actions to correct any known deficiencies to prevent pollution of the waters of the state or adjacent property owners prior to the engineer's weekly inspections;

(f) Review and acknowledge receipt of each MoDOT Inspection Report (Land Disturbance Inspection Record) for the Project within forty-eight (48) hours of receiving the report and ensure that all Stormwater Deficiencies noted on the report are corrected as soon as possible, but no later than stated in Section 5.0.

3.0 Pre-Activity Meeting for Grading/Land Disturbance and Required Hold Point. A Pre-Activity meeting for grading/land disturbance shall be held prior to the start of any land disturbance operations. No land disturbance operations shall commence prior to the Pre-Activity meeting except work necessary to install perimeter controls and entrances. Discussion items at the pre-activity meeting shall include a review of the Project SWPPP, the planned order of grading operations, proposed areas of initial disturbance, identification of all necessary BMPs that shall be installed prior to commencement of grading operations, and any issues relating to compliance with the Stormwater requirements that could arise in the course of construction activity at the project.

3.1 Hold Point. Following the pre-activity meeting for grading/land disturbance and subsequent installation of the initial BMPs identified at the pre-activity meeting, a Hold Point shall occur prior to the start of any land disturbance operations to allow the engineer and WPCM the time needed to perform an on-site review of the installation of the BMPs to ensure compliance with the SWPPP is met. Land disturbance operations shall not begin until authorization is given by the engineer.

4.0 Inspection Reports. Weekly and post run-off inspections will be performed by the engineer and each Inspection Report (Land Disturbance Inspection Record) will be entered into a web-based Stormwater Compliance database. The WPCM will be granted access to this database and shall promptly review all reports, including any noted deficiencies, and shall acknowledge receipt of the report as required in Section 2.1 (f.).

5.0 Stormwater Deficiency Corrections. All stormwater deficiencies identified in the Inspection Report shall be corrected by the contractor within 7 days of the inspection date or any extended period granted by the engineer when weather or field conditions prohibit the corrective work. If the contractor does not initiate corrective measures within 5 calendar days of the inspection date or any extended period granted by the engineer, all work shall cease on the project except for work to correct these deficiencies, unless otherwise allowed by the engineer. All impact costs related to this halting of work, including, but not limited to stand-by time for equipment, shall be borne by the contractor. Work shall not resume until the engineer approves the corrective work.

5.1 Liquidated Damages. If the contractor fails to complete the correction of all Stormwater Deficiencies listed on the MoDOT Inspection Report within the specified time limit, the Commission will be damaged in various ways, including but not limited to, potential liability, required mitigation, environmental clean-up, fines, and penalties. These damages are not reasonably capable of being computed or quantified. Therefore, the contractor will be charged with liquidated damages specified in the amount of $2,000 per day for failure to correct one or more of the Stormwater Deficiencies listed on the Inspection Report within the specified time limit. In addition to the stipulated damages, the stoppage of work shall remain in effect until all corrections are complete.

6.0 Basis of Payment. No direct payment will be made for compliance with this provision.

- ***Delete Sec 106.9, including all subsections and substitute the following:***

106.9 Buy America Requirements.
Buy America Requirements are waived if the total amount of Federal financial assistance applied to the project, through awards or subawards, is below $500,000.

106.9.1 Buy America Requirements for Iron or Steel Products.

The contractor's attention is directed to Title 23 CFR 635.410 *Buy America Requirements*. Where articles, materials or supplies that consist wholly or predominantly of iron or steel or a combination of both are to be permanently incorporated into the contract work, steel and iron material shall be manufactured, from the initial melting stage through the application of coatings, in the USA except for "minimal use" as described herein. Predominantly of iron or steel or a combination of both means that the cost of the iron and steel content exceeds 50 percent of the total cost of all its components. Under a general waiver from FHWA the use of pig iron and processed, pelletized, and reduced iron ore manufactured outside of the USA will be permitted in the domestic manufacturing process for steel or iron material.

106.9.1.1 Any sources other than the USA as defined will be considered foreign. The required domestic manufacturing process shall include formation of ingots and any subsequent process. Coatings shall include any surface finish that protects or adds value to the product.

106.9.1.2 "Minimal use" of foreign steel, iron or coating processes will be permitted, provided the cost of such products does not exceed 1/10 of one percent (0.1 percent) of the total contract cost or $2,500.00, whichever is greater. If foreign steel, iron, or coating processes are used, invoices to document the cost of the foreign portion, as delivered to the project, shall be provided and the engineer's written approval obtained prior to placing the material in any work.

106.9.1.3 Buy America requirements include a step certification for all fabrication processes of all steel or iron materials that are accepted per Sec 1000. The AASHTO Product Evaluation and Audit Solutions compliance program verifies that all steel and iron products fabrication processes conform to 23 CFR 635.410 Buy America Requirements and is an acceptable standard per 23 CFR 635.410(d). AASHTO Product Evaluation and Audit Solutions compliant suppliers will not be required to submit step certification documentation with the shipment for some selected steel and iron materials. The AASHTO Product Evaluation and Audit Solutions compliant supplier shall maintain the step certification documentation on file and shall provide this documentation to the engineer upon request.

106.9.1.3.1 Items designated as Category 1 will consist of steel girders, piling, and reinforcing steel installed on site. Category 1 items require supporting documentation prior to incorporation into the project showing all steps of manufacturing, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410 Buy America Requirements. This includes the Mill Test Report from the original producing steel mill and certifications documenting the manufacturing process for all subsequent fabrication, including coatings. The certification shall include language that certifies all steel and iron materials permanently incorporated in this project was procured and processed domestically and all manufacturing processes, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410.

106.9.1.3.2 Items designated as Category 2 will include all other steel or iron products not in Category 1 and permanently incorporated in the project. Category 2 items shall consist of, but not be limited to items such as fencing, guardrail, signing, lighting and signal supports. The prime contractor is required to submit a material of origin form certification prior to incorporation into the project from the fabricator for each item that the product is domestic. The Certificate of Materials Origin form (link to certificate form) from the fabricator must show all steps of manufacturing, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410 Buy America Requirements and be signed by a fabricator representative. The engineer reserves the right to request additional information and documentation to verify that all Buy America requirements have been satisfied. These documents shall be submitted upon

request by the engineer and retained for a period of 3 years after the last reimbursement of the material.

106.9.1.3.3 Any minor miscellaneous steel or iron items that are not included in the materials specifications shall be certified by the prime contractor as being procured domestically. Examples of these items would be bolts for sign posts, anchorage inserts, etc. The certification shall read "I certify that all steel and iron materials permanently incorporated in this project during all manufacturing processes, including coating, as being completed in the United States and in accordance with CFR Title 23 Section 635.410 Buy America Requirements procured and processed domestically in accordance with CFR Title 23 Section 635.410 Buy America Requirements. Any foreign steel used was submitted and accepted under minor usage". The certification shall be signed by an authorized representative of the prime contractor.

106.9.1.4 When permitted in the contract, alternate bids may be submitted for foreign steel and iron products. The award of the contract when alternate bids are permitted will be based on the lowest total bid of the contract based on furnishing domestic steel or iron products or 125 percent of the lowest total bid based on furnishing foreign steel or iron products. If foreign steel or iron products are awarded in the contract, domestic steel or iron products may be used; however, payment will be at the contract unit price for foreign steel or iron products.

106.9.2 Buy America Requirements for Construction Materials other than iron or steel products.

Construction materials mean articles, materials, or supplies that consist of only one of the items listed. Minor additions of articles, materials, supplies, or binding agents to a construction material do not change the categorization of the construction material. Upon request by the engineer, the contractor shall submit a domestic certification for all construction materials listed that are incorporated into the project.

(a) Non-ferrous metals
(b) Plastic and Polymer-based products (including polyvinylchloride, composite building materials, and polymers used in fiber optic cables)
(c) Glass (including optic glass)
(d) Fiber optic cable (including drop cable)
(e) Optical fiber
(f) Lumber
(g) Engineered wood
(h) Drywall

106.9.3 Buy America Requirements for Manufactured Products.

Manufactured products mean articles, materials or supplies that have been processed into a specific form and shape, or combined with other articles, materials or supplies to create a product with different properties than the individual articles, materials or supplies. If an item is classified as an iron or steel product, an excluded material, or other product category as specified by law or in 2 CFR part 184, then it is not a manufactured product. However, an article, material or supply classified as a manufactured product may include components that are iron or steel products, excluded materials, or other product categories as specified by law or in 2 CFR part 184. Mixtures of excluded materials delivered to a work site without final form for incorporation into a project are not a manufactured product.

106.9.3.1 Produced in the United States, in the case of manufactured products, means:

(A) For projects obligated on or after October 1, 2025, the product was manufactured in the United States; and
(B) For projects obligated on or after October 1, 2026, the product was manufactured in the United States and the cost of the components of the manufactured product that are mined, produced, or manufactured in the United States is greater than 55 percent of the total cost of all components of the manufactured product.

106.9.3.2 (i) With respect to precast concrete products that are classified as manufactured products, components of precast concrete products that consist wholly or predominantly of iron or steel or a combination of both shall meet the requirements of paragraph (b) of this section. The cost of such components shall be included in the applicable calculation for purposes of determining whether the precast concrete product is produced in the United States.
(ii) With respect to intelligent transportation systems and other electronic hardware systems that are installed in the highway right of way or other real property and classified as manufactured products, the cabinets or other enclosures of such systems that consist wholly or predominantly of iron or steel or a combination of both shall meet the requirements of paragraph (b) of this section. The cost of cabinets or other enclosures shall be included in the applicable calculation for purposes of determining whether systems referred to in the preceding sentence are produced in the United States.

106.9.4 Waiver for De Minimis Costs for Manufactured and Construction Materials other than iron or steel products.
"The total value of the non-compliant products is no more than the lesser of $1,000,000 or 5% of total applicable costs for the project." The contractor shall submit to the engineer any non-domestic materials and their total material cost to the engineer. The contractor and the engineer will both track these totals to assure that the minimal usage allowance is not exceeded.

- Third-Party Test Waiver for Concrete Aggregate

1.0 Description. Third party tests may be allowed for determining the durability factor for concrete pavement and concrete masonry aggregate.

2.0 Material. All aggregate for concrete shall be in accordance with Sec 1005.

2.1 MoDOT personnel shall be present at the time of sampling at the quarry. The aggregate sample shall be placed in an approved tamper-evident container (provided by the quarry) for shipment to the third-party testing facility.

2.2 AASHTO T 161 Method B Resistance of Concrete to Rapid Freezing and Thawing, shall be used to determine the aggregate durability factor. All concrete beams for testing shall be 3-inch wide by 4-inch deep by 16-inch long or 3.5-inch wide by 4.5-inch deep by 16-inch long. All beams for testing shall receive a 35-day wet cure fully immersed in saturated lime water prior to initiating the testing process.

2.3 Concrete test beams shall be made using a MoDOT approved concrete pavement mix design.

3.0 Testing Facility Requirements. All third-party test facilities shall meet the requirements outlined in this provision.

3.1 The testing facility shall be AASHTO accredited.

3.1.1 For tests ran after January 1, 2025, accreditation documentation shall be on file with the Construction and Materials Division prior to any tests being performed.

3.1.2 Construction and Materials Division may consider tests completed prior to January 1, 2025, to be acceptable if all sections of this provision are met, with the exception of 3.1.1. Accreditation documentation shall be provided with the test results for tests completed prior to January 1, 2025. No tests completed prior to September 1, 2024, will be accepted.

3.2 The testing facility shall provide their testing process, list of equipment, equipment calibration documentation, and testing certifications or qualifications of technicians performing the AASHTO T 161 Procedure B tests. The testing facility shall provide details on their freezing and thawing apparatus including the time and temperature profile of their freeze-thaw chamber. The profile shall include the temperature set points throughout the entirety of the freeze-thaw cycle. The profile shall show the cycle time at which the apparatus drains/fills with water and the cycle time at which the apparatus begins cooling the specimens.

3.3 Results, no more than five years old, from the third-party test facility shall compare within ±2.0 percent of an independent test from another AASHTO accredited test facility or with MoDOT test records, in order to be approved for use (e.g. test facility results in a durability factor of 79, MoDOT's recent durability test factor is 81; this compared within +2 percent). The independent testing facility shall be in accordance with this provision. The comparison test can be from a different sample of the same ledge combination.

3.4 When there is a dispute between the third party durability test results and MoDOT durability test results, the MoDOT durability test result shall govern.

3.5 Test results shall be submitted to MoDOT's Construction and Materials division electronically for final approval. Test results shall include raw data for all measurements of relative dynamic modulus of elasticity and percent length change for each individual concrete specimen. Raw data shall include initial measurements made at zero cycles and every subsequent measurement of concrete specimens. Raw data shall include the cycle count and date each measurement was taken. Test results shall also include properties of the concrete mixture as required by AASHTO T 161. This shall include the gradation of the coarse aggregate sample. If AASHTO T 152 is used to measure fresh air content, then the aggregate correction factor for the mix determined in accordance with AASHTO T 152 shall also be included.

4.0 Method of Measurement. There is no method of measurement for this provision. The testing requirements and number of specimens shall be in accordance with AASHTO T 161 Procedure B.

5.0 Basis of Payment. No direct payment will be made to the contractor or quarry to recover the cost of aggregate samples, sample shipments, testing equipment, labor to prepare samples or test samples, or developing the durability report.

- *Delete paragraph 15.0 of the General Provision Disadvantaged Business Enterprise (DBE) Program Requirements and substitute the following*:

15.0 Bidder's List Quote Summary. MoDOT is a recipient of federal funds and is required by 49 CFR 26.11 to provide data about its DBE program. All bidders who seek to work on federally

assisted contracts must submit data about all DBE and non-DBEs in accordance with Sec 102.7.9. MoDOT will not compare the submitted Bidder's List Quote Summary to any other documents or submittals, pre or post award. All information will be used by MoDOT in accordance with 49 CFR 26.11 for reporting to USDOT and to aid in overall DBE goal setting**.**

- *Add Sec 102.7.9 to include the following:*

102.7.9 Bidder's List Quote Summary. Each bidder shall submit with each bid a summary of all subcontractors, material suppliers, and service providers (e.g. hauling) considered on federally funded projects pursuant to 49 CFR 26.11. The bidder will provide the firm's name, the corresponding North American Industry Classification System (NAICS) code(s) the firm(s) were considered for, and whether or not they were used in the bid. The information submitted should be the most complete information available at the time of bid. The information shall be disclosed on the Bidder's List Quote Summary form provided in the bidding documents and submitted in accordance with Sec 102.10. Failure to disclose this information may result in a bid being declared irregular.

- Revisions to General Conditions of the Contract for Missouri Standard Specifications for Highway Construction

Insert the following definitions into Sec 101.2:

Agent of Contractor. Subcontractors, its employees, assigns, and agents.

Agent of MoDOT. Any private contractors, subcontractors, engineers, or the employees thereof performing work in accordance with the plans and specifications approved by MoDOT.

Commencement of Work. Also defined as the start of construction operations/activities, this is the date the contractor, its employees, agents, and/or assigns first begins performing work pursuant to the terms of the contract, including the furnishing of labor, material, equipment, and other incidentals necessary or convenient to the successful completion of the project and the carrying out of duties and obligations imposed by the contract. For purposes of clarity, this date shall be deemed to occur on the date certified payroll activities on the project commence.

Exceptions. Work items identified by the engineer, as documented on the semi-final inspection, that are allowed to be completed after the contract completion date but prior to the item-specific completion date established by the engineer. Failure to complete any excepted work item by the item-specific completion date will result in assessment of contract liquidated damages. Designation of exceptions not mandated by the contract is at the sole discretion of the engineer.

Typical exceptions include:

(a) Seasonal items (e.g., sodding, overseeding, establishment of grass for soil stabilization, or tree/shrub plantings)
(b) Tasks that have contractually required or allowed delays (e.g., removal of sediment control devices, waiting periods for signal/lighting systems, pause for retroreflectivity evaluation of pavement markings)

(c) Other tasks in which the engineer determines it is in the best interest of the Commission to allow completion of such task to extend beyond the contract completion date, but within a designated period of time.

Delete Sec 105.10.7, including all subsections and substitute the following:

105.10.7 Final Inspection. Upon apparent completion of the entire project, the engineer will make a Final Inspection of the work to determine acceptance for maintenance in accordance with Sec 105.15.

Delete Sec 105.15, including all subsections and substitute the following:

105.15 Acceptance.

105.15.1 Partial Acceptance. At the discretion of the engineer, portions of the work within a project may be accepted for maintenance prior to the Final Inspection of all work for that project. When a portion of the work or a specific item is partially accepted, the contractor is relieved from maintenance on the identified portion of the work, but this is not the Final Inspection, as defined in Sec 105.15.2, and will not excuse the contractor from liability or responsibility to the Commission for work performed.

105.15.1.1 Acceptance of a Specific Item or Section of Work. Upon completion of any of the items or sections of work listed herein, the contractor may request the engineer's inspection of the work and partial acceptance. If the engineer finds the work to be complete and acceptable, including submittal by the contractor of all required documentation, partial acceptance will be made for that item or section. The following items, complete in place, as determined by the engineer, are eligible for consideration of partial acceptance:

(a) Any section 0.5 mile or more in length.
(b) Any section 0.5 mile or more in length in one direction of a divided highway.
(c) A complete bridge.
(d) An intersection traffic signal system. Partial acceptance may be made for signal equipment prior to the 30-day testing period though any required performance tests and/or guarantees shall remain applicable.
(e) Devices intended to be used for traffic safety and control. Acceptance of traffic safety devices is limited to guardrail, impact attenuation barriers, traffic signal items, signs, delineators, lighting, concrete barrier walls, concrete bridge parapet, bridge railing, guard cable, crash cushions and fence, which are permanently installed in their final position in accordance with the contract documents.

105.15.1.2 Semi-Final Inspection, Corrections and Exceptions. The contractor shall submit a written request for a semi-final inspection at least seven days prior to the anticipated completion of work, excluding exceptions. If the engineer postpones the inspection beyond the date the contractor completes all work, the period of postponement will be considered an excusable but non-compensable delay.

105.15.1.2.1 Immediately following the semi-final inspection, the engineer will provide the contractor with a list of any remaining items of work, corrections, and exceptions. The count of contract time will continue until all work and corrections are complete. If the engineer determines all work is complete, with no exceptions, the semi-final inspection will be considered the Final Inspection in accordance with Sec 105.15.2.

105.15.1.2.2 Work Complete Date. Upon verification by the engineer that all work, exclusive of exceptions, is complete, the engineer will declare partial acceptance and cease the count of contract time. The count of contract time will resume should the contractor fail to complete one or more exceptions by the required date.

105.15.2 Final Inspection and Acceptance for Maintenance. The contractor shall promptly notify the engineer when all work on a project, including exceptions, is complete. Upon Final Inspection by the engineer and verification that all work on a project is complete, a notice of acceptance for maintenance will be submitted to the contractor. Acceptance for maintenance excludes any items covered by item-specific performance bonds. Final Inspection shall occur not later than ten (10) business days after contractor's notification to the engineer that all corrections and exceptions have been completed. If the Final Inspection has not occurred within the ten (10) business-day time frame, all corrections and exceptions shall be deemed completed and MoDOT will be deemed to have accepted maintenance. If written acceptance for maintenance is not received within twenty (20) business days after the date of the Final Inspection, nor any objections sent to the Agent of MoDOT during this twenty (20) business-day period, the project and the work shall automatically be deemed accepted for maintenance.

105.15.2.1 Following the Final Inspection, the Agent of MoDOT will be relieved of any new or additional liability to third parties for personal injury, death or property damages which may be alleged to result from the design or construction of the work, unless additional work is performed by the Agent of MoDOT on the right of way after Final Inspection.

105.15.2.2 Nothing in these specifications shall be deemed to excuse the contractor of liability or responsibility for any personal injury, death or property damages which may have occurred during the time period from the Commencement of Work through the Final Inspection.

105.15.2.3 Acceptance of a project shall not be construed to relieve the contractor of full responsibility for making good any non-latent defect in work or material found on any section of work prior to final acceptance of the entire project, to alter in any manner the method of payment prescribed in the contract or to constitute a waiver of any claim the Commission might have against the contractor on the entire project.

105.15.2.4 Contracts with Multiple Projects. For contracts that include two or more projects, the contractor may request a separate final inspection and acceptance for maintenance as the work is completed on each project.

105.15.3 Final Acceptance and Payment. Following Final Inspection and acceptance for maintenance, the engineer will prepare the final tabulation of quantities in accordance with Sec 109.8. A final change order, if necessary, and the final tabulation of quantities will be submitted to the contractor for review. Upon receipt of the final tabulation of quantities, the contractor shall promptly submit to the engineer any remaining project documentation including, but not limited to, those listed in Sec 105.15.3.2.

105.15.3.1 A Final Acceptance report will be submitted to the contractor, and final payment will be made, no later than thirty days following concurrence on tabulation of quantities, receipt by the engineer of all project documentation, and verification by the engineer that all material incorporated into the work has been properly inspected. If the final tabulation of

quantities determines the contractor was overpaid, the contractor, or in case of default, the surety, shall return the amount of overpayment to the Commission within thirty days of receiving notice of the overpayment from the engineer.

105.15.3.2 When required by the contract, project documentation shall consist of the following:

(a) Contractor's Affidavit Regarding Settlement of Claims (Form C-242)
(b) Final Change Order
(c) DBE Participation List and Final Verification
(d) Affidavit – Compliance with the Prevailing Wage Law

105.15.3.3 Final acceptance will not excuse the contractor's liability or responsibility to the Commission for any latent defects in the work or material incorporated into the work, or for claims relating to any work or material incorporated into the work, except as barred by Sections 537.600 and 537.610, RSMo.

Delete Sec 107.11, including all subsections, and substitute the following:

107.11 Responsibility for Claims for Damage or Injury. The contractor shall be responsible, to the extent imposed by applicable law, for injury, property damage, damage to the Work, or other loss caused by the negligent, wrongful, intentional, reckless, or contractually noncompliant acts or omissions of the contractor or an Agent of Contractor from Commencement of construction activities through Final Inspection and acceptance for maintenance.

107.11.1 The contractor shall not be responsible for damage relating to personal injury or death, arising from the design, condition, or maintenance of the project area prior to commencement of work and after Final Inspection and acceptance of the work, in accordance with Sec 101.2 and 105.15.2, unless any of the following conditions exist:

(a) The work is so defective that it creates an imminent danger to third parties;
(b) A defect in the work was concealed and not discoverable by a reasonable inspection by the Commission;
(c) The agent of MoDOT knew of the dangerous condition and did not disclose it to the Commission; or
(d) The plans or specifications followed were so imperfect or improper that the agent of MoDOT should have known the work to be done thereunder would result in an unsafe condition.

107.11.2 Neither the Commission nor the contractor, by execution of a contract, shall intend to or create a new or enlarge an existing cause of action in any third party. This provision shall not be interpreted to create any new liability that does not exist under the law, or to waive or extinguish any defense that either party to this contract or their respective agents and employees may have to an action or suit by a third party.

Delete Sec 107.12, including all subsections, and substitute the following:

107.12 Contractor's Responsibility for Work Damages to any portion of the work occurring after the date of Commencement of Work and before the work is deemed approved and accepted, caused by the action of the elements or from any other reason, shall be

repaired or replaced at the contractor's expense. The contractor, at the contractor's option, may insure against any such damages. The Commission may, in its discretion, make such a payment, determined in accordance with Sec 109.4, for damage to the work due to unforeseeable causes beyond the control of, and without fault or negligence on the part of the contractor, unless the contractor has been reimbursed for such damages by the contractor's insurer. Prior to reimbursement, the contractor shall furnish documentary evidence of all efforts to recover such repair costs.

107.12.1 The contractor shall immediately give written notice to the engineer of any pedestrian, worker and/or vehicular accident that occurs in or near the work zone. The contractor may be directed by the engineer to repair permanent Commission facilities that have been damaged by events that are beyond the control of the contractor. Reimbursement will be provided by the Commission, determined in accordance with Sec 109.4, for the actual direct cost of labor, equipment and material, exclusive of overhead, indirect or consequential costs of profit. The Commission may elect to make such repairs in lieu of the contractor.

Delete Sections 107.13, 107.13.1, 107.13.2, 107.13.3, 107.13.3.4, 107.13.5, 107.13.6, 107.13.9, 107.13.10.4, 107.13.10.8, and substitute the following:

107.13 General Insurance Requirements. From the commencement of construction activities through the Final Inspection and acceptance for maintenance of the project by the engineer, the contractor shall procure and maintain at the contractor's expense, insurance for all damages and losses imposed by law and assumed under the contract, of the kinds and in the amounts specified in Secs 107.13.1 through 107.13.8.

107.13.1 Sovereign Immunity Limits for Missouri Public Entities. The contractor shall procure and maintain at least minimum insurance coverages to meet the sovereign immunity limits for Missouri public entities as calculated by the Missouri Department of Insurance and published annually in the Missouri Register pursuant to Section 537.610, RSMo for Sec 107.13.2 through 107.13.5, unless specified otherwise for each type of insurance coverage. Each policy shall provide additional insured status for the Missouri Highways and Transportation Commission, its members, the Missouri Department of Transportation, and its employees up to Missouri's sovereign immunity limits. Provided, however, additional insured coverage applies only to liability caused in whole or in part by the acts or omissions of the named insured or those acting on its behalf and does not provide defense or indemnity for liability that Section 537.600, RSMo. places solely on MoDOT or another public entity. Each policy shall be endorsed to not waive sovereign immunity limits. The naming of the Commission, its members, MoDOT, and its employees as additional insureds under any insurance policy shall not be construed as a waiver of any sovereign, official, or other governmental immunity. The Commission, its members, MoDOT, and its employees reserve the right to assert any sovereign, official, or any other governmental immunities. Nothing in the Section shall be construed to enlarge the liability of the contractor beyond that imposed by applicable law, create a contractual duty to defend or indemnify prohibited by Section 537.600, RSMo, or require insurance coverage for liability that Section 537.600, RSMo places solely upon MoDOT. Insurance coverage and priority shall otherwise be determined in accordance with the applicable policies and endorsements.

107.13.2 Commercial General Liability Insurance. The contractor shall procure, and maintain during the term of the project, commercial general liability insurance with coverage at least as broad as Insurance Services Office (ISO) policy form CG 00 01. The general aggregate limit shall, by endorsement or otherwise, provide a designated aggregate limit

solely for this project using ISO form CG 25 03 05 09 or an equivalent form. General liability policies shall be endorsed to add the Commission, its members, MoDOT, its employees, agents, and assigns as additional insureds (the "Additional Insureds") using Insurance Services Office forms CG 20 10 or the equivalent under such policy. For construction contracts, an endorsement providing completed operations coverage to the Additional Insureds, ISO form CG 20 37 or the equivalent, is also required. This form, CG 20 37, shall be endorsed on each subsequent commercial general liability policy issued to the contractor for three (3) years after final acceptance of the project. Should work on the project be discontinued, the commercial general liability insurance coverage shall remain in effect for three (3) years after the date of discontinuation, when applicable. Coverage shall not be reduced by insured versus insured exclusions or by explosion, collapse and underground (XCU) exclusions.

107.13.3 Commercial Automobile Liability Insurance. The contractor shall procure and maintain automobile liability coverage at least as broad as ISO policy form CA 00 01 covering owned, hired, and non-owned autos. The policy shall be endorsed to Commission, its members, MoDOT, and its employees, agents, and assigns as additional insureds (the "Additional Insureds").

107.13.4 Contractor's Pollution Liability (CPL) Insurance. The contractor shall procure and maintain contractor's pollution liability insurance for liability arising out of sudden, accidental, and gradual pollution and remediation. The policy shall have minimum limits of $1,000,000. The Commission, its members, MoDOT, and its employees, agents, and assigns shall be endorsed as additional insureds under such policy. The policy shall provide coverage for hauling of waste from the project site to the final disposal location including non-owned disposal sites. Completed operations coverage for pollution liability shall extend a minimum of three (3) years after final acceptance of the project. Contractor shall require any subcontractor that performs environmental remediation, hazardous material removal or related work including the transportation, disposal, or environmental engineering work, to provide contractor's pollution liability insurance with limits and scope of coverage appropriate to the exposure. The Commission, its members, MoDOT, and its employees, agents, and assigns shall be endorsed as additional insured under such policy. The policy shall not contain a cross suits exclusion or other provisions that would eliminate additional insured claims against the contractor or subcontractor.

107.13.5 Aircraft Liability Insurance. If aircraft, including unmanned aircraft, will be used on the project, contractor shall provide, or cause to be provided, aircraft liability insurance protecting against claims for damages resulting from such use in all cases where any aircraft that is owned, leased or chartered by any Contractor-Related Entity used on the Project. The policy shall have minimum limits of $1,000,000 and the Commission, its members, MoDOT, and its employees, agents, and assigns shall be additional insureds on the policy by endorsement or policy provision. The use of any aircraft in performance of the Work, the aircraft crew, flight path and altitude, including landing of any aircraft on the Site or on any property owned by the Commission, MoDOT or other parties at interest, shall be subject to review and written acceptance by the Commission prior to any such usage. If any aircraft are leased or chartered with crew and/or pilot, evidence of non-owned aircraft liability insurance will be acceptable to meet these requirements but must be provided prior to use of the aircraft. For use of unmanned aircraft vehicles, the contractor may provide insurance either through an aircraft liability insurance policy, or by endorsement to the contractor's commercial general liability insurance policy and excess liability policies. Use of unmanned

aircraft must comply with all state and federal rules and regulations, including FAA requirements.

107.13.6 Excess or Umbrella Liability Insurance. The contractor may satisfy the required limits for Secs 107.13.2 through 107.13.5 by use of excess or umbrella liability insurance policies in any combination that meets the contract limits requirements. Such policies shall include as additional insureds, the Commission, its members, MoDOT, and its employees, agents, and assigns.

107.13.9 Evidence of Insurance. Required evidence of insurance providing confirmation of compliance with these requirements shall consist of a certificate of insurance and any endorsements adding the Commission, MoDOT and its employees as additional insureds where specified. "Blanket" or "automatic" additional insured endorsements providing additional insured coverage "where required by contract," may be used, provided that such forms provide coverage at least as broad as provided by the specified endorsement forms required. The contractor and any subcontract work shall not commence under the contract until the contractor obtains the applicable insurance coverage required and receives approval for such insurance from the engineer. No later than five (5) business days prior to the Commencement of Work, all evidence of insurance for the prime contractor, including certificates of insurance and required endorsements, and notices shall be submitted electronically by the insurance agent to ContractorSupport@MoDOT.mo.gov. The aforementioned evidence of insurance shall also be submitted in the same manner no fewer than five (5) business days prior to the effective date of any change or renewal of insurance during the term of the project. All evidence of insurance for the prime contractor, including certificates of insurance and required endorsements, and notices shall be submitted electronically by the insurance agent to ContractorSupport@MoDOT.mo.gov. The contractor shall promptly furnish the engineer with a complete copy of its policy upon request. Failure to furnish evidence of proper insurance, or complete insurance policies when requested, may result in the suspension of work as provided in Sec 108, and may result in other claims or actions for breach of contract or otherwise, as may be recognized at law or in equity.

107.13.10.4 Primary and Non-contributory. For any claims related to this contract or insurance requirements herein identified, the contractor's insurance coverage shall be primary insurance with respect to the Commission, its members, MoDOT, and its employees, as the additional insureds. Any other insurance or self-insurance maintained by any of these parties shall be excess of the contractor's insurance and shall not contribute with the contractor's insurance, unless liability caused in whole or in part by the acts or omissions of the named insured or those acting on its behalf and does not provide defense or indemnity for liability that Section 537.600, RSMo places solely upon MoDOT or another public entity. Priority and allocation shall be governed by the applicable policies and endorsements. MoDOT may not unilaterally alter priority among the contractor's, any subcontractor's, or any additional insured's policies.

107.13.10.8 Timely Notice of Claims. Contractor shall give the engineer prompt and timely notice of claims made or suits instituted that arise out of or result from contractor's or agent of contractor's performance under this Agreement, and that involve or may involve coverage under any of the required liability policies. The Commission and MoDOT will provide timely notice to the contractor of any claims or lawsuits that it receives.

Delete Sec 107.14 and substitute the following:

107.14 Cooperation in Defense. The Agent of MoDOT and MoDOT shall reasonably cooperate in the defense of the other against potential third party claims. This cooperation includes providing reasonable access to relevant records, documents, and personnel. Nothing in this section creates a contractual duty to defend prohibited by RSMo 537.600(5).

Delete Sec 107.18 and substitute the following:

107.18 Basis of Payment. No direct payment will be made for compliance with Sec 107.

- Payment for Excess Piling

Delete Sec 702.6.3 and insert the following:

702.6.3 Pile Cut-Offs. No direct payment will be made for routine pile cut-offs, except as otherwise provided herein.

702.6.3.1 Excess Piling. If the total measured length of installed piling on a given structure, per item, is 85 percent or less of the plan quantity, the difference between plan quantity and installed quantity shall be deemed as excess piling. Reimbursement will be made for excess piling, as determined by the engineer. No reimbursement will be made for piling purchased in excess of plan quantity. The contractor shall provide the engineer with all paid invoices, which may be used to determine an equitable reimbursement. Shipping costs on the invoice will be included in the reimbursement payment, but no handling, overhead or profit will be included. All excess piling shall be removed from the project and retained by the contractor.

- *Delete Sec 102.18.1 and renumber existing Sec 102.18.2 through 102.18.5.4 including all subsections:*

102.18.1 Certification Regarding Disbarment, Eligibility, Indictments, Convictions or Civil Judgments. The president or authorized official of the bidder, under penalty of perjury under the laws of the USA, shall certify that, except as noted in the exceptions, the company or any person associated therewith in the capacity of owner, partner, director, officer, principal investor, project director, manager, auditor or any position involving the administration of federal funds:

(a) Is not currently under suspension, debarment, voluntary exclusion or determination of ineligibility by any federal agency.

(b) Has not been suspended, debarred, voluntarily excluded or determined ineligible by any federal agency within the past three years.

(c) Does not have a proposed debarment or suspension pending.

(d) Has not been indicted, convicted or had a civil judgment rendered against any of the listed parties by a court of competent jurisdiction in any matter involving fraud or official misconduct within the past three years.

102.18.1.1 If there are any exceptions, the bidder shall submit the exceptions on company letterhead, signed by the bidder and inserted inside the bid submitted.

102.18.1.2 Exceptions will not necessarily result in denial of award but will be considered in determining bidder responsibility.

102.18.1.3 For any exception noted, the bidder shall indicate to whom it applies, the initiating agency, and dates of action.

102.18.1.4 Providing false information may result in criminal prosecution or administrative sanctions.

102.18.2 Certification Regarding Anti-Collusion. In accordance with 23 USC 112, the bidder shall certify, under penalty of perjury, that the bidder has not, either directly or indirectly, entered into any agreement, participated in any collusion or otherwise taken any action in restraint of free competitive bidding in connection with this contract.

102.18.3 Certification Regarding Lobbying Activities. In accordance with 31 USC 1352, the bidder shall certify that:

(a) No federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any federal agency, a member of Congress, an officer or employee of Congress or an employee of a member of Congress in connection with the awarding of any federal contract, the making of any federal grant, the making of any federal loan, the entering into of any cooperative agreement and the extension, continuation, renewal, amendment or modification of any federal contract, grant, loan or cooperative agreement.

(b) If any funds other than federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any federal agency, a member of Congress, an officer or employee of Congress or an employee of a member of Congress in connection with this federal contract, grant, loan or cooperative agreement, the bidder shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with the instructions.

102.18.3.1 This certification shall be a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification shall be a prerequisite for making or entering into this transaction imposed by 31 USC 1352. Any person who fails to file the required certification will be subject to a civil penalty of no less than $10,000 and no more than $100,000 for each such failure.

102.18.3.2 The bidder also agrees by submitting a bid that the bidder shall require that the language of this certification be included in all subcontracts that exceed $100,000, and that all such subrecipients shall certify and disclose any lobbying activities accordingly.

102.18.4 Certification Regarding Missouri Domestic Products Procurement Act. This certification will only apply to state-funded projects as noted on the cover of the Request for Bid. The bidder's attention is directed to Sections 34.350 through 34.359 RSMo 2000, which requires all manufactured goods or commodities used or supplied in the performance of the contract or any subcontract to be manufactured, assembled or produced in the USA. Sections 34.350 through 34.359 RSMo will not apply if the total bid is less than $1,000.00.

102.18.4.1 Section 34.355 RSMo requires the vendor or bidder to certify compliance with Section 34.353 RSMo and, if applicable, Section 34.359 RSMo at the time of bidding and prior to payment. Failure to comply with Section 34.353 RSMo during performance of the contract and to provide certification of compliance prior to payment will result in nonpayment for those goods or commodities.

102.18.4.2 The bidder shall certify that all the specified goods or products for which this bid was solicited are manufactured, assembled or produced in the USA. If there are any exceptions, the bidder shall submit a list of the exceptions on company letterhead, signed by the bidder and attached to the inside of the bid submitted. The list shall include the pay item number and the location where the item is manufactured. The bidder shall identify any of the exceptions in the list that are specified goods or products that are treated as manufactured, assembled or produced in the USA under an existing treaty, law, agreement or regulation of the USA regarding export/import restrictions and international trade.

102.18.4.3 The bidder shall notify the contact listed in the Request for Bid of any specified goods or products that cannot be manufactured, assembled or produced in the USA in sufficient quantities or in time to meet the contract specifications.

102.18.4.4 The bidder shall certify that the bid complies with all provisions of Section 34.350 *et seq* RSMo.

Delete Sec 106.10 and substitute the following:

106.10 Missouri Domestic Products Requirement. For state funded projects, as noted on the cover of the contract, material shall be in accordance with Sec 102.18.4.

G. Utilities JSP-93-26F

1.0 For informational purposes only, the following is a list of contact information for the known utility companies within the project limits:

Utility Name	**Known Required Adjustment**	**Type**
City of Ash Grove Chris Boyd 100 W Main St, Ash Grove, MO 65604 Phone: 417-366-5206	Yes Section 1.3	Sewer and Water
AT&T – Distribution Scott Hall 600 St. Louis, Room 630 Springfield, MO 65806 Phone: 417-849-8265 Email: sh4949@att.com	Yes Section 1.4	Communication
Liberty Utilities - Electric William Endicott 3400 Kodiak Road Joplin, MO 65804	Yes Section 1.5	Electric

Phone: 417-438-4713 Email: William.endicott@libertyutilities.com		
Spire Fred Del Toro 3025 SE. Clover Drive Lee's Summit, MO 64082 Phone: 314-341-0973 Email: fred.deltoro@spireenergy.com	Yes Section 1.6	Gas
Mediacom Kyle Keller 1533 S Enterprise Ave. Springfield, MO 65804 Phone: 417-496-8577 Email: kkeller@mediacomcc.com	Yes Section 1.7	Communications

1.1 The existence and approximate location of utility facilities known to exist, as shown on the plans, are based upon the best information available to the Commission at this time. This information is provided by the Commission "as-is" and the Commission expressly disclaims any representation or warranty as to the completeness, accuracy, or suitability of the information for any use. Reliance upon this information is done at the risk and peril of the user, and the Commission shall not be liable for any damage that may arise from any error in the information. It is, therefore, the responsibility of the contractor to verify the above listing information indicating existence, location and status of any facility. Such verification includes direct contact with the listed utilities.

1.2 Overhead Primary Electric. Various utilities listed above have overhead lines within the project limits near the contractor's work. The contractor shall comply with the Missouri Overhead Powerline Safety Act, which makes it illegal for an unauthorized person or entity to work or bring equipment within 10 feet of a high-voltage line that has not been covered or de-energized. If the contractor requires line cover when working near a primary power line, the contractor shall notify the utility owner a minimum of 14 days prior. The contractor is responsible for any damage to overhead lines caused by their operations. There will be no direct payment for compliance with this specification.

1.3 City of Ash Grove – The city has sewer and water facilities in the area of culvert replacement. The sewer will be installed by MoDOT contractor. Proximity of proposed sewer line will be determined in the field and, if water is within 18" of sewer, install casing per DNR requirements. All work for Ash Grove water and sewer facilities will be built into MoDOT contract.

1.4 AT&T Distribution – AT&T has underground facilities on both north and south sides of 160. North side copper will be removed. South side fiber will be installed in new conduit and lowered in place at least 36" below proposed culvert.

1.5 Liberty Utilities Electric – Liberty Electric has overhead power in conflict with proposed excavation. Upon acquisition of right of way, these lines will be relocated to the new 6' utility corridor.

1.6 Spire – Spire has a buried 2" gas line that crosses the proposed culvert location. Spire will install new conduit and 2" gas line and will lower in place at least 36" below proposed culvert.

1.7 Mediacom – Mediacom has a fiber on the north side of 160 that is 10'-15' deep near the culvert. This line will not be relocated. They have an aerial coaxial line crossing 160 on Liberty's poles. This line will move with Liberty's relocations.

H. Right-of-Way Clearance – Delayed Possession

1.0 Description. The right-of-way for this project has been acquired except for

Parcel 2 (City of Ash Grove) – New RW and TCE
Parcel 3 (RENPROP, LLC) – New RW and TCE
Parcel 4 (MFA Inc.) - New RW and TCE

1.1 The contractor shall inform itself of the location of this tract. No encroachment, storage of equipment and materials or construction on these tracts shall be permitted until notification by the engineer is given that these tracts have been acquired.

1.2 The contractor shall schedule its work utilizing the available right of way until this tract is cleared for construction, which is estimated to be December 21, 2026. However, this date expressly is not a warranty by or contractually binding on the Commission as the date the four tracts will be clear for construction. No encroachment, storage of equipment and materials or construction on these tracts shall be permitted until the contractor is notified by the engineer that these tracts have been acquired.

.

1.3 The contractor shall have no claim for damage for delay, disruption, interference or otherwise as a result of the unavailability of **Parcels listed above in Item 1.0.** The contractor may be given an extension of time upon proof of actual delay caused by the unavailability of these tracts as approved by the engineer.

I. Liquidated Damages Specified JSP-93-28A

1.0 Description. If the Culvert replacement over Hamilton Creek between Thurmond Avenue and Perryman Avenue is not complete and open to traffic after 21 days of closure, the Commission, the traveling public, and state and local police and governmental authorities will be damaged in various ways, including but not limited to, increased construction administration cost, potential liability, traffic and traffic flow regulation cost, traffic congestion and motorist delay, with its resulting cost to the traveling public. These damages are not reasonably capable of being computed or quantified. Therefore, the contractor will be charged with liquidated damages specified in the amount of $500 per day for each day, or partial day thereof, that the Culvert replacement over Hamilton Creek between Thurmond Avenue and Perryman Avenue is not complete and open to traffic in excess of the limitation as specified elsewhere in this special provision. It shall be the responsibility of the engineer to determine the quantity of excess closure time.

1.1 The said liquidated damages specified will be assessed regardless of whether it would otherwise be charged as liquidated damages under the Missouri Standard Specification for Highway Construction, as amended elsewhere in this contract.

J. Contractor Quality Control NJSP-15-42

1.0 The contractor shall perform Quality Control (QC) testing in accordance with the specifications and as specified herein. The contractor shall submit a Quality Control Plan (QC Plan) to the engineer for approval that includes all items listed in Section 2.0, prior to beginning work.

2.0 Quality Control Plan.

(a) The name and contact information of the person in responsible charge of the QC testing.
(b) A list of the QC technicians who will perform testing on the project, including the fields in which they are certified to perform testing.
(c) A proposed independent third party testing firm for dispute resolution, including all contact information.
(d) A list of Hold Points, when specified by the engineer.
(e) The MoDOT Standard Inspection and Testing Plan (ITP). This shall be the version that is posted at the time of bid on the MoDOT website (www.modot.org/quality).

3.0 Quality Control Testing and Reporting. Testing shall be performed per the test method and frequency specified in the ITP. All personnel who perform sampling or testing shall be certified in the MoDOT Technician Certification Program for each test that they perform.

3.1 Reporting of Test Results. All QC test reports shall be submitted as soon as practical, but no later than the day following the test. Test data shall be immediately provided to the engineer upon request at any time, including prior to the submission of the test report. No payment will be made for the work performed until acceptable QC test results have been received by the engineer and confirmed by QA test results.

3.1.1 Test results shall be reported on electronic forms provided by MoDOT. Forms and Contractor Reporting Excel2Oracle Reports (CRE2O) can be found on the MoDOT website. All required forms, reports and material certifications shall be uploaded to a Microsoft SharePoint® site provided by MoDOT, and organized in the file structure established by MoDOT.

3.2 Non-Conformance Reporting. A Non-Conformance Report (NCR) shall be submitted by the contractor when the contractor proposes to incorporate material into the work that does not meet the testing requirements or for any work that does not comply with the contract terms or specifications.

3.2.1 Non-Conformance Reporting shall be submitted electronically on the Non-Conformance Report form provided on the MoDOT Website. The NCR shall be uploaded to the MoDOT SharePoint® site and an email notification sent to the engineer.

3.2.2 The contractor shall propose a resolution to the non-conforming material or work. Acceptance of a resolution by the engineer is required before closure of the non-conformance report.

4.0 Work Planning and Scheduling.

4.1 Two-week Schedule. Each week, the contractor shall submit to the engineer a schedule that outlines the planned project activities for the following two-week period. The two-week schedule shall detail all work and traffic control events planned for that period and any Hold Points specified by the engineer.

4.2 Weekly Meeting. When work is active, the contractor shall hold a weekly project meeting with the engineer to review the planned activities for the following week and to resolve any outstanding issues. Attendees shall include the engineer, the contractor superintendent or project manager and any foreman leading major activities. This meeting may be waived when, in the opinion of the engineer, a meeting is not necessary. Attendees may join the meeting in person, by phone or video conference.

4.3 Pre-Activity Meeting. A pre-activity meeting is required in advance of the start of each new activity, except when waived by the engineer. The purpose of this meeting is to review construction details of the new activity. At a minimum, the discussion topics shall include: safety precautions, QC testing, traffic impacts, and any required Hold Points. Attendees shall include the engineer, the contractor superintendent and the foreman who will be leading the new activity. Pre-activity meetings may be held in conjunction with the weekly project meeting.

4.4 Hold Points. Hold Points are events that require approval by the engineer prior to continuation of work. Hold Points occur at definable stages of work when, in the opinion of the engineer, a review of the preceding work is necessary before continuation to the next stage.

4.4.1 A list of typical Hold Point events is available on the MoDOT website. Use of the Hold Point process will only be required for the project-specific list of Hold Points, if any, that the engineer submits to the contractor in advance of the work. The engineer may make changes to the Hold Point list at any time.

4.4.2 Prior to all Hold Point inspections, the contractor shall verify the work has been completed in accordance with the contract and specifications. If the engineer identifies any corrective actions needed during a Hold Point inspection, the corrections shall be completed prior to continuing work. The engineer may require a new Hold Point to be scheduled if the corrections require a follow-up inspection. Re-scheduling of Hold Points require a minimum 24-hour advance notification from the contractor unless otherwise allowed by the engineer.

5.0 Quality Assurance Testing and Inspection. MoDOT will perform quality assurance testing and inspection of the work, except as specified herein. The contractor shall utilize the inspection checklists provided in the ITP as a guide to minimize findings by MoDOT inspection staff. Submittal of completed checklists is not required, except as specified in 5.1.

5.1 Inspection and testing required in the production of concrete for the project shall be the responsibility of the contractor. Submittal of the 501 Concrete Plant Checklist is required.

6.0 Basis of Payment. No direct payment will be made for compliance with this provision.

K. Optional Pavements JSP 06-06H

1.0 Description. This work shall consist of a pavement composed of either Portland cement concrete or asphaltic concrete constructed on a prepared subgrade. This work shall be performed in accordance with the standard specifications and as shown on the plans or established by the engineer.

2.0 The quantities shown reflect the total square yards of pavement surface designated for each pavement type as computed and shown on the plans.

2.1 No additional payment will be made for asphaltic concrete mix quantities to construct the required 1:1 slope along the edge of the pavement, or for tack applied between lifts of asphalt.

2.2 No additional payment will be made for aggregate base quantities outside the limits of the final surface area as computed and shown on the plans. When A2 shoulders are specified, payment for aggregate base will be as shown on the plans.

2.3 The grading shown on the plans was designed for the thicker pavement option. For projects with grading in the contract, there will be no adjustment of the earthwork quantities due to adjusting the roadway subgrade for optional pavements.

2.4 The contractor shall comply with Sections 401 through 403 for the asphalt option and Sections 501 and 502 for the concrete option.

2.5 Pavement options composed of Portland cement concrete shall have contrast pavement marking for intermittent markings (skips), dotted lines, and solid intersection lane lines. The pavement markings shall be in accordance with Section 620. No additional payment will be made for the contrast pavement markings.

3.0 Method of Measurement. The quantities of concrete pavement will be measured in accordance with Section 502.14. The quantities of asphaltic concrete pavement will be measured in accordance with Section 403.22.

4.0 Basis of Payment. The accepted quantity of the chosen option will be paid for at the contract unit bid price for Item 401-99.05, Optional Pavement, per square yard.

4.1 For projects with previously graded roadbeds, any additional quantities required to bring the roadway subgrade to the proper elevation will be considered completely covered by the pay item for Subgrading and Shouldering.

4.2 Price Adjustment for Fuel. If the contractor accepts the option for fuel adjustment in the bid proposal, a fuel adjustment will be applied in accordance with Sec 109.14 for the type of pavement constructed.

L. Seeding and Mulching Requirements JSP-25-03

1.0 Seeding. Seeding shall be in accordance with Sec 805 except as otherwise stated herein. Cool season grasses shall be utilized in accordance with Standard Plan 805.00.

1.1 Temporary Seeding. Temporary seeding shall be in accordance with Sec 806.50 except as otherwise stated herein.

2.0 Mulching. Mulching shall be in accordance with Sec 802 except as otherwise stated herein.

3.0 Method of Measurement. No measurement will be made for seeding, temporary seeding or mulching. Seeding and mulching of all disturbed areas, including any additional areas disturbed beyond what is shown on the plans, shall be considered included in the single lump sum item provided.

4.0 Basis of Payment. All labor, equipment, and materials necessary to complete all seeding, temporary seeding and mulching shall be completely covered by the contract unit price for 805-99.01 Seeding and Mulching - Cool Season Grasses, per lump sum.

M. Contractor Furnished Surveying and Staking - SW

In addition to the requirements of Section 627 of the Missouri Standard Specifications for Highway Construction, the following shall apply:

1.0 Description. The contractor shall be responsible for all layout required on the project. This responsibility shall include, but not be limited to the following: Construction signing, transition milling, pavement marking, loop detectors, etc.

1.1 The above list is not all inclusive. The contractor shall have the primary responsibility for these operations. The contractor shall provide the Resident Engineer (RE) with a staking plan layout for approval prior to the installation of signs. The RE will also provide assistance during this layout provided a request is submitted to the RE or Construction Project Manager 48 hours in advance. This will ensure that all permanently mounted traffic control devices remain consistent with District policy and avoid re-staking. If the contractor installs any signs without engineer approval, all costs associated with re-staking and/or relocation will be at the contractor's expense.

1.2 The intent of this provision is to increase the quality of our work zones and minimize negative impacts to the contractor's schedule that can result from delays in staking.

1.3 Any adjustments to the plan quantities or line numbers established in the contract shall be approved by the Engineer.

2.0 Basis of Payment. No direct payment will be made to cover the costs associated with these additional requirements. All costs will be considered completely covered by the unit bid price submitted for Contractor Furnished Surveying and Staking.

N. Property Owner Notification

1.0 Description. It shall be the contractor's responsibility to inform and notify the adjacent property owner 48 hours prior to starting any construction activities that may impact driveway and parking lot access or occur along the frontage of the property owner's parcel. Notification shall be in written form and include the contractor's contact information, the Engineer's contact information, and an estimated schedule of work and the associated impacts.

2.0 Basis of Payment. No direct payment will be made to the contractor for the labor, equipment, material, or time required to comply with this provision.

O. Pavement Marking Log

1.0 Description. This work shall consist of the Contractor documenting the location of all existing pavement markings prior to coldmilling or resurfacing and installing new pavement markings to match the scheme that was in place prior to the project.

2.0 Construction Requirements. Prior to the start of resurfacing work, the Contractor shall document the color, type, and location of the existing pavement markings, including any change in pavement marking (e.g., solid yellow to intermittent yellow on the centerline) and no passing zones. The Contractor shall submit the method of documentation to the Engineer for approval prior to recording the existing pavement marking information.

2.1 The existing pavement marking documentation provided by the Contractor shall include the location of existing pavement markings by either station or log mile. The Engineer shall reserve the right to make adjustments to the final pavement marking locations. The Engineer will provide the Contractor with any adjusted locations. Under no circumstances shall the Contractor make adjustments to the location of permanent pavement markings without the Engineer's approval.

2.2 All permanent pavement markings shall be installed in accordance with Sec 620.

3.0. Temporary Pavement Marking. The Contractor shall provide temporary pavement marking in accordance with Sec 620 and Standard Plan 620.10. No compensation will be made to the Contractor for temporary pavement marking.

4.0 Method of Measurement. Measurement will be made in accordance with Sec 620.

5.0 Basis of Payment. No direct compensation will be made to the Contractor for compliance with this provision. All costs associated with the equipment, labor, materials, and time necessary to fulfill the requirements of this provision shall be considered completely covered by the pavement marking (Sec 620) line items in the contract.

P. Permanent Pavement Marking - SW

1.0 Description. This work shall consist of furnishing and placing permanent centerline, edge line, and lane line markings as specified, at locations shown on the plans or as approved by the engineer. This work shall be in accordance with Section 620 and specifically as follows.

2.0 Construction Requirements. On roadways open to traffic, permanent centerline, edge line, and lane line markings shall be in place no later than five days after the final paving operations. This requirement applies per individual route if multiple routes are included in a contract or if a 15 mile section of an individual route is open to traffic within a contract. This requirement also applies to divided highways, once a directional segment of 15 mile, or the entire directional segment if less than 15 miles, is paved and open to traffic within a contract. To fulfill this requirement, the contractor may have to mobilize more than once for the installation of permanent centerline, edge line, and lane line markings. The contractor will also need to coordinate the permanent pavement marking with the installation of rumble strips

3.0 Basis of Payment. The accepted quantity of permanent pavement marking paint will be paid for at the contract unit price for each of the pay items include in the contract. Payment will be considered full compensation for all labor, equipment, material or time necessary to complete the described work including any other incidental items.

Q. No Value Engineering Proposals for 2.5 Inch Perforated Square Steel Tube (PSST) Posts and Concrete Post Anchors for 2.5 Inch Perforated Square Steel Tube (PSST) Posts

This project will require 2.5 In. Perforated Square Steel Tube (PSST) Posts and Concrete Post Anchors for 2.5 In. Perforated Square Steel Tube (PSST) Posts as specified in the plans. No Contractor initiated Value Engineering Change Proposals (VECPs) or Practical Design Value Engineering Change Proposals (PDVECPs) will be accepted for any part of installing existing signs or new signs on new Perforated Square Steel Tube (PSST) Posts and Concrete Post Anchors different than the 2.5 Inch Perforated Square Steel Tube (PSST) Posts and Concrete Post Anchor for 2.5 Inch Perforated Square Steel Tube (PSST) Posts that is required.

R. Site Sanitary Sewerage Systems

1.0 Pipe Materials

1.1 Gravity sewer: Ductile Iron material or SDR 26 PVC as shown; inside nominal diameter as specified on the drawings (8 inches minimum).

2.0 Pipe Accessories

2.1 Pipe joints: Bell and spigot style gasket sealed joint end. Compression gasket rims for force main.

2.2 Gravity sewer fittings: Same material as pipe, molded or formed to suit pipe size and end design in required tees, bends, elbows, clean-outs, reducers, traps and other configurations.

3.0 Installation Pipe

3.1 Install pipe, fittings, and accessories in accordance with applicable ASTM standards and manufacturer's instructions. Seal joints watertight.

3.2 Lay pipe to slope gradients noted on plan and profile drawings (0.50% minimum and 10.0% maximum) with a maximum variation from true slope of 1:1000. Under no circumstances shall pipe be laid in water and no pipe shall be laid under unsuitable weather or trench conditions.

3.3 Every precaution shall be taken to prevent foreign material from entering the pipe while it is being installed. No debris, tools, clothing, or other materials shall be placed in the pipe.

3.4 Whenever pipe lying is stopped, the open end of the line shall be sealed with a watertight plug.

3.5 Install bedding at sides and over top of pipe to minimum compacted thickness of 12 inches; compacted to 95 percent.

3.6 Force mains: Concrete reaction or thrust blocking should be provided at each valve, bend, tee and at reducers or fittings where changes occur in pipe diameter or direction. Avoid placing pipes with high points or air pockets in the system.

4.0 Sanitary sewer and water main locations:

4.0.1 Horizontal separation: Sanitary sewer and water mains shall be separated horizontally by at least 10 feet as indicated in the standard drawings. Should local conditions prevent a lateral separation of 10 feet and the City has given their approval, a water main may be laid in a separate trench or on an undisturbed earth shelf located on one side of the sewer line and at such an elevation that the bottom of the water main is at least 24 inches above the top of the sewer line. This vertical separation must be maintained for a normal distance of 10 feet.

4.0.2 Vertical separation: Where sanitary sewer and water mains must cross, the sanitary sewer main must be laid at such an elevation that the top of the sanitary sewer main is at least 24 inches below the bottom of the water main, and a full length of sanitary sewer pipe must be centered under the water main to be crossed so that the joints will be equally distant from the water main and as remote therefrom as possible.

4.0.3 Special conditions: Where conditions prevent the minimum vertical separation as set forth above from being maintained or where it is necessary for the water main to pass under a sewer line, the water main (if newly installed) must be encased with the same type of pressure pipe, which must extend on each side of the crossing until the normal distance from the water main to the sewer is at least 10 feet. In making such crossings, a full length of pipe must be centered over or under the sewer to be crossed so that the joints will be equally distant from the sewer and as remote therefrom as possible. If the water main exists, the sanitary sewer main shall be encased in concrete at a length making the end points at least 10 feet from the water main.

5.0 Acceptance Tests for Sewers

5.1 Scope of work: The work shall consist of furnishing all labor, equipment, tools and materials, and the performance of any or all acceptance tests as required by the drawings, Job Special Provisions, or inspector of the governing agency having authority over the installation.

6.0 General requirements

6.0.1 The Contractor shall furnish the Engineer with every reasonable facility for ascertaining whether or not the work performed was in accordance with the requirements and intent of the plans and specifications. Any work done (except excavation) or material used without suitable supervision or inspection by the Engineer may be ordered removed and replaced at the Contractor’s expense.

6.0.2 The Contractor is responsible for providing the personnel and equipment necessary to run the tests. The project representative or inspector shall observe test and record testing information in the permanent record.

6.0.3 Prior to backfilling, the Contractor shall provide facilities to the Engineer to make a visual observation test of the straightness of each section of sewer between two adjacent manholes by either a laser beam or lamping.

6.0.4 After substantial completion of the work, which includes jetting, backfilling, and rough cleanup, or from time to time as the work progresses, the Contractor shall, under the

direction of the Engineer, make such tests of the entire work or any part thereof as may be required to demonstrate the efficiency of the sewer and its components. Any test conducted must be performed 30 days or greater after final backfill is in place. If required, the Contractor shall make such openings as the Engineer may direct and shall restore the part of the work so disturbed to the satisfaction of the Engineer. Should any part of the work be found faulty in any respect, the Contractor shall repair such defects or replace them with new work as may be directed by the Engineer.

6.0.5 Pressure testing prior to backfilling is discouraged due to safety concerns.

6.1 Acceptance tests for gravity sewers - deflection testing

6.1.1 Contractor shall clean pipe of excess mortar, joint sealant and other dirt debris prior to acceptance.

6.1.2 The Contractor will be required during construction to install a line throughout the entire length of the sewer project. This line will be used for running a mandrel through the lines. The ends of the line will be secured in a manner satisfactory to the Engineer to ensure that the line will not be removed from the sewer before inspection. The line to be installed shall be 1/4 inch nylon or polypropylene yellow or white rope.

6.1.3 A mandrel will be furnished by the contractor to use to mandrel all sewer lines in checking for the presence of any misaligned, displaced, or broken pipe and the presence of visible infiltration, debris or other defects. All mandrelling must be done in the presence of the Engineer.

Nominal Pipe Size (inches)	Minimum Pipe Diameter (inches)	95% Deflection Mandrel Diameter (inches)
8	7.665	7.28
10	9.563	9.08
12	11.361	10.79
15	13.898	13.20

6.1.4 Mandrel diameter shall be equal to 95 percent of the inside diameter of the pipe. All tests shall be performed without mechanical pulling devices thirty (30) days after final backfill has been placed. No pipe shall have a deflection greater than 5%. The following shall be used for mandrel sizing, and the Contractor shall confirm the size of mandrel used with the Engineer:

6.1.5 The Contractor shall correct all defects found during mandrelling operations prior to conducting leakage test.

6.2 Acceptance test for gravity sewers - air leakage testing

6.2.1 An air leakage test shall be performed in accordance with ASTM F1417-92 on the full length of all sewer lines and lateral lines prior to acceptance.

6.2.2 Contractor must perform air tests on all pipe less than eighteen (18) inch diameter and may be required to perform air tests for all pipe sizes.

6.2.3 The Contractor must furnish all facilities required including necessary piping connections, test pumping equipment, pressure gauges, bulkheads, regulator to avoid over pressurization,

and all miscellaneous items required.

6.2.4 The pipe plug for introducing air to the sewer line shall be equipped with two taps. One tap will be used to introduce air into the line being tested, through suitable valves and fittings, so that the input air may be regulated. The second tap will be fitted with valves and fittings to accept a pressure test gauge readable from ground level indicating internal pressure in the sewer pipe. The pressure test gauge will also be used to indicate loss of air pressure due to leaks in the sewer line.

6.2.5 The pressure test gauge shall meet the following minimum specifications:

a) Size (diameter): 4 to 4 1/2 inches.

b) Pressure range: 0 to 30 PSI.

c) Figure intervals: 0.5 psi increments.

d) Pressure tube: Bourdon Tube or diaphragm.

e) Accuracy: +/- 0.25 percent of maximum scale reading.

f) Dial: White coated aluminum with black lettering, 270 degree arc.

g) Pipe connection: Low male 1/2 inch NPT.

6.2.6 Calibration data will be supplied with all pressure test gauges. Certification of pressure test gauge will be required from the gauge manufacturer. This certification and calibration data will be available to the Engineer whenever air tests are performed. The test gauges shall be calibrated at least every six months.

6.2.7 The Contractor shall test each reach of sewer pipe between manholes after completion of installation of all utilities.

6.2.8 The Contractor shall plug ends of line and cap or plug all connections to withstand internal pressure. One of the plugs provided must have two taps for connecting equipment. After connecting air control equipment to the air hose, monitor air pressure so that internal pressure does not exceed 5.0 psig. After reaching 4.0 psig, throttle the air supply to maintain between 4.0 and 3.5 psig for at least two (2) minutes in order to allow equilibrium between air temperature and pipe walls. If the time in seconds, for the air pressure to decrease from 3.5 psig to 2.5 psig is greater than that shown in the table below, the pipe shall be presumed free of defects.

Pipe dia.	100ft.	150ft.	200ft.	250ft.	300ft.	350ft.	400ft.
(in)	Specification for time length, min:sec						
4	1:53	1:53	1:53	1:53	1:53	1:53	1:53
6	2:50	2:50	2:50	2:50	2:50	2:50	2:51
8	3:47	3:47	3:47	3:47	3:48	4:26	5:04
10	4:43	4:43	4:43	4:57	5:56	6:55	7:54
12	5:40	5:40	5:42	7:08	8:33	9:58	11:24
15	7:05	7:05	8:54	11:08	13:21	15:35	17:48

6.2.9 If the air test fails to meet the above requirements, repeat test as necessary after all leaks and defects have been repaired. Prior to acceptance, all constructed sewer lines shall satisfactorily pass the low-pressure air test.

6.2.10 In areas where groundwater is known to exist, the Contractor shall install one-half inch diameter capped pipe nipple, approximately 10 inches long, through manhole wall on top of one of the sewer lines entering the manhole. This shall be done at the time the sewer line is installed. Immediately prior to the performance of the acceptance test, groundwater level shall be determined by removing pipe cap, blowing air through the pipe nipple into the ground so as to clear it, and then connecting a clear plastic tube to the pipe nipple. The hose shall be held vertically and a measurement of height in feet of water shall be taken after the water stops rising in this plastic tube. The height in feet shall be divided by 2.3 to establish the pounds of pressure that will be added to all readings.

6.2.11 In high groundwater conditions, the Contractor may be allowed upon receiving prior approval by the City to conduct infiltration and exfiltration acceptance testing in lieu of air leakage testing. This test shall be conducted in accordance with ASTM C969 standards.

S. Sanitary Sewer Relocation

1.0 Description. This work consists of relocating sanitary sewer. All Materials and installation shall comply with City of Ash Grove standard specifications.

2.0 Method of Measurement. Final measurement will not be made.

3.0 Basis of Payment. The sanitary sewer, complete and in-place, will be paid for at the contract unit price for the following bid items:

Bid Item No.	Description	Units
603-99.23	Sewer {Sanitary Sewer Manhole}	Lin. Ft.
603-99.23	Sewer {8” PVC Casing}	Lin. Ft.
603-99.23	Sewer {20” Concrete Casing}	Lin. Ft.

T. Manholes and Covers

1.0 Products and Materials. Manhole sections: Circular, reinforced precast concrete in accordance with ASTM C478.

1.1 Gaskets

1.1.1 Mastic Fed Spec SS S 210; K.T. Snyder Ram-Nek; Hamilton Kent, Kent Seal #2; or approved equivalent.

1.1.2 Rubber Neoprene or other synthetic, 40 plus or minus 5 hardness when measured by ASTM D2240, Type A durometer.

1.1.3 Slip-on rubber manhole adapter as manufactured by Fernco or equivalent.

1.1.4 Cast-in pipe gasket as manufactured by A-LOK Products, Inc. or equivalent conforming to ASTM C-923.

1.2 If the Contractor desires to suggest changes, modifications or alternatives, the Contractor shall submit, in writing, a description of the proposed changes or modifications for review by the City and Engineer.

2.0 Components.

2.1 Manhole lid and frame: Neenah; Deeter; or approved equivalent, ASTM A48, Class 30B cast iron construction, machined flat bearing surface, removable closed lid design; live load rating suitable for H-20 load requirements of 16,000 lbs.; having lid molded with and identifying use such as sanitary sewer or sewer.

2.2 Wetwell lid and frame: Neenah; Deeter; U.S. Foundry; or approved equivalent, aluminum construction with a 300 psf live load rating, or approved equivalent.

2.3 Manhole steps: As per Manufacturer.

3.0 Configuration.

3.1 Shaft construction: Concentric and cylindrical with eccentric cone top section; lipped male/female joints; sleeved to receive pipe sections.

3.2 Clear inside dimensions: 48 inch or 60 inch for inside drop manhole structures. For wetwells, minimum inside diameter shall be based on capacity requirements.

3.3 Design depth: As indicated.

3.4 Clear lid opening: 24 inches. Manholes shall include self-sealing lid and concealed pick holes. Wetwells shall include a reinforced concrete top with opening for surface mounted lift station or with embedded aluminum access hatch for submersible lift stations. Top shall match wet well sections and sealed with mastic gasket.

3.5 Pipe entry: Provide precast openings with gasketed fittings as required.

3.6 Steps: 12 inches wide, 16 inches on center vertically, set into manhole wall.

4.0 Examination. Verify calculated rim elevation agrees with actual finish grade found at site. Contractor shall
inform the City and make adjustments as necessary to the manhole component make-up.\

4.1 Waterproofing of manholes: Surface preparation and application shall comply with manufacturer's recommendations. Contractor and manufacturer are advised that surface preparation and waterproofing application shall occur at manufacturer's plant, prior to shipment, and comply with paint manufacturer's recommendations. Exteriors of precast sections shall be waterproofed with a minimum 15.0 MILS DFT coating of Coal Tar paint 47 - BX4 or equivalent.

5.0 Placing Manhole Sections. Provide six (6) inches of compacted granular fill (Class IA) beneath bottom.

5.1 Place manhole sections plumb and level, trim to correct elevations, anchor to base pad (if necessary). Provide a double row of mastic gasket to seal joints between sections. Fill inside of void between precast sections with non-shrink grout. Trowel smooth.

5.2 Cut and fit for pipe and gasketed fittings. Install an “A-LOK” flexible rubber gasket; Fernco slipon rubber manhole adapter; or approved equivalent at the entrance hole. Sleeve openings are acceptable for pump outlet piping. A non-shrink grout shall be installed around outlet pipe penetrations.

5.3 Grout base of shaft sections to achieve slope to exit piping (if base has not been precast as part of the manhole). Trowel smooth. Contour as required.

5.4 The flow channel of base shall conform in shape and slope to that of the sewer and shall be finished as smoothly as possible to provide a roughness coefficient nearly equal to that of the pipe. Changes in flow direction shall not exceed 90 degrees. Where a junction of two or more lines occur, a separate channel shall be constructed for each incoming line with the channels gradually merging ahead of the outlet using uniform curves.

5.5 Set cover frames and covers level without tipping, to correct elevations. Set frame level so that top of cover is two (2) inches higher than finish grade or as indicated on drawings.

6.0 Acceptance Tests

6.1 Scope of work: The work shall consist of furnishing of all labor, equipment, tools, and materials, in the performance of any acceptance test.

6.1.1 All manholes and wetwells must be tested to assure water tightness.

6.1.2 Existing manholes must be tested prior to excavation and after pipe installation and backfilling. If vacuum test fails on initial test, cease excavation at this area and notify the City and the Engineer. Any repairs to existing manholes necessary to pass the vacuum test are the responsibility of the Contractor.

6.1.3 After the manhole is in place and backfilled to finish grade, the Contractor shall plug the inlet and outlet sewer feeds in a watertight manner. The manhole will then be tested using a vacuum test. Wetwells may be tested using either a water-test or a vacuum test. Tests must be performed in the presence of the Engineer or his representative.

6.2 Vacuum testing manholes: The Contractor shall furnish all facilities required, including necessary piping connections, test pumping equipment, pressure gauges, bulkheads, regulator to avoid over pressurization and all miscellaneous items required.

6.2.1 Calibration data will be supplied with all pressure test gauges. Certification of vacuum test gauges will be required from the gauge manufacturer. This certification and calibration data will be available to the Engineer whenever air tests are performed.

6.2.2 Test each manhole and appurtenances in accordance with ASTM C1244-93 after the

complete installation. Stabilize the vacuum at 10 inches Hg (Mercury). After pressure has stabilized, the gauge is allowed a maximum of 1 inch Hg drop during the test period. The required minimum test period is as follows for all sizes and manhole depths:

Manhole Depth (feet)	Manhole Diameter (inches)					
	42	48	54	60	66	72
	Time (seconds)					
8	17	20	23	26	29	33
10	21	25	29	33	36	41
12	25	30	35	39	43	49
14	30	35	41	46	51	57
16	34	40	46	52	58	67
18	38	45	52	59	65	73
20	42	50	58	65	72	81
22	46	55	64	72	79	89
24	51	59	69	78	87	97
26	55	64	75	85	94	105
28	59	69	81	91	101	113
30	63	74	87	98	108	121

6.2.3 If the vacuum test fails to meet the above requirement, repeat test as necessary. Repair all leaks and defects.