

1 SHEET DELETED

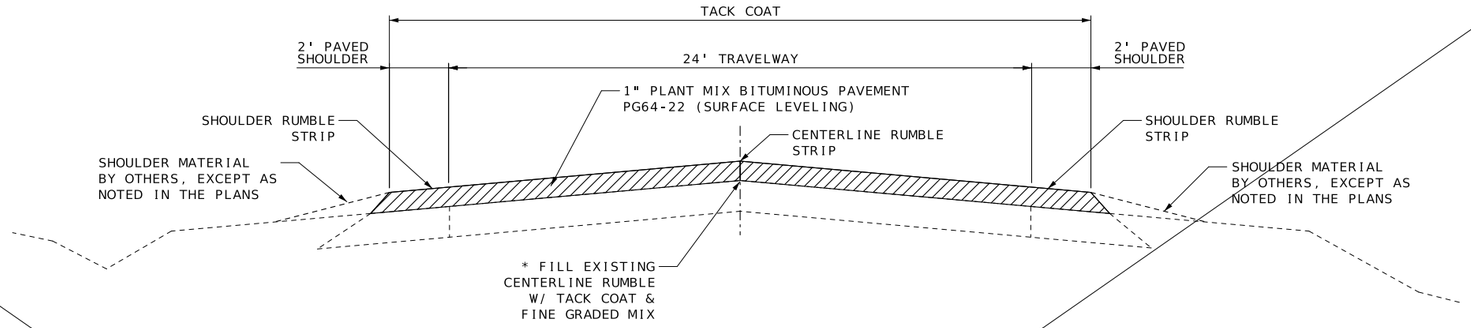

EXCEPTIONS:
LOG MILE 3.563 TO LOG MILE 3.577 - BRIDGE A2306
LOG MILE 6.174 TO LOG MILE 6.198 - BRIDGE A2307
LOG MILE 7.836 TO LOG MILE 8.453 - CONCRETE PAVEMENT
LOG MILE 13.320 TO LOG MILE 13.932 - BRIDGE A4985/CONCRETE PAVEMENT
LOG MILE 14.561 TO LOG MILE 15.444 - BRIDGE A4986/CONCRETE PAVEMENT
LOG MILE 19.033 TO LOG MILE 19.051 - BRIDGE B0338
LOG MILE 21.563 TO LOG MILE 21.615 - BRIDGE A0989
LOG MILE 26.421 TO LOG MILE 26.490 - BRIDGE A4988
LOG MILE 30.132 TO LOG MILE 30.178 - BRIDGE A4982
LOG MILE 31.995 TO LOG MILE 32.018 - BRIDGE A4265

TYPICAL SECTION
ROUTE 94
LOG MILE 0.978 TO LOG MILE 3.563
LOG MILE 3.577 TO LOG MILE 6.174
LOG MILE 6.198 TO LOG MILE 6.649
LOG MILE 7.754 TO LOG MILE 7.836
LOG MILE 8.453 TO LOG MILE 8.476
LOG MILE 13.932 TO LOG MILE 14.561
LOG MILE 26.338 TO LOG MILE 26.421
LOG MILE 26.490 TO LOG MILE 26.658
LOG MILE 29.976 TO LOG MILE 30.132
LOG MILE 30.178 TO LOG MILE 30.316

PAVE BRIDGE DECK:
LOG MILE 27.872 TO LOG MILE 27.896 - BRIDGE B0336

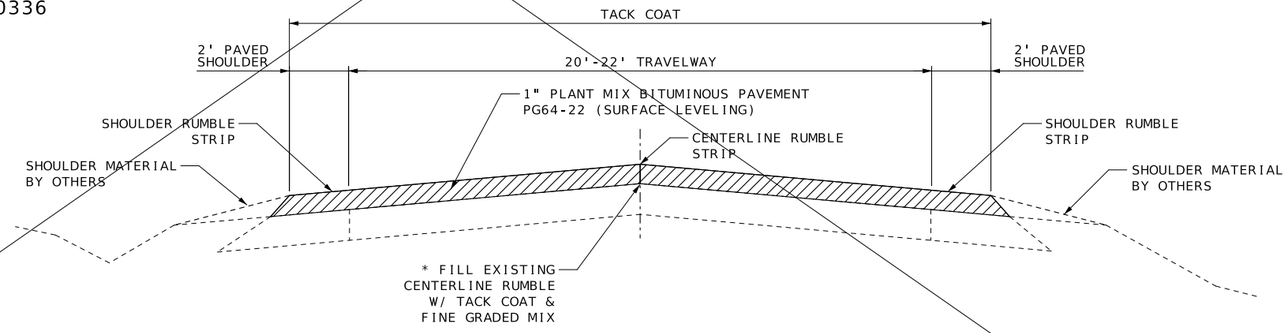

BITUMINOUS PAVEMENT MIXTURE PG64-22 (SURFACE LEVELING)	1.987 TON/YD³
* ASPHALTIC CONCRETE MIXTURE SP048 PG64-22	1.975 TON/YD³
TACK COAT	0.08 GAL/YD²

NOTE:
SURFACE PLACEMENT SHALL BE ONE PASS PER LANE
NO S.E. CORRECTION.

* SP048 MIX MAY BE REPLACED WITH BP-3, MICROSURFACING, OR OTHER FINE GRADED MIX AT NO ADDITIONAL COST, AS APPROVED BY THE ENGINEER.

TYPICAL SECTION
ROUTE 94
LOG MILE 6.649 TO LOG MILE 7.754
LOG MILE 8.476 TO LOG MILE 13.320
LOG MILE 15.444 TO LOG MILE 19.033
LOG MILE 19.051 TO LOG MILE 21.563
LOG MILE 21.615 TO LOG MILE 26.338
LOG MILE 26.658 TO LOG MILE 27.872
LOG MILE 27.896 TO LOG MILE 29.976
LOG MILE 30.316 TO LOG MILE 31.995
LOG MILE 32.018 TO LOG MILE 34.498

TYPICAL SECTION
SHEET 1 OF 1

STATE OF MISSOURI
GREGORY G. LEARY
NUMBER PE-026654
PROFESSIONAL ENGINEER
11/17/2026 9:35:07 AM
GREGORY G. LEARY - CIVIL
MO-PE-026654

DATE PREPARED
11/17/2026

ROUTE	STATE
94	MO
DISTRICT	SHEET NO.
CD/NE	2

COUNTY
CALLAWAY/MONTGOMERY

JOB NO.
JCD0294

CONTRACT ID.

PROJECT NO.


BRIDGE NO.

DESCRIPTION	DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

BITUMINOUS PAVEMENT MIXTURE PG64-22 (SURFACE LEVELING)	1.987 TON/YD³
TACK COAT	0.08 GAL/YD²


NOTE:
SURFACE PLACEMENT SHALL BE ONE PASS PER LANE
NO S.E. CORRECTION.

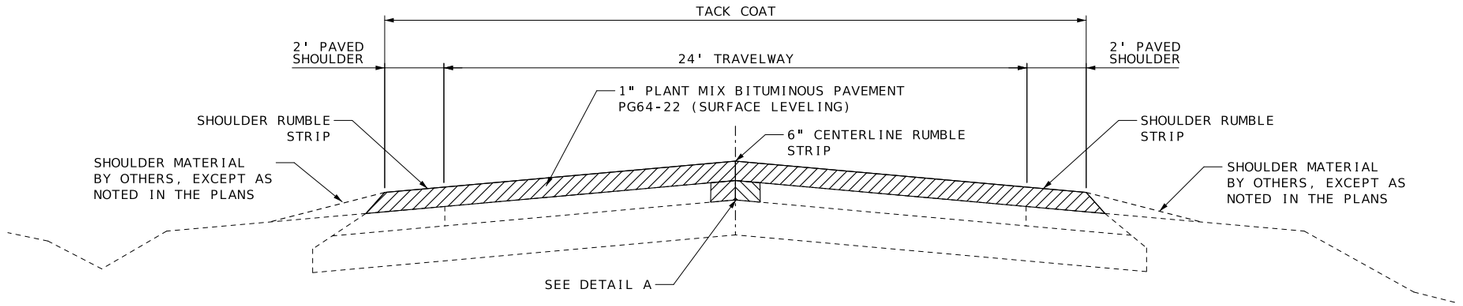


TYPICAL SECTION
ROUTE 94
LOG MILE 0.978 TO LOG MILE 3.563
LOG MILE 3.577 TO LOG MILE 6.174
LOG MILE 6.198 TO LOG MILE 6.649
LOG MILE 7.754 TO LOG MILE 7.836
LOG MILE 8.453 TO LOG MILE 8.476
LOG MILE 13.932 TO LOG MILE 14.561
LOG MILE 26.338 TO LOG MILE 26.421
LOG MILE 26.490 TO LOG MILE 26.658
LOG MILE 29.976 TO LOG MILE 30.132
LOG MILE 30.178 TO LOG MILE 30.316

EXCEPTIONS:
LOG MILE 3.563 TO LOG MILE 3.577 - BRIDGE A2306
LOG MILE 6.174 TO LOG MILE 6.198 - BRIDGE A2307
LOG MILE 7.836 TO LOG MILE 8.453 - CONCRETE PAVEMENT
LOG MILE 13.320 TO LOG MILE 13.932 - BRIDGE A4985/CONCRETE PAVEMENT
LOG MILE 14.561 TO LOG MILE 15.444 - BRIDGE A4986/CONCRETE PAVEMENT
LOG MILE 19.033 TO LOG MILE 19.051 - BRIDGE B0338
LOG MILE 21.563 TO LOG MILE 21.615 - BRIDGE A0989
LOG MILE 26.421 TO LOG MILE 26.490 - BRIDGE A4988
LOG MILE 30.132 TO LOG MILE 30.178 - BRIDGE A4982
LOG MILE 31.995 TO LOG MILE 32.018 - BRIDGE A4265

PAVE BRIDGE DECK:
LOG MILE 27.872 TO LOG MILE 27.896 - BRIDGE B0336

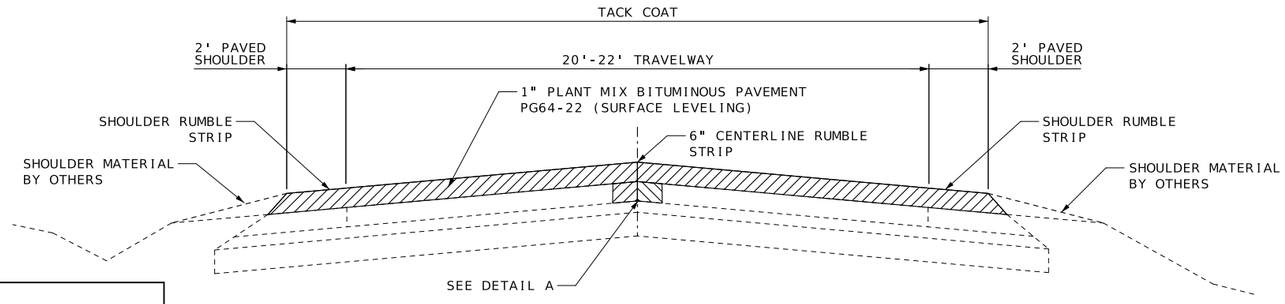


TYPICAL SECTION
ROUTE 94
LOG MILE 6.649 TO LOG MILE 7.754
LOG MILE 8.476 TO LOG MILE 13.320
LOG MILE 15.444 TO LOG MILE 19.033
LOG MILE 19.051 TO LOG MILE 21.563
LOG MILE 21.615 TO LOG MILE 26.338
LOG MILE 26.658 TO LOG MILE 27.872
LOG MILE 27.896 TO LOG MILE 29.976
LOG MILE 30.316 TO LOG MILE 31.995
LOG MILE 32.018 TO LOG MILE 34.498

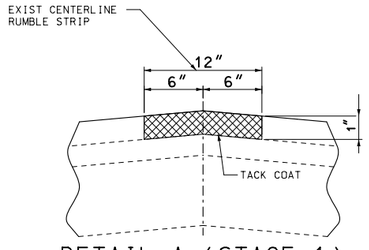

DETAIL A (STAGE 1)

= 1" COLDMILL

(FULL REMOVAL OF SURFACE LIFT)

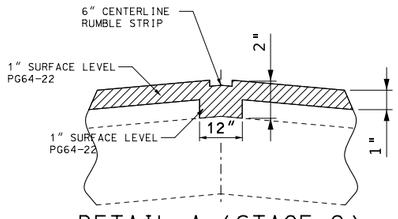

DETAIL A (STAGE 2)

FILL 1" COLDMILLED RUMBLE AND RESURFACE WITH 1" SURFACE LEVEL MIX PG64-22

PLACE 6" CENTERLINE RUMBLE STRIP

MILLING DEPTH AND WIDTH MAY BE ADJUSTED TO MEET FIELD CONDITIONS, AS APPROVED BY THE ENGINEER

1 SHEET ADDED

TYPICAL SECTION
SHEET 1A OF 1

STATE OF MISSOURI
GREGORY G. LEARY
NUMBER PE-026654
PROFESSIONAL ENGINEER
11/17/2026 9:35:45 AM
GREGORY G LEARY - CIVIL
MO-PE-026654

DATE PREPARED: 11/17/2026
ROUTE: 94 | STATE: MO
DISTRICT: CD/NE | SHEET NO.: 2
COUNTY: CALLAWAY/MONTGOMERY
JOB NO.: JCD0294
CONTRACT ID.:
PROJECT NO.:
BRIDGE NO.:

DESCRIPTION	DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

1 SHEET DELETED

ASPHALT RESURFACING

LOG MILE	LOG MILE	LOCATION	LENGTH MI	LENGTH LF	AVG WIDTH FT	BITUMINOUS PAVEMENT MIX PG64-22 (SURFACE LEVELING) TONS	* ASPHALTIC CONCRETE MIX PG64-22 (SP048F MIX) TONS	TACK 0.08 GAL/SY GAL	REMARKS
0.978	1.016	ROUTE 94	0.038	200.6	27	33.22	0.31	49.93	
1.016	3.563	ROUTE 94	2.547	13,448.2	28	2309.27	20.71	3466.65	
3.563	3.577	ROUTE 94	0.014	75.0					BRIDGE A2306 EXCEPTION
3.577	6.174	ROUTE 94	2.597	13,712.2	28	2354.60	21.12	3534.70	
6.174	6.198	ROUTE 94	0.024	125.0					BRIDGE A2307 EXCEPTION
6.198	6.649	ROUTE 94	0.451	2,381.3	28	408.91	3.67	613.85	
6.649	7.754	ROUTE 94	1.105	5,834.4	26	930.30	8.98	1400.26	
7.754	7.836	ROUTE 94	0.082	433.0	28	74.35	0.67	111.62	
7.836	8.453	ROUTE 94	0.617	3,257.8	28				CONCRETE EXCEPTION
8.453	8.476	ROUTE 94	0.023	121.4	28	20.85	0.19	31.29	
8.476	13.320	ROUTE 94	4.844	25,576.3	24	3764.45	39.39	5683.62	
13.320	13.625	ROUTE 94	0.305	1,610.4	28				CONCRETE EXCEPTION
13.625	13.663	ROUTE 94	0.038	202.0					BRIDGE A4985 EXCEPTION
13.663	13.932	ROUTE 94	0.269	1,420.3	28				CONCRETE EXCEPTION
13.932	14.561	ROUTE 94	0.629	3,321.1	28	570.29	5.11	856.11	
14.561	14.993	ROUTE 94	0.432	2,281.0	28				CONCRETE EXCEPTION
14.993	15.040	ROUTE 94	0.047	250.2					BRIDGE A4986 EXCEPTION
15.040	15.444	ROUTE 94	0.404	2,133.1	28				CONCRETE EXCEPTION
15.444	19.033	ROUTE 94	3.589	18,949.9	24	2789.14	29.18	4211.09	
19.033	19.051	ROUTE 94	0.018	93.0					BRIDGE B0338 EXCEPTION
19.051	21.563	ROUTE 94	2.512	13,263.4	26	2114.86	20.43	3183.22	
21.563	21.615	ROUTE 94	0.052	273.0					BRIDGE A0989 EXCEPTION
21.615	26.338	ROUTE 94	4.723	24,937.4	26.0	3976.28	38.40	5984.98	
26.338	26.421	ROUTE 94	0.083	438.2	28.0	75.25	0.67	112.96	
26.421	26.490	ROUTE 94	0.069	363.0					BRIDGE A4988 EXCEPTION
26.490	26.658	ROUTE 94	0.168	887.0	28	152.31	1.37	228.65	
26.658	27.872	ROUTE 94	1.214	6,409.9	25	982.75	9.87	1481.40	
27.872	27.896	ROUTE 94	0.024	129.2	24	19.02		28.71	BRIDGE B0336 - PAVE DECK
27.896	29.976	ROUTE 94	2.08	10,982.4	25	1683.80	16.91	2538.15	
29.976	30.132	ROUTE 94	0.156	823.7	28	141.44	1.27	212.33	
30.132	30.178	ROUTE 94	0.046	243.9					BRIDGE A4982 EXCEPTION
30.178	30.316	ROUTE 94	0.138	728.6	28	125.11	1.12	187.82	
30.316	31.995	ROUTE 94	1.679	8,865.1	25	1359.18	13.65	2048.82	
31.995	32.018	ROUTE 94	0.023	121.0					BRIDGE A4265 EXCEPTION
32.018	32.760	ROUTE 94	0.742	3,917.8	25	600.67	6.03	905.45	MONTGOMERY COUNTY LINE
32.760	34.498	ROUTE 94	1.738	9,176.6	25	1406.94	14.13	2120.81	
10.409		ROUTE 94		-	-	19.85		28.76	ROUTE AA. SEE SPECIAL SHEET 3. APPOX. AREA = 3236 SF.
17.360		ROUTE 94		-	-	24.41		35.38	ROUTE PP. SEE SPECIAL SHEET 3. APPOX. AREA = 3980 SF.
18.720		ROUTE 94		-	-	29.74		43.11	ROUTE C. SEE SPECIAL SHEET 3. APPOX. AREA = 4850 SF.
22.299		ROUTE 94		-	-	24.73		35.85	ROUTE CC. SEE SPECIAL SHEET 3. APPOX. AREA = 4033 SF.
29.276		ROUTE 94		-	-	30.01		43.50	ROUTE D. SEE SPECIAL SHEET 3. APPOX. AREA = 4894 SF.
		ROUTE 94		990.00	2.00	12.14		17.60	PAVED ENTRANCES AND STREETS - 2' WING OUT
						281.39			20% FOR IRREGULARITIES AND ENTRANCES - NE
						4897.21			20% FOR IRREGULARITIES AND ENTRANCES - CD
									ESTIMATE FACTOR:
					SUBTOTAL	31,212.47	253.18	39,196.62	SURFACE LEVEL MIX - 1.987 TONS/CY
					USE	31,212.5	253.2	39,197	SP048 MIX - 1.975 TONS/CY

*PRIOR TO OVERLAY, EXISTING CENTERLINE RUMBLE STRIPS SHALL BE FILLED WITH TACK COAT AND SP048 OR OTHER FINE GRADED MIX, SUCH AS MICROSURFACE OR BP-3, AS APPROVED BY THE ENGINEER

SUMMARY OF QUANTITIES
SHEET 5 OF 10

STATE OF MISSOURI
GREGORY G. LEARY
NUMBER PE-026654
PROFESSIONAL ENGINEER
11/17/2026 9:36:14 AM
GREGORY G. LEARY - CIVIL
MO-PE-026654

DATE PREPARED
11/17/2026

ROUTE	STATE
94	MO
DISTRICT	SHEET NO.
CD/NE	3

COUNTY
CALLAWAY/MONTGOMERY

JOB NO.
JCD0294

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

ASPHALT RESURFACING

LOG MILE	LOG MILE	LOCATION	LENGTH MI	LENGTH LF	AVG WIDTH FT	BITUMINOUS PAVEMENT MIX PG64-22 (SURFACE LEVELING) TONS	TACK 0.08 GAL/SY GAL	REMARKS
0.978	1.016	ROUTE 94	0.038	200.6	27	33.22	49.93	
1.016	3.563	ROUTE 94	2.547	13,448.2	28	2309.27	3466.65	
3.563	3.577	ROUTE 94	0.014	75.0				BRIDGE A2306 EXCEPTION
3.577	6.174	ROUTE 94	2.597	13,712.2	28	2354.60	3534.70	
6.174	6.198	ROUTE 94	0.024	125.0				BRIDGE A2307 EXCEPTION
6.198	6.649	ROUTE 94	0.451	2,381.3	28	408.91	613.85	
6.649	7.754	ROUTE 94	1.105	5,834.4	26	930.30	1400.26	
7.754	7.836	ROUTE 94	0.082	433.0	28	74.35	111.62	
7.836	8.453	ROUTE 94	0.617	3,257.8	28			CONCRETE EXCEPTION
8.453	8.476	ROUTE 94	0.023	121.4	28	20.85	31.29	
8.476	13.320	ROUTE 94	4.844	25,576.3	24	3764.45	5683.62	
13.320	13.625	ROUTE 94	0.305	1,610.4	28			CONCRETE EXCEPTION
13.625	13.663	ROUTE 94	0.038	202.0				BRIDGE A4985 EXCEPTION
13.663	13.932	ROUTE 94	0.269	1,420.3	28			CONCRETE EXCEPTION
13.932	14.561	ROUTE 94	0.629	3,321.1	28	570.29	856.11	
14.561	14.993	ROUTE 94	0.432	2,281.0	28			CONCRETE EXCEPTION
14.993	15.040	ROUTE 94	0.047	250.2				BRIDGE A4986 EXCEPTION
15.040	15.444	ROUTE 94	0.404	2,133.1	28			CONCRETE EXCEPTION
15.444	19.033	ROUTE 94	3.589	18,949.9	24	2789.14	4211.09	
19.033	19.051	ROUTE 94	0.018	93.0				BRIDGE B0338 EXCEPTION
19.051	21.563	ROUTE 94	2.512	13,263.4	26	2114.86	3183.22	
21.563	21.615	ROUTE 94	0.052	273.0				BRIDGE A0989 EXCEPTION
21.615	26.338	ROUTE 94	4.723	24,937.4	26.0	3976.28	5984.98	
26.338	26.421	ROUTE 94	0.083	438.2	28.0	75.25	112.96	
26.421	26.490	ROUTE 94	0.069	363.0				BRIDGE A4988 EXCEPTION
26.490	26.658	ROUTE 94	0.168	887.0	28	152.31	228.65	
26.658	27.872	ROUTE 94	1.214	6,409.9	25	982.75	1481.40	
27.872	27.896	ROUTE 94	0.024	129.2	24	19.02	28.71	BRIDGE B0336 - PAVE DECK
27.896	29.976	ROUTE 94	2.08	10,982.4	25	1683.80	2538.15	
29.976	30.132	ROUTE 94	0.156	823.7	28	141.44	212.33	
30.132	30.178	ROUTE 94	0.046	243.9				BRIDGE A4982 EXCEPTION
30.178	30.316	ROUTE 94	0.138	728.6	28	125.11	187.82	
30.316	31.995	ROUTE 94	1.679	8,865.1	25	1359.18	2048.82	
31.995	32.018	ROUTE 94	0.023	121.0				BRIDGE A4265 EXCEPTION
32.018	32.760	ROUTE 94	0.742	3,917.8	25	600.67	905.45	MONTGOMERY COUNTY LINE
32.760	34.498	ROUTE 94	1.738	9,176.6	25	1406.94	2120.81	
0.978	32.760	ROUTE 94		152,912.0	1	937.77		1' WIDE MILLED CENTERLINE - ADJUST IN FIELD AS NEEDED
32.760	34.498	ROUTE 94		9,177.0	1	56.28		1' WIDE MILLED CENTERLINE - ADJUST IN FIELD AS NEEDED
10.409		ROUTE 94		-	-	19.85	28.76	ROUTE AA. SEE SPECIAL SHEET 3. APPOX. AREA = 3236 SF.
17.360		ROUTE 94		-	-	24.41	35.38	ROUTE PP. SEE SPECIAL SHEET 3. APPOX. AREA = 3980 SF.
18.720		ROUTE 94		-	-	29.74	43.11	ROUTE C. SEE SPECIAL SHEET 3. APPOX. AREA = 4850 SF.
22.299		ROUTE 94		-	-	24.73	35.85	ROUTE CC. SEE SPECIAL SHEET 3. APPOX. AREA = 4033 SF.
29.276		ROUTE 94		-	-	30.01	43.50	ROUTE D. SEE SPECIAL SHEET 3. APPOX. AREA = 4894 SF.
		ROUTE 94		990.00	2.00	12.14	17.60	PAVED ENTRANCES AND STREETS - 2' WING OUT
						281.39		20% FOR IRREGULARITIES AND ENTRANCES - NE
						4897.21		20% FOR IRREGULARITIES AND ENTRANCES - CD
					SUBTOTAL	32,206.52	39,196.62	ESTIMATE FACTOR:
					USE	32,206.5	39,197	SURFACE LEVEL MIX - 1.987 TONS/CY

*PRIOR TO OVERLAY, EXISTING CENTERLINE RUMBLE STRIP SHALL BE MILLED AT MINIMUM 1" DEPTH AND 12" WIDTH, AS APPROVED BY THE ENGINEER

COLDMILLING BITUMINOUS PAVEMENT FOR REMOVAL OF SURFACING (3 IN THICK OR LESS)

LOG MILE	LOG MILE	LOCATION	LENGTH FT	WIDTH FT	DEPTH IN	QUANTITY SY	REMARKS
0.978	32.760	ROUTE 94	152912	1	1	16990.2	MILL CENTERLINE PRIOR TO RESURFACING
32.760	34.498	ROUTE 94	9177	1	1	1019.7	MILL CENTERLINE PRIOR TO RESURFACING
				TOTAL		18009.9	
				USE		18010	

*MILLING DEPTH AND WIDTH MAY BE ADJUSTED IN THE FIELD, AS APPROVED BY THE ENGINEER

1 SHEET ADDED

SUMMARY OF QUANTITIES
SHEET 5A OF 10

STATE OF MISSOURI
GREGORY G. LEARY
NUMBER PE-026654
PROFESSIONAL ENGINEER
11/17/2026 9:36:07 AM
GREGORY G. LEARY - CIVIL
MO-PE-026654

DATE PREPARED: 11/17/2026
ROUTE: 94 | STATE: MO
DISTRICT: CD/NE | SHEET NO.: 3
COUNTY: CALLAWAY/MONTGOMERY
JOB NO.: JCD0294
CONTRACT ID.:
PROJECT NO.:
BRIDGE NO.:

DATE	DESCRIPTION

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)

1 ADDED 6 INCH WIDE

CENTERLINE RUMBLE STRIPS

LOG MILE	LOG MILE	LOCATION	LENGTH MI	LENGTH LF	BITUMINOUS CENTERLINE RUMBLE STRIPS STA	REMARKS
0.978	3.563	ROUTE 94	2.585	13648.80	136.49	
3.563	3.577	ROUTE 94	0.014	73.92		BRIDGE A2306 EXCEPTION
3.577	6.174	ROUTE 94	2.597	13712.16	137.12	
6.174	6.198	ROUTE 94	0.024	126.72		BRIDGE A2307 EXCEPTION
6.198	6.690	ROUTE 94	0.492	2597.76	25.98	
6.690	7.795	ROUTE 94	1.105	5834.40	58.34	
7.795	7.836	ROUTE 94	0.041	216.48	2.16	
7.836	8.453	ROUTE 94	0.617	3257.76		CONCRETE EXCEPTION
8.453	8.530	ROUTE 94	0.077	406.56	4.07	
8.530	13.320	ROUTE 94	4.790	25291.20	252.91	
13.320	13.641	ROUTE 94	0.321	1694.88		CONCRETE EXCEPTION
13.641	13.679	ROUTE 94	0.038	200.64		BRIDGE A4985 EXCEPTION
13.679	13.932	ROUTE 94	0.253	1335.84		CONCRETE EXCEPTION
13.932	14.561	ROUTE 94	0.629	3321.12	33.21	
14.561	15.000	ROUTE 94	0.439	2317.92		CONCRETE EXCEPTION
15.000	15.047	ROUTE 94	0.047	248.16		BRIDGE A4986 EXCEPTION
15.047	15.444	ROUTE 94	0.397	2096.16		CONCRETE EXCEPTION
15.444	19.033	ROUTE 94	3.589	18949.92	189.50	
19.033	19.051	ROUTE 94	0.018	95.04		BRIDGE B0338 EXCEPTION
19.051	21.563	ROUTE 94	2.512	13263.36	132.63	
21.563	21.615	ROUTE 94	0.052	274.56		BRIDGE A0989 EXCEPTION
21.615	26.338	ROUTE 94	4.723	24937.44	249.37	
26.338	26.421	ROUTE 94	0.083	438.24	4.38	
26.421	26.490	ROUTE 94	0.069	364.32		BRIDGE A4988 EXCEPTION
26.490	27.655	ROUTE 94	1.165	6151.20	61.51	
27.655	28.137	ROUTE 94	0.482	2544.96		PORTLAND (45 MPH) EXCEPTION
28.137	30.127	ROUTE 94	1.990	10507.20	105.07	
30.127	30.132	ROUTE 94	0.005	26.40	0.26	
30.132	30.178	ROUTE 94	0.046	242.88		BRIDGE A4982 EXCEPTION
30.178	32.014	ROUTE 94	1.836	9694.08	96.94	
31.995	32.018	ROUTE 94	0.023	121.44		BRIDGE A4265 EXCEPTION
32.018	32.760	ROUTE 94	0.742	3917.76	39.18	MONTGOMERY COUNTY LINE
32.760	34.498	ROUTE 94	1.738	9176.64	91.77	
				TOTAL	1620.89	
				USE	1620.90	

STANDARD SIGN ASSEMBLIES

LOG MILE	LOCATION	TYPE SHF - FLAT SHEET FLUORESCENT SIGN DESCRIPTION, SIZES & NUMBER - QTY. (EA) OM3-L	OM3-R	W11-15	W16-7P
12.740	ROUTE 94	4	4		
18.400	ROUTE 94	6	4		
19.659	ROUTE 94	4	4		
34.225	ROUTE 94	6	6		
34.455	ROUTE 94 - RT			1	1
34.467	ROUTE 94 - LT			1	1
	TOTAL	20	18	2	2

SIGN SUMMARY

STANDARD SIGN OR SPECIAL SIGN NUMBER	SIGN DETAIL SHEET NO.	QTY.	SIZE, TYPE & SQUARE FEET SIZE	FLAT SHEET FLUORESCENT, SHF ITEM NO. 9035069A SF
OBJECT MARKER LT (OM3-L)	STD	20	12" X 36"	60
OBJECT MARKER RT (OM3-R)	STD	18	12" X 36"	54
BICYCLE/PEDESTRIAN (W11-15)	STD	2	36" X 36"	18
DOWN ARROW (W16-7P)	STD	2	30" X 21"	8.75
		TOTAL		140.75
		USE		141

SIGN NO.	LOCATION	LOG MILE	PERFORATED SQUARE STEEL TUBE** POST QTY	U-CHANNEL POST (13' EA) ITEM NO. 9031250A	2.5" POST ITEM NO. 9031280	CONCRETE ANCHOR ITEM NO. 9031285
			EA	LF	LF	EA
S1	ROUTE 94	12.740	6	78		
S2	ROUTE 94	18.400	8	104		
S3	ROUTE 94	19.659	4	52		
S4	ROUTE 94	34.225	10	130		
S5	ROUTE 94	34.455	1		16	1
S6	ROUTE 94	34.467	1		16	1
			TOTAL	364	32	2

**FOR PSST WITHOUT BREAKAWAY DEVICES, POST LENGTH SHALL INCLUDE AN ADDITIONAL 6" FOR INSERTION INTO ANCHOR. PSST POST SHALL BE CUT IN THE FIELD TO MEET MINIMUM SIGN MOUNTNG HEIGHT, AS SHOWN IN STD PLAN 903.03, AT NO DIRECT PAY.

SUMMARY OF QUANTITIES
SHEET 6 OF 10

STATE OF MISSOURI
GREGORY G. LEARY
NUMBER PE-026654
PROFESSIONAL ENGINEER
11/17/2026 9:34:50 AM
GREGORY G. LEARY - CIVIL
MO-PE-026654

DATE PREPARED 11/17/2026
ROUTE 94 | STATE MO
DISTRICT CD/NE | SHEET NO. 3
COUNTY CALLAWAY/MONTGOMERY
JOB NO. JCD0294
CONTRACT ID.
PROJECT NO.
BRIDGE NO.

DESCRIPTION | DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)