NOTES: SEE JOB SPECIAL PROVISION-OPTIONAL PAVEMENT.

SEE JOB SPECIAL PROVISION-REPAIRING EXISTING SUBGRADE AND AGGREGATE BASE.


LANE WIDTH NOTED IS TYPICAL LANE WIDTH.
ADJUST PAVING WIDTHS TO EXISTING FIELD CONDITIONS.

NO S.E. CORRECTION

1 ADDED

OPTIONAL PAVEMENT DESIGN

HMA





1.5" BP-2, PG64-22
8.5" PMBB, PG64-22
6" TYPE 1 AGGR. BASE

OR

JPCP

8" JPCP
15 FT. JOINT SPACING
AND 1.25" DOWELS
6" TYPE 1 AGGR. BASE



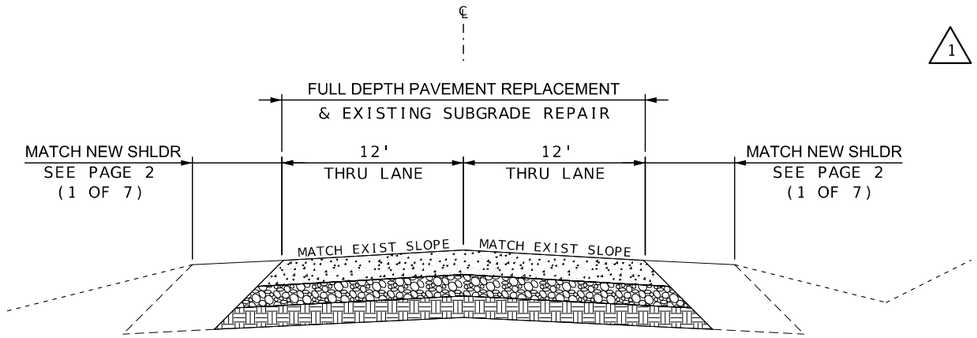

OPTIONAL PAVEMENT 10" HMA OR 8" JPCP

TYPE 1 AGGREGATE BASE (6")

REPAIR EXISTING SUBGRADE (6")


1 ADDED

ASPHALT FACTORS

	COMBINED FACTOR
BP-2 (PG64-22)	1.995 TONS/CY
PMBB (PG64-22)	2.006 TONS/CY

ROUTE C

LOG MILE 3.651 TO LOG MILE 3.670

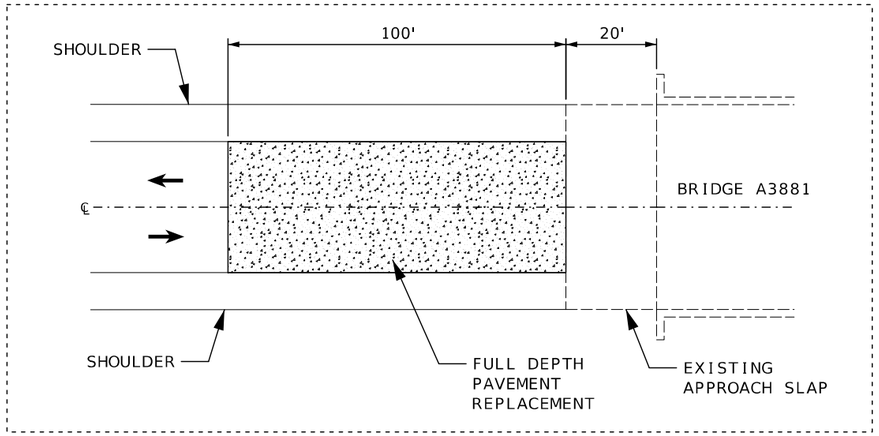

1 REVISED

TYPICAL SECTIONS
SHEET 2 OF 7

STATE OF MISSOURI
CAMERON SODY
NUMBER PE-2021019715
PROFESSIONAL ENGINEER

11-06-2026
CAMERON SODY - CIVIL
MO-PE-2021019715

DATE PREPARED
11/6/2026

ROUTE	STATE
C	MO
DISTRICT	SHEET NO.
SW	2

COUNTY
HENRY/BENTON

JOB NO.
JSR0090

CONTRACT ID.

PROJECT NO.

BRIDGE NO.

DESCRIPTION	DATE

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION

105 WEST CAPITOL
JEFFERSON CITY, MO 65102
1-888-ASK-MODOT (1-888-275-6636)