
TABLE OF CONTENTS

A. Construction Requirements

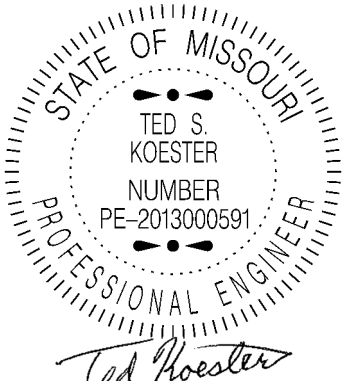

09/29/2026 8:25:08 AM
TED S. KOESTER - CIVIL
MO-PE-2013000591

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION
105 W. CAPITOL AVE.
JEFFERSON CITY, MO 65101
Phone (888) 275-6636

If a seal is present on this sheet, JSP's has been electronically sealed and dated.

JOB NO. JCD0036
Phelps County, MO
Date Prepared: 9/29/2026

Only the following items of the Job Special Provisions (Bridge) are authenticated by this seal: A

A. CONSTRUCTION REQUIREMENTS

1.0 Description. This provision contains general construction requirements for this project.

2.0 Construction Requirements. The plans and the asbestos and lead inspection report(s) for the existing structure(s) and the foundation investigation report(s) for the new structure(s) are included in the contract in the bridge electronic deliverables zip file for informational purposes only.

2.1 In order to assure the least traffic interference, the work shall be scheduled so that the bridge closure is for the absolute minimum amount of time required to complete the work. The bridge shall not be closed until material is available for continuous construction and the contractor is prepared to diligently pursue the work until the closed bridge is opened to traffic.

2.2 Provisions shall be made to prevent any debris and material from falling into the waterway. If determined necessary by the engineer, any debris and material that falls below the bridge outside the previously specified limits shall be removed as approved by the engineer at the contractor's expense.

2.3 Provisions shall be made to prevent damage to any existing utilities. Any damage sustained to the utilities as a result of the contractor's operations shall be the responsibility of the contractor. All costs of repair and disruption of service shall be as determined by the utility owners and as approved by the engineer.

3.0 Environmental Contact. Environmental Section may be contacted at the below address or phone number. The Missouri Department of Health may be contacted at (573) 751-6102.

MoDOT - Design Division - Environmental Section
P.O. Box 270
105 W. Capitol Ave., Jefferson City, MO 65102
Telephone: (573) 526-4778

3.1 Approved Smelter and Hazardous Waste Treatment, Storage and Disposal Facility. The following is the approved smelter and hazardous waste treatment, storage and disposal facility:

Doe Run Company - Resource Recycling Division - Buick Facility
Highway KK
Boss, MO 65440
Telephone: (573) 626-4813

4.0 Method of Measurement. No measurement will be made.

5.0 Basis of Payment. Payment for the above described work will be considered completely covered by the contract unit price for other items included in the contract.